

# SMT Power Inductors

High Current Molded Power Inductor - PA4343.XXXANLT Series




- Height: 6.5mm Max
- Footprint: 14.0mm x 12.8mm Max
- Current Rating: up to 53A
- Inductance Range: 0.22uH to 68uH
- Shielded construction and compact design
- High current, low DCR, and high efficiency
- Minimized acoustic noise and minimized leakage flux
- 200 Vdc Isolation between terminal and core

## Electrical Specifications @ 25°C - Operating Temperature -55°C to +155°C


Part Number	Inductance <sup>5,8</sup> 100KHz, 1V	Rated <sup>5</sup> Current	DC Resistance		Saturation <sup>2</sup> Current	SRF	Mechanical	K Factor
			TYP.	MAX.	TYP.	TYP.		
	uH±20%	A	mΩ	mΩ	A	MHz		
PA4343.221ANLT	0.22	42	0.4	0.46	105	130	Footprint 1	93.5
PA4343.331ANLT	0.33	36	0.6	0.70	65	80	Footprint 1	106.1
PA4343.471ANLT	0.47	35	0.88	1.02	58	70	Footprint 1	60.4
PA4343.561ANLT	0.56	33.5	1.1	1.3	50	62	Footprint 1	60.4
PA4343.681ANLT	0.68	33	1.25	1.5	46	58	Footprint 1	75.8
PA4343.821ANLT	0.82	31	1.3	1.65	39	56	Footprint 1	68.7
PA4343.102ANLT	1.0	29	1.5	1.8	36	43	Footprint 1	53.5
PA4343.152ANLT	1.5	25	2.2	2.53	30	33	Footprint 1	38.1
PA4343.222ANLT	2.2	21	3.7	4.2	24	25	Footprint 2	32.2
PA4343.242ANLT	2.4	20.5	3.9	4.5	23.5	23	Footprint 2	
PA4343.332ANLT	3.3	19	5.3	6.2	22.5	17	Footprint 2	22.6
PA4343.472ANLT	4.7	17	6.8	8.0	21	15	Footprint 2	16.5
PA4343.562ANLT	5.6	15	8.3	9.8	19.5	14	Footprint 2	16.5
PA4343.682ANLT	6.8	14	9.8	11.3	18	12	Footprint 2	12.0
PA4343.822ANLT	8.2	12.5	12	13.8	17	10	Footprint 2	11.0
PA4343.103ANLT	10	11	13	15.8	15	10	Footprint 2	10.1
PA4343.223ANLT	22	8	31	35	9	6	Footprint 2	8.6
PA4343.333ANLT	33	6.5	46	55	8	4	Footprint 2	5.1
PA4343.473ANLT	47	5.7	58	67	6.8	4	Footprint 2	6.2
PA4343.683ANLT	68	4.8	82	100	5.0	3	Footprint 2	4.7

## Notes:


1. Actual temperature of the component during system operation (ambient plus temperature rise) must be within the standard operating range.
2. The saturation current is the current at which the initial inductance drops by approximately 30% at the stated ambient temperature. The maximum allowable drop at this stated current is 40% of the initial inductance. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effect) to the component.
3. The rated current is the DC current required to raise the component temperature by approximately 40°C. Take note that the components' performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
4. The part temperature (ambient+temp rise) should not exceed maximum operating temperature under worst case operating conditions. Circuit design, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
5. Please note that the inductance tolerance of all parts are  $\pm 20\%$ , except those indicated by an \* which are  $\pm 30\%$ .
6. Parts shown in bold are standard catalog parts and are available through sample stock and distribution. Parts in lighter font are available but are not necessarily held in sample stock or distribution **and lead times may be longer**. Please contact Pulse for availability.
7. The mechanical dimensions are 100% tested in production but do not necessarily meet a product capability index (Cpk) 1.33 and therefore may not strictly conform to PPAP.
8. Special Characteristics 

## Mechanical

### PA4343.XXXANLT

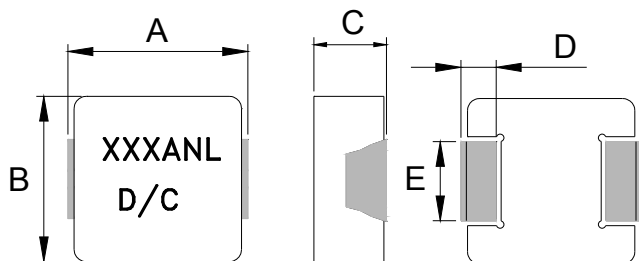


Footprint 1

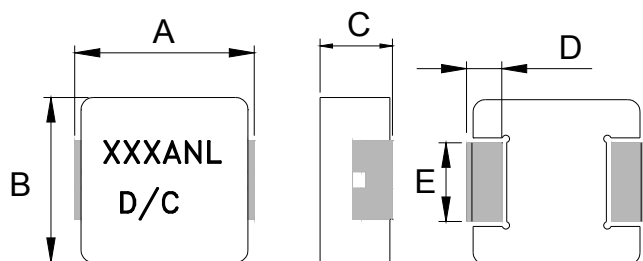

Footprint 2

Final Layout



SUGGESTED PAD LAYOUT


Series	Mechanical	A	B	C	D	E	L	G	H
PA4343.XXXANLT	Footprint 1	13.5 $\pm$ 0.5	12.6 $\pm$ 0.2	6.2 $\pm$ 0.3	2.3 $\pm$ 0.3	4.0 $\pm$ 0.3	14.5	8.0	5.0
PA4343.XXXANLT	Footprint 2	13.5 $\pm$ 0.5	12.6 $\pm$ 0.2	6.2 $\pm$ 0.3	2.3 $\pm$ 0.3	4.7 $\pm$ 0.3	14.5	8.0	5.0

All Dimensions in mm.

# SMT Power Inductors

High Current Molded Power Inductor - PA4343.XXXANLT Series





## TAPE & REEL INFO






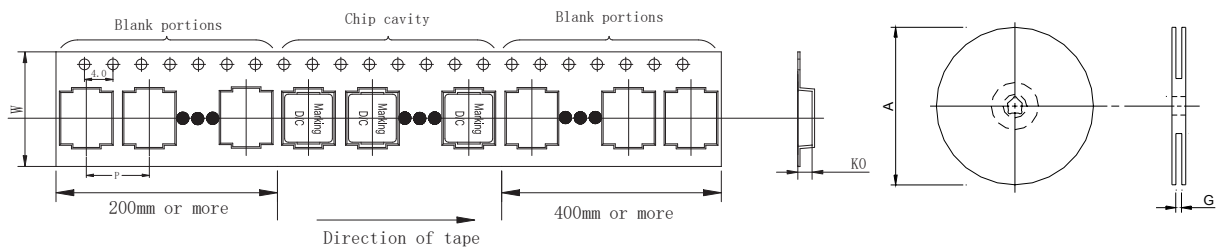


SURFACE MOUNTING TYPE, REEL/TAPE LIST

	REEL SIZE (mm)		TAPE SIZE (mm)			QTY
	A	G	P <sub>1</sub>	W	K <sub>0</sub>	PCS/REEL
PA4343.XXXANLT	Ø330	24.4	16	24	7.0	500

## Typical Performance Curves

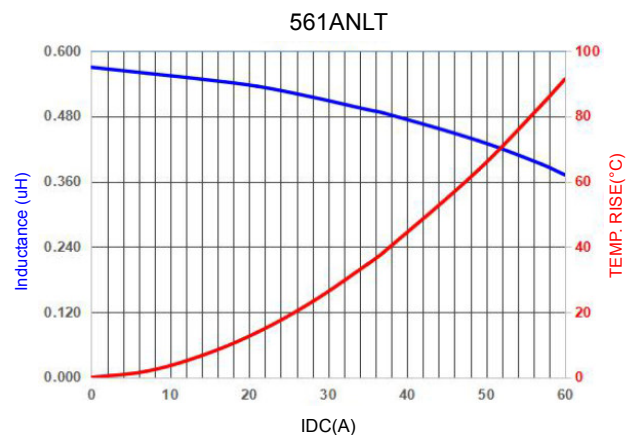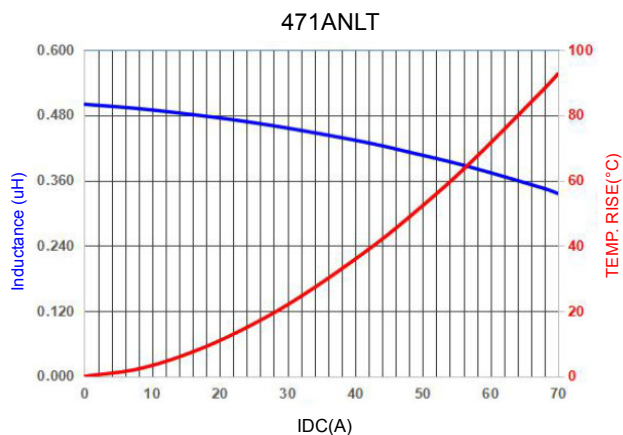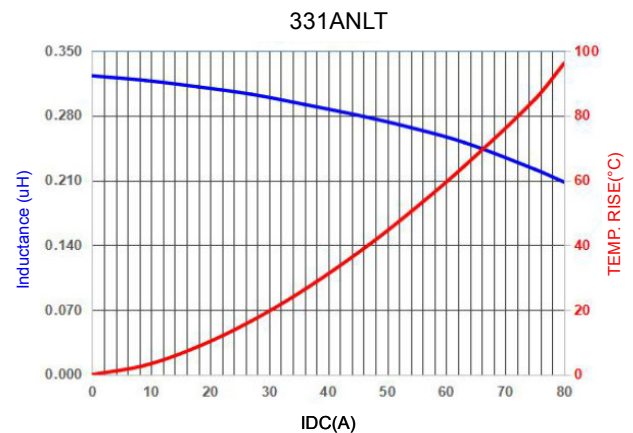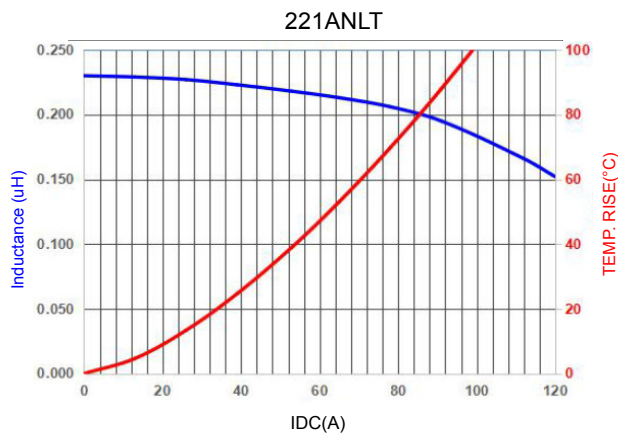

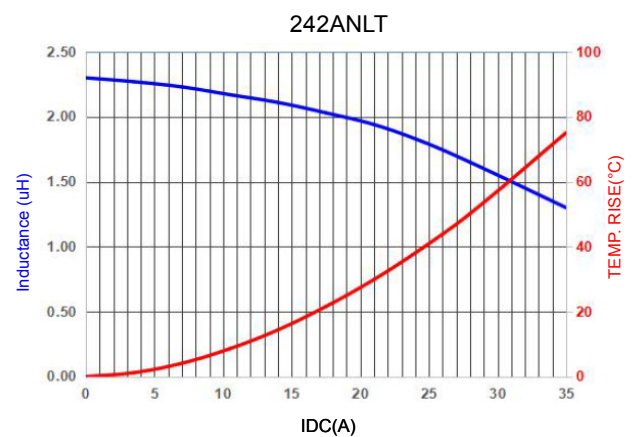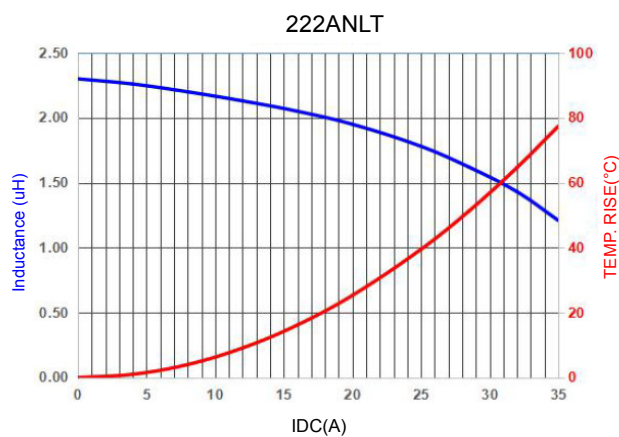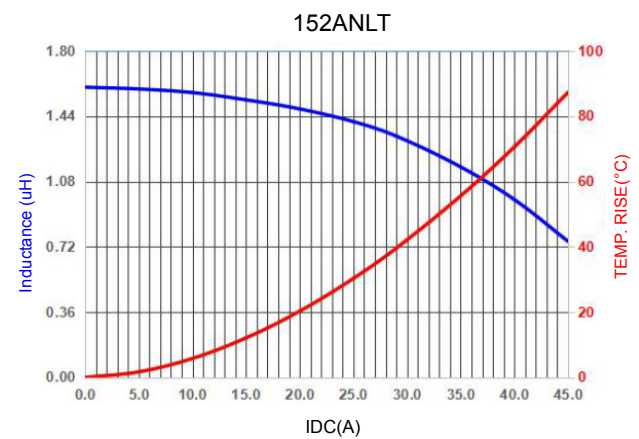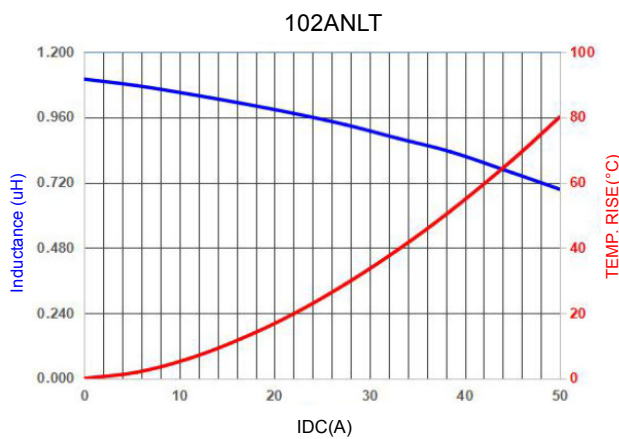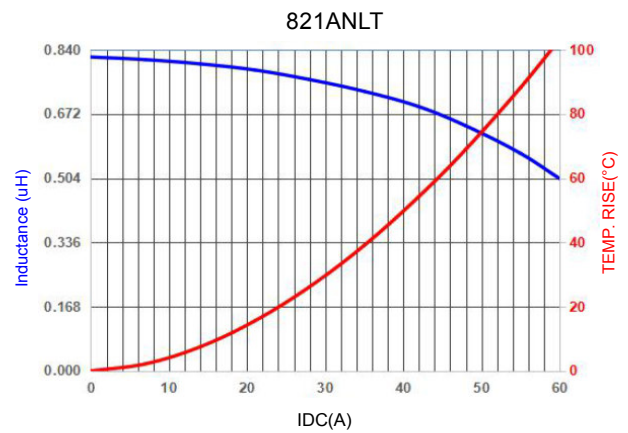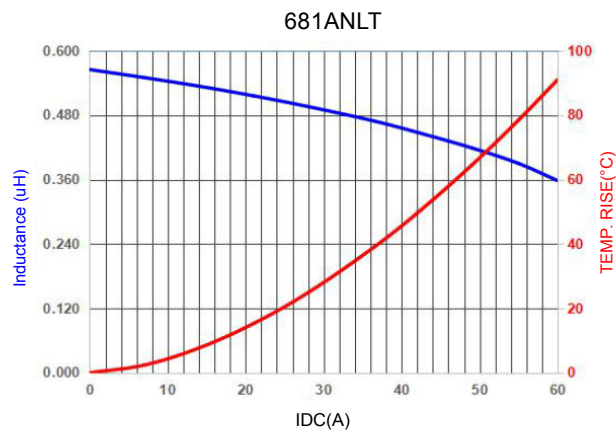


# SMT Power Inductors


High Current Molded Power Inductor - PA4343.XXXANLT Series




332ANLT

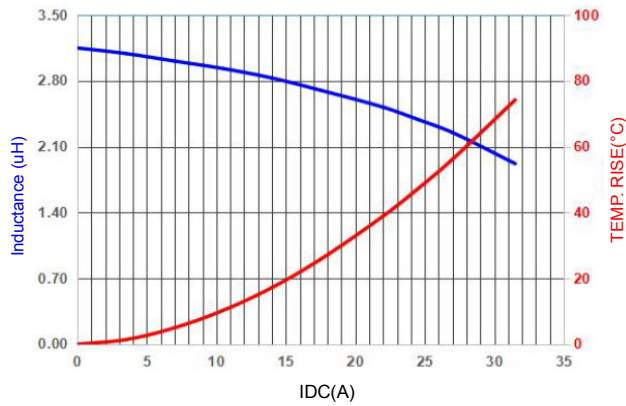


472ANLT

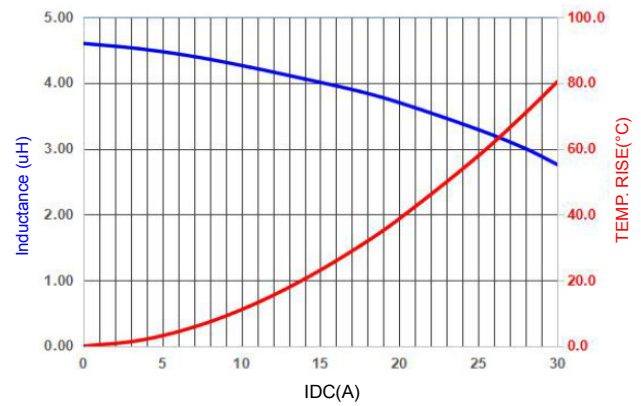


562ANLT

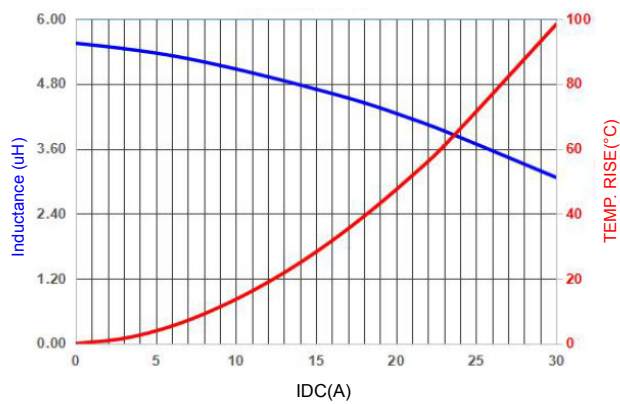


682ANLT

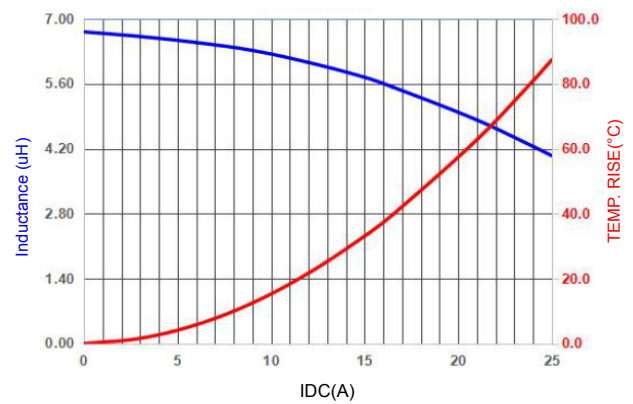

822ANLT




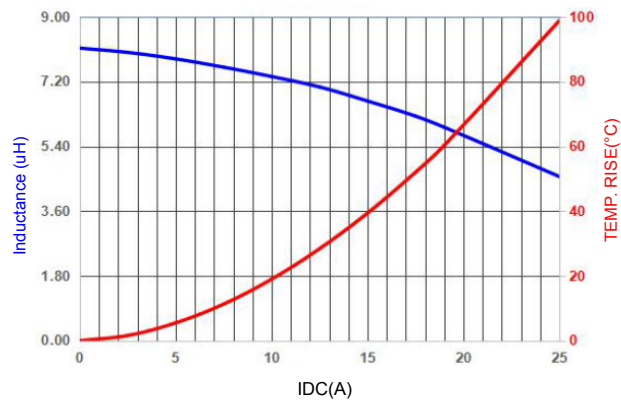


103ANLT

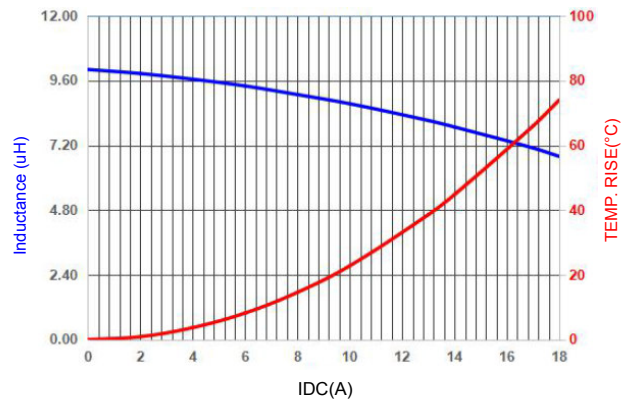

# SMT Power Inductors

High Current Molded Power Inductor - PA4343.XXXANLT Series

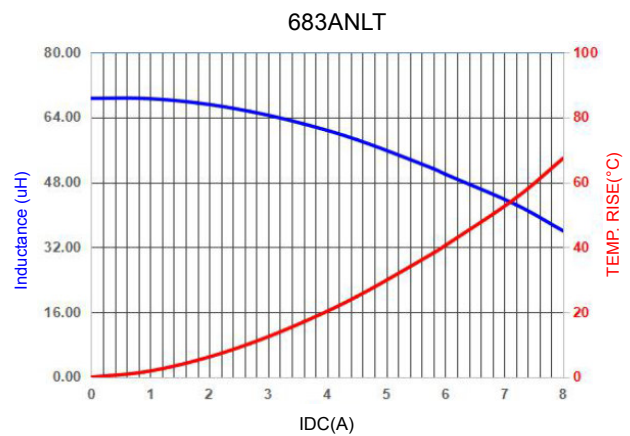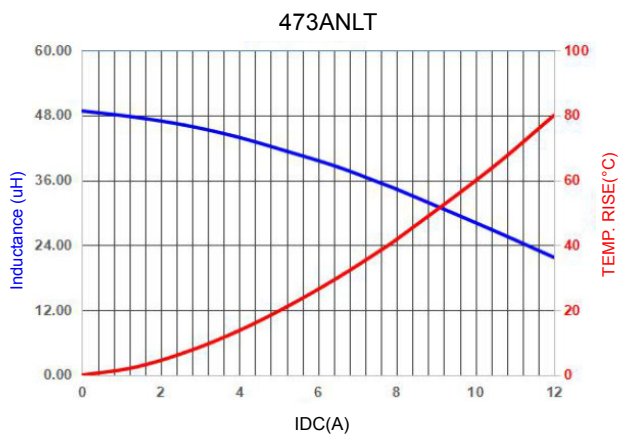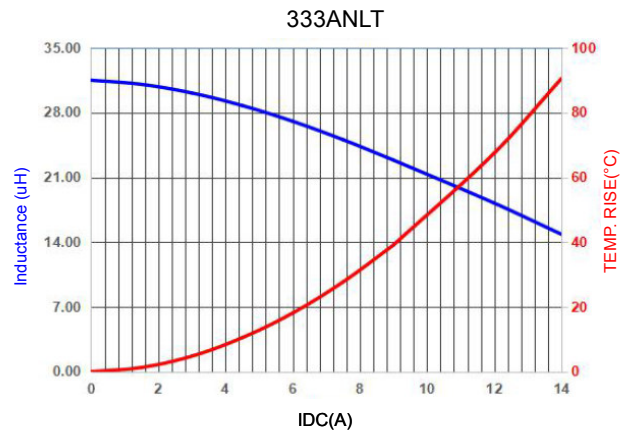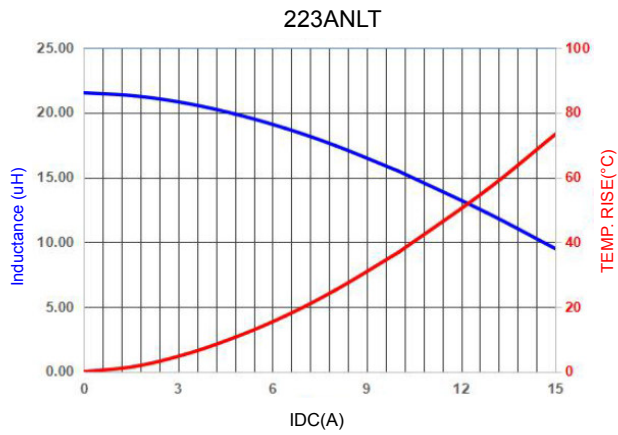




# SMT Power Inductors

High Current Molded Power Inductor - PA4343.XXXANLT Series

## Core Loss

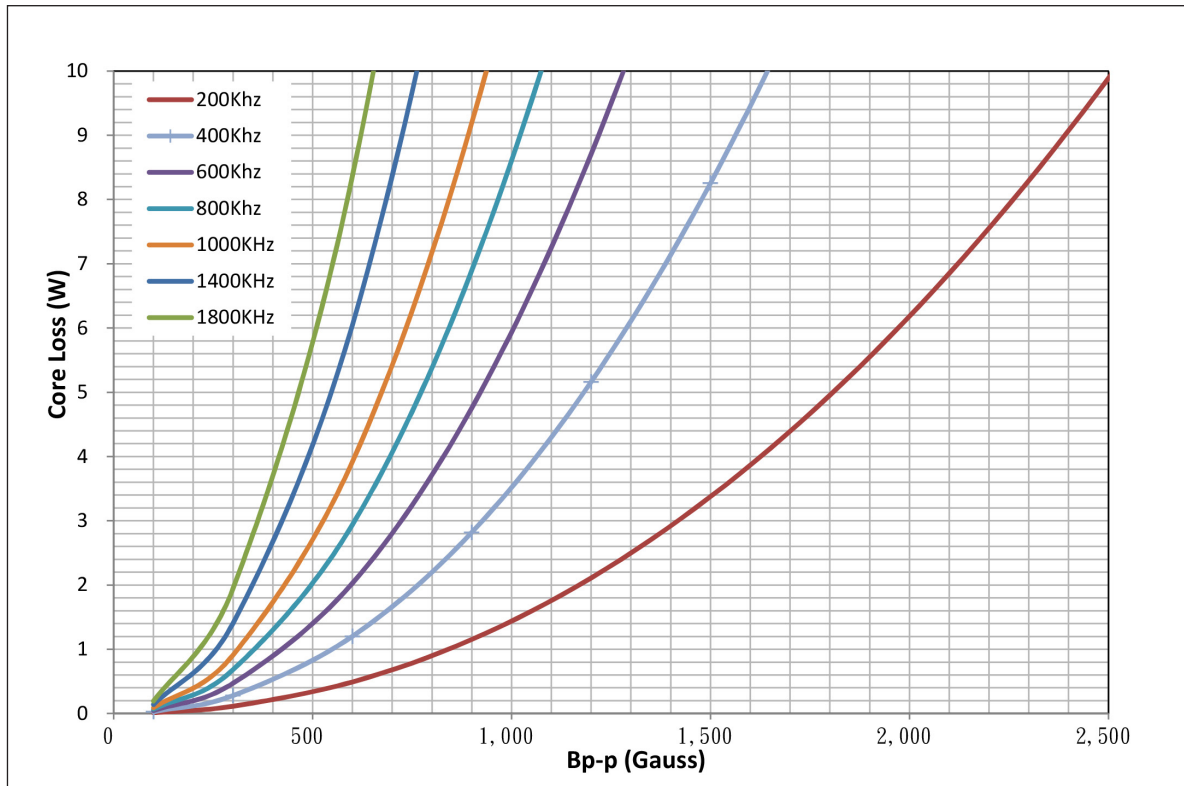

$$Bp-p = K * L(uH) * \Delta I(A)$$

## For More Information:

Americas - [prodinfo\\_power\\_americas@yageo.com](mailto:prodinfo_power_americas@yageo.com) | Europe - [prodinfo\\_power\\_emea@yageo.com](mailto:prodinfo_power_emea@yageo.com) | Asia - [prodinfo\\_power\\_asia@yageo.com](mailto:prodinfo_power_asia@yageo.com)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2023. Pulse Electronics, Inc. All rights reserved.

YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Pulse:](#)

[PA4343.561ANLT](#)