
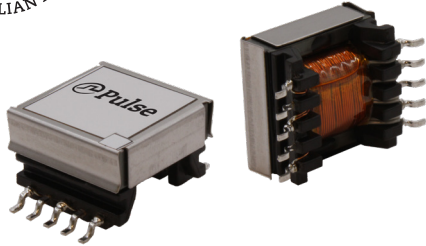
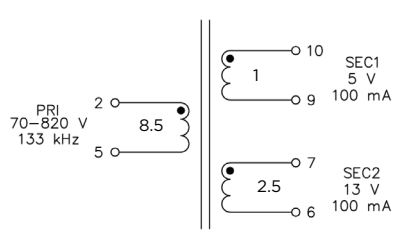


# High Frequency Wire Wound Transformers

EFD15 flyback transformer – pin 5+5

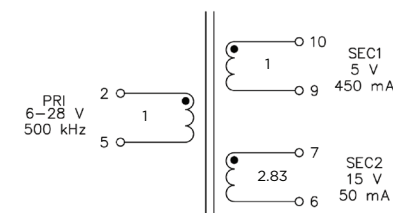

- Ⓟ 4000Vrms Hi-Pot
- Ⓟ Power Range: Up to 12.5W
- Ⓟ Height: 11mm Max
- Ⓟ Footprint: 21.9mm x 16.5mm Max
- Ⓟ Topology: Flyback transformer
- Ⓟ Creepage: PRI To SEC 5.1mm MIN
- Ⓟ Clearance: PRI To SEC 5.1mm MIN

Pulse PN	Electrical Specifications @25°C – Operating Temperature -40°C to 130°C <sup>1</sup>					Schematic	
PGT6465NL	Pri. Inductance		205uH		+/-10%		
	Lk. Inductance	(1-5)W/(6,7,9,10) shorted	10		uH Max		
	DCR	(1-5)	650	mΩ Max			
		(6-7)	280				
		(9-10)	65				
	Hi-Pot	Pri-Sec	4000	Vrms			
	K1 Factor <sup>5,6</sup>	2679					
PGT6466NL	Pri. Inductance		1.8uH		+/-15%		
	Lk. Inductance	(2-5)W/(6,7,9,10) shorted	0.2uH		uH Max		
	DCR	(2-5)	20	mΩ Max			
		(6-7)	150				
		(9-10)	50				
	Hi-Pot	Pri-Sec	3000	Vdc			
	K1 Factor <sup>5,6</sup>	200					

## Notes:


- Storage Temperature: -40°C to 125°C
- The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
- Pri/Lk. Inductance value is measured at 100KHz/0.1Vrms.
- Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. (PGT6465NL becomes PGT6465NLT). Pulse complies with industry standard tape and reel specification EIA481.
- For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2700Gauss. To calculate the peak flux density use the following formula:  
$$B_{pk} \text{ (Gauss)} = K1\_Factor * I_{pk}(A)$$
- In high volt-μsec applications, it is important to calculate the core loss of the transformer. Approximate transformer core loss can be calculated as:  
$$CoreLoss \text{ (W)} = 4.6E-14 * (Freq\_kHz)^{1.63} * (\Delta B\_Gauss)^{2.63}$$
  
where ΔB can be calculated as:  
For Flyback Topology:  $\Delta B = K1\_Factor * \Delta(A)$

# High Frequency Wire Wound Transformers


EFD15 flyback transformer – pin 5+5

## Mechanical

### PGT6465/56NL

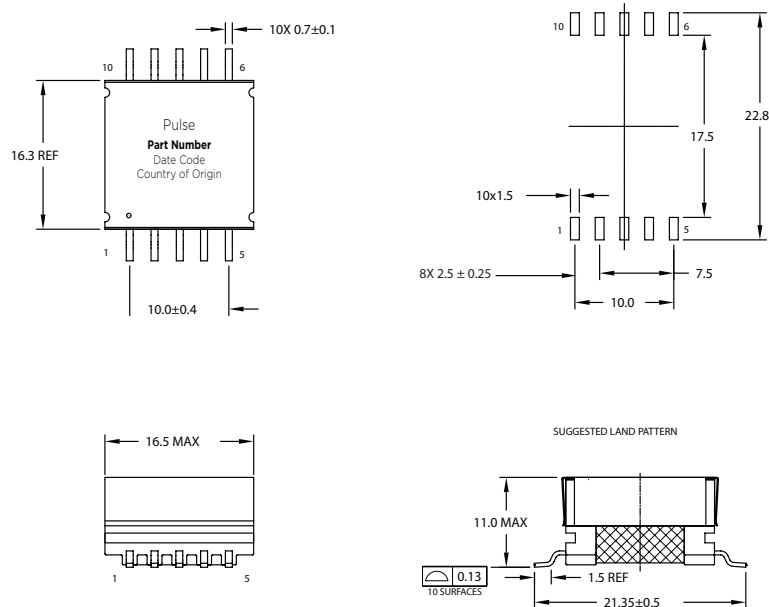

### TAPE & REEL INFO

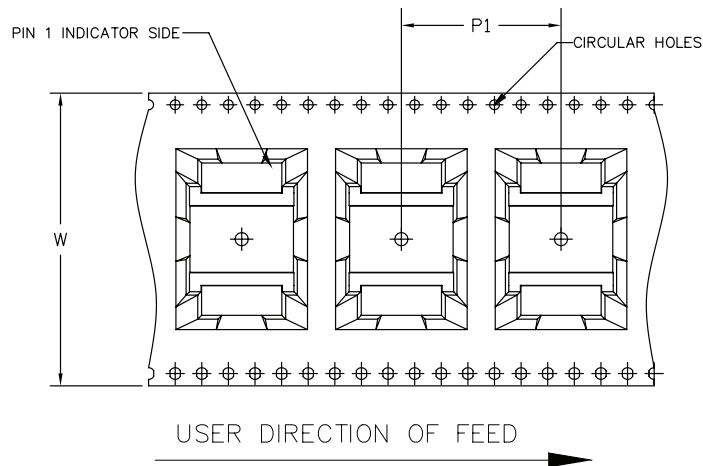

#### SURFACE MOUNTING TYPE, REEL/TAPE LIST

PGT6465/66NL	W	P <sub>1</sub>	K <sub>0</sub>	PCS/REEL
	44	24	11.3	150

### For More Information:

Americas - [prodinfo\\_power@pulseelectronics.com](mailto:prodinfo_power@pulseelectronics.com) | Europe - [power-apps-europe@pulseelectronics.com](mailto:power-apps-europe@pulseelectronics.com) | Asia - [power-apps-asia@pulseelectronics.com](mailto:power-apps-asia@pulseelectronics.com)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2021. Pulse Electronics, Inc. All rights reserved.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[PGT6465NLT](#) [PGT6466NLT](#)