






2-#2.27.1
1/2-DIA. 087
THRU HOLE


HOLE PATTERN: B

HOLE PATTERN: C

SPECIFICATION

- 10120-0324-*09**
- MF=MAUNTING FLANGES
- DESIGN NUMBER
- HOLE PATTERN AND
INSERT DIRECTION (TABLE 1)
- NUMBER OF SIDES WITH CONTACT
- NUMBER OF PINS
- SOCKET SERIES

1. INSULATION RESISTANCE
1.000MQ mini. at DC500V.
2. WITHSTANDING VOLTAGE
AC700V for one minute.
3. CONTACT RESISTANCE
30mQ max. at 10mA/20mV max.
4. OPERATING TEMPERATURE
-40°C ~ +170°C.
5. NORMAL FORCE
20g mini.
/contact at minimum displacement 0.3mm.
90g max.
/contact at maximum displacement 0.8mm.

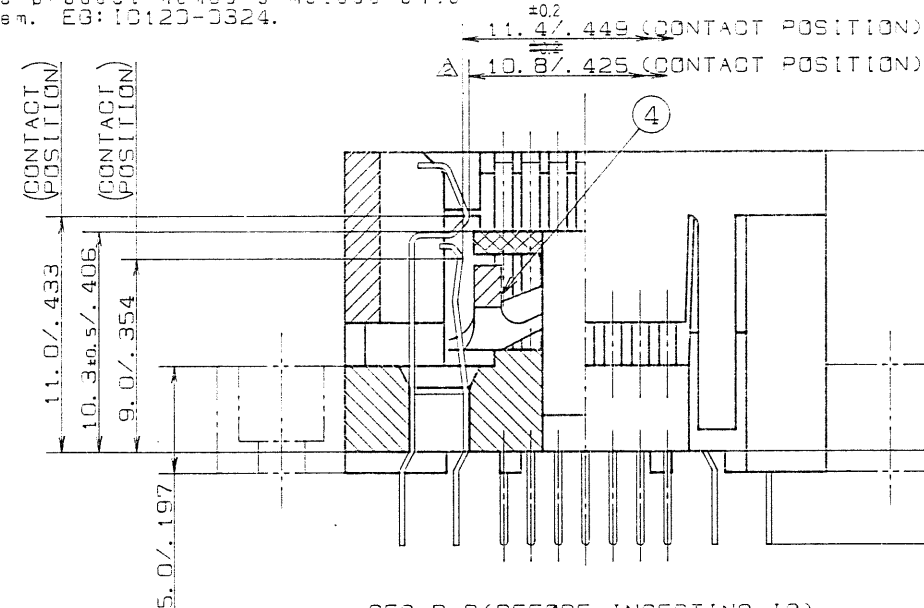

MATCHING IC DIMENSION

HANDLING INSTRUCTIONS (DEAD BUG)

Place the package in an upside down position on the plane and push downward. Then lift Insulator B up to the lock position.

For extraction, push Insulator B downward.
The package comes up for easy removal with a vacuum or tweezers.

TABLE 1

PART TITLE	HOLE PATTERN	NO. OF CONTACT O/D	INSERT DIRECTION
10:20-0324-009**	A	16/16	DEAD BUG
10:20-0324-209**	B	14/13	DEAD BUG
10:20-0324-409**	C	13/14	DEAD BUG

TOLERANCES. $\pm 0.3 / \pm .012$
Unless otherwise specified dimensions.

Ⓐ 山一電機工業株式会社
YAMAICHI ELECTRIC MFG.CO.,LTD.

分類 (CLASS)

名称 (TITLE)


IC120-0324-不09不不

11 图番 (DRAW. NO.)

KL-8519 3/4

REV

尺寸 SCALE	4 : 1	承認 APP.	承認 APP.	檢図 CHK.	製図 DRW.	設計 DSGN.
單位 DIMENSION	m mm INCH	278.2	57.82	87.82	878.3	8776.11
三角図法 3D ANGLE PROJECTION		K.	M.	J.	K.	K.
		Watanabe	Watanabe	Inaki	Watanabe	Watanabe

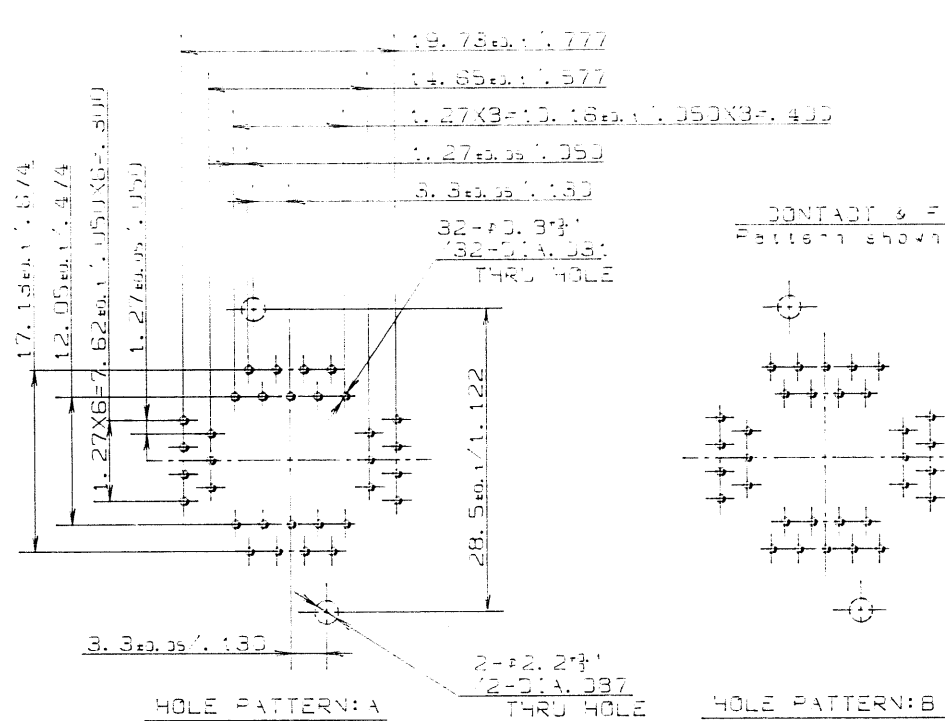


CONTACT & FIXING SCREW HOLE PATTERN. (3-2'10)

SPECIFICATION

- 10120-0324-*09**
- MF=MAUNTING FLANGES
- DESIGN NUMBER
- HOLE PATTERN AND
INSERT DIRECTION (TABLE 1)
- NUMBER OF SIDES WITH CONTACT
- NUMBER OF PINS
- SOCKET SERIES

1. INSULATION RESISTANCE
1.000MΩ mini. at DC500V.
2. WITHSTANDING VOLTAGE
AC700V for one minute.
3. CONTACT RESISTANCE
30mΩ max. at 10mA/20mV max.
4. OPERATING TEMPERATURE
-40°C to +170°C.
5. NORMAL FORCE
20g mini.
/contact at minimum displacement 0.3mm.
90g max.
/contact at maximum displacement 0.8mm.

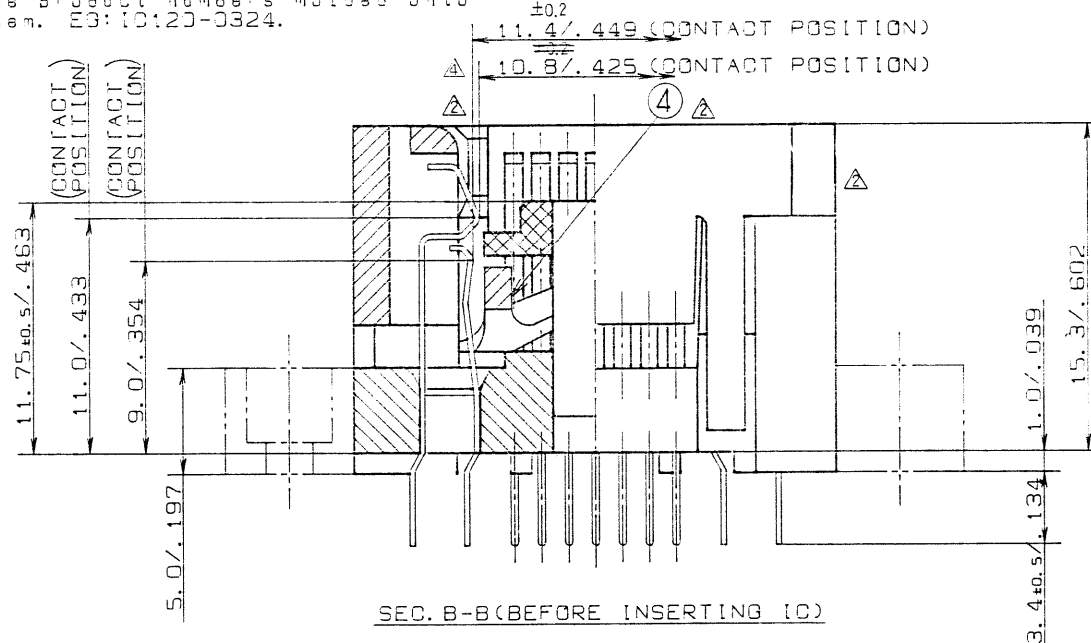

INSERT DIRECTION
(LIVE BUG)

MATCHING TO DIMENSION

HANDLING INSTRUCTIONS (LIVE BUG)

Place the package right side up onto the plane and push downward.
Then lift Insulator B up to the lock position.

For extraction, push insulator B downward.
The package comes up for easy removal with a vacuum or tweezers.

PART TITLE	HOLE PATTERN	NO. OF CONTACT C/P	INSERT DIRECTION
10:20-3824-109**	4	16/16	LIVE BUS
10:20-3824-809**	6	14/13	LIVE BUS
10:20-3824-609**	3	13/14	LIVE BUS

TOLERANCES. $\pm 0.3/\pm 0.012$
Unless otherwise specified dimensions

Ⓐ 山一電機工業株式会社
YAMAICHI ELECTRIC MFG.CO.,LTD.

分類 (CLASS)

Y. R. (TITLE)

10120-0324-* 39**

附录: DRW N

KI - 3519 4/4

R

Copyright © 2003 by John Wiley & Sons, Inc.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Yamaichi Electronics:](#)

[IC120-0324-109](#) [IC120-0324-309](#)