



MVP-5100/6100

SERVICE MANUAL ABOUT GETTING STARTED

Rev.: 1.1



Table of Contents

Getting Started

MVP-5100

- Install HDD/SSD
- Install CFast Card
- Install M.2 module
- Install Mini PCIe module
- Wall mount

MVP-5100-MXM

- Install HDD/SSD
- Install M.2 module
- Install Mini PCIe module
- Wall mount

MVP-6120/6140

- Install HDD/SSD
- Install HDD/SSD (Option)
- Install CFast Card
- Install M.2 module
- Install Mini PCIe module
- Wall mount
- Install Fan Kit (Option)
- PCIe/PCI card's max. dimension


MVP-5100

Install HDD/SSD

1. Remove the 6 bottom cover screws by screwdriver



2. Remove the bottom cover by lifting

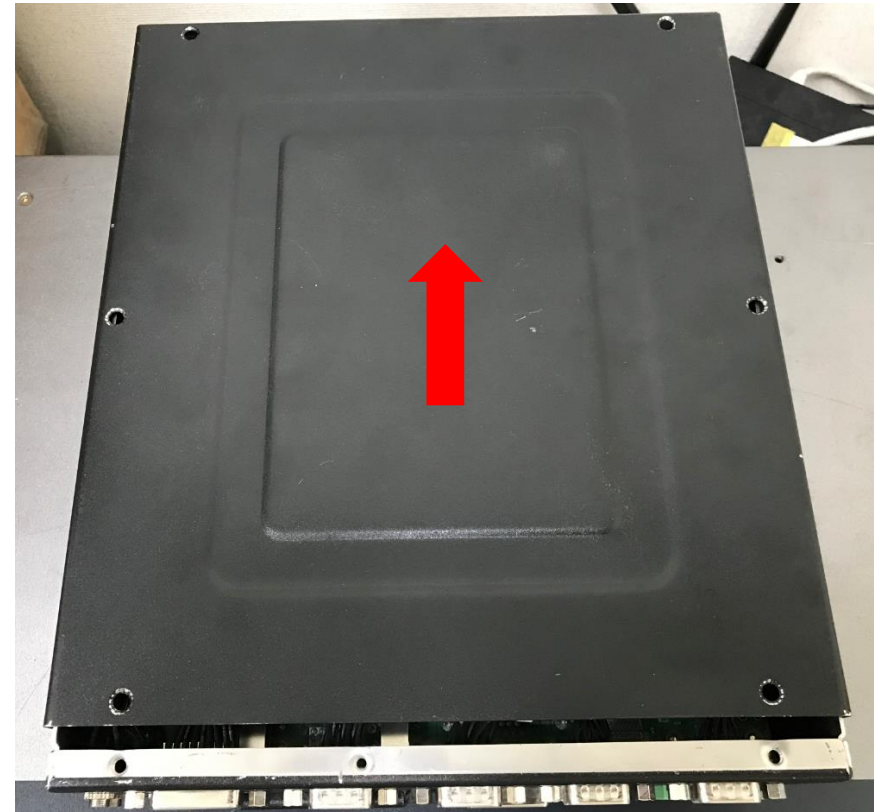

Install HDD/SSD

3. Release the hand screw to take the two bracket out.



4. Use 8 of the included M3 screws to fix two 2.5" HDD or SSD unit to the Tray from the accessory pack.



Note: 2.5" HDD or SSD maximum thickness support to 15mm

Install HDD/SSD



5. Gently seat the drive into the SATA connector on the PCB and 4 hand screws are fix to the bracket.



Install CFast card


1. Remove the screws fixing the CFast socket cover on the front panel and remove the cover.

2. True the CFast card with the alignment guide.
3. Gently insert the CFast card until it is firmly seated in the socket.

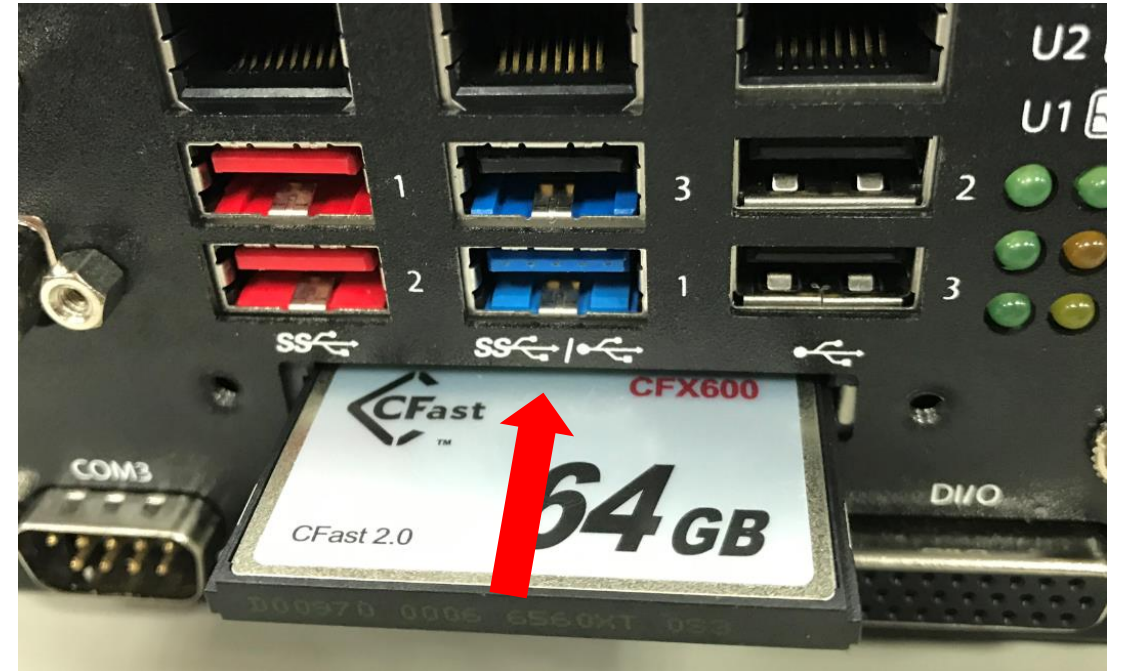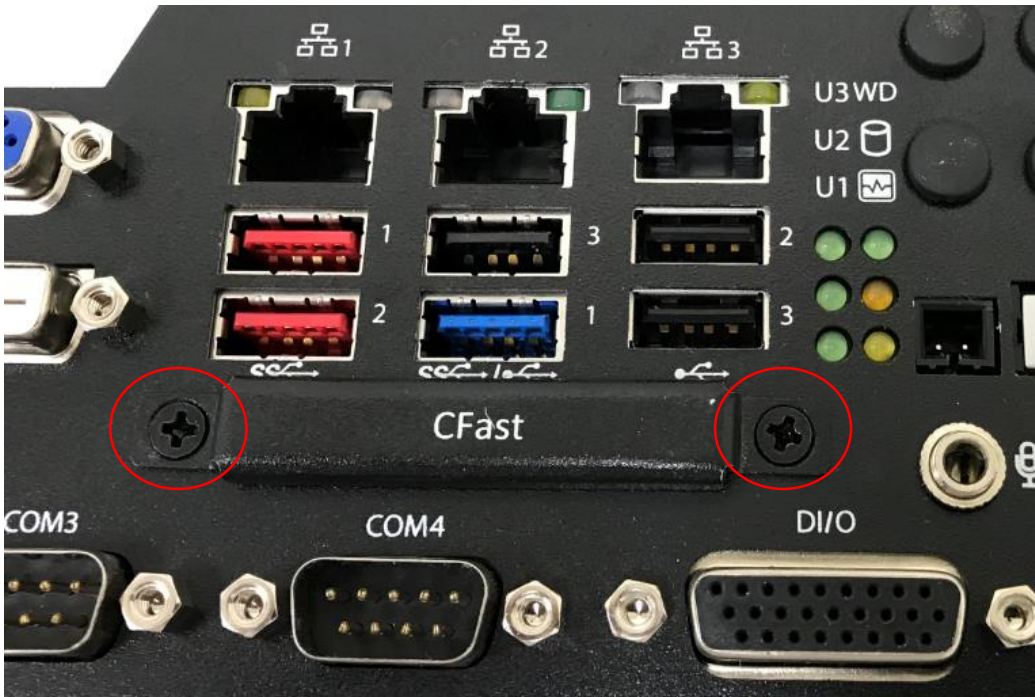


Install M.2 module

1. Gently pull the drive out of the SATA connector on the PCB after loosening the 4 hand screws.

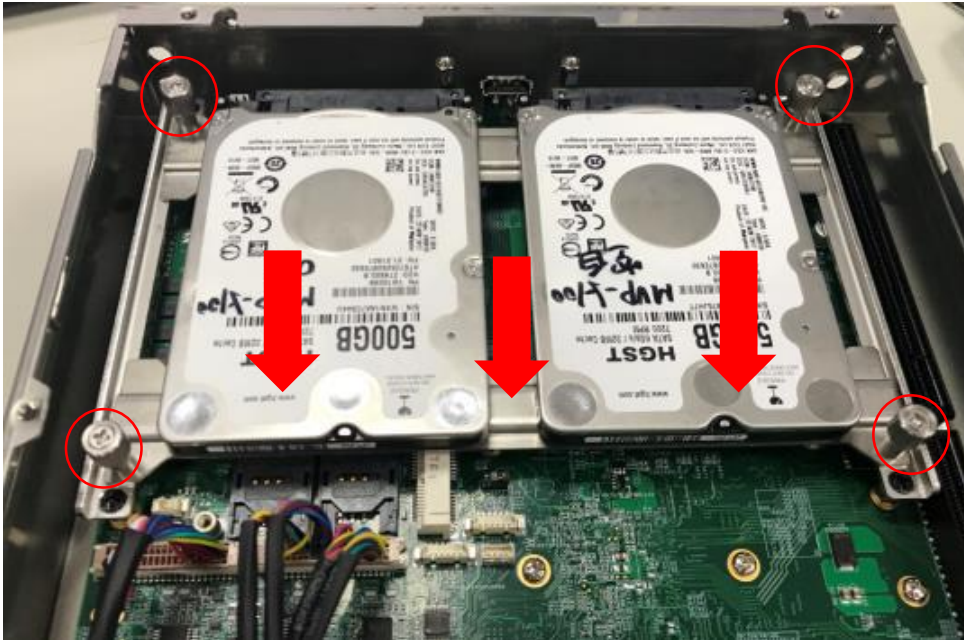

2. Use the included M3 standoff screw to fix it on the main board, The position depending on the size of M.2.

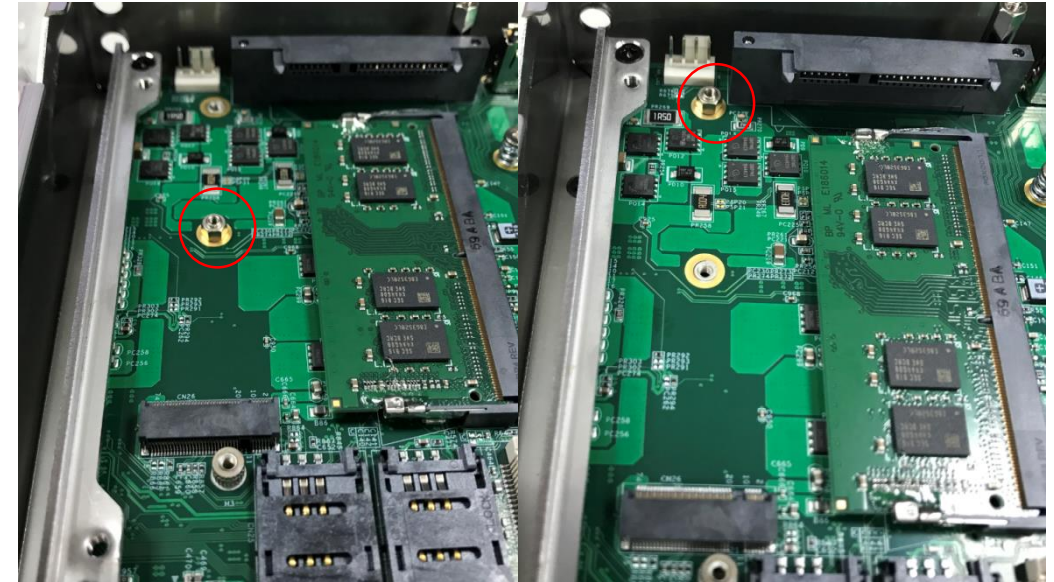


M.2 size 3042

M.2 size 2280


Install M.2 module

3. Install the M.2 module and lock the included screw.

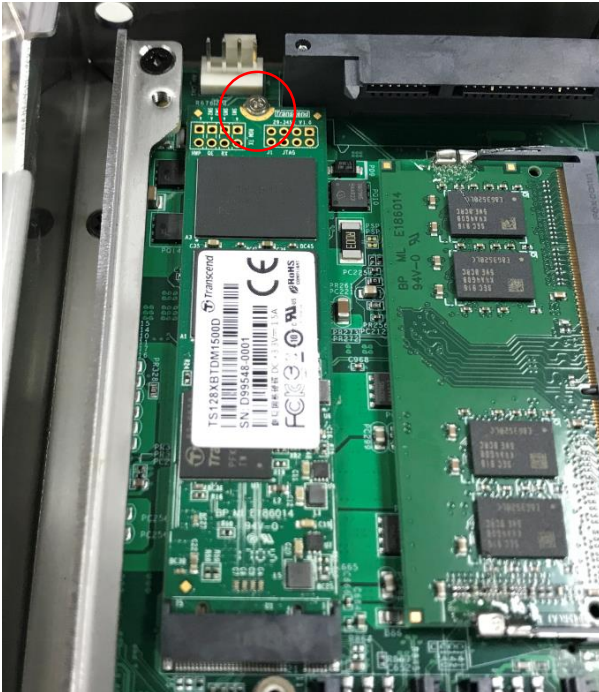

Install Mini PCIe module

3. Gently pull the drive out of the SATA connector on the PCB after loosening the 4 hand screws.

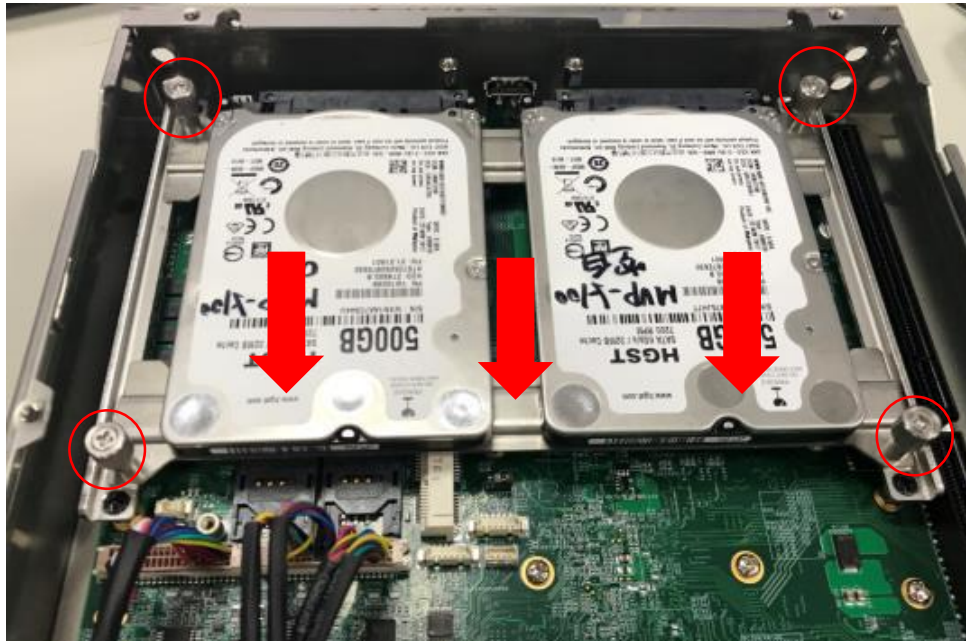

4. Install the miniPCIe module and lock the included 2 M2.5 screws.




Wall-mount

1.Remove the 6 bottom cover screws by screwdriver





2.Use the 6 M4 screws shipped with the controller to fix the 2 wall-mount brackets, also included, to the chassis, according to the spacing dimensions of the screw holes and brackets, as shown.

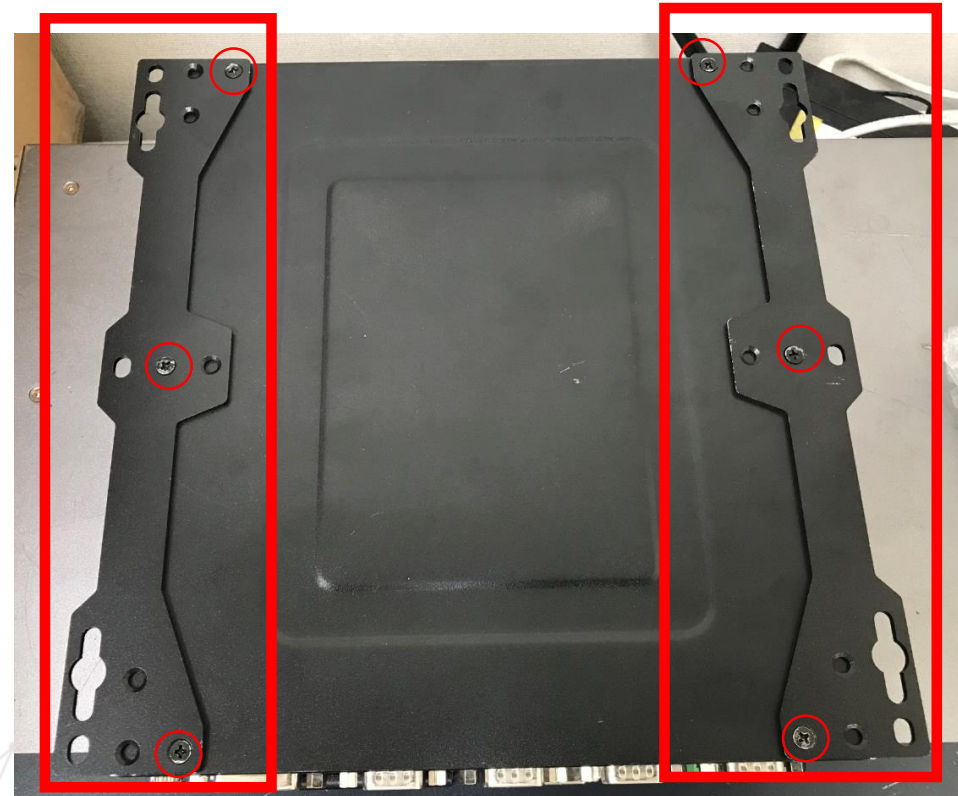

Wall mount

3. Once final assembly as shown is complete, mount the MVP-5000 on the wall via screw holes.

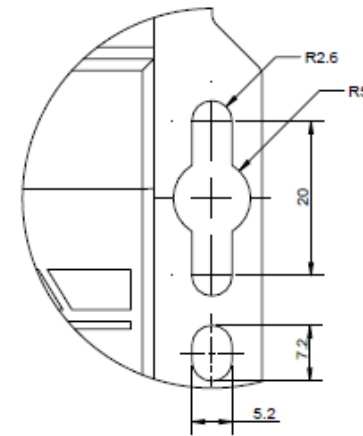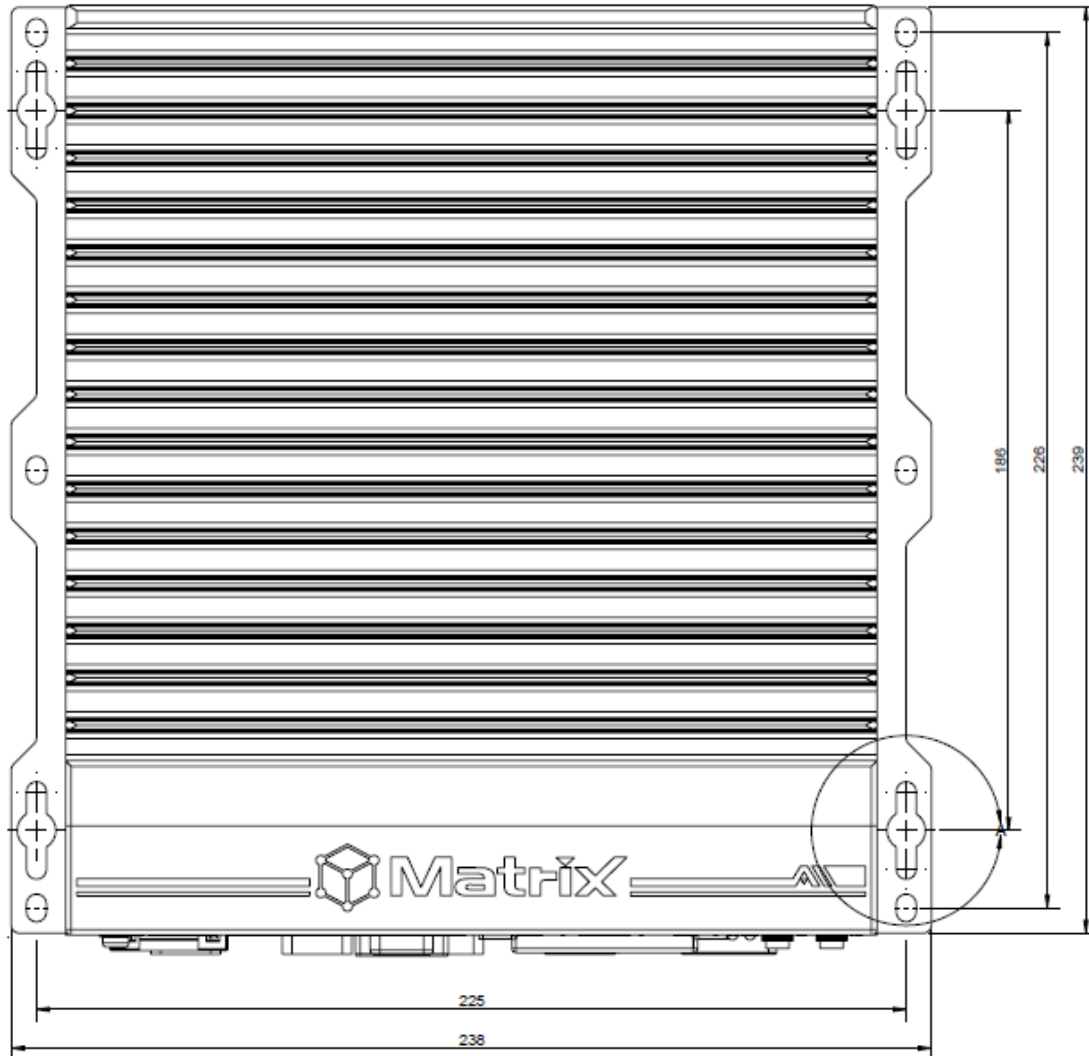

細部放大圖 A
比例 2:1


MVP-6120/6140

Install HDD/SSD

1. Remove the top cover after loosening the hand screw




2. Remove the 4 rear base case screws by screwdriver

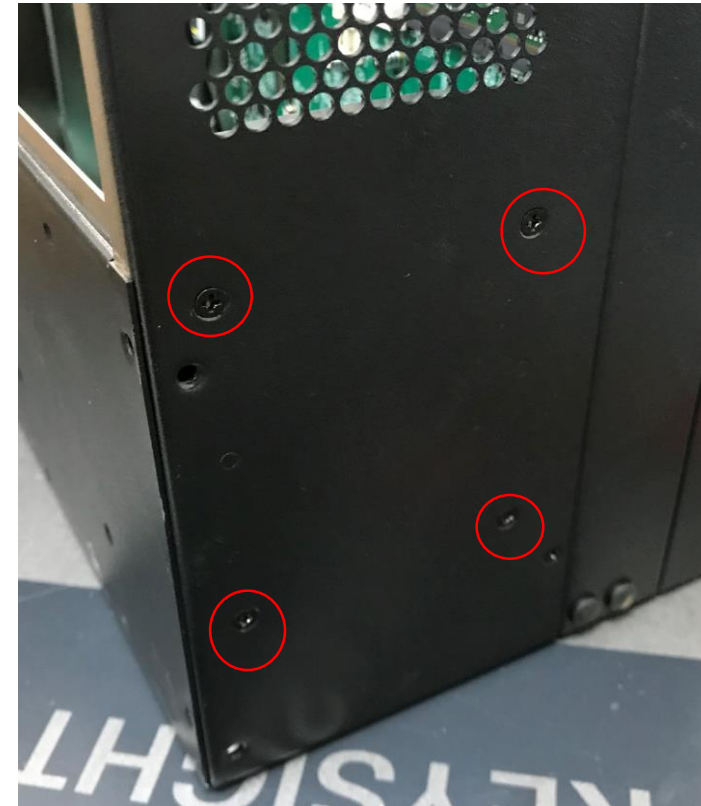

Install HDD/SSD

3. Remove the bracket by lifting

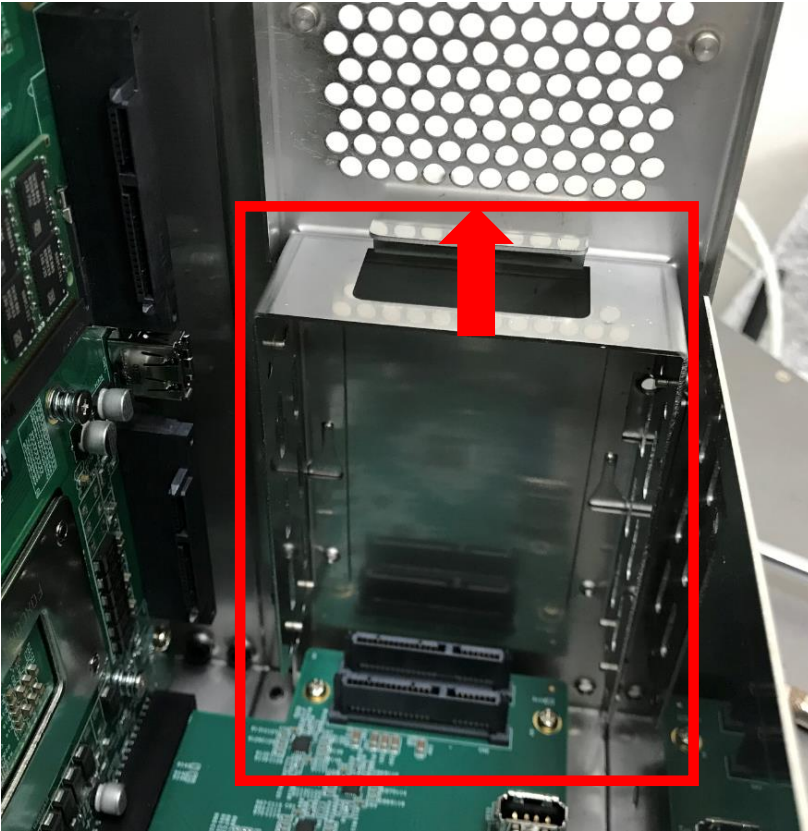

4. Use 8 of the included M3 screws to fix two 2.5" HDD or SSD unit to the bracket.



Note: 2.5" HDD or SSD maximum thickness support to 9.5mm

Install HDD/SSD

3. Gently seat the drive into the SATA connector on the PCB.




Install HDD/SSD (option)



Bracket X 1




Screw X 8

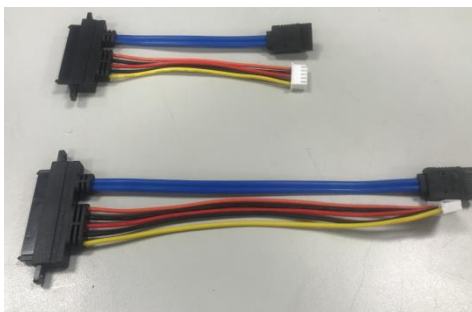

SATA/Power cable(short) X 1

SATA /Power cable(long) X 1

1. Combined with two 2.5" HDD or SSD

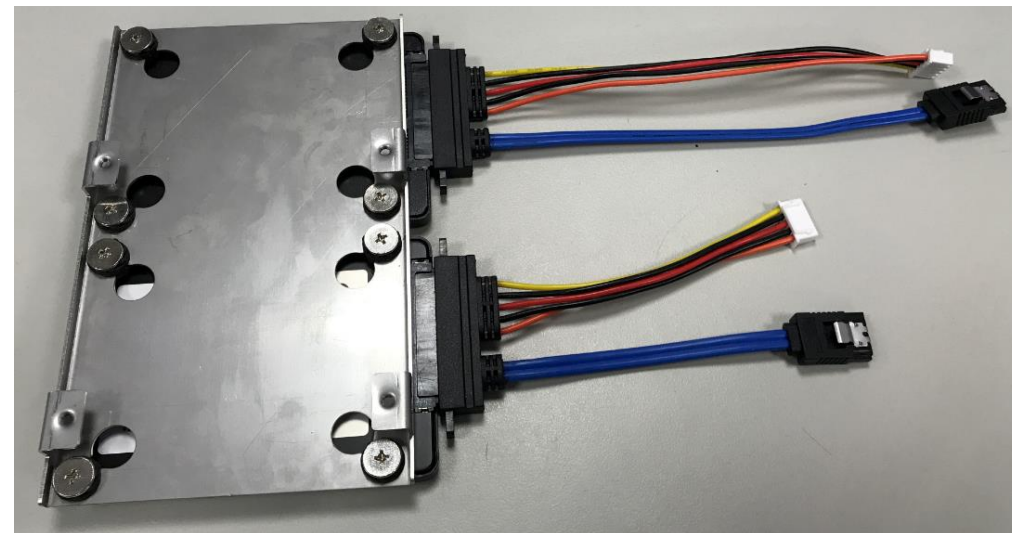

Note: 2.5" HDD or SSD maximum thickness support to 15mm

Install HDD/SSD (option)

1. Remove the top cover after loosening the hand screw.




2. Remove the 4 side base case screws by screwdriver.



Install HDD/SSD (option)

3. Put the HDD or SSD assembly into the system and lock the 4 side base case screws .

4. Connect the cables to the PCB in sequence.

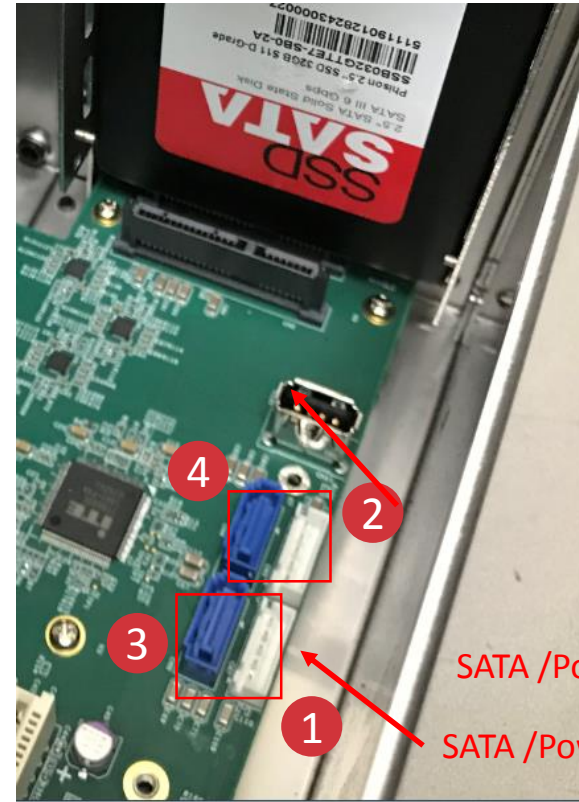



SATA /Power cable(long)

SATA /Power cable(short)

Install CFast card

1. Remove the screws fixing the CFast socket cover on the front panel and remove the cover.

2. True the CFast card with the alignment guide.
3. Gently insert the CFast card until it is firmly seated in the socket.

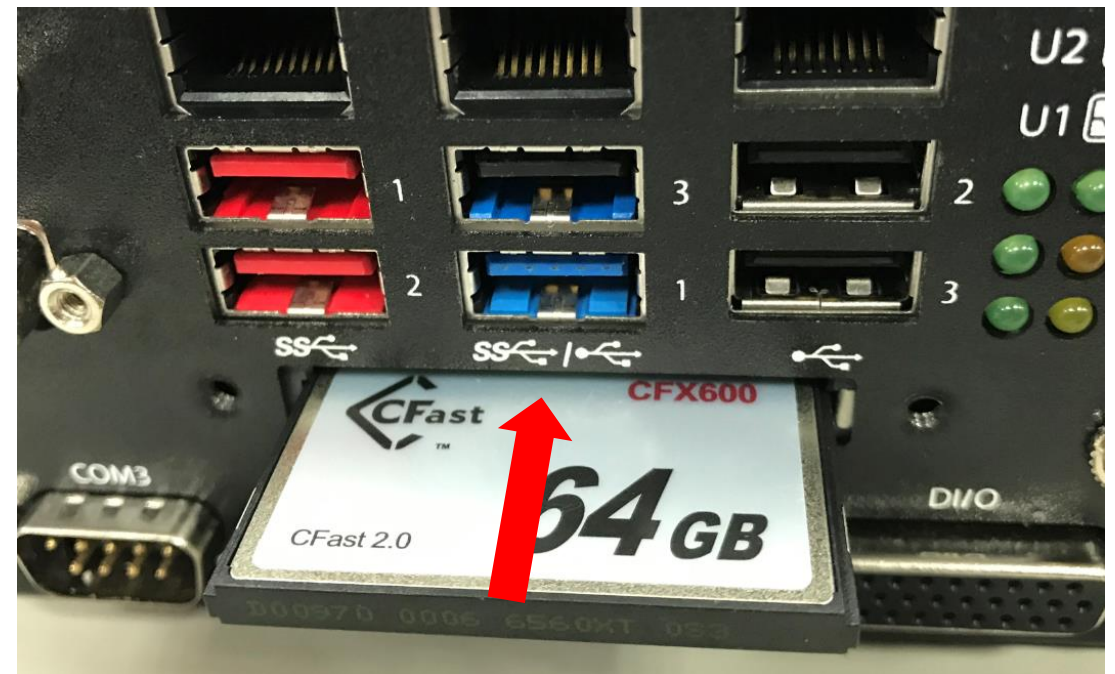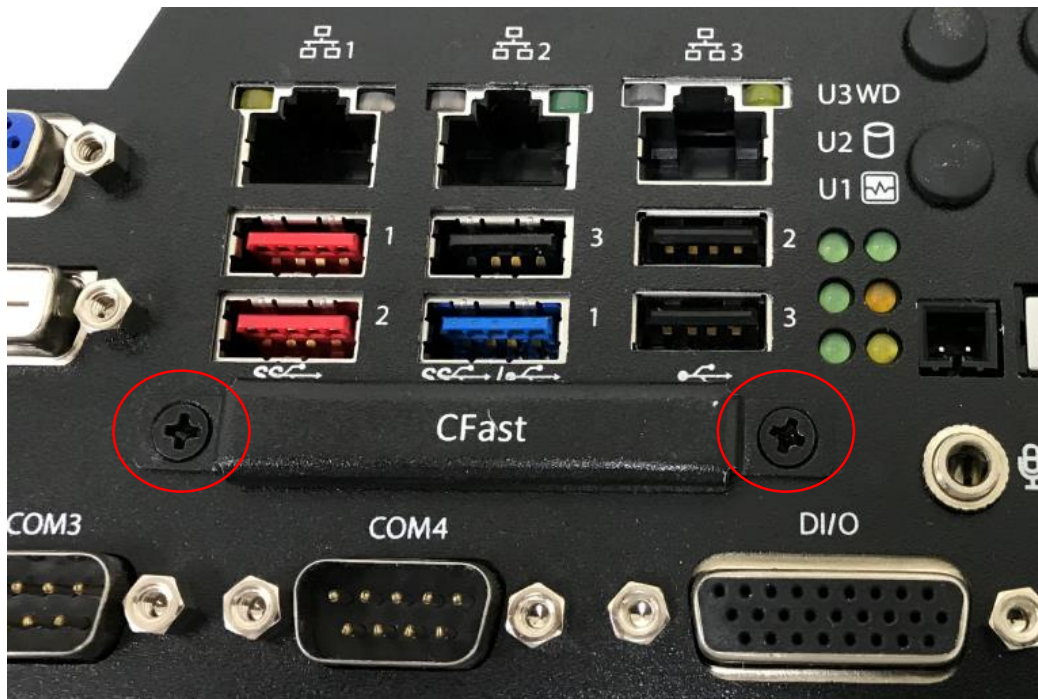

Install M.2 module


1. Remove the top cover after loosening the hand screw.



2. Use the included M3 standoff screw to fix it on the main board, The position depending on the size of M.2.



M.2 size 3042

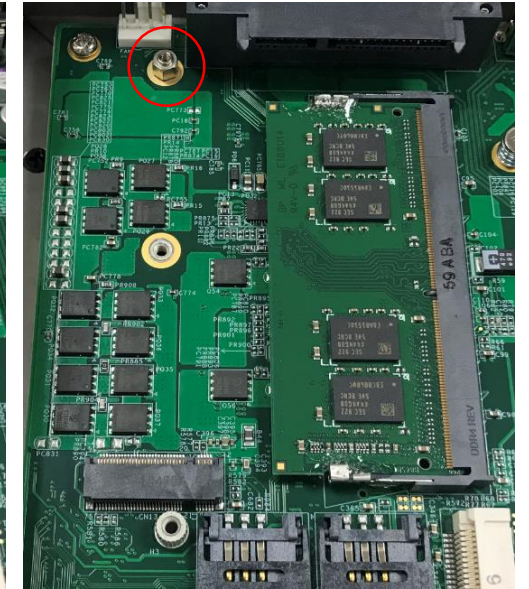

M.2 size 2280

Install M.2 module

3. Install the M.2 module and lock the included screw.



Install Mini PCIe module

1. Remove the top cover after loosening the hand screw.





2. Install the miniPCIe module and lock the included 2 M2.5 screws.





Wall mount for MVP-6120 (rear side)

1. Use the 6 M4 screws shipped with the controller to fix the 2 wall-mount brackets, also included, to the chassis, according to the spacing dimensions of the screw holes and brackets, as shown.

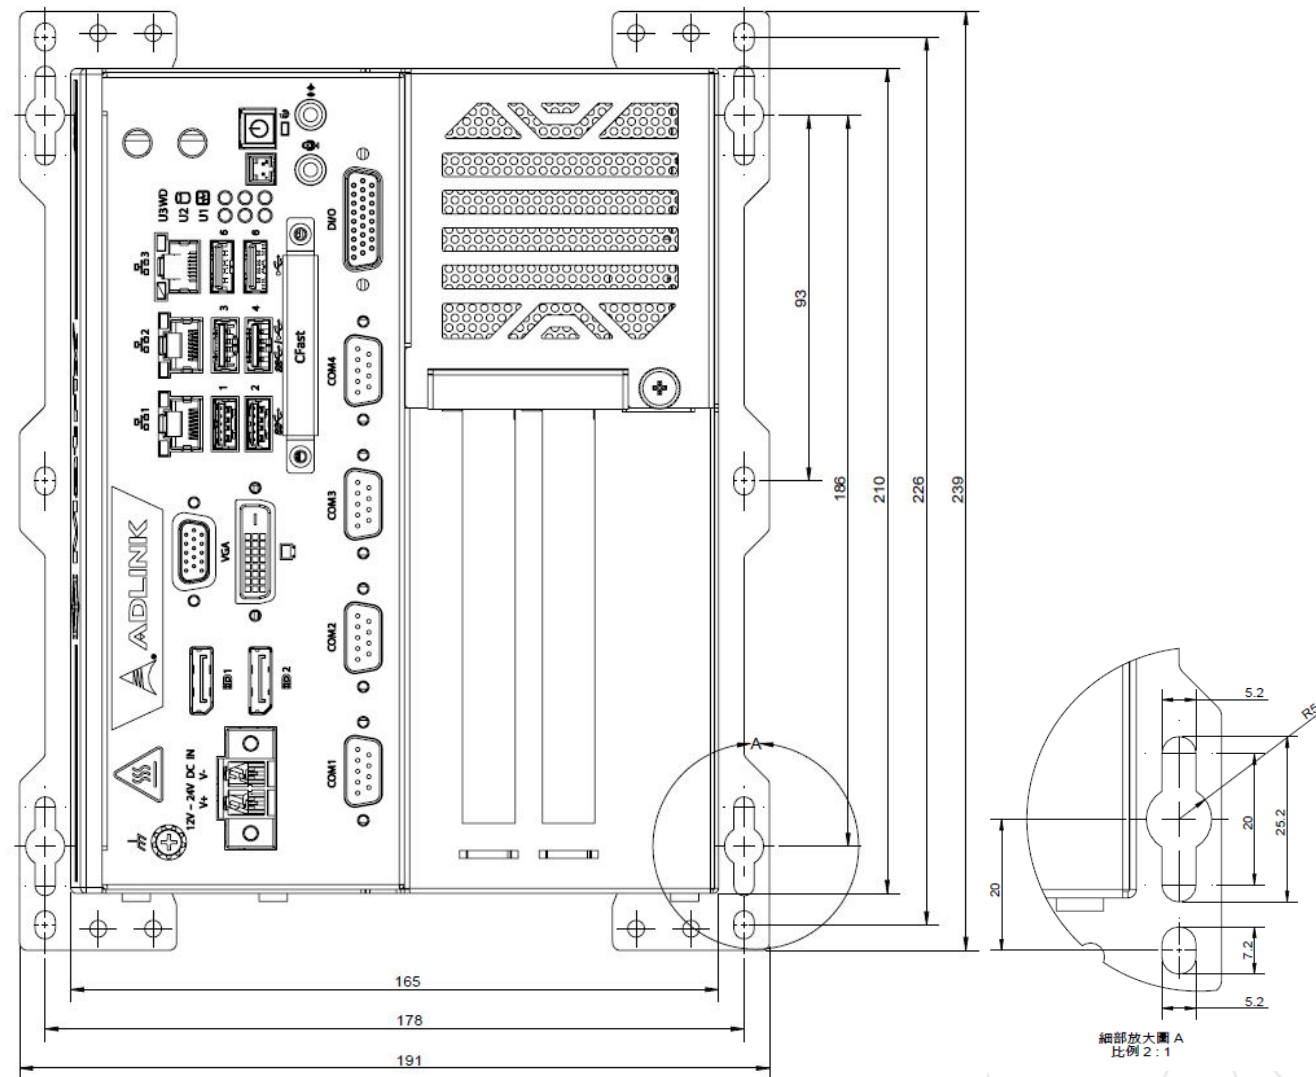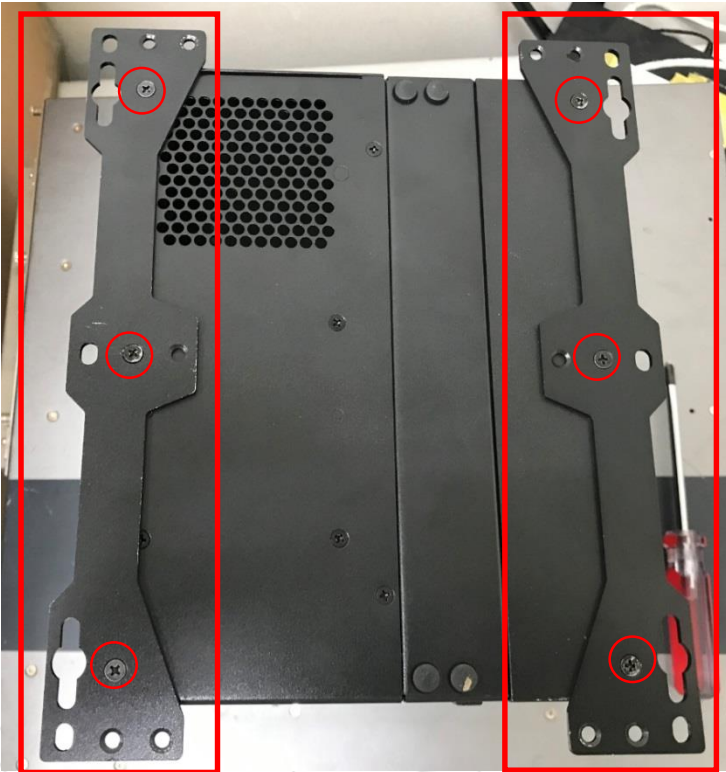



Wall mount for MVP-6140 (rear side)

1. Use the 6 M4 screws shipped with the controller to fix the 2 wall-mount brackets, also included, to the chassis, according to the spacing dimensions of the screw holes and brackets, as shown.

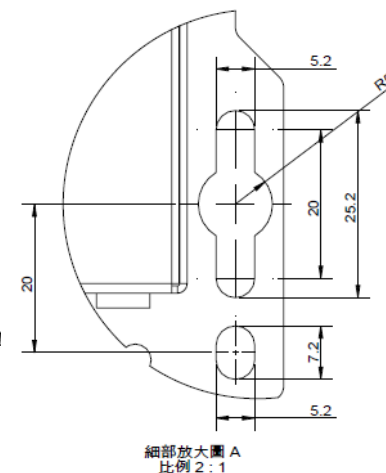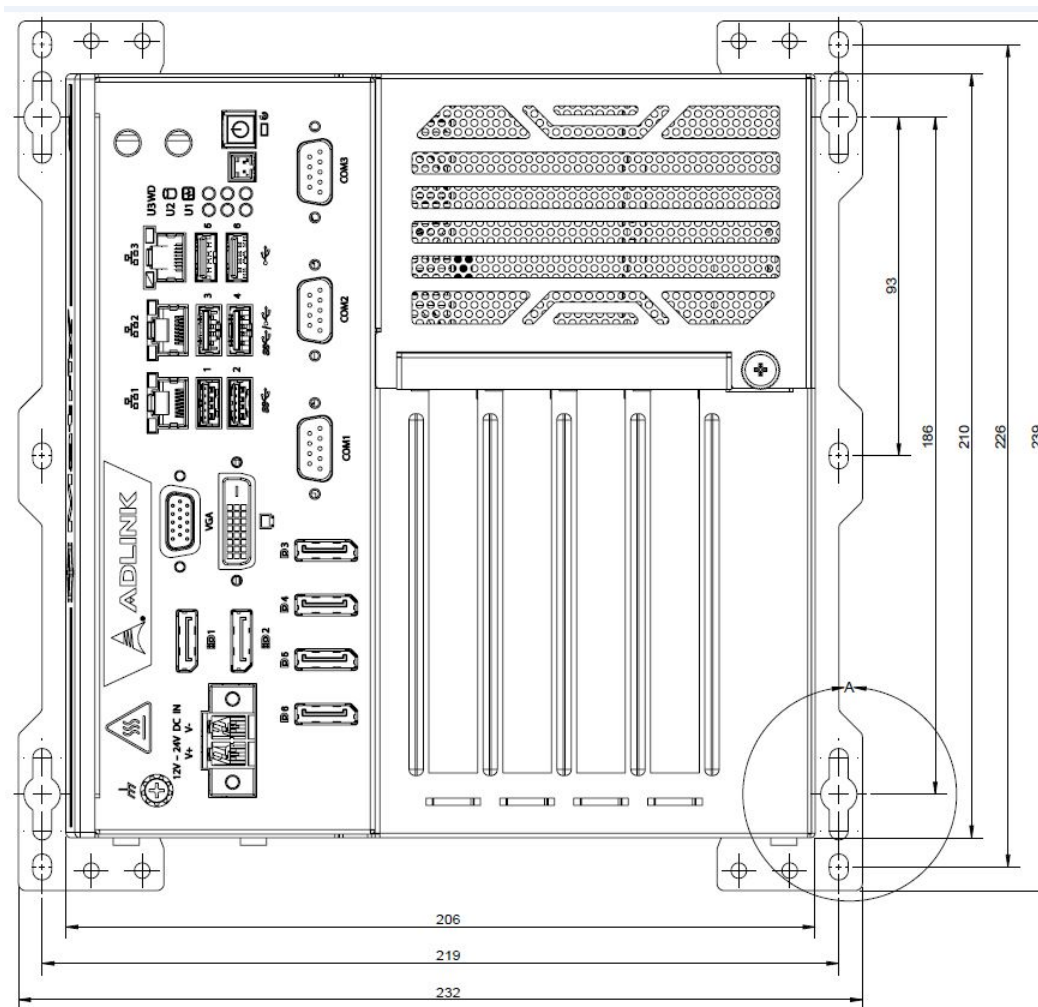


Wall mount for MVP-6120/6140 (right side)

1. Use the 6 M4 screws shipped with the controller to fix the 2 wall-mount brackets, also included, to the chassis, according to the spacing dimensions of the screw holes and brackets, as shown.

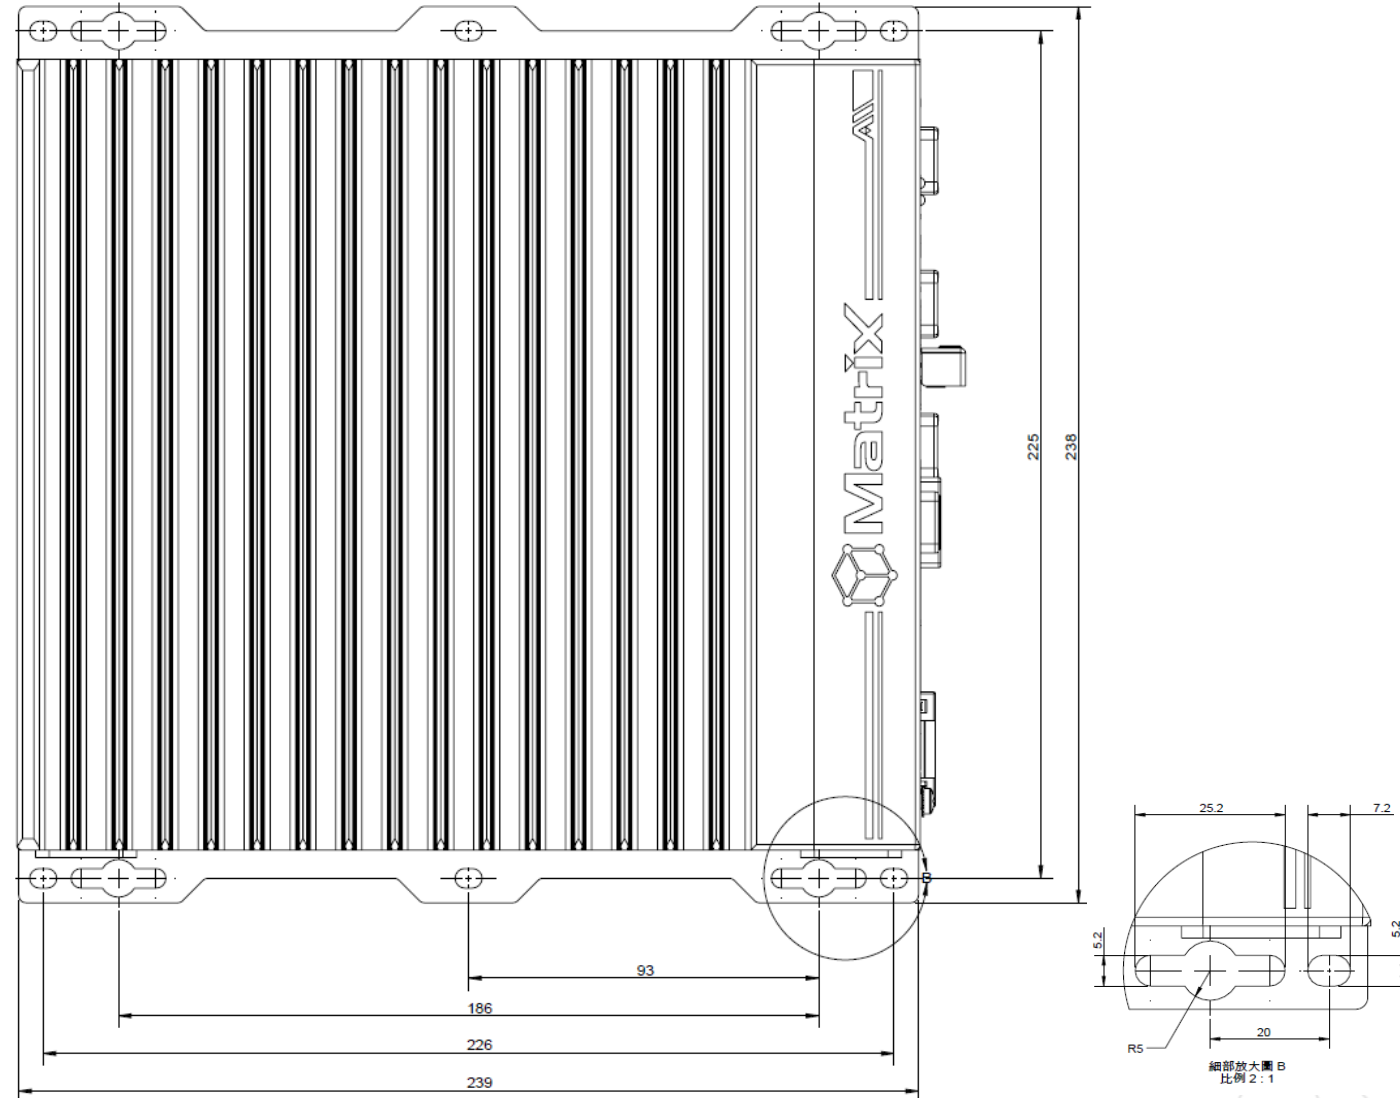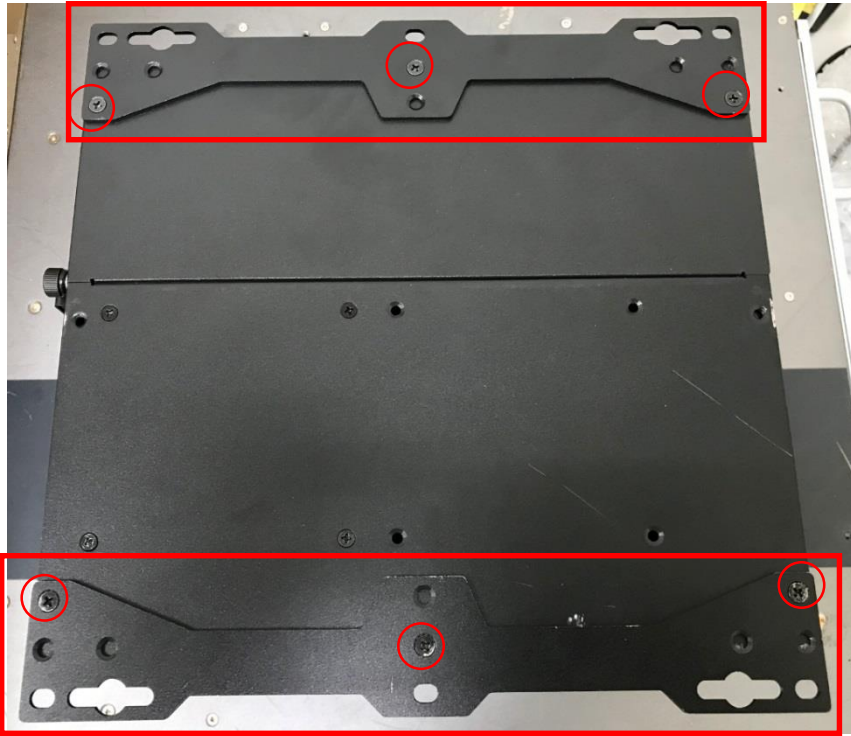

Install Fan kit (option)

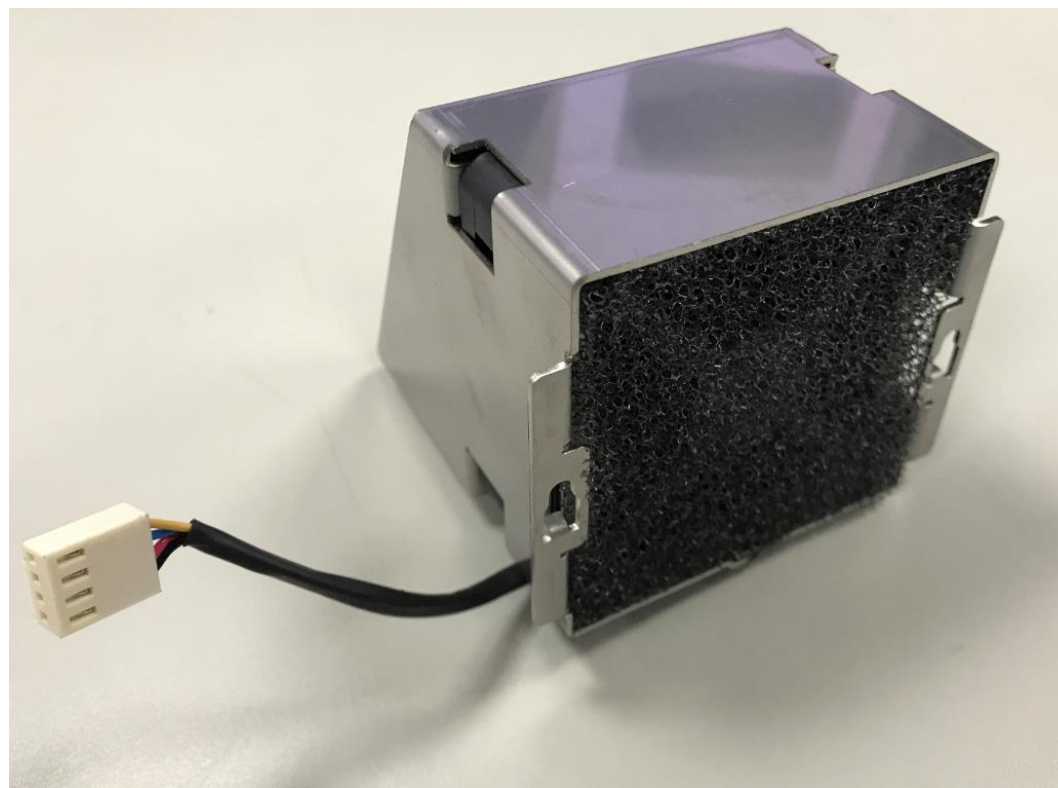


FAN KIT X 1

Install Fan kit (option)



1. Remove the top cover after loosening the hand screw.




2. First connect the fan connector to the PCB, and then fasten the FAN ASSM SET to the chassis.

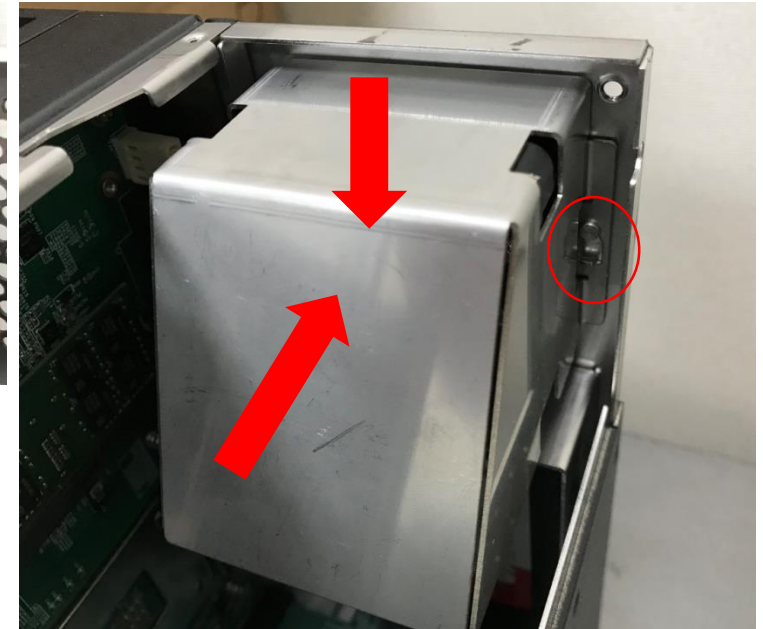

Max. PCI/PCIe card dimension

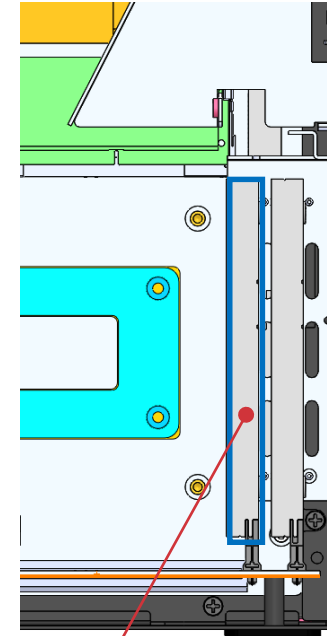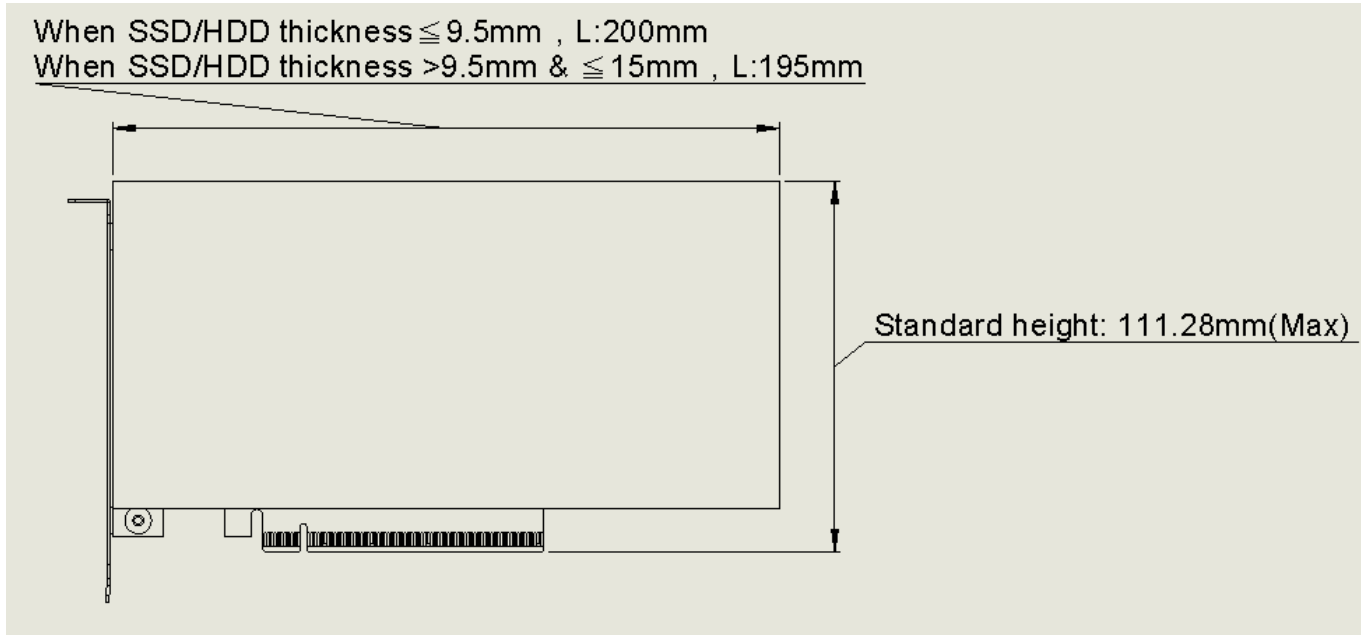

SSD/HDD thickness $\leq 9.5\text{mm}$

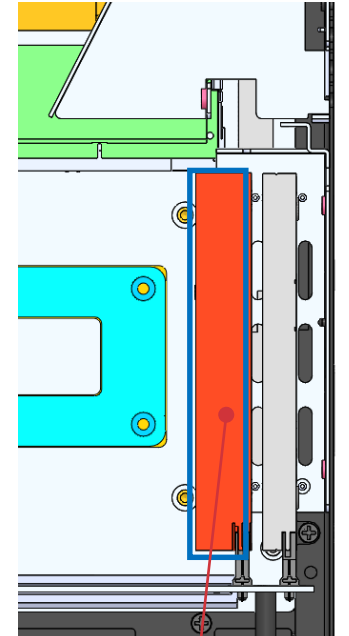

SSD/HDD thickness $>9.5\text{mm}$ & $\leq 15\text{mm}$


MVP-5100-MXM

Install HDD/SSD

1. Remove the 6 HEATSINK screws by screwdriver




2. Remove the HEATSINK by lifting

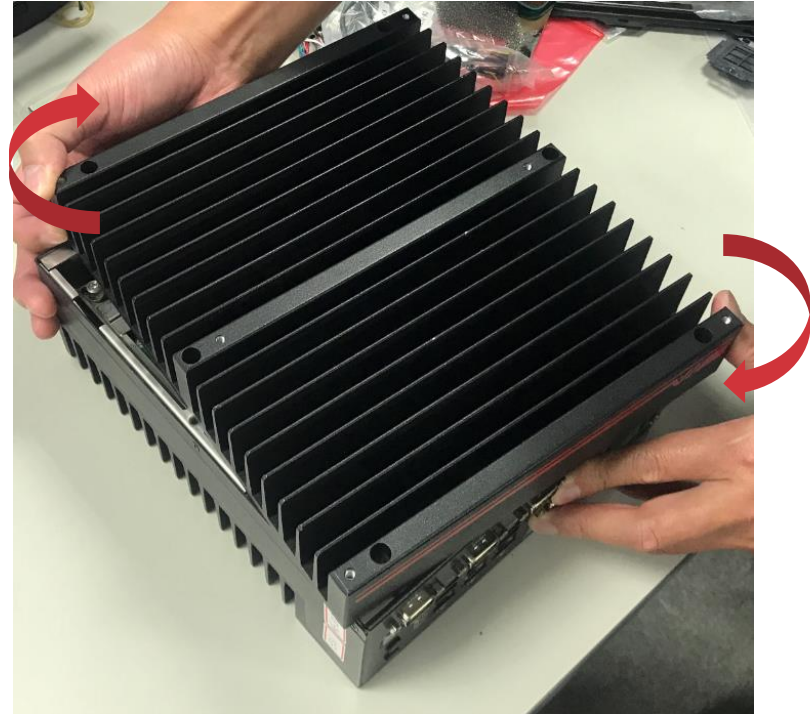


Install HDD/SSD

3. Release the FPC' PCIe16 golden finger.

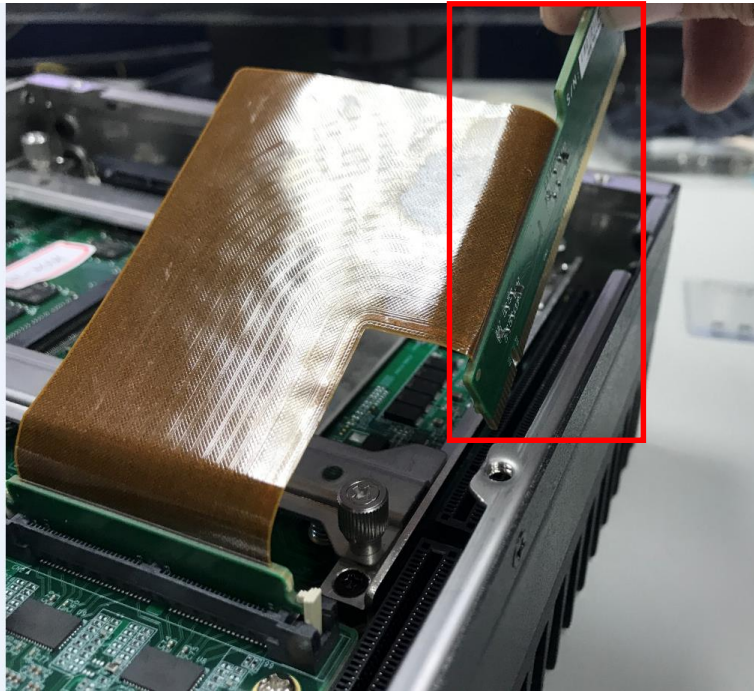

4. Release the hand screw to take the two bracket out.

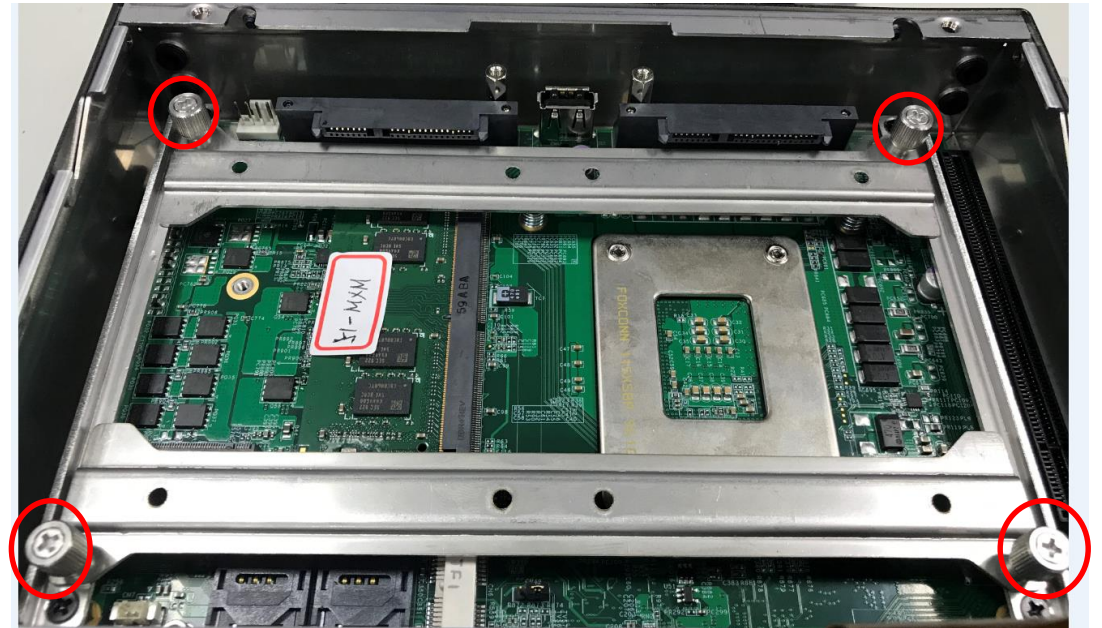


Install HDD/SSD

5. Use 8 of the included M3 screws to fix two 2.5" HDD or SSD unit to the bracket from the accessory pack.




6. Gently seat the drive into the SATA connector on the PCB and 4 hand screws are fix to the bracket.
7. Replace the FPC' PCIe16 golden finger and HEATSINK and refasten screws.

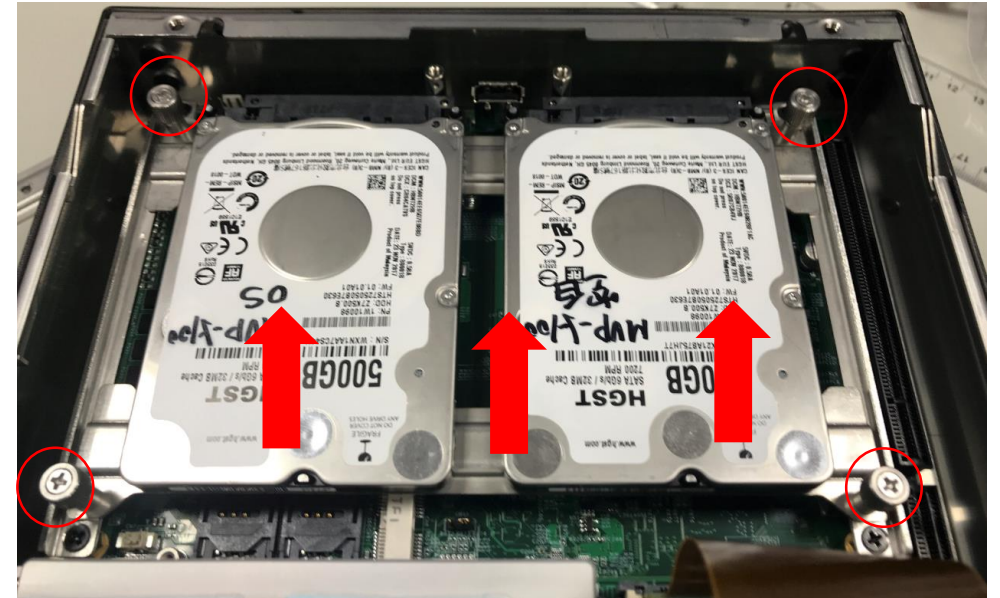


Install M.2 module

1. Gently pull the drive out of the SATA connector on the PCB after loosening the 4 hand screws.

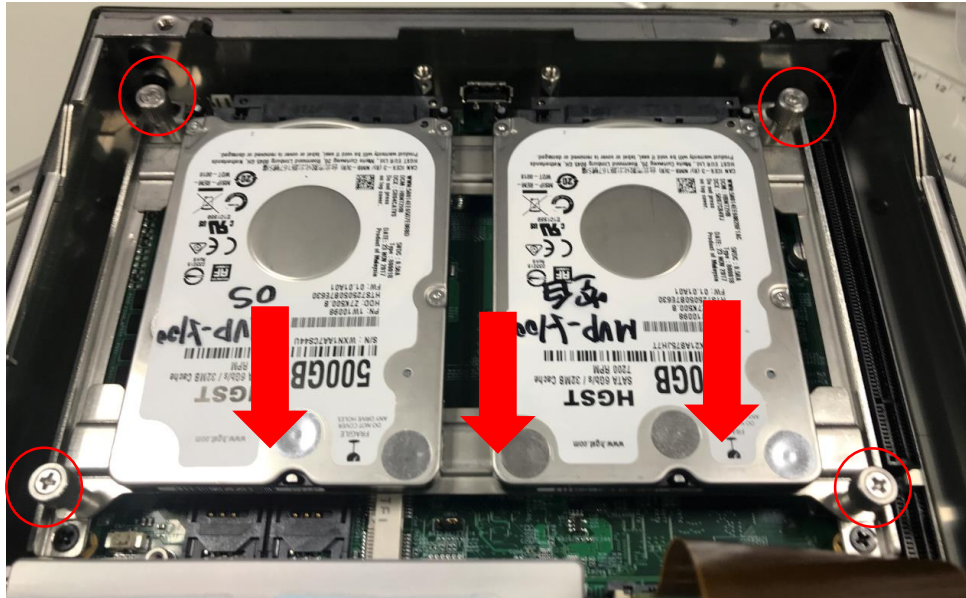

2. Use the included M3 standoff screw to fix it on the main board, The position depending on the size of M.2.

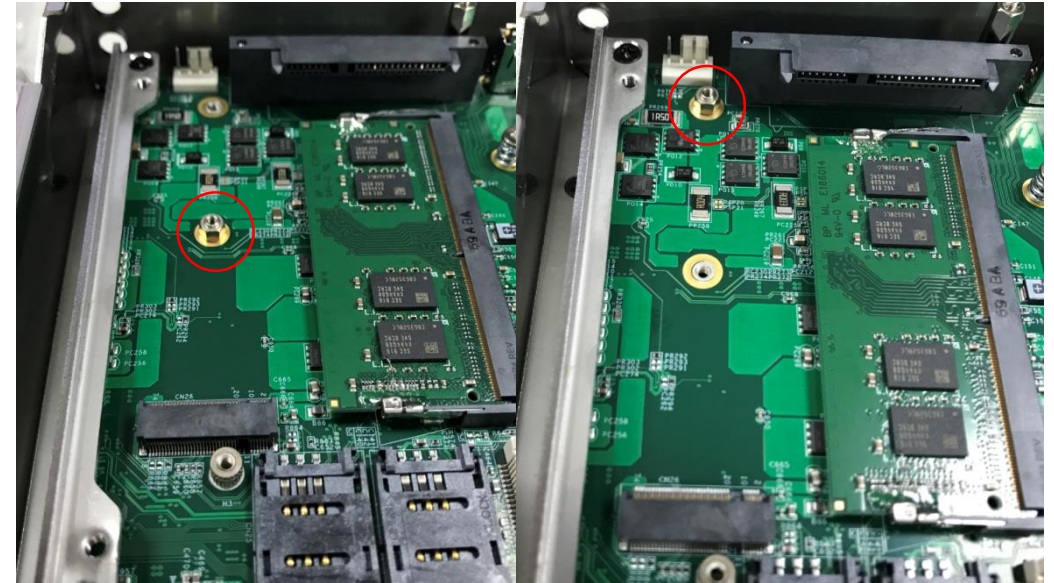

M.2 size 3042

M.2 size 2280


Install M.2 module

3. Install the M.2 module and lock the included screw.



Install Mini PCIe module

1. Gently pull the drive out of the SATA connector on the PCB after loosening the 4 hand screws.


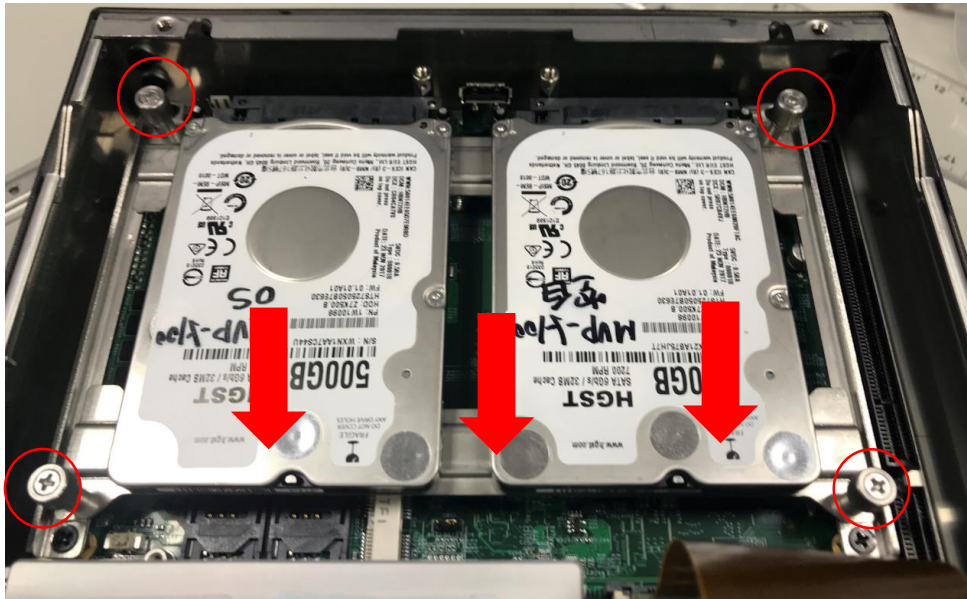


2. Install the miniPCIe module and lock the included 2 M2.5 screws.





Wall mount

1. Use the 6 M4 screws shipped with the controller to fix the 2 wall-mount brackets, also included, to the chassis according to the spacing dimensions of the screw hole and brackets, as shown.

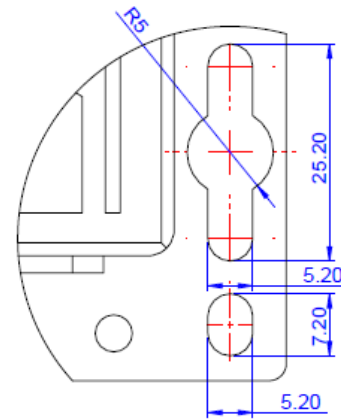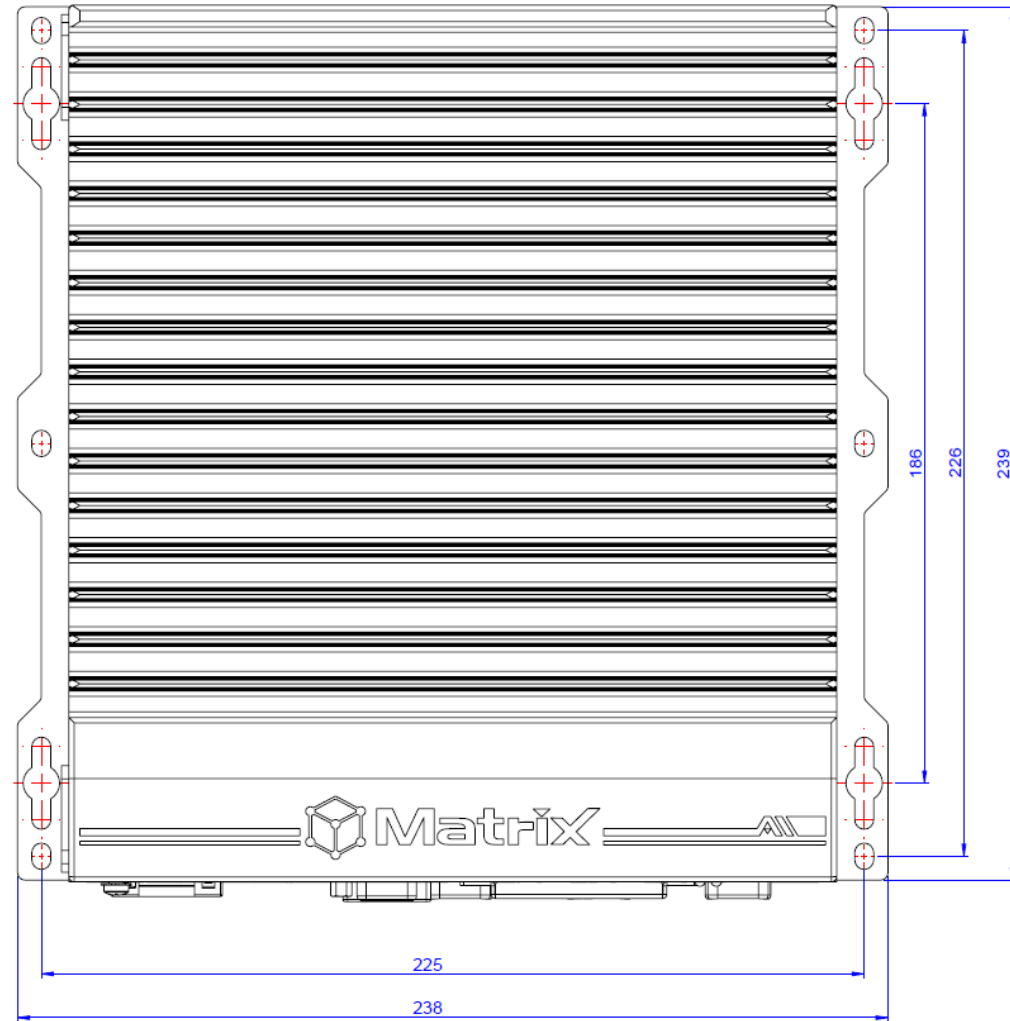

Wall mount

1. Use the 6 M4 screws shipped with the controller to fix the 2 wall-mount brackets, also included, to the chassis, according to the spacing dimensions of the screw holes and brackets, as shown.

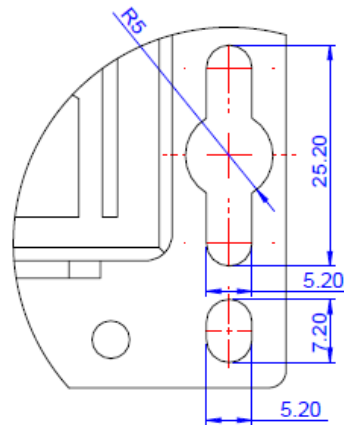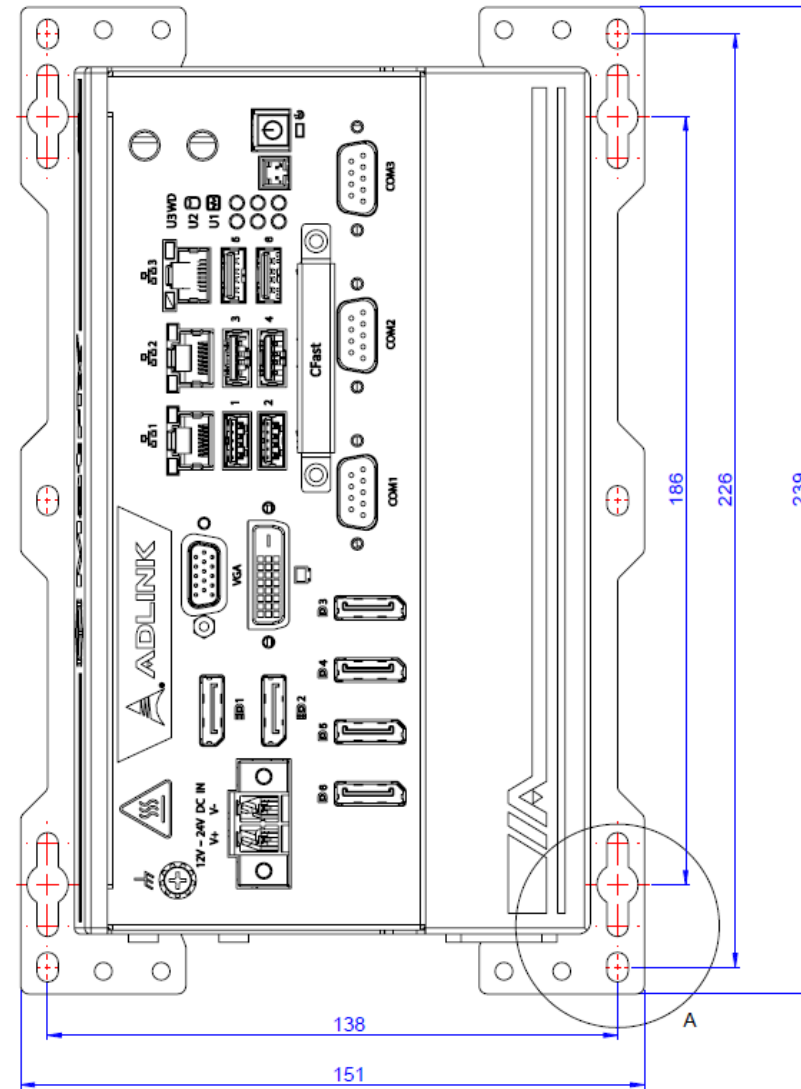



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ADLINK Technology:](#)

[MVP-5100 Wall mount BKT](#)