

M12-Receptacle Connectors In Accordance With IEC 61076-2-101


RSFPM.../0.5 M | RKFPM.../0.5 M



Male, 3-, 4-, 5- and 8-Pole

M12 Receptacle connector, combined FIXCON/ M12 male connector for front mounting, adjustable, assembled stranded wire, solder contacts potted with epoxy, chassis side thread M16 x 1.5.

RSFPM.../0.5 M

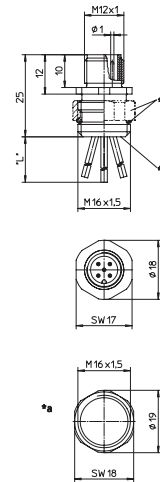


*a O-ring enclosed separately
*b solder contacts potted with epoxy
L=0.5 m

Female, 3-, 4-, 5- and 8-Pole

M12 Receptacle connector, combined FIXCON/ M12 female connector for front mounting, adjustable, assembled stranded wire, solder contacts potted with epoxy, chassis side thread M16 x 1.5.

RKFPM.../0.5 M

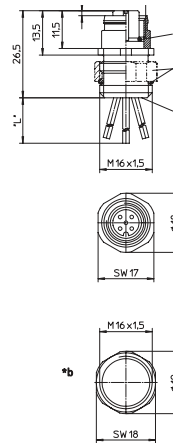


*a O-ring enclosed separately
*b solder contacts potted with epoxy
L=0.5 m


Pin Assignments

Face Views / M12, Male / Female


3 pole




4 pole



5 pole



8 pole





Be Certain with Belden

M12-Receptacle Connectors In Accordance With IEC 61076-2-101
 RSFPM.../0.5 M | RKFPM.../0.5 M

Technical Data

Environmental

Degree of protection IP 67 / NEMA 6P
 Operating temperature range -25°C (-13°F) / +80°C (+176°F)

Mechanical

Housing / Molded body CuZn, nickel-plated
 Insert PA
 Contact 8 poles TPU
 CuZn, pre-nickel and 0.8 microns gold-plated
 O-ring FKM
 RSFM.../20: Neoprene

Electrical

Contact resistance ≤ 5 mΩ
 Nominal current at 40°C 3-5 poles 4 A
 8 poles 1,5 A
 Nominal voltage 3-4 poles 240 V
 5 poles 60 V
 poles 30 V
 Rated voltage 3-4 poles 250 V
 5 poles 63 V
 8 poles 36 V
 Test voltage 3-4 poles 2.0 kV eff. / 60 s
 5-8 poles 1.5 kV eff. / 60 s
 Insulation resistance > 10⁹ Ω
 Pollution degree 3

Part Number	Pins	Lead (mm ²)	Characteristics
RSFPM 3/0,5 M RKFPM 4-3/0,5 M	3	0.34	
RSFPM 4/0,5 M RKFPM 4/0,5 M	4	0.34	
RSFPM 5/0,5 M RKFPM 5/0,5 M	5	4 x 0.34 / 1 x 0.50	
RSFPM 8/0,5 M RKFPM 8/0,5 M	8	0.25	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Lumberg Automation:](#)

[RSFPM 4/0.5 M](#) [RSFPM 5/0.5 M](#)