

REVISION U

TABLE 1
TERMINAL SPECIFICATION

LEAD STYLE	SOCKET	"L" REF
-2	SC-1P1-XX	.300
-3	SC-1S1-XX	.203
-10	SC-3P1-XX	.230
-11	SC-4P1-XX	.240
-12	SC-5P1-XX	.190
-15	SC-1M2-XX	.167
-18	SC-6P1-XX	.353
-19	SC-8P1-XX	.165
-22	EZ-1P1-XX	.300
-30	EZ-3P1-XX	.230
-31	EZ-4P1-XX	.240
-32	EZ-5P1-XX	.190
-38	EZ-6P1-XX	.353

TABLE 2


ROW SPECIFICATION	LEAD STYLE	PLUG	TUBE
01	-3	TP-12	PT-1-24-01-23
02	-10,-12,-32,-38	TP-03	PT-1-24-01-14
03	-12, -23	TP-03	PT-1-24-01-59

NOTES:

- 1.) FILL ALL POSITIONS.
- 2.) PINS TO ENTER BODY FROM C'BORE SIDE.
- 3.) BARB ON SOCKET MUST BE VISIBLE BELOW BODY.
- 4.) DELETED
- 5.) ALL OPTIONS ROWS 4-20, WITH LEAD STYLE 02, 10, 11, 12, AND 18, TO BE PACKAGED ON BEAD BOARD.
- 6.) ALL OPTIONS ROWS 1-3, TO BE PACKAGED IN TUBES. UNLESS OTHERWISE SPECIFIED, ALL OTHER PARTS TO BE BULK PACKAGED.
- 7.) MAXIMUM ALLOWABLE FLASH: .010[0.25].

-L OPTION

AVAILABLE IN STYLES -2 & -22 ONLY

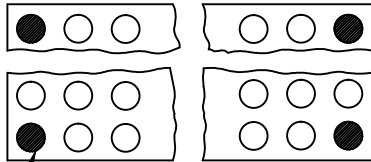

REPLACE CORNER POSITIONS WITH
SC-1L1-GT (WHEN USING SC LEAD STYLE)
OR EZ-1L1-GT WHEN USING EZ LEAD STYLE)
NOTE: FOR -ST PLATING SPEC.
USE SC-1L1-GT OR EZ-1L1-GT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE DECIMALS: $\pm .1[.3]$ THREE PLACE DECIMALS: $\pm .005[.13]$ ANGLES $\pm 2^\circ$
TWO PLACE DECIMALS: $\pm .01[.3]$ FOUR PLACE DECIMALS: $\pm .0020[.051]$

TITLE:

HLS ASSEMBLY

DWG NO:

HLS-XXXX-XX-XX-X

SHEET 1 OF 1

HLS-XXXX-XX-XX-X

ROW SPECIFICATION

(SEE FIG. 1)
EXPRESSED IN NO. OF ROWS
1 THRU 20

BODY LENGTH SPECIFICATION

(SEE FIG. 1)
EXPRESSED IN NO. OF POS. PER ROW
1 THRU 20

OPTION


-L LOCKING LEAD
(USE ONLY WITH LEAD
STYLE -2 OR -22)

LEAD STYLE SPECIFICATION
(SEE TABLE 1)

PLATING SPECIFICATION


- G: GOLD, SPECIFY -GG IN SOCKET SUFFIX -XX
- T: TIN, SPECIFY -GT IN SOCKET SUFFIX -XX
(-3 LEAD STYLE NOT AVAILABLE)
- TT: TIN/TIN, SPECIFY -TT IN SOCKET SUFFIX -XX
(STYLE 2,10,11,12,18,22,30,31,&32 ONLY)
- S: SELECTIVE, SPECIFY -ST IN SOCKET SUFFIX -XX
(STYLE -2 & -22 ONLY)

ASSEMBLY INSTRUCTIONS

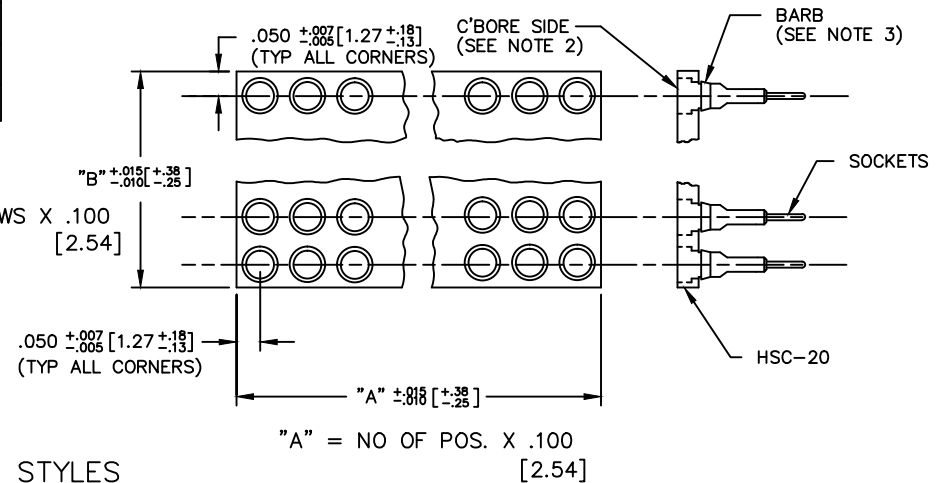

STYLES
-11,12,15,19,31 & 32

FIGURE 1



SOCKETS TO BE RECESSED (COUNTER-SUNK)
INTO BODY TO ALLOW BARB
PROTRUSION AT BOTTOM

* PROPRIETARY NOTE *

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE REPRODUCED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSMITTED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

EXISPROD\ASSEMBLY\100
HLS-ASM

samtec

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY: JORDAN 5-30-85
CHECKED BY: THRUSTON 6-4-85

ENGINEER
APPROVAL
BET
6-4-85

HLS-XXXX-XX-XX-X
SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec:](#)

[HLS-0106-G-3](#) [HLS-0407-S-2](#) [HLS-0105-G-3](#) [HLS-0215-G-10](#) [HLS-0215-G-11](#) [HLS-0217-T-15](#) [HLS-0220-G-12](#)
[HLS-0220-G-2](#) [HLS-0220-T-31](#) [HLS-0220-T-32](#) [HLS-0301-TT-12](#) [HLS-0304-TT-11](#) [HLS-0305-G-11](#) [HLS-0305-G-12](#)
[HLS-0308-G-18](#) [HLS-0310-G-22](#) [HLS-0314-G-11](#) [HLS-0316-G-2](#) [HLS-0316-G-38](#) [HLS-0318-TT-22](#) [HLS-0320-G-2](#)
[HLS-0404-T-10](#) [HLS-0405-S-2](#) [HLS-0408-TT-22](#) [HLS-0414-S-2](#) [HLS-0416-T-10](#) [HLS-0417-T-2](#) [HLS-0508-G-38](#)
[HLS-0520-T-18](#) [HLS-0807-T-2](#) [HLS-0813-TT-2](#) [HLS-0813-TT-22](#) [HLS-2001-TT-12](#) [HLS-0204-T-31](#) [HLS-0205-TT-12](#)
[HLS-0206-G-10](#) [HLS-0207-S-2](#) [HLS-0207-T-11](#) [HLS-0209-G-2](#) [HLS-0209-G-38](#) [HLS-0209-T-10](#) [HLS-0213-G-3](#)
[HLS-0216-G-2](#) [HLS-0218-T-11](#) [HLS-0220-T-18](#) [HLS-0303-G-18](#) [HLS-0303-G-2](#) [HLS-0306-G-11](#) [HLS-0306-G-18](#)
[HLS-0306-T-11](#) [HLS-0306-T-12](#) [HLS-0308-T-22](#) [HLS-0308-TT-22](#) [HLS-0311-G-12](#) [HLS-0312-T-30](#) [HLS-0312-TT-30](#)
[HLS-0314-T-32](#) [HLS-0317-T-2](#) [HLS-0317-T-22](#) [HLS-0320-T-18](#) [HLS-0406-T-18](#) [HLS-0406-TT-10](#) [HLS-0412-G-2](#)
[HLS-0420-G-2](#) [HLS-0513-G-38](#) [HLS-0610-T-2](#) [HLS-0611-T-12](#) [HLS-1111-TT-22-L](#) [HLS-0314-T-31](#) [HLS-0317-S-2](#)
[HLS-0317-T-30](#) [HLS-0320-T-2](#) [HLS-0320-T-22](#) [HLS-0406-T-2](#) [HLS-0407-G-10](#) [HLS-0407-G-11](#) [HLS-0410-T-2](#) [HLS-](#)
[0411-G-2](#) [HLS-0420-S-2](#) [HLS-0420-T-12](#) [HLS-0512-T-18](#) [HLS-0610-TT-2](#) [HLS-0610-TT-22](#) [HLS-0910-G-2](#) [HLS-](#)
[1012-G-10](#) [HLS-0312-G-11](#) [HLS-0312-T-12](#) [HLS-0313-G-11](#) [HLS-0314-T-12](#) [HLS-0314-TT-2](#) [HLS-0316-T-12](#) [HLS-](#)
[0316-TT-11](#) [HLS-0320-T-15](#) [HLS-0406-T-11](#) [HLS-0410-G-2](#) [HLS-0420-G-19](#) [HLS-0516-G-38](#) [HLS-0620-T-22](#) [HLS-](#)
[1212-G-2](#) [HLS-0303-T-2](#)