
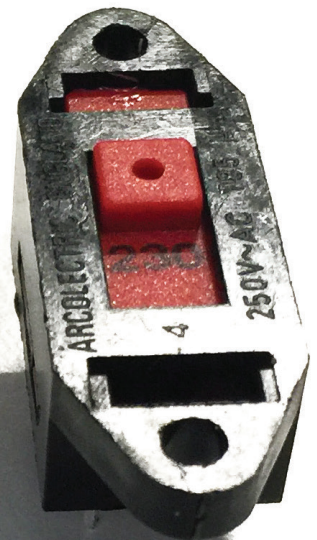



With up to 5 switching positions as well as multiple terminal, circuit and slider options, Bulgin's board mounted power slide switches can be configured to suit your needs. We also offer a wide range of voltage selector types that can be either snapped into a panel or flange mounted.

- Ratings up to 16A, 250V ac
- PCB and solder terminals
- Voltage Selector Models
- Snap in and flange mounting
- 2, 3, 4 and 5 position
- Choice of circuits
- Choice of actuators

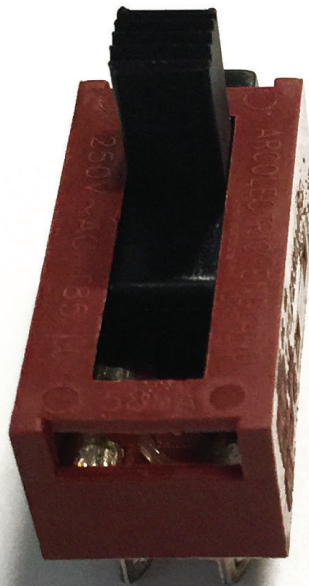

# 2000 Slide Switches - up to 5 position

10A 250Vac



## Key Features

- Slide switches
- Ratings up to 16A, 250V ac
- PCB and solder terminals
- 2, 3, 4 and 5 position
- Choice of circuits
- Choice of actuators

## Approvals and specifications


10A 250Vac T85  
6(3)A 250Vac T85








UL CSA 16A 250Vac Non Inductive  
UL CSA 4A 300Vac  
UL 65°C, file no. E45221, CSA file no. LR10990

μ contact gap  
Please specify: Standard action (SP116) or Light action (SP118).  
2000 series lubrication is inorganic and does not degrade plastics.

Terminal	Series	Position	Circuit	Slider
<b>K</b>  2.8 x 0.8	<b>2</b>	<b>2</b> Switching positions	<b>10</b>  <b>20</b>  <b>30</b>  <b>40</b> 	<b>0</b>  <b>1</b>  <b>2</b>  <b>3</b>  <b>4</b>  <b>5</b> 
<b>R</b>  2.8 x 0.8			<b>10</b>  <b>20</b>  <b>30</b>  <b>40</b> 	<b>6</b>  <b>7</b>  <b>9</b>  <b>A</b>  <b>B</b>  <b>C</b> 
<b>T</b>  Solder		<b>3</b> Switching positions	<b>10</b>  <b>20</b>  <b>30</b>  <b>40</b> 	<b>D</b>  <b>E</b>  <b>G</b>  <b>H</b>  <b>J</b>  <b>K</b> 
<b>X</b>  PCB 0.8 Sq.			<b>10</b>  <b>20</b>  <b>30</b>  <b>40</b> 	<b>L</b>  <b>N</b>  <b>P</b>  <b>R</b>  <b>S</b>  <b>T</b> 
<b>Y</b>  PCB 0.8 Sq. For mounting stability switches have extra "support" terminals * Nominal - Dimension varies with body type. For exact figure call sales		<b>4</b> Switching positions	<b>10</b>  <b>20</b>  <b>30</b>  <b>40</b> 	<b>5</b>  <b>6</b>  <b>7</b>  <b>9</b>  <b>A</b>  <b>B</b>  <b>C</b> 
		<b>5</b> Switching positions	<b>10</b>  <b>20</b>  <b>30</b>  <b>40</b> 	<b>0</b>  <b>1</b>  <b>2</b>  <b>3</b>  <b>4</b>  <b>5</b> 


## Examples

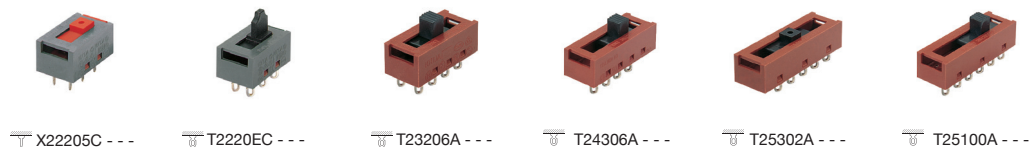


Body		Options
<b>C</b> 2 positions 	<b>H</b> 2 positions 	<p><b>Colour</b> Call sales for custom colours. A full range is available for large orders.</p> <p><b>Legend printing</b> A wide range is available For all options call sales</p>
<b>A</b> 3 positions 	<b>H</b> 3 positions 	
<b>A</b> 4 positions 	<b>H</b> 4 positions 	
<b>A</b> 5 positions 		

## Dimensions


### C 2 positions




### H 2 positions





### Cut-out /PCB Matrix




### A 3 positions





### H 3 positions





### A 4 positions



### H 4 positions




### A 5 positions



# 2000 Slide Switches - Snap fit and panel mount

10A 250Vac

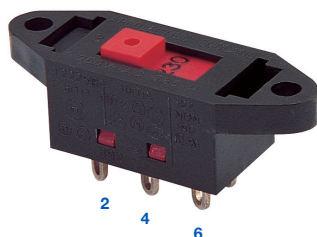

115/230 is preferred legend

## Key Features

- 2 way 'voltage selector'
- Ratings up to 16A, 250V ac
- Snap fit and panel mount
- PCB & solder terminals
- 2 and 3 position
- Choice of circuits
- Choice of actuators

## Approvals and specifications

10A 250Vac T85  
6(3)A 250Vac T85

UL CSA 16A 250Vac Non Inductive  
UL CSA 4A 300Vac  
UL 65°C, file no. E45221, CSA file no. LR10990

μ contact gap  
Please specify: Standard action (SP116) or Light action (SP118).  
2000 series lubrication is inorganic and does not degrade plastics.

Terminal	Series	Position	Circuit	Slider			
<div><b>K</b>  2.8 x 0.8</div>	<b>2</b>	<b>2</b> Switching positions	<b>10</b> 	<b>0</b> 	<b>6</b> 	<b>C</b> 	<b>L</b> 
<div><b>R</b>  2.8 x 0.8</div>			<b>20</b> 	<b>2</b> 	<b>7</b> 	<b>D</b> 	<b>M</b> 
<div><b>T</b>  Solder</div>			<b>30</b> 	<b>3</b> 	<b>8</b> 	<b>E</b> 	<b>N</b> 
<div><b>X</b>  PCB 0.8 Sq. For mounting stability switches have extra "support" terminals  * Nominal - Dimension varies with body type. For exact figure call sales</div>			<b>40</b> 	<b>4</b> 	<b>9</b> 	<b>H</b> 	<b>P</b> 
	<b>3</b> Switching positions	<b>3</b> Switching positions	<b>10</b> 	<b>5</b> 	<b>A</b> 	<b>K</b> 	<b>R</b> 
			<b>20</b> 	<b>S</b> 	<b>T</b> 		
			<b>30</b> 				
			<b>40</b> 				

## Examples



T22208E ---



T22308E ---



T2230MF ---









T22205B ---



T22305B ---




T23204B ---


Body	Options
<p><b>B</b></p> <p>With mounting holes</p>  	<p><b>Colour</b></p> <p>Call sales for custom colours. A full range is available for large orders. Standard body colour is black.</p>
<p><b>E</b></p> <p>Snap fit</p>  	
<p><b>F</b></p> <p>Snap fit (single pole ON OFF only)</p>  	

## Dimensions



### 2 Pos B





### 3 Pos B



### 2 Pos E



### 2 Pos F



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bulgin:

[X2226C](#) [K232CB](#) [T22205BB-437W](#) [X2225CR-437W](#) [K221ABB](#) [T2228ER-EN437W](#) [T2215BEN506](#) [K22208EB](#)  
[T2329B](#) [K22205BB](#) [T22205BR](#) [K2228E](#) [T22205BR-436W](#) [K2228ER-437W](#) [K22205BR-450B](#) [K2329B](#) [X2320AA](#)  
[K2228ER-436W](#) [K22205BR-436B](#) [X22205A-437W](#)