



| | 107 | SILICONE RU | UBBER GREEN | 1.679 | 2.5 - 2.8 | - |
|-----------|------|-------------------------|--------------------------------|------------------------|----------------|-------------|
| | 105 | SILICONE RU | 1.441 | 5.8 - 5.3 | - | |
| | 103 | SILICONE_RU | UBBER_WHITE | 1.565 | 4.8 - 4.17 | _ |
| | 102 | SILICONE R | RUBBER GRAY | 1.522 | 5.4 - 4.73 | _ |
| | 101 | SILICONE F | RUBBER RED | 1.460 | 6.1 - 5.4 | _ |
| | 106 | SILICONE_COM | MPOUND_WHITE | 1.469 | 5.5 - 5 | |
| | 105 | SILICONE COMPO | ound dark gray | 1.441 | 5.8 - 5.3 | 15513454 |
| | 104 | SILICONE COMPOU | SILICONE COMPOUND LIGHT ORANGE | | 6.5 - 6 | _ |
| | 103 | SILICONE COMPOUND GREEN | | 1.565 | 4.37 - 4.17 | 15513453 |
| | 102 | SILICONE COM | POUND YELLOW | 1.522 | 4.93 - 4.73 | 15513452 |
| EE NOTE 6 | 101 | SILICONE COMPO | SILICONE COMPOUND LIGHT BLUE | | 5.66 - 5.4 | 15513451 |
| USAGE | TYPE | MATERIAL SPECIFICATION | | VOL (CM ³) | CABLE OD RANGE | REPLACED BY |
| 12 | | 1 1 | 10 | | 9 | 8 |

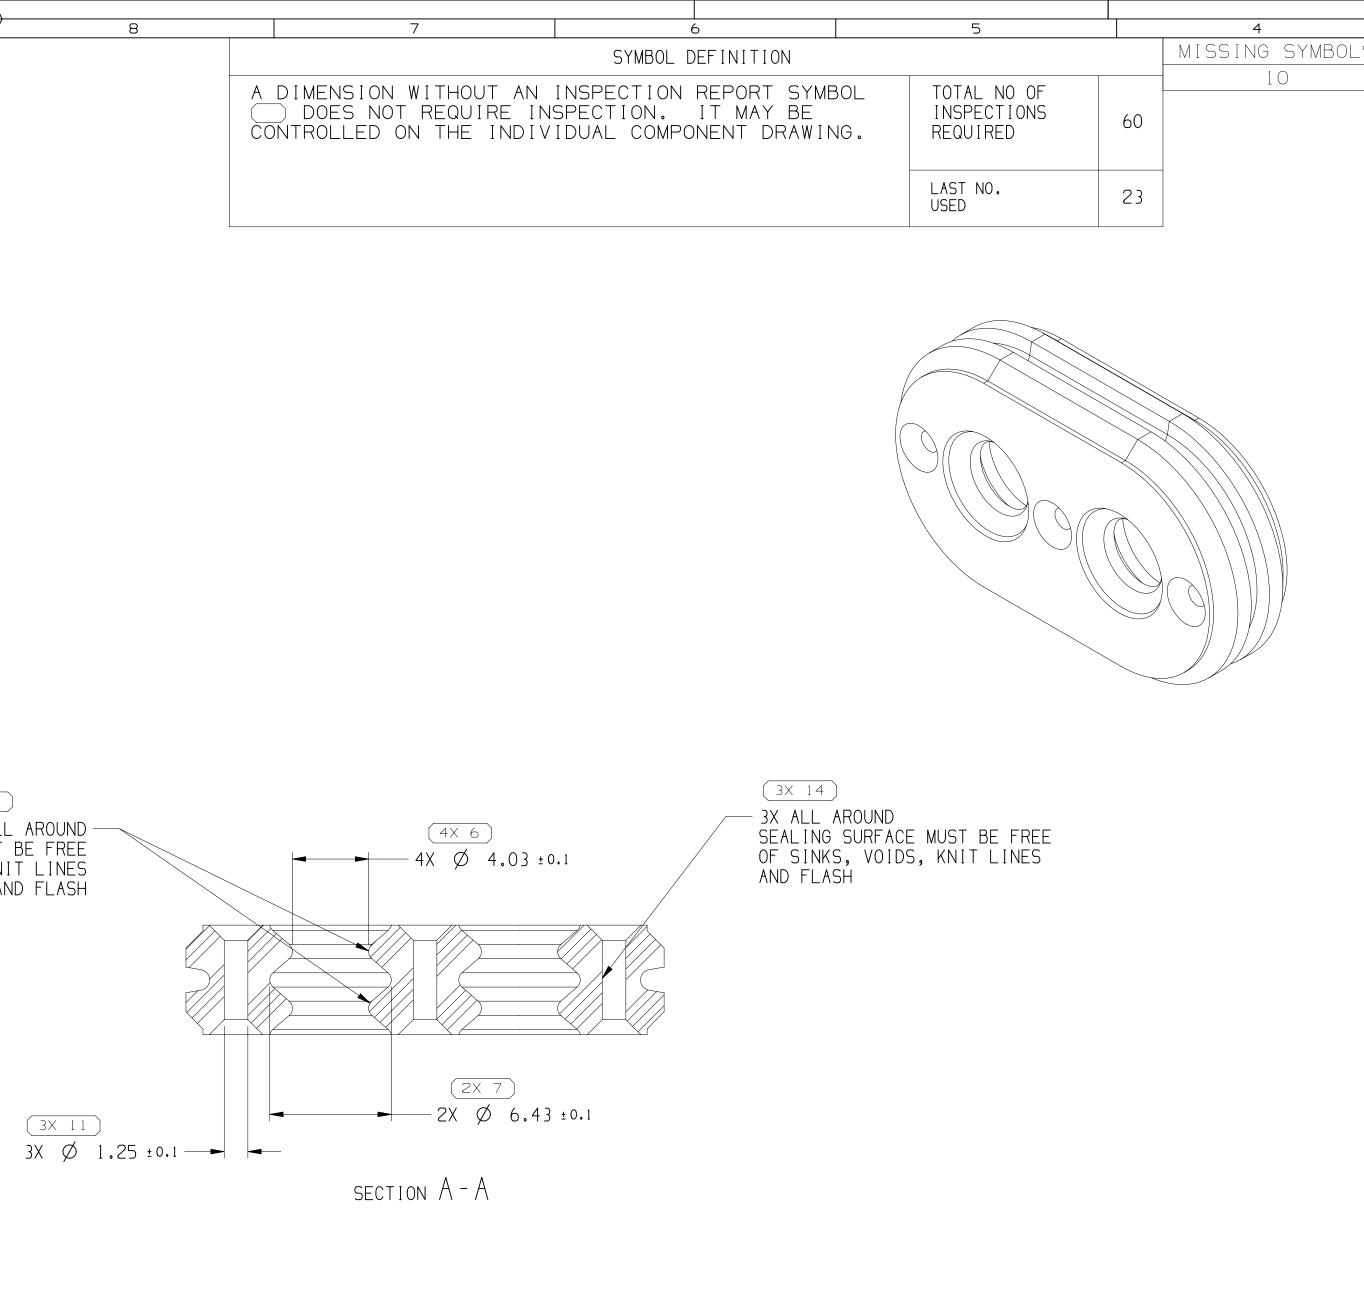

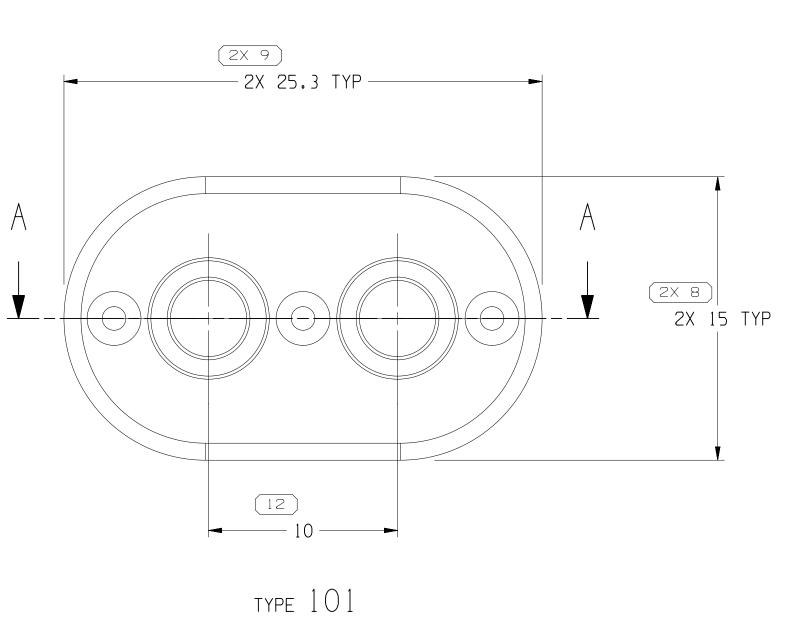

NOTES

- 1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
- DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
- 2. PARTS SHOWN ON THIS DRAWING ACCEPT ASSEMBLIES SHOWN ON TAXI 13830164.
- 3. WHEN INSTALLING COMPONENT ON WIRE, DOW 550 PROCESSING AGENT MAY BE APPLIED TO THE OD OF THE WÍRE TO REDUCE SEAL TO WIRE SLIDING FORCES.
- 4. SILICONE SEALING SURFACES MUST BE FREE OF DEFECTS, PARTING LINES, MOLD MISMATCH AND KNIT LINES, ETC.
- 5. THIS PRODUCT IS NOT CATEGORIZED AS AN APPEARANCE ITEM, MINOR IMPERFECTIONS INCLUDING, BUT NOT LIMITED TO, FLOW MARKS, COLOR BLEMISHES, GATE VESTIGE, AND SOFT FLASH THAT DO NOT AFFECT THE FIT, FORM, OR FUNCTION OF THE PART ARE PERMISSIBLE PER DPNP-4.7-CS-01.
- 6. PART(S) RESTRICTED FOR USE IN YAZAKI NORTH AMERICA; TESLA MOTORS; MULTIPLE; W242. REFER TO CHART FOR SPECIFIC RESTRICTED PART NUMBERS.

(5) PROCESS SENSITIVE DIMENSION

4

DIMENSIONS ENCLOSED IN () INDICATE REFERENCE DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED

| DWG STATUS | | | | ZONE | DEVICION HISTORY | AUTH | | APVD | | \ \ | |
|------------|-----|-----|-----|------|------------------|---|--------|------|-----------|--------|----------|
| DATE | STG | REV | N/P | CHG | ZUNE | REVISION HISTORY | | DR | APVD 1 | 2 7 | <u>'</u> |
| 02JN10 | R | 01 | - | - | | ALL PARTS-CREATED PART DRAWING | 410951 | LLJ | LLJ | NL | |
| 22JL10 | R | 02 | - | - | | UPDATED PDM ATTRIBUTES | 411376 | LLJ | LLJ | NL | N |
| 23MY11 | R | 03 | - | - | | ADDED TYPES 104-106 & DIMS 16-21. | 414306 | LLJ | LLJ | NL | |
| 25JN12 | R | 04 | - | - | | ALL PARTS-ADDED APPLICABLE SECONDARY LOCK TO CHART. | 418535 | LLJ | LLJ | NL | |
| 05DE12 | R | 05 | - | - | | 15513451,15513452,15513453 & 15513454 - RELEASED AS INACTIVE. | 420314 | JOR | JRV | JOR | |
| 19MR13 | R | 06 | - | - | | 13887943,13887973,13887974 & 15513454 - JACKETED CABLE TYPE WAS "SAE" | 421779 | JOR | AAS | JOR | |
| 02AU13 | R | 07 | - | - | | 15513451-54 - UPDATED PART AVAILABILITY | 423447 | JOR | AAS | JOR | |
| 08JL15 | R | 08 | - | - | | 13824774-76 & 13887973 - ADDED REPLACED BY COLUMN; 13824775-76 & 13887973 - OBSOLETE AND 13824774 - RESTRICTED | 427663 | JVR | JVM | ΥVΗ | |
| 20JL15 | R | 09 | - | - | | 13887943, 13887974 & 15513451-54 - ADDED MUST BE MEASURED NOTE | 430019 | ABH | JVM | ΥVΗ | |
| 11DE18 | R | 10 | - | - | | ALL ACTIVE PARTS - REMOVED ISO/SAE DESIGNATION FROM "CABLE SIZE" CHART COLUMN | 441757 | JLL | JAA | TAV | |
| 0 3AU20 | R | 11 | - | - | | 15513451 - CABLE OD RANGE 6.1-5.4 WAS 5.66-5.4 | 552136 | CGD | CGD | MNC | |
| 19MY22 | R | 12 | - | - | | 15513452 - CABLE OD RANGE 5.4-4.73 WAS 4.93-4.73; 15513453 - CABLE OD RANGE 4.8-4.17 WAS 4.37-4.17; ALL ACTIVE PARTS - REMOVE SHIELDED, JACKETED CABLE SIZE & APPLICABLE SECONDARY LOCK OR EQUIVALENT COLUMN | 557459 | ESG | JAA | TAG | ĸ |
| 09MR23 | R | 13 | - | - | | 35759277 - RELEASED | 559826 | JGO | GLG | LAA | 1 |

| | A LINE DRAWN THROUGH A PART NUMBER INDICATES THAT PHYSICAL PARTS ARE NOT AVAILABLE | • A P T I \ | /• | | | |
|-----------------|---|---|------------------|---|--|--|
| | FOR ORDERING. PART NUMBERS THAT DO NOT HAVE A LINE PRESENT INDICATE THAT PHYSICAL PARTS ARE AVAILABLE FOR ORDERING. | CONNECTION SYSTEMS Warren, oh copyright 2010 aptiv. all rights re | ESERVED. | | | |
| | CONTACT APTIV SALES TO ASSURE AVAILABILITY OF PARTS. DWG TYPE PART DRAWING | THIS DRAWING IS THE PROPERTY OF APTIV AND CONTAINS APTIV CONFIDENTIAL INFORMATION. THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT OR ITS RELATED CAD MATH DATA, AS WELL AS COMMUNICATION OF ANY CONTENT TO OTHERS, WITHOUT EXPRESS AUTHORIZATION, IS PROHIBITED. | | | | |
| | STYLE | | DATE | | | |
| | VOLUME (CM ³) DISTR CODE | DR APVD1 L. JONES APVD2 L. JONES | 02JN10 02JN10 | В | | |
| | UNLESS OTHERWISE SPECIFIED | APVD3 N. LIPTAK APVD4 | 02JN10 | | | |
| | THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994 AS AMENDED BY THE GM GLOBAL DIMENSIONING AND TOLERANCING ADDENDUM-2001, SEPARATE PATTERNS OF FEATURES MAY BE GAGED SEPARATELY REGARDLESS OF DATUM | APVD5 SUBSTANCES OF CONCERN AND RE CONTENT PER APTIV 109490 | CYCLED 01 | | | |
| | REFERENCES. | SEE CHART | | | | |
|)N | ALL DIMENSIONS ARE IN MILLIMETERS | DRAWING NAME | | | | |
| | REFERENCE | TAXI SEAL CBL/CONN | | l | | |
| E 1 20 20 | THIRD ANGLE PROJECTION CALE | DRAWING NUMBER | .5 | A | | |
| .2 | | SIZE SCALE FRAME NO SHEET NO AO 5:1 1 OF 1 1 OF 1 | | l | | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Aptiv:</u> 15513453