

## FEATURES

- ±15 kV ESD protection on input pins
- 400 Mbps (200 MHz) switching rates
- Flow-through pinout simplifies PCB layout
- 2.5 ns maximum propagation delay
- 3.3 V power supply
- High impedance outputs on power-down
- Low power design: typically 18 mW (quiescent)
- Interoperable with existing 5 V LVDS drivers
- Accepts small swing (310 mV typical) differential signal levels
- Supports open, short, and terminated input fail-safe
- 0 V to -100 mV threshold region
- Conforms to TIA/EIA-644 LVDS standard
- Industrial operating temperature range: -40°C to +85°C
- Available in surface-mount (SOIC) package

## APPLICATIONS

- Point-to-point data transmission
- Multidrop buses
- Clock distribution networks
- Backplane receivers

## GENERAL DESCRIPTION

The [ADN4662](#) is a single, CMOS, low voltage differential signaling (LVDS) line receiver offering data rates of over 400 Mbps (200 MHz), and ultralow power consumption. It features a flow-through pinout for easy PCB layout and separation of input and output signals.

The device accepts low voltage (310 mV typical) differential input signals and converts them to a single-ended 3 V TTL/CMOS logic level.

## FUNCTIONAL BLOCK DIAGRAM




Figure 1.

07860-001

The [ADN4662](#) and its companion driver, the [ADN4661](#), offer a new solution to high speed, point-to-point data transmission, and a low power alternative to emitter-coupled logic (ECL) or positive emitter-coupled logic (PECL).

**TABLE OF CONTENTS**

Features .....	1	ESD Caution.....	6
Applications.....	1	Pin Configuration and Function Descriptions.....	7
Functional Block Diagram .....	1	Typical Performance Characteristics .....	8
General Description .....	1	Theory of Operation .....	11
Revision History .....	2	Applications Information.....	11
Specifications.....	3	Outline Dimensions .....	12
AC Characteristics.....	4	Ordering Guide .....	12
Absolute Maximum Ratings.....	6		

**REVISION HISTORY**

<b>10/13—Rev. 0 to Rev. A</b>	
Change to Features Section .....	1
<b>1/09—Revision 0: Initial Version</b>	

## SPECIFICATIONS

$V_{DD} = 3.0\text{ V to }3.6\text{ V}$ ;  $C_L = 15\text{ pF to GND}$ ; all specifications  $T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted.

Table 1.

Parameter <sup>1</sup>	Symbol	Min	Typ <sup>2</sup>	Max	Unit	Conditions/Comments
LVDS INPUT						
High Threshold at $R_{IN+}$ , $R_{IN-}$ <sup>3</sup>	$V_{TH}$			+100	mV	$V_{CM} = 1.2\text{ V, }0.05\text{ V, }2.95\text{ V}$
Low Threshold at $R_{IN+}$ , $R_{IN-}$ <sup>3</sup>	$V_{TL}$	-100			mV	$V_{CM} = 1.2\text{ V, }0.05\text{ V, }2.95\text{ V}$
Input Current at $R_{IN+}$ , $R_{IN-}$	$I_{IN}$	-10	±1	+10	µA	$V_{IN} = 2.8\text{ V, }V_{CC} = 3.6\text{ V or }0\text{ V}$
		-10	±1	+10	µA	$V_{IN} = 0\text{ V, }V_{CC} = 3.6\text{ V or }0\text{ V}$
		-20	±1	+20	µA	$V_{IN} = 3.6\text{ V, }V_{CC} = 0\text{ V}$
OUTPUT						
Output High Voltage	$V_{OH}$	2.7	3.1		V	$I_{OH} = -0.4\text{ mA, }V_{ID} = +200\text{ mV}$
		2.7	3.1		V	$I_{OH} = -0.4\text{ mA, input terminated}$
		2.7	3.1		V	$I_{OH} = -0.4\text{ mA, input shorted}$
Output Low Voltage	$V_{OL}$		0.3	0.5	V	$I_{OL} = 2\text{ mA, }V_{ID} = -200\text{ mV}$
Output Short-Circuit Current <sup>4</sup>	$I_{OS}$	-15	-47	-100	mA	Enabled, $V_{OUT} = 0\text{ V}$
Input Clamp Voltage	$V_{CL}$	-1.5	-0.8		V	$I_{CL} = -18\text{ mA}$
POWER SUPPLY						
No Load Supply Current	$I_{CC}$		5.4	9	mA	Inputs open
ESD PROTECTION						
$R_{IN+}$ , $R_{IN-}$ Pins			±15		kV	Human body model
All Pins Except $R_{IN+}$ , $R_{IN-}$			±4		kV	Human body model

<sup>1</sup> Current into device pins is defined as positive. Current out of device pins is defined as negative. All voltages are referenced to ground, unless otherwise specified.

<sup>2</sup> All typicals are given for:  $V_{CC} = +3.3\text{ V}$ ,  $T_A = 25^\circ\text{C}$ .

<sup>3</sup>  $V_{CC}$  is always higher than  $R_{IN+}$  and  $R_{IN-}$  voltage.  $R_{IN-}$  and  $R_{IN+}$  are allowed to have a voltage range of  $-0.2\text{ V to }V_{CC} - V_{ID}/2$ . However, to be compliant with ac specifications, the common voltage range is  $0.1\text{ V to }2.3\text{ V}$ .

<sup>4</sup> Output short-circuit current ( $I_{OS}$ ) is specified as magnitude only; the minus sign indicates direction only. Only one output should be shorted at a time. Do not exceed maximum junction temperature specification.

## AC CHARACTERISTICS

$V_{DD} = 3.0\text{ V to }3.6\text{ V}$ ;  $C_L^1 = 15\text{ pF to GND}$ ; all specifications  $T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted.

Table 2.

Parameter	Symbol	Min	Typ <sup>2</sup>	Max	Unit	Conditions/Comments <sup>3</sup>
Differential Propagation Delay High to Low	$t_{PHLD}$	1.0	2.15	2.5	ns	$C_L = 15\text{ pF}, V_{ID} = 200\text{ mV}$ (see Figure 2 and Figure 3)
Differential Propagation Delay Low to High	$t_{PLHD}$	1.0	2.03	2.5	ns	$C_L = 15\text{ pF}, V_{ID} = 200\text{ mV}$ (see Figure 2 and Figure 3)
Differential Pulse Skew $ t_{PHLD} - t_{PLHD} ^4$	$t_{SKD1}$	0	80	400	ps	$C_L = 15\text{ pF}, V_{ID} = 200\text{ mV}$ (see Figure 2 and Figure 3)
Differential Part-to-Part Skew <sup>5</sup>	$t_{SKD3}$			1.0	ns	$C_L = 15\text{ pF}, V_{ID} = 200\text{ mV}$ (see Figure 2 and Figure 3)
Differential Part-to-Part Skew <sup>6</sup>	$t_{SKD4}$			1.5	ns	$C_L = 15\text{ pF}, V_{ID} = 200\text{ mV}$ (see Figure 2 and Figure 3)
Rise Time	$t_{TLH}$		510	800	ps	$C_L = 15\text{ pF}, V_{ID} = 200\text{ mV}$ (see Figure 2 and Figure 3)
Fall Time	$t_{THL}$		445	800	ps	$C_L = 15\text{ pF}, V_{ID} = 200\text{ mV}$ (see Figure 2 and Figure 3)
Maximum Operating Frequency <sup>7</sup>	$f_{MAX}$	200	250		MHz	All channels switching

<sup>1</sup>  $C_L$  includes probe and jig capacitance.

<sup>2</sup> All typicals are given for  $V_{CC} = 3.3\text{ V}$ ,  $T_A = 25^\circ\text{C}$ .

<sup>3</sup> Generator waveform for all tests unless otherwise specified:  $f = 1\text{ MHz}$ ,  $Z_0 = 50\ \Omega$ ,  $t_{TLH}$  and  $t_{THL}$  (0% to 100%)  $\leq 3\text{ ns}$  for  $R_{IN+}/R_{IN-}$ .

<sup>4</sup>  $t_{SKD1}$  is the magnitude difference in differential propagation delay time between the positive going edge and the negative going edge of the same channel.

<sup>5</sup>  $t_{SKD3}$ , part-to-part skew, is the differential channel-to-channel skew of any event between devices. This specification applies to devices at the same  $V_{CC}$  and within  $5^\circ\text{C}$  of each other within the operating temperature range.

<sup>6</sup>  $t_{SKD4}$ , part-to-part skew, is the differential channel-to-channel skew of any event between devices. This specification applies to devices over recommended operating temperature and voltage ranges, and across process distribution.  $t_{SKD4}$  is defined as |maximum – minimum| differential propagation delay.

<sup>7</sup>  $f_{MAX}$  generator input conditions:  $f = 200\text{ MHz}$ ,  $t_{TLH} = t_{THL} < 1\text{ ns}$  (0% to 100%), 50% duty cycle, differential (1.05 V to 1.35 V peak-to-peak). Output criteria: 60%/40% duty cycle,  $V_{OL}$  (maximum 0.4 V),  $V_{OH}$  (minimum 2.7 V), load = 15 pF (stray plus probes).

Test Circuits and Timing Diagrams

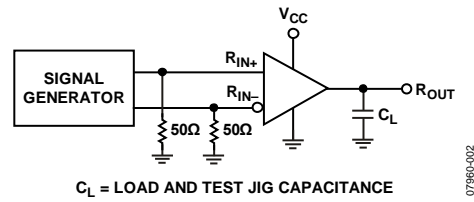


Figure 2. Test Circuit for Receiver Propagation Delay and Transition Time

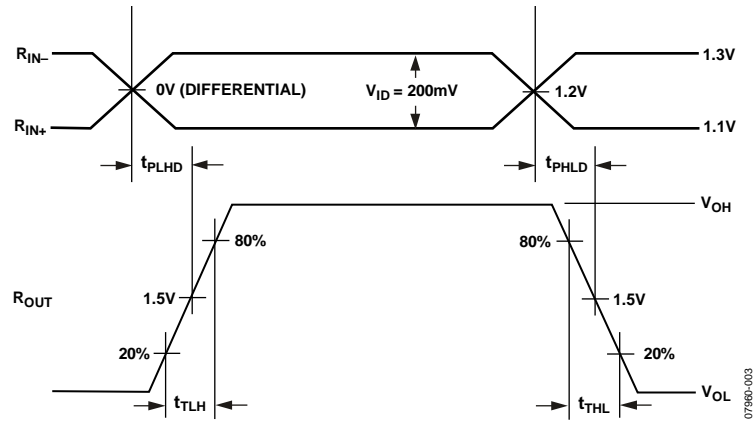


Figure 3. Receiver Propagation Delay and Transition Time Waveforms

## ABSOLUTE MAXIMUM RATINGS

$T_A = 25^\circ\text{C}$ , unless otherwise noted.

Table 3.

Parameter	Rating
$V_{CC}$ to GND	-0.3 V to +4 V
Input Voltage ( $R_{IN+}$ , $R_{IN-}$ ) to GND	-0.3 V to $V_{CC} + 3.9$ V
Output Voltage ( $R_{OUT}$ ) to GND	-0.3 V to $V_{CC} + 0.3$ V
Operating Temperature Range	
Industrial Temperature Range	-40°C to +85°C
Storage Temperature Range	-65°C to +150°C
Junction Temperature ( $T_J$ max)	150°C
Power Dissipation	$(T_J \text{ max} - T_A)/\theta_{JA}$
SOIC Package	
$\theta_{JA}$ Thermal Impedance	149.5°C/W
Reflow Soldering Peak Temperature	
Pb-Free	260°C $\pm$ 5°C

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### ESD CAUTION



**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## PIN CONFIGURATION AND FUNCTION DESCRIPTIONS




Figure 4. Pin Configuration

Table 4. Pin Function Descriptions

Pin No.	Mnemonic	Description
1	R <sub>IN-</sub>	Receiver Channel 1 Inverting Input. When this input is more negative than R <sub>IN+</sub> , R <sub>OUT</sub> is high. When this input is more positive than R <sub>IN+</sub> , R <sub>OUT</sub> is low.
2	R <sub>IN+</sub>	Receiver Channel 1 Noninverting Input. When this input is more positive than R <sub>IN-</sub> , R <sub>OUT</sub> is high. When this input is more negative than R <sub>IN-</sub> , R <sub>OUT</sub> is low.
3	NC	No Connect.
4	NC	No Connect.
5	GND	Ground reference point for all circuitry on the part.
6	NC	No Connect.
7	R <sub>OUT</sub>	Receiver Output (3 V TTL/CMOS). If the differential input voltage between R <sub>IN+</sub> and R <sub>IN-</sub> is positive, this output is high. If the differential input voltage is negative, this output is low.
8	V <sub>CC</sub>	Power Supply Input. This part can be operated from 3.0 V to 3.6 V.

TYPICAL PERFORMANCE CHARACTERISTICS

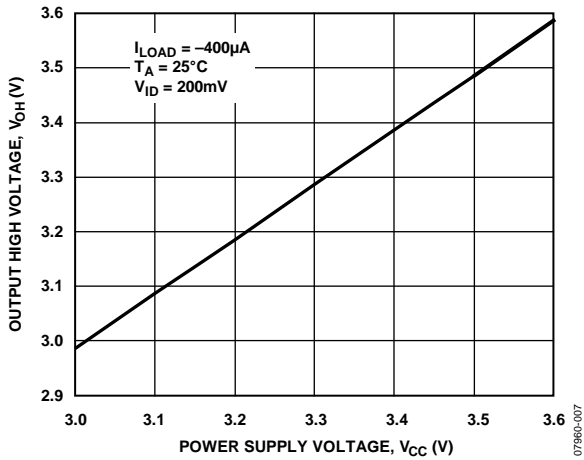


Figure 5. Output High Voltage vs. Power Supply Voltage

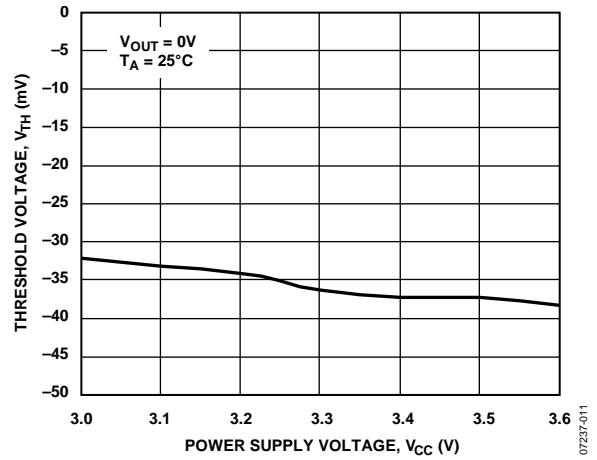


Figure 8. Threshold Voltage vs. Power Supply Voltage

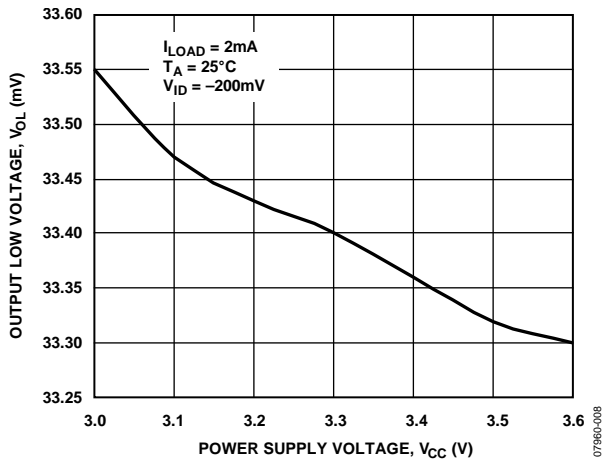


Figure 6. Output Low Voltage vs. Power Supply Voltage

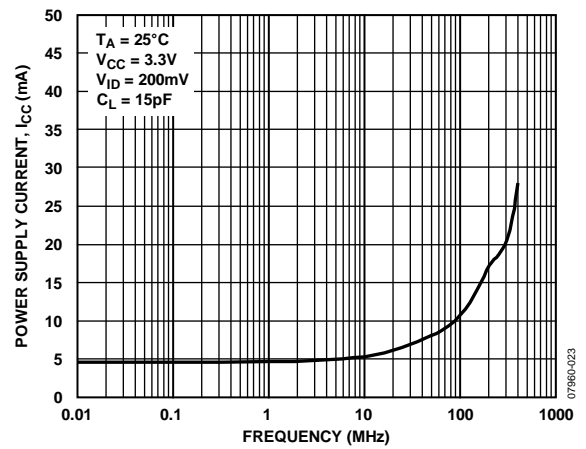


Figure 9. Power Supply Current vs. Frequency

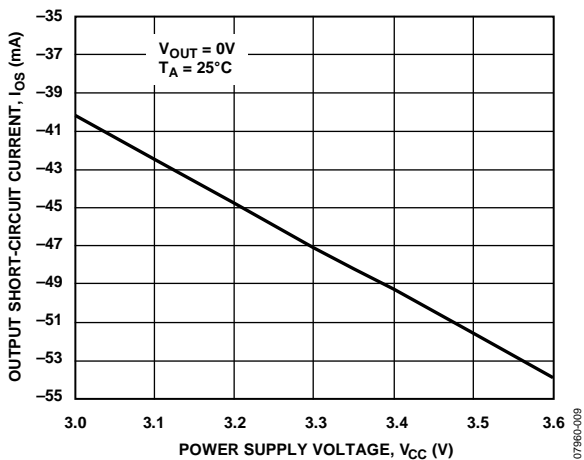


Figure 7. Output Short-Circuit Current vs. Power Supply Voltage

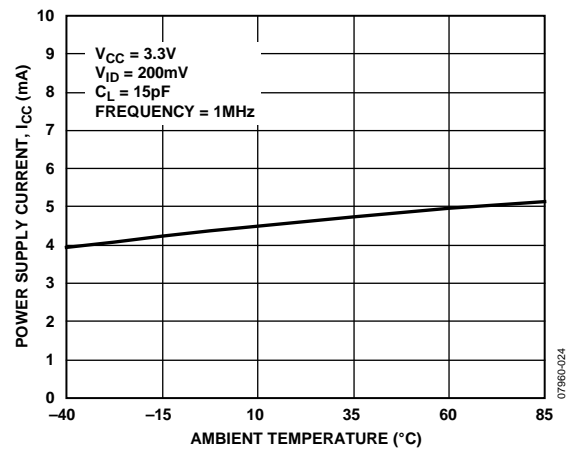


Figure 10. Power Supply Current vs. Ambient Temperature



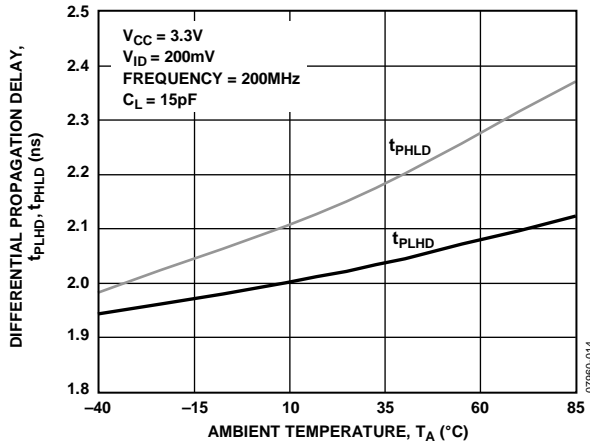


Figure 11. Differential Propagation Delay vs. Ambient Temperature

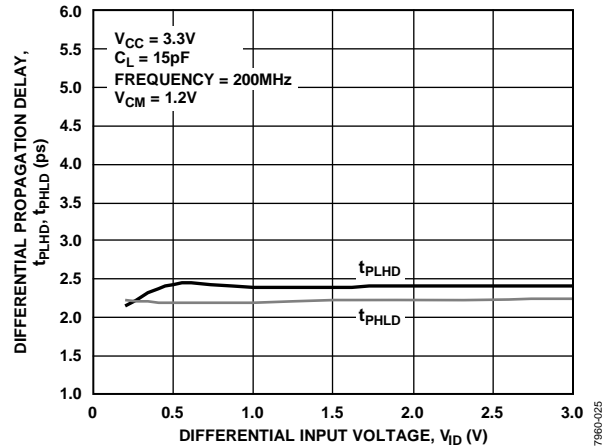


Figure 14. Differential Propagation Delay vs. Differential Input Voltage

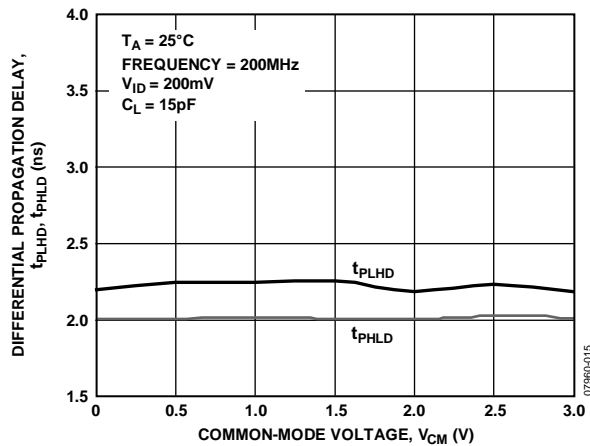


Figure 12. Differential Propagation Delay vs. Common-Mode Voltage

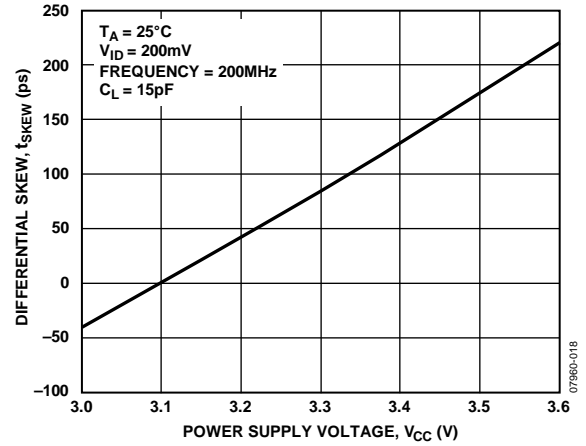


Figure 15. Differential Skew vs. Power Supply Voltage

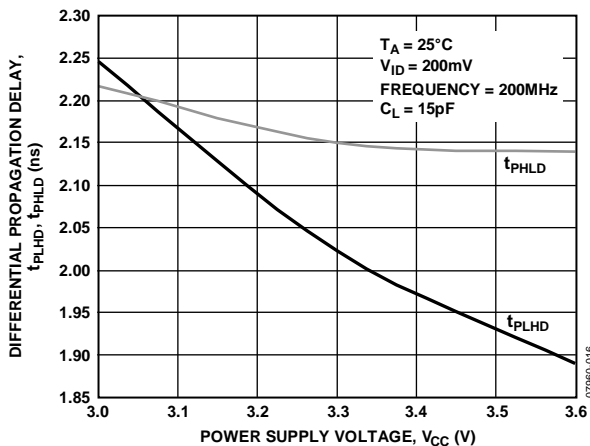


Figure 13. Differential Propagation Delay vs. Power Supply Voltage

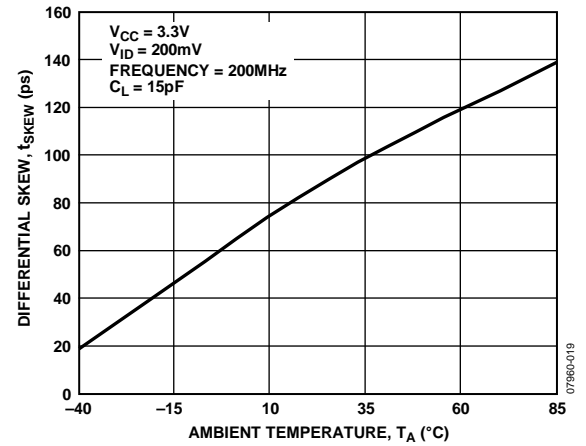


Figure 16. Differential Skew vs. Ambient Temperature

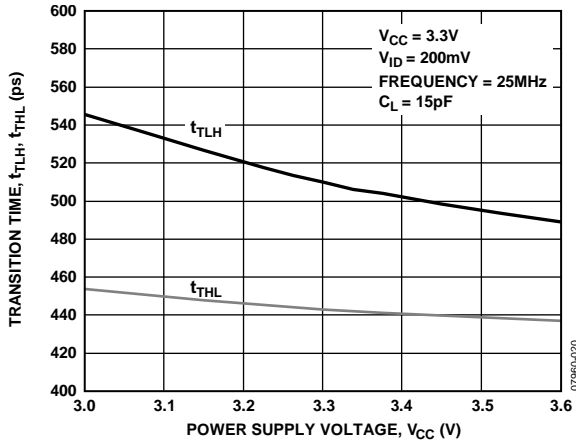


Figure 17. Transition Time vs. Power Supply Voltage

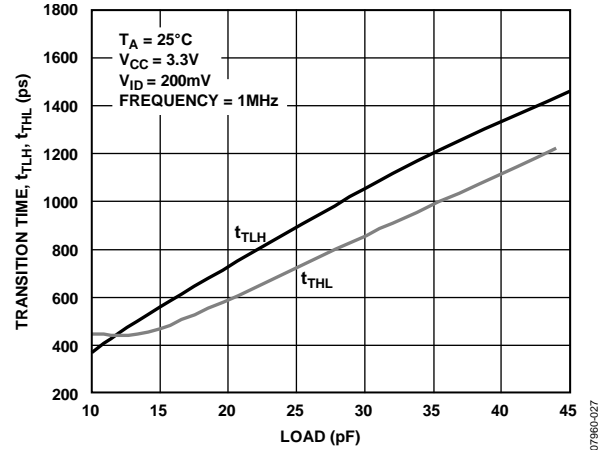


Figure 20. Transition Time vs. Load

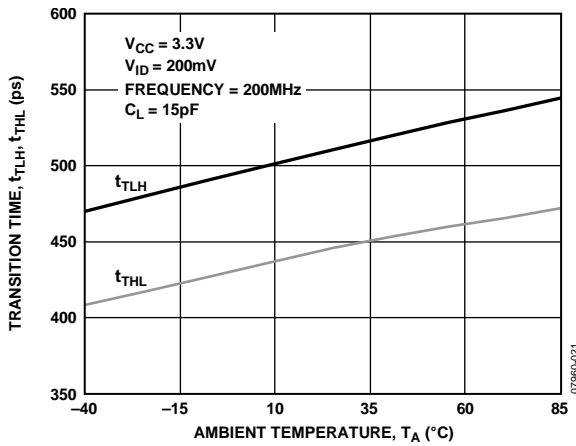


Figure 18. Transition Time vs. Ambient Temperature

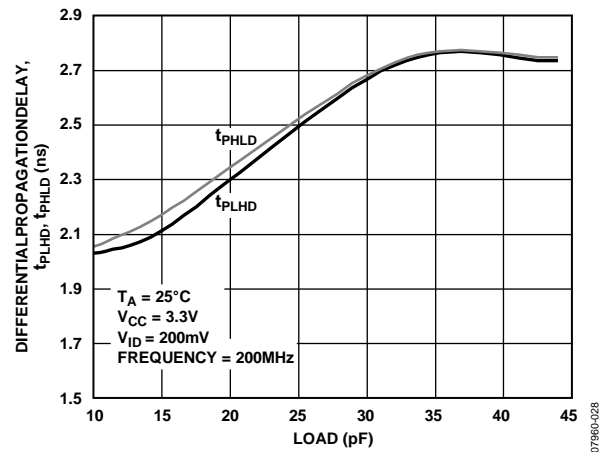


Figure 21. Differential Propagation Delay vs. Load at 200 MHz

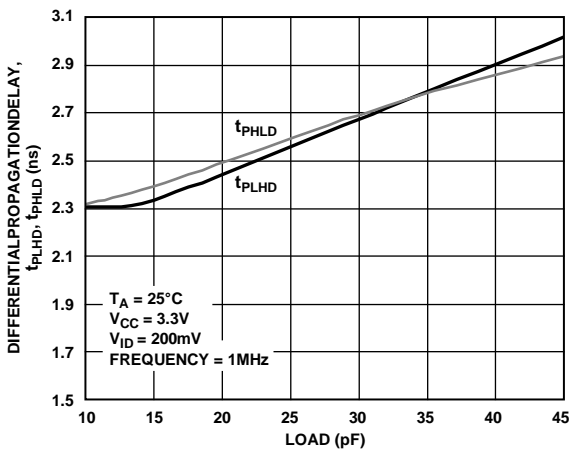


Figure 19. Differential Propagation Delay vs. Load at 1 MHz

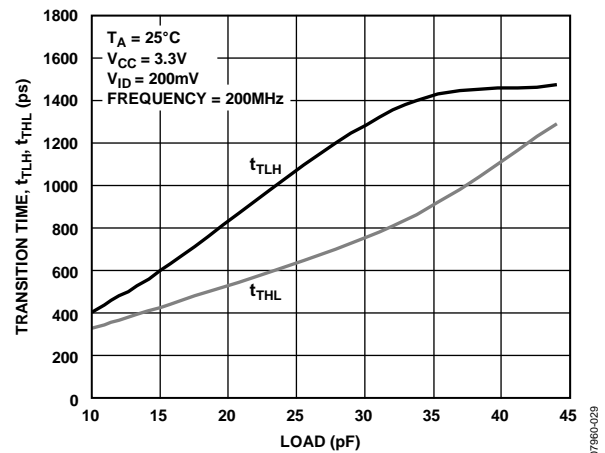


Figure 22. Transition Time vs. Load at 200 MHz

## THEORY OF OPERATION

The [ADN4662](#) is a single line receiver for low voltage differential signaling. It takes a differential input signal of 310 mV typically and converts it into a single-ended 3 V TTL/CMOS logic signal.

A differential current input signal, received via a transmission medium, such as a twisted pair cable, develops a voltage across a terminating resistor,  $R_T$ . This resistor is chosen to match the characteristic impedance of the medium, typically around 100  $\Omega$ . The differential voltage is detected by the receiver and converted back into a single-ended logic signal.

When the noninverting receiver input,  $R_{IN+}$ , is positive with respect to the inverting input  $R_{IN-}$  (current flows through  $R_T$  from  $R_{IN+}$  to  $R_{IN-}$ ), then  $R_{OUT}$  is high. When the noninverting receiver input  $R_{IN+}$  is negative with respect to the inverting input  $R_{IN-}$  (current flows through  $R_T$  from  $R_{IN-}$  to  $R_{IN+}$ ), then  $R_{OUT}$  is low.

The [ADN4662](#) differential line receiver is capable of receiving signals of 100 mV over a  $\pm 1$  V common-mode range centered around 1.2 V. This relates to the typical driver offset voltage value of 1.2 V. The signal originating from the driver is centered around 1.2 V and may shift  $\pm 1$  V around this center point. This  $\pm 1$  V shifting may be caused by a difference in the ground potential of the driver and receiver, the common-mode effect of coupled noise, or both.

Using the [ADN4663](#) as a driver, the received differential current is between 2.5 mA and 4.5 mA (typically 3.1 mA), developing between 250 mV and 450 mV across a 100  $\Omega$  termination resistor. The received voltage is centered around the receiver offset of 1.2 V. In other words, the noninverting receiver input is typically

$(1.2 \text{ V} + [310 \text{ mV}/2]) = 1.355 \text{ V}$ , and the inverting receiver input  $(1.2 \text{ V} - [310 \text{ mV}/2]) = 1.045 \text{ V}$  for Logic 1. For Logic 0, the inverting and noninverting input voltages are reversed. Note that because the differential voltage reverses polarity, the peak-to-peak voltage swing across  $R_T$  is twice the differential voltage.

Current mode signalling offers considerable advantages over voltage mode signalling, such as RS-422. The operating current remains fairly constant with increased switching frequency, whereas with voltage mode drivers the current increases exponentially in most cases. This is caused by the overlap as internal gates switch between high and low, which causes currents to flow from  $V_{CC}$  to ground. A current mode device simply reverses a constant current between its two outputs, with no significant overlap currents.

This is similar to emitter-coupled logic (ECL) and positive emitter-coupled logic (PECL), but without the high quiescent current of ECL and PECL.

## APPLICATIONS INFORMATION

Figure 23 shows a typical application for point-to-point data transmission using the [ADN4663](#) as the driver.


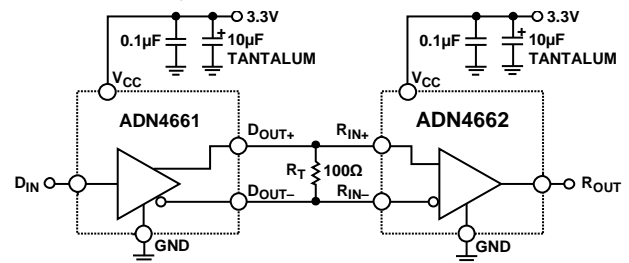


Figure 23. Typical Application Circuit

07960-119

OUTLINE DIMENSIONS

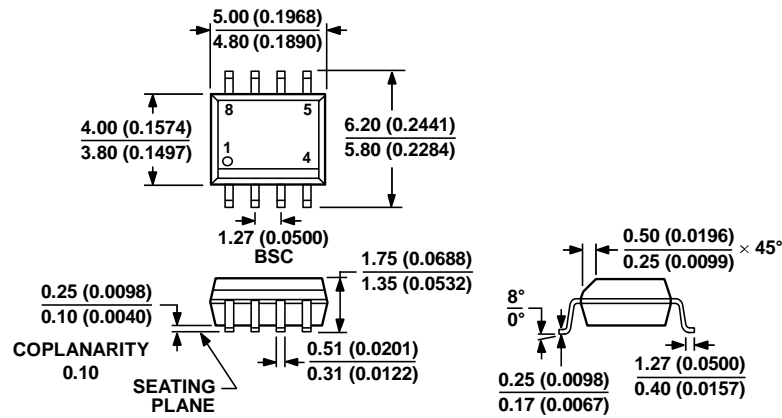

COMPLIANT TO JEDEC STANDARDS MS-012-AA  
 CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS  
 (IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR  
 REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

012407-A

Figure 24. 8-Lead Standard Small Outline Package [SOIC\_N]  
 Narrow Body  
 (R-8)  
 Dimensions shown in millimeters and (inches)

ORDERING GUIDE

Model <sup>1</sup>	Temperature Range	Package Description	Package Option
ADN4662BRZ	-40°C to +85°C	8-Lead Standard Small Outline Package [SOIC_N]	R-8
ADN4662BRZ-REEL7	-40°C to +85°C	8-Lead Standard Small Outline Package [SOIC_N]	R-8

<sup>1</sup> Z = RoHS Compliant Part.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[ADN4662BRZ](#) [ADN4662BRZ-REEL7](#)