




TYPE 102
SAME AS TYPE 101
EXCEPT AS SHOWN

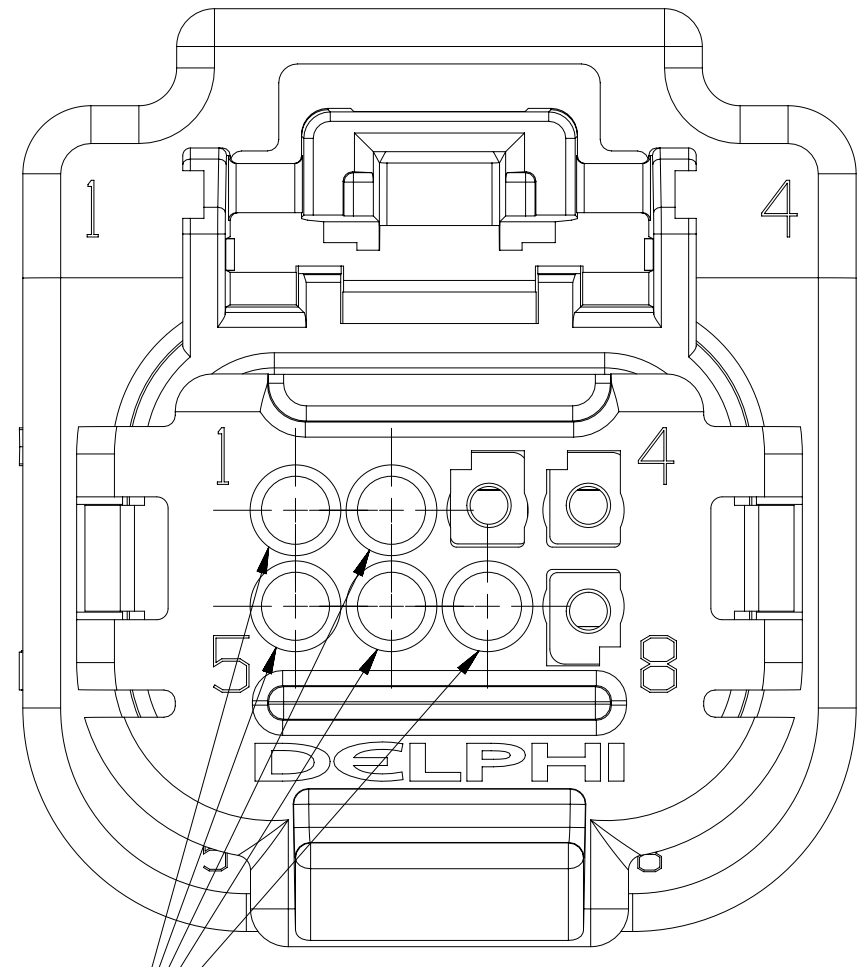



TYPE 103
SAME AS TYPE 101
EXCEPT AS SHOWN

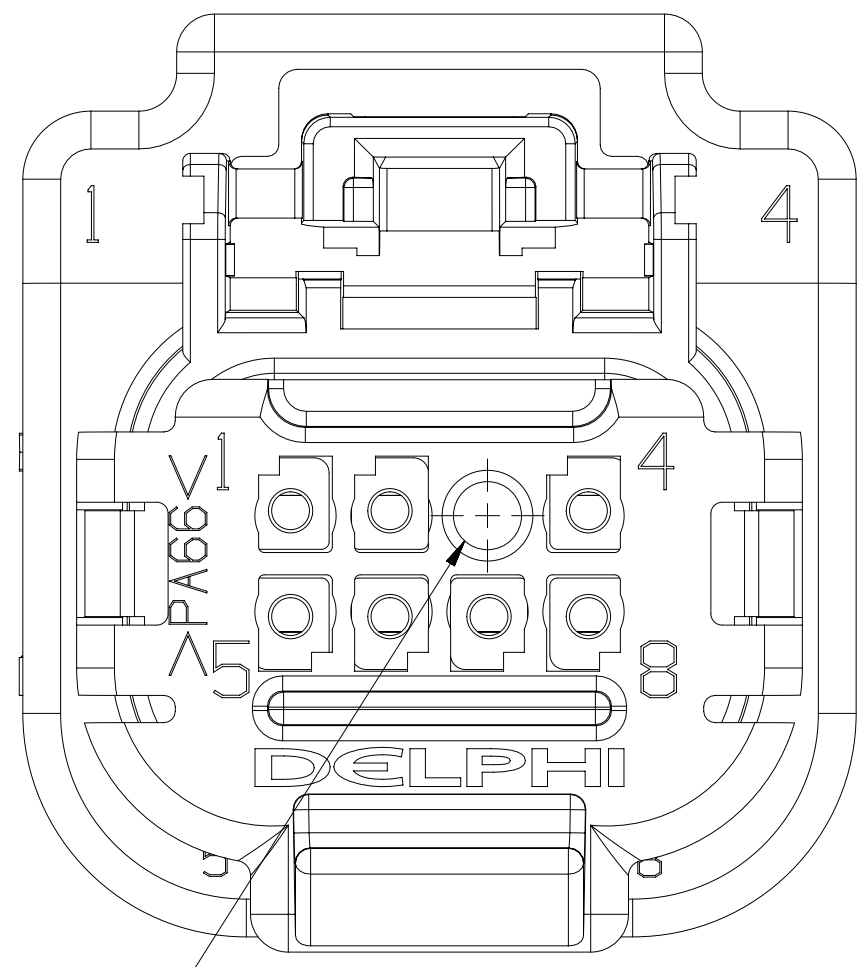



TYPE 104
SAME AS TYPE 101
EXCEPT AS SHOWN

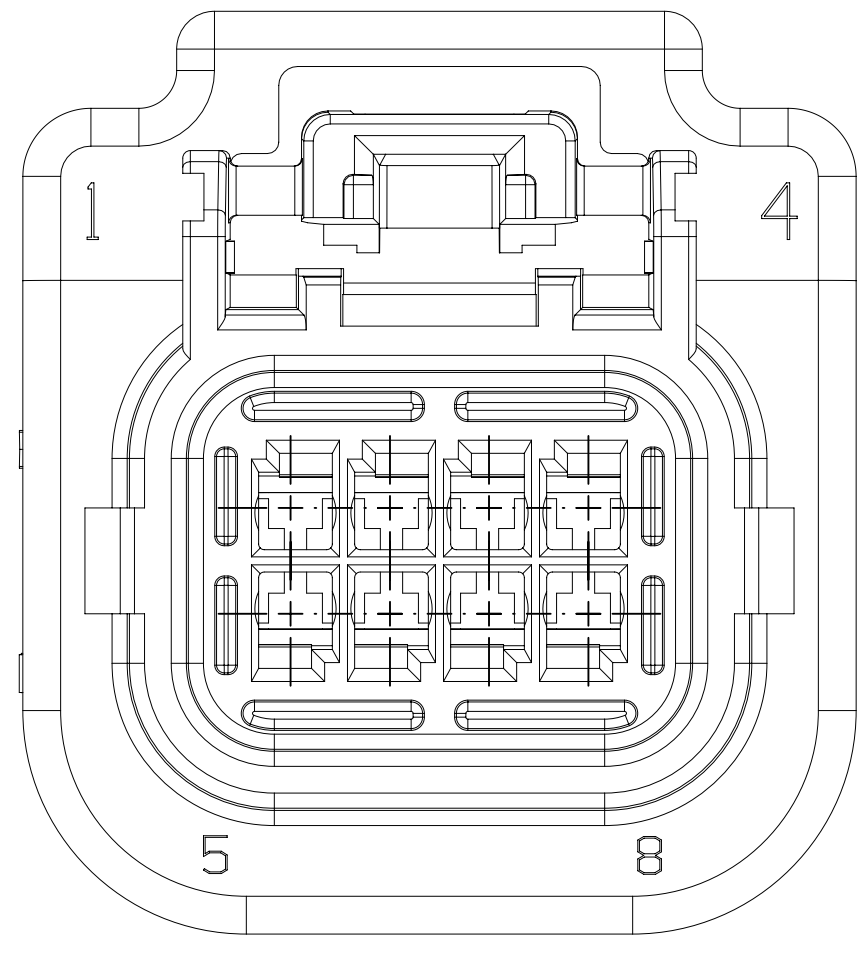



TYPE 105
SAME AS TYPE 101
EXCEPT AS SHOWN

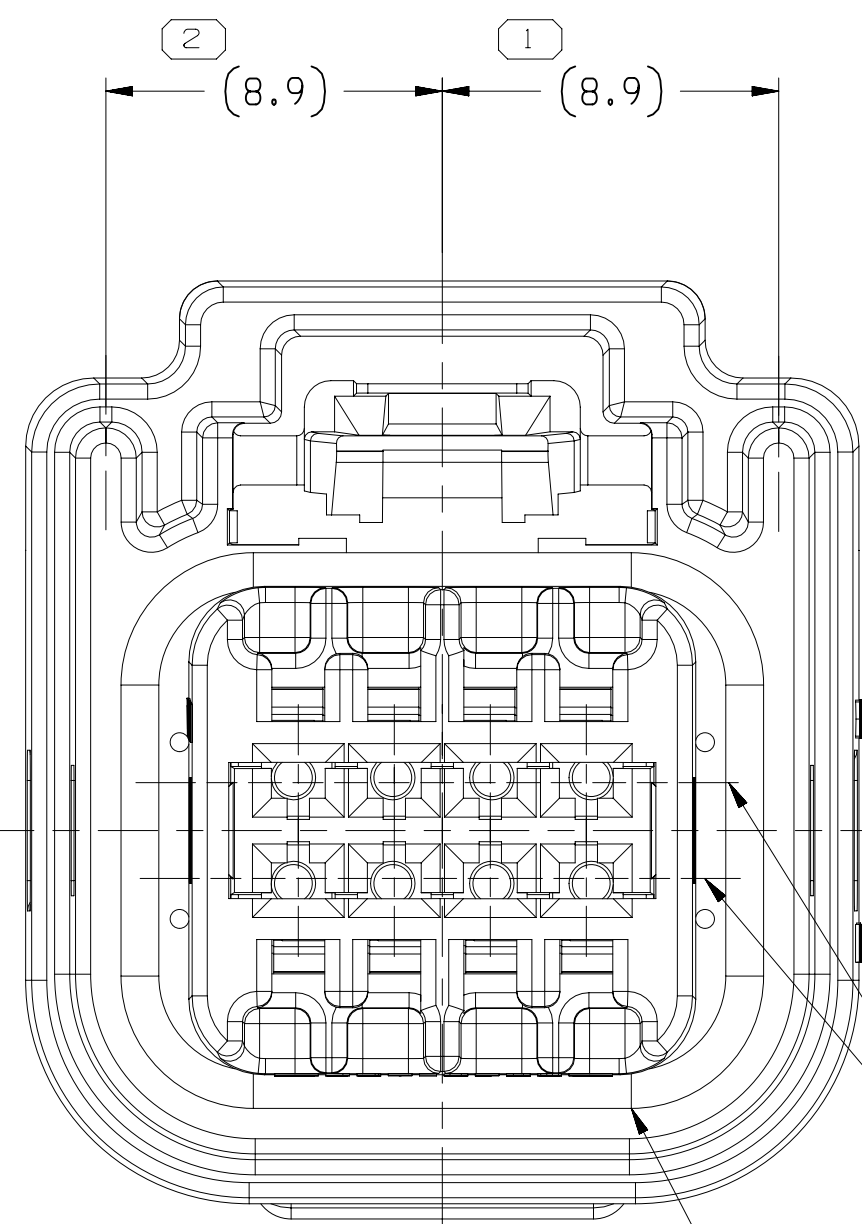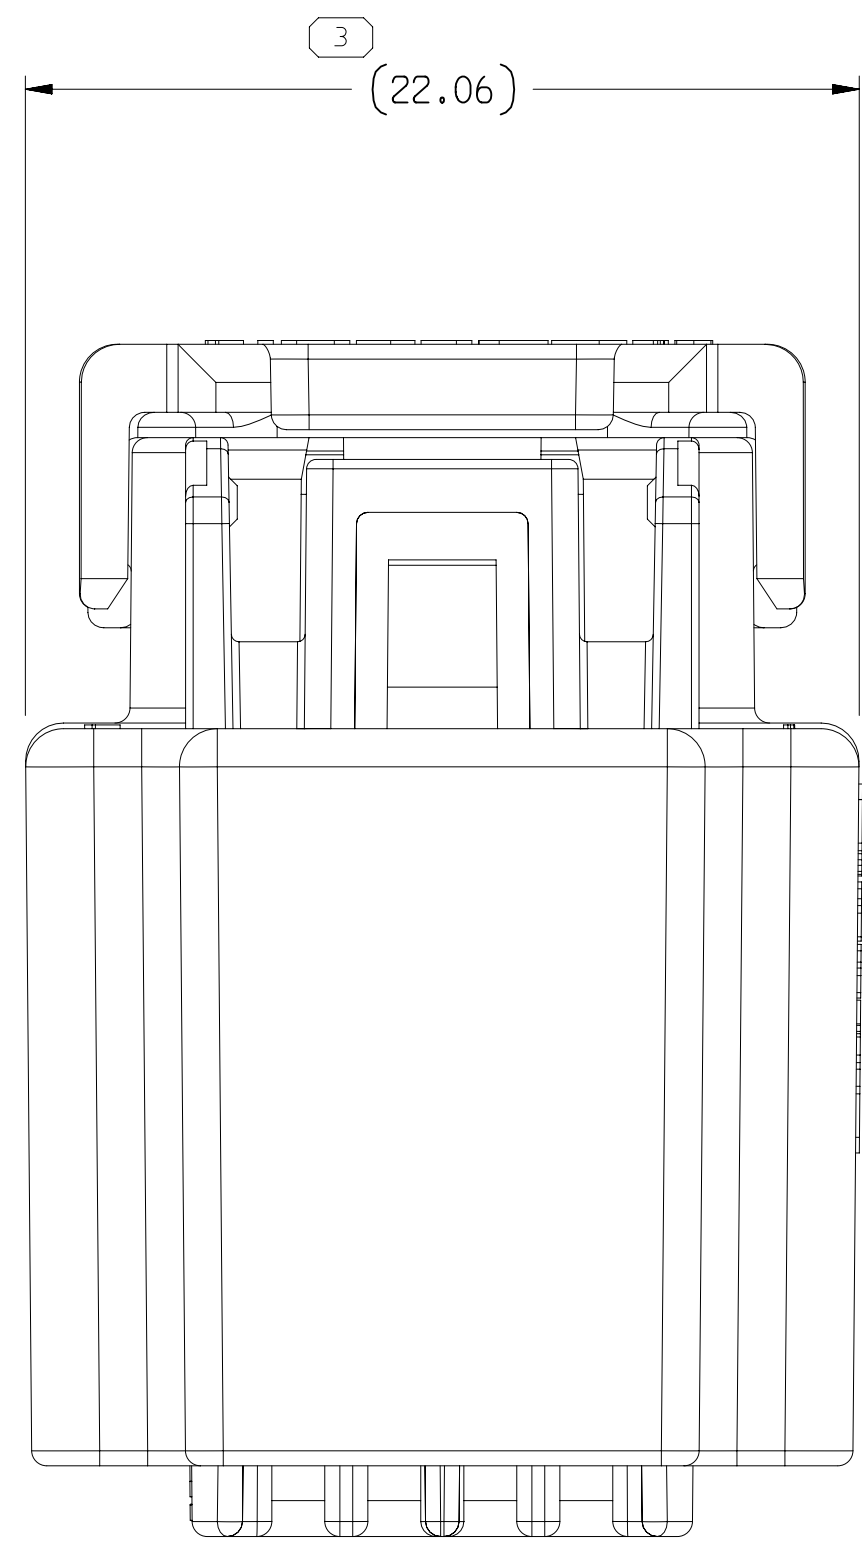

CONNECTOR SEAL - SEE CHART

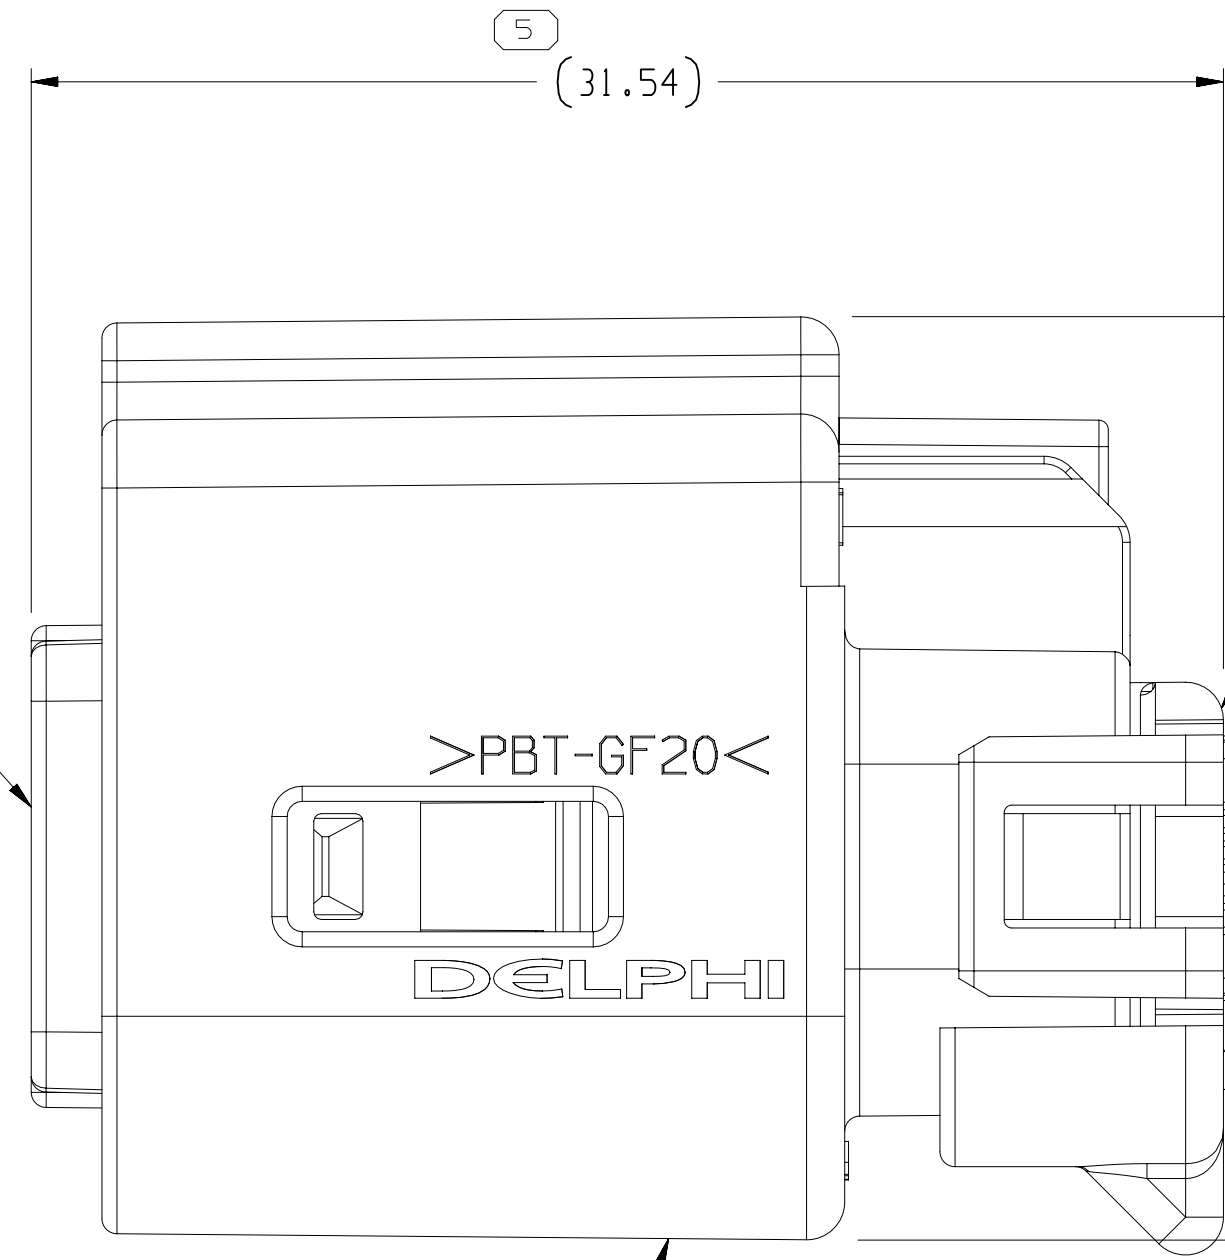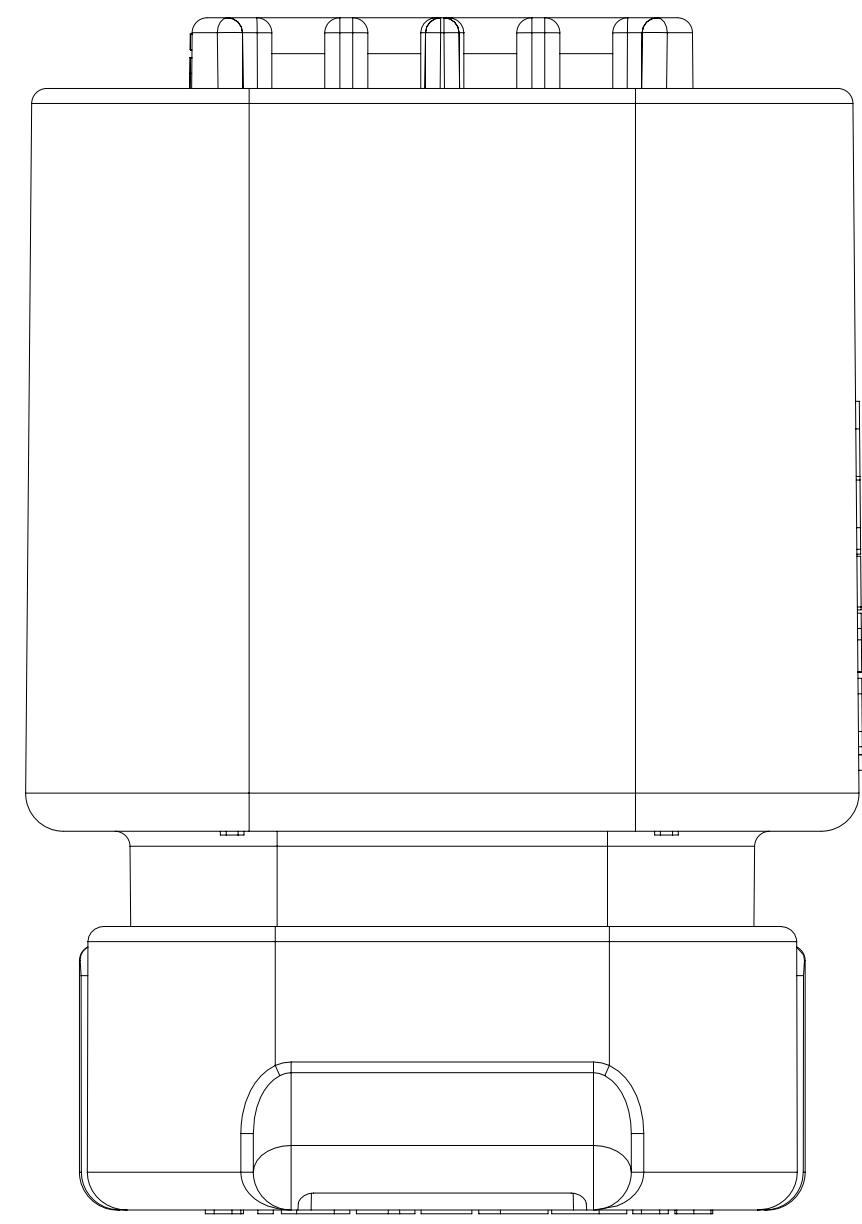

CONNECTOR - SEE CHART

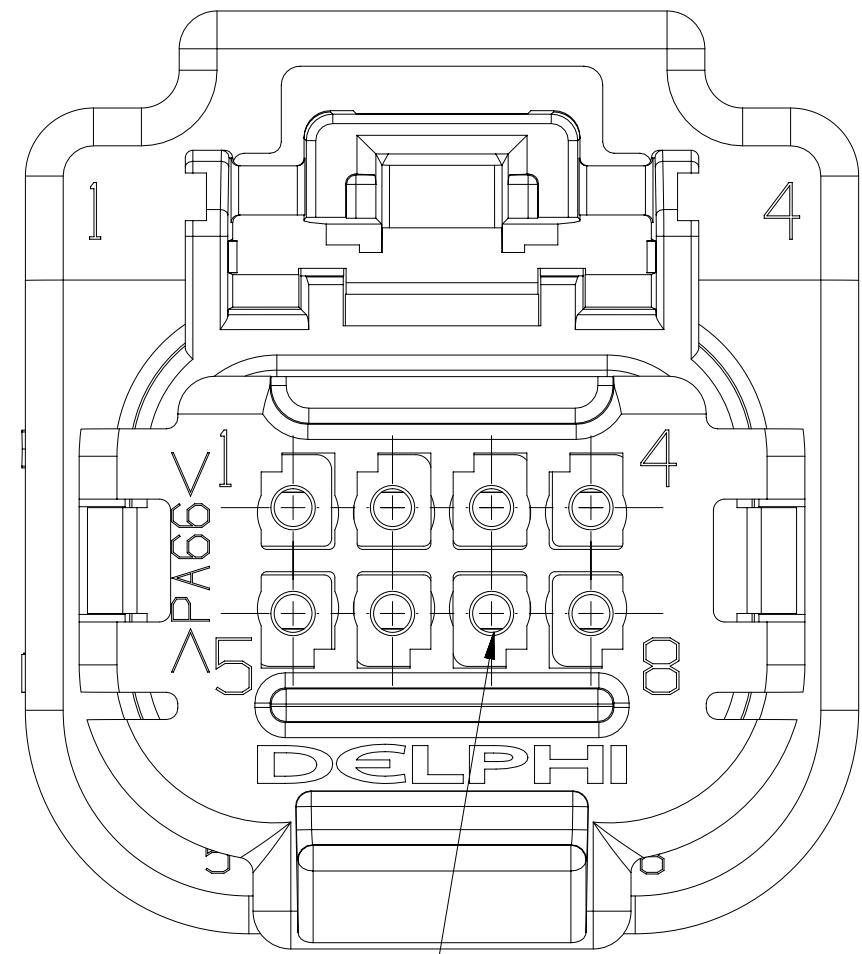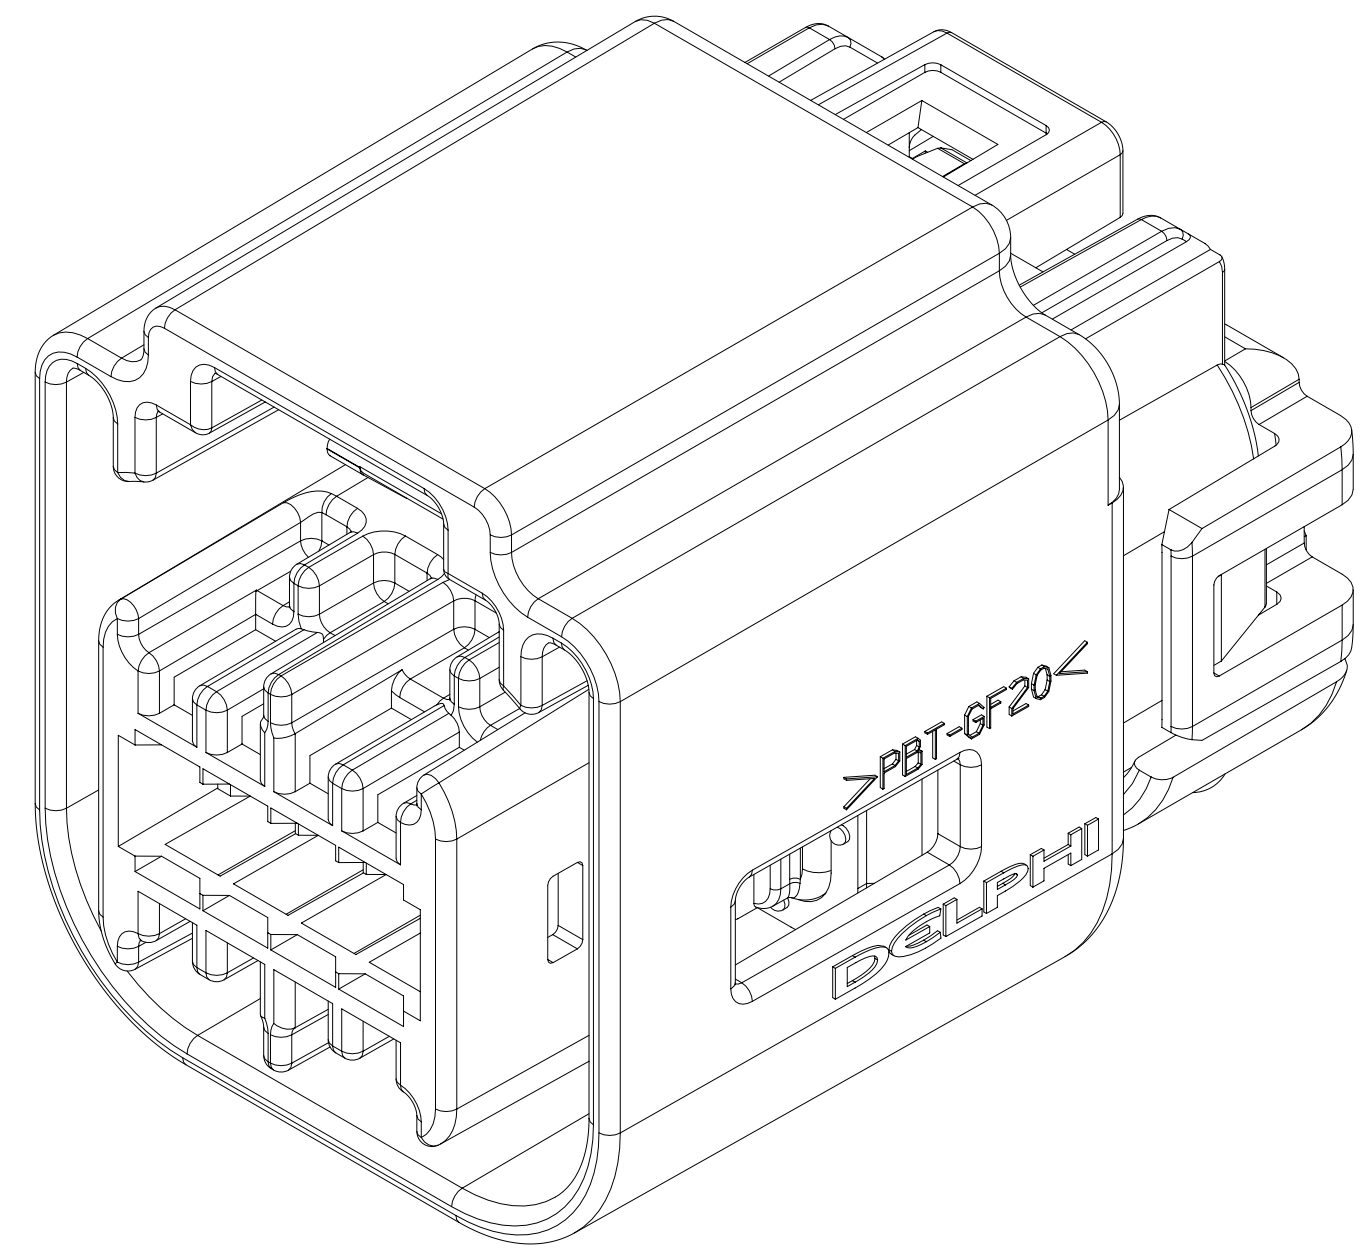

TYPE 101

NOTES

- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
DIMENSIONS ARE TO FACE OF VIEW SHOWN AND
AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION
(SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL
OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL
BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
- WHEN PARTS ARE SHIPPED THEY MUST BE PACKED IN PLASTIC BAGS
OR SHIPPING CONTAINERS MUST BE LINED WITH PLASTIC LINERS.
BAGS OR LINERS MUST BE SEALED TO AVOID FOREIGN MATTER.
- ASSEMBLY VALIDATED TO SAE/USCAR-2 REV 4 MAY 2004:

SEALING CODE 4 - CONNECTOR SYSTEM ENVIRONMENTAL TEST FLOWCHART
(PRESSURE/VACUUM AND SUBMERSION).

ALSO CONFORMS TO:
SAE/USCAR-2 REV 6 FEB 2013 53-ENVIRONMENTAL TEST SEQUENCE HIGH
TEMP EXPOSURE; PV LEAK; SUBMERSION; HIGH PRESS. SPRAY.

TEMPERATURE CLASS 3

5.4.5 MISCELLANEOUS COMPONENT ENGAGE/DISENGAGE FORCE
PLR ENGAGE PRE SET TO LOCK
WITHOUT TERMINALS: 69-78N
WITH TERMINALS: 57-73N
- THESE PARTS ARE NOT CONTROLLED FOR AUTOMATIC FEEDING.
- THIS PRODUCT IS NOT CATEGORIZED AS AN APPEARANCE ITEM, MINOR
IMPERFECTIONS INCLUDING, BUT NOT LIMITED TO, FLOW MARKS, COLOR
BLEMISHES, GATE VESTIGE, AND SOFT FLASH THAT DO NOT AFFECT THE
FIT, FORM, OR FUNCTION OF THE PART ARE PERMISSIBLE PER PER DPNP-4.7-C5-01.
- FOR APPLICATION DATA SEE THE INDIVIDUAL APPLICATION DRAWINGS.

PART NO	REV	N/P	TYPE	CONNECTOR	STRAIN RELIEF	POSITIVE LOCK REINFORCEMENT	CONNECTOR SEAL	CABLE SEAL	BLOCKED CAVITIES
33130470	01	AD	104	13567796	33130471	13567795	13567794	13567793	3
13720596	01	AD	103	13567796	13720595	13567795	13567794	13567793	1,2,5,6,7
13567798	01	AF	102	13567796	13587323	13567795	13567794	13567793	2,4,6,8
13572498	02	AF	101	13567796	13567797	13567795	13567794	13567793	-

DIMENSIONAL RANGE (MM)										CHART E	
FROM	> 0	> 20	> 30	> 70	> 100	> 150	> 200	> 250	> 300		
TO	20	30	70	100	150	200	250	300	400		
TOLERANCE UNLESS OTHERWISE SPECIFIED											
	±0.15	±0.2	±0.3	±0.4	±0.5	±0.6	±0.8	±1	±1.2		
ANGULAR TOLERANCE ±2°											

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Aptiv:](#)

[33130470](#)