

Terminal Part Number: 12124075

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1002

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 1,85 - 2,18

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1002 0,80		2,02	90	1,20	0,05	2,05	0,10	2,10	0,10	2,60	0,10

Cable type code legend:

1002:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: ECTFE, ETFE, PBT, PTFE, PUR, TFE

Insul. Wall Designator: THIN

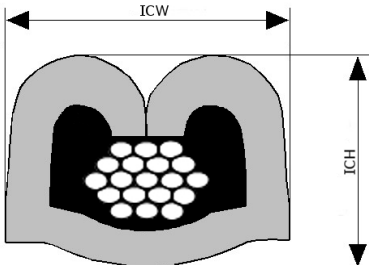

Terminal Part Number: 12124075

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1002

Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED

Insulation Range Φ[mm]: 1,85 - 2,18

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1002 0,80		2,02	90	1,20	0,05	2,05	0,10	2,10	0,10	2,60	0,10

Cable type code legend:

1002:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: ECTFE, ETFE, PBT, PTFE, PUR, TFE

Insul. Wall Designator: THIN

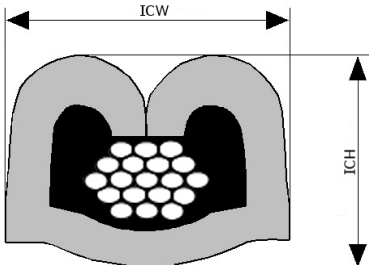

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1003
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,20 - 2,45
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1003 0,80		2,33	90	1,20	0,05	2,05	0,10	2,10	0,10	2,60	0,10

Cable type code legend:

1003:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: ECTFE, ETFE, PTFE, PUR, TFE
Insul. Wall Designator: REGULAR

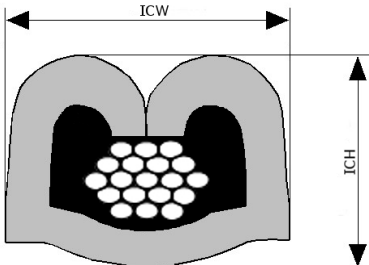

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1003
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 2,20 - 2,45
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1003 0,80		2,33	90	1,20	0,05	2,05	0,10	2,10	0,10	2,60	0,10

Cable type code legend:

1003:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: ECTFE, ETFE, PTFE, PUR, TFE
Insul. Wall Designator: REGULAR

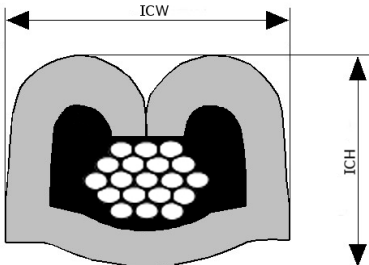

Terminal Part Number: 12124075

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,80 | 1,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 1005

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 1,85 - 2,40

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,80		2,03	90	1,20	0,05	2,05	0,10	2,10	0,10	2,60	0,10
1005 1,00		2,23	120	1,30	0,05	2,05	0,10	2,20	0,10	2,60	0,10

Cable type code legend:

1005:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, PVDF, XLPE

Insul. Wall Designator: THIN

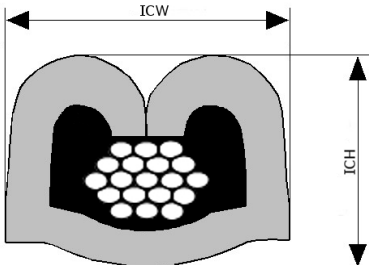

Terminal Part Number: 12124075

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1005

Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]

Insulation Range Φ[mm]: 1,85 - 2,20

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,80		2,03	90	1,20	0,05	2,05	0,10	2,10	0,10	2,60	0,10

Cable type code legend:

1005:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, PVDF, XLPE

Insul. Wall Designator: THIN

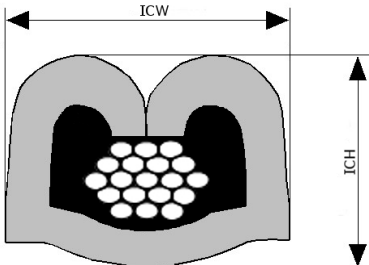

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80 | 1,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1005
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 1,85 - 2,40
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,80		2,03	90	1,20	0,05	2,05	0,10	2,10	0,10	2,60	0,10
1005 1,00		2,23	120	1,30	0,05	2,05	0,10	2,20	0,10	2,60	0,10

Cable type code legend:

1005:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

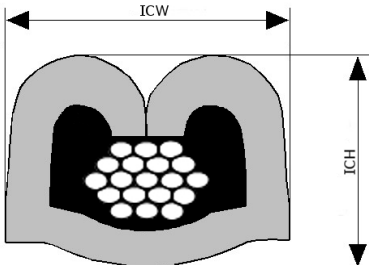

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80 | 1,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1007
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,20 - 2,70
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,80		2,33	90	1,20	0,05	2,05	0,10	2,20	0,10	2,60	0,10
1007 1,00		2,58	120	1,30	0,05	2,05	0,10	2,20	0,10	2,60	0,10

Cable type code legend:

1007:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR

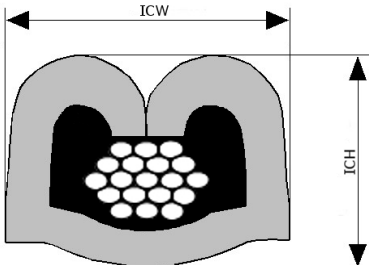

Terminal Part Number: 12124075

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1007

Crimp Process: (SR) SOLDER - REFLOW [LOW IMPEDANCE (SIR) CIRCUIT]

Insulation Range Φ[mm]: 2,20 - 2,45

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,80		2,33	90	1,20	0,05	2,05	0,10	2,20	0,10	2,60	0,10

Cable type code legend:

1007:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPA/PVDF, XLPE

Insul. Wall Designator: REGULAR

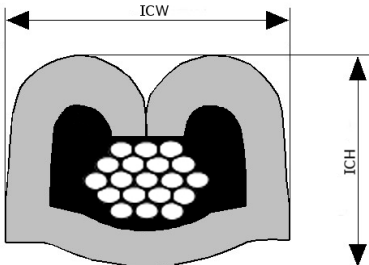

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80 | 1,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1007
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ [mm]: 2,20 - 2,70
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,80		2,33	90	1,20	0,05	2,05	0,10	2,20	0,10	2,60	0,10
1007 1,00		2,58	120	1,30	0,05	2,05	0,10	2,20	0,10	2,60	0,10

Cable type code legend:

1007:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR

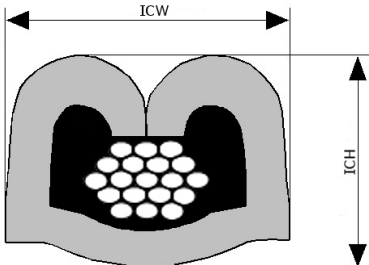

Terminal Part Number: 12124075

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,50 | 0,51 | 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1009

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 2,30 - 3,05

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,50		2,45	80	1,05	0,05	2,05	0,10	2,20	0,10	2,60	0,10
1009 0,51		2,45	80	1,05	0,05	2,05	0,10	2,20	0,10	2,60	0,10
1009 0,80		2,78	90	1,20	0,05	2,05	0,10	2,20	0,10	2,60	0,10

Cable type code legend:

1009:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPE

Insul. Wall Designator: SPECIAL

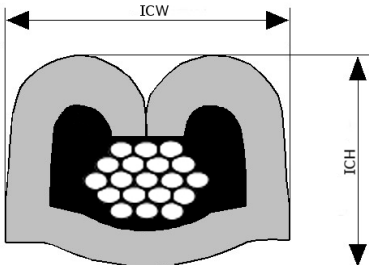

Terminal Part Number: 12124075

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1009

Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD

Insulation Range Φ[mm]: 2,50 - 3,05

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,80		2,78	90	1,20	0,05	2,05	0,10	2,20	0,10	2,60	0,10

Cable type code legend:

1009:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPE

Insul. Wall Designator: SPECIAL

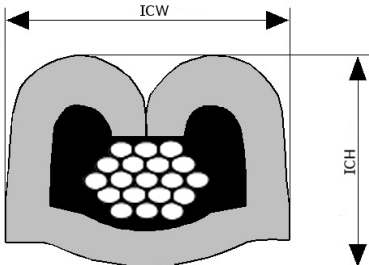

Terminal Part Number: 12124075

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1009

Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED

Insulation Range Φ[mm]: 2,50 - 3,05

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,80		2,78	90	1,20	0,05	2,05	0,10	2,20	0,10	2,60	0,10

Cable type code legend:

1009:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPE

Insul. Wall Designator: SPECIAL

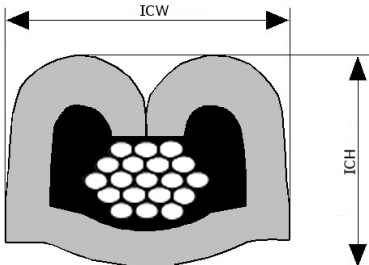

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1019
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,70 - 1,90
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1019 0,80		1,80	90	1,20	0,05	2,05	0,10	2,10	0,10	2,60	0,10

Cable type code legend:

1019:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: THIN SPECIAL

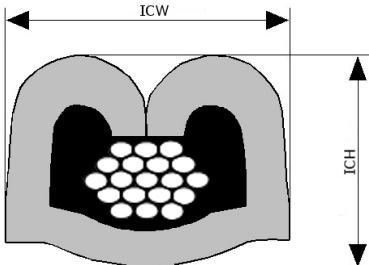

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1025
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,85 - 2,18
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1025 0,80		2,02	90	1,20	0,05	2,05	0,10	2,10	0,10	2,60	0,10

Cable type code legend:

1025:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE
Insul. Wall Designator: THIN

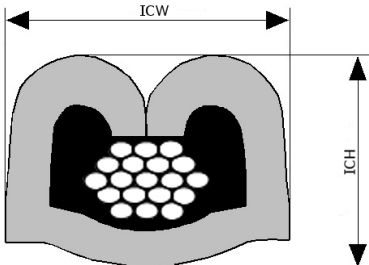

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1025
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 1,85 - 2,18
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1025 0,80		2,02	90	1,20	0,05	2,05	0,10	2,10	0,10	2,60	0,10

Cable type code legend:

1025:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE
Insul. Wall Designator: THIN

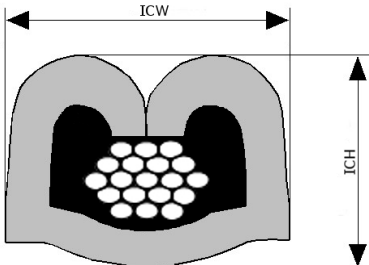

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80 | 1,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1026
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,20 - 2,65
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1026 0,80		2,33	90	1,20	0,05	2,05	0,10	2,10	0,10	2,60	0,10
1026 1,00		2,55	120	1,30	0,05	2,05	0,10	2,20	0,10	2,60	0,10

Cable type code legend:

1026:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: HDPE, PVC, XLPE
Insul. Wall Designator: REGULAR

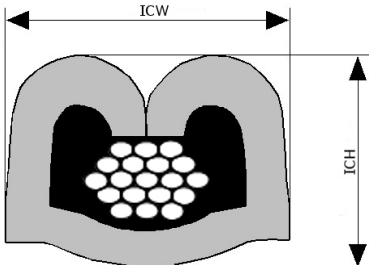

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1026
Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
Insulation Range Φ[mm]: 2,20 - 2,45
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1026 0,80		2,33	90	1,20	0,05	2,05	0,10	2,10	0,10	2,60	0,10

Cable type code legend:

1026:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: HDPE, PVC, XLPE
Insul. Wall Designator: REGULAR

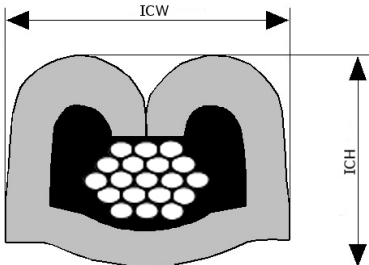

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1035
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,20 - 2,45
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1035 0,80		2,33	90	1,25	0,05	2,05	0,10	2,10	0,10	2,60	0,10

Cable type code legend:

1035:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: XLPE
Insul. Wall Designator: REGULAR

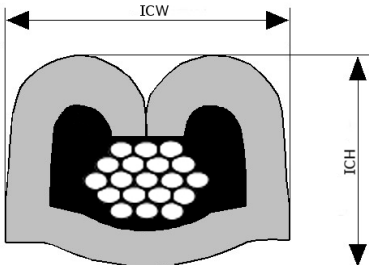

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80 | 1,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1051
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,85 - 2,40
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1051 0,80		2,02	90	1,20	0,05	2,05	0,10	2,10	0,10	2,60	0,10
1051 1,00		2,23	120	1,30	0,05	2,05	0,10	2,10	0,10	2,60	0,10

Cable type code legend:

1051:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: XLPE
Insul. Wall Designator: THIN

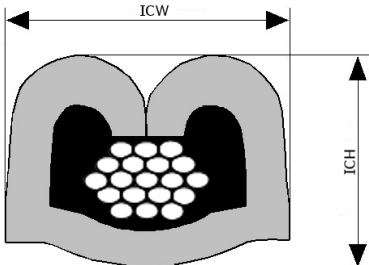

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80 | 1,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1051
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 1,85 - 2,40
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1051 0,80		2,02	90	1,20	0,05	2,05	0,10	2,10	0,10	2,60	0,10
1051 1,00		2,23	120	1,30	0,05	2,05	0,10	2,10	0,10	2,60	0,10

Cable type code legend:

1051:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: XLPE
Insul. Wall Designator: THIN

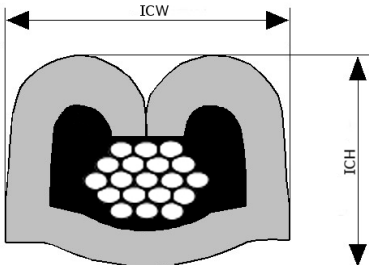

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1056
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,85 - 2,18
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1056 0,80		2,02	90	1,20	0,05	2,00	0,10	2,10	0,10	2,60	0,10

Cable type code legend:

1056:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NI
Insul. Material: FLUORPOLYM, PTFE
Insul. Wall Designator: THIN

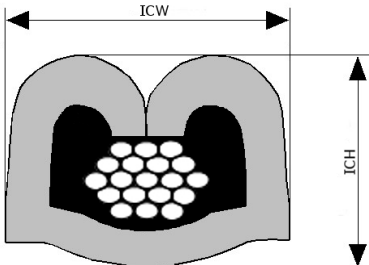

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 1,00

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1085
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,90 - 3,10
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1085 1,00		3,00	120	1,20	0,05	2,05	0,10	2,10	0,10	2,60	0,10

Cable type code legend:

1085:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: TPE
Insul. Wall Designator: HEAVY

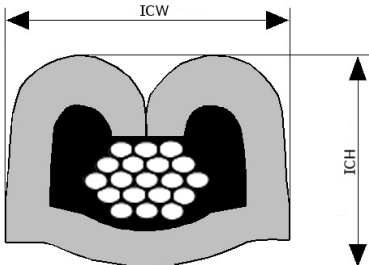

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1094
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,35 - 2,50
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1094 0,50		2,43	80	1,05	0,05	2,05	0,10	2,20	0,10	2,60	0,10

Cable type code legend:

1094:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: HEAVY DUTY

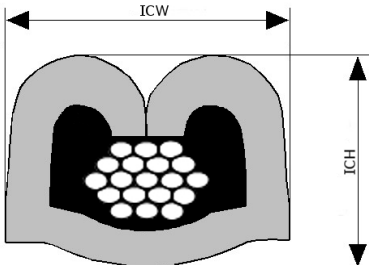

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 1,00

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2005
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,90 - 2,45
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2005 1,00		2,18	207	1,25	0,05	2,05	0,10	2,20	0,10	2,65	0,10

Cable type code legend:

2005: FLR2X (SAAB C)
Industry Designator: ISO
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, TPE, XLPE
Insul. Wall Designator: THIN

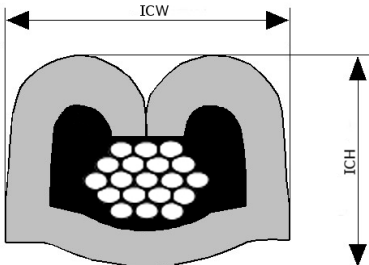

Crimp Information Sheet

DELPHI

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,50 | 0,75 | 1,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2010
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ [mm]: 1,30 - 2,10
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,50		1,50	75	1,05	0,05	2,05	0,10	1,80	0,10	2,60	0,10
2010 0,75		1,75	120	1,30	0,05	1,85	0,10	2,10	0,10	2,60	0,10
2010 1,00		1,95	160	1,40	0,05	1,90	0,10	2,20	0,10	2,60	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR
(AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE,
XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

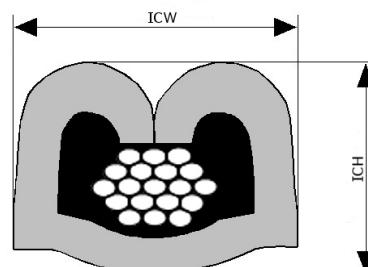

Crimp Information Sheet

DELPHI

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 1,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2010
Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED
Insulation Range Φ [mm]: 2,00 - 2,40
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 1,50		2,20	324	1,35	0,05	2,10	0,10	2,35	0,10	2,65	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR
(AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE,
XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

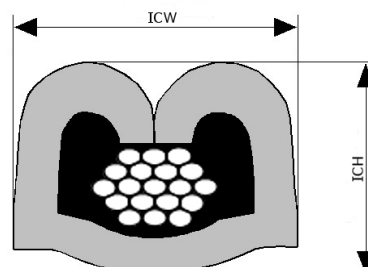

Terminal Part Number: 12124075

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 1,30

Cable Type codes: 2011

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 2,50 - 2,90

Seal(s): NONE

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2011 1,30		2,70	125	1,35	0,05	2,05	0,10	2,10	0,10	2,60	0,10

Cable type code legend:

2011: FL33X, FLK, FLY, FLYKW, IH WIRE



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: P/EST, PE, PVC, XLPE

Insul. Wall Designator: REGULAR

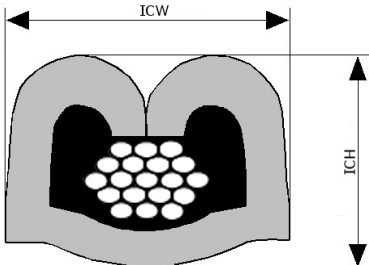

Terminal Part Number: 12124075

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,75

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2017

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 1,60 - 1,90

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2017 0,75		1,75	155	1,15	0,05	2,05	0,10	1,85	0,10	2,60	0,10

Cable type code legend:

2017: FLR41X-B, FLRY-A



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: SN

Insul. Material: PA, PP, PVC, XLPE

Insul. Wall Designator: THIN

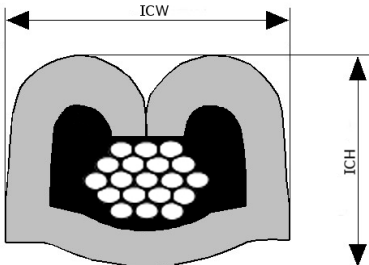

Terminal Part Number: 12124075

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,50 | 0,75 | 1,00 | 1,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 2019

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 1,30 - 2,40

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2019 0,50		1,50	110	1,10	0,05	2,00	0,10	1,75	0,10	2,55	0,10
2019 0,75		1,70	90	1,15	0,05	2,05	0,10	1,90	0,10	2,60	0,10
2019 1,00		1,95	120	1,25	0,05	2,05	0,10	2,20	0,10	2,65	0,10
2019 1,50		2,20	329	1,35	0,05	2,10	0,10	2,10	0,10	2,65	0,10

Cable type code legend:

2019: FL7Y 179, FLR7Y, FLR7Y-A, FLR7Y-B, FLU7Y



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: SN

Insul. Material: ETFE

Insul. Wall Designator: THIN

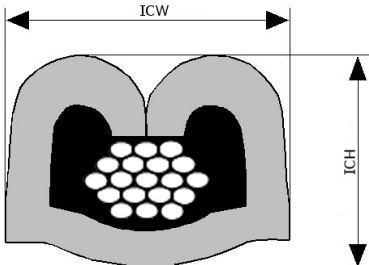

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 1,00

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 2021
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,70 - 2,10
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2021 1,00		1,90	120	1,20	0,05	2,05	0,10	2,10	0,10	2,60	0,10

Cable type code legend:

2021: FLR6Y-A, FLR6Y-B
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: ETFE, FEP, XLETFE
Insul. Wall Designator: THIN

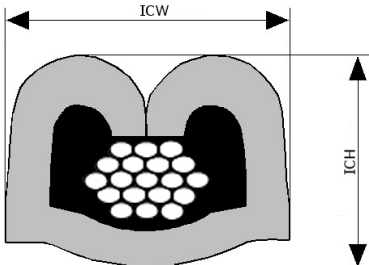

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,75 | 1,00

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2044
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,65 - 2,10
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2044 0,75		1,78	120	1,30	0,05	1,90	0,10	2,10	0,10	2,70	0,10
2044 1,00		1,96	160	1,40	0,05	1,90	0,10	2,20	0,10	2,70	0,10

Cable type code legend:

2044: A3Z, F3Z, FL RENAULT A3Z
Industry Designator: NRA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: XLPA/PVDF, XLPE, X-POLY ZH
Insul. Wall Designator: THIN

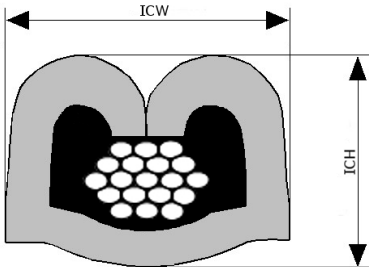

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,75

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 2053
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,60 - 1,80
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2053 0,75		1,70	90	1,15	0,05	2,05	0,10	2,00	0,10	2,60	0,10

Cable type code legend:

2053: PSA T2 ZH ID, PSA T3 ZH ID, PSA T4 ZH ID
Industry Designator: PSA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: POLYOLEFIN, X-POLY
Insul. Wall Designator: ID

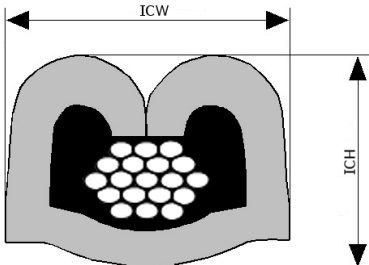

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,75

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 2063
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 0,00 - 1,20
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2063 0,75		0,60	90	1,15	0,05	2,05	0,10	1,90	0,10	2,60	0,10

Cable type code legend:

2063: DRAIN-A
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: NONE
Insul. Wall Designator: NONE

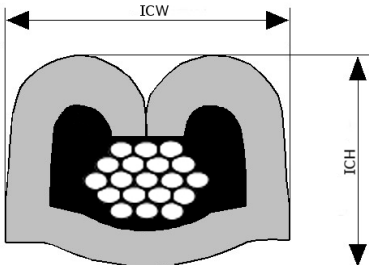

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,85

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 3002
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,00 - 2,40
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3002 0,85		2,20	95	1,20	0,05	2,05	0,10	2,30	0,10	2,70	0,10

Cable type code legend:

3002:

Industry Designator: JIS/JA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPVC
Insul. Wall Designator: REGULAR

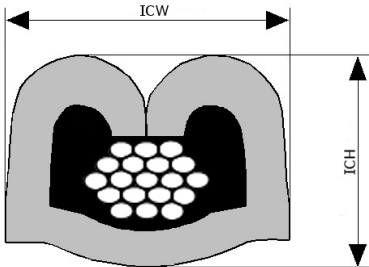

Terminal Part Number: 12124075

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,85

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 3003

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 1,70 - 1,90

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3003 0,85		1,80	95	1,20	0,05	2,05	0,10	2,10	0,10	2,60	0,10

Cable type code legend:

3003: AVSS



Industry Designator: JIS/JA

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, X-PVC

Insul. Wall Designator: THIN

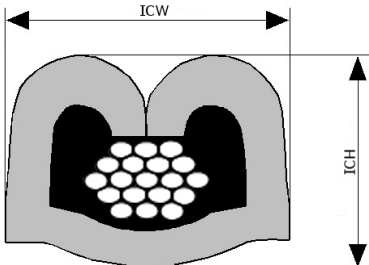

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,50 | 0,85 | 1,25

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 3004
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,50 - 2,20
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3004 0,50		1,60	75	1,10	0,05	2,05	0,10	1,90	0,10	2,60	0,10
3004 0,85		1,80	90	1,20	0,05	2,05	0,10	2,10	0,10	2,60	0,10
3004 1,25		2,10	135	1,30	0,05	2,05	0,10	2,30	0,10	2,60	0,10

Cable type code legend:

3004: AVSS
Industry Designator: JIS/JA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE, X-PVC
Insul. Wall Designator: THIN

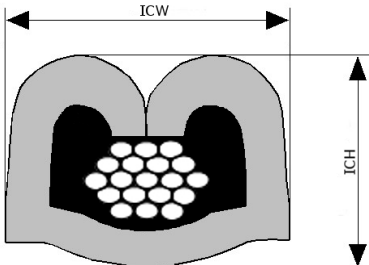

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,75 | 1,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 8000
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,70 - 2,10
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
8000 0,75		1,80	85	1,15	0,05	2,00	0,10	2,10	0,10	2,60	0,10
8000 1,00		2,00	120	1,20	0,05	2,05	0,10	2,10	0,10	2,60	0,10

Cable type code legend:

8000:

Industry Designator: N/G
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: SYNTHRESIN
Insul. Wall Designator: THIN

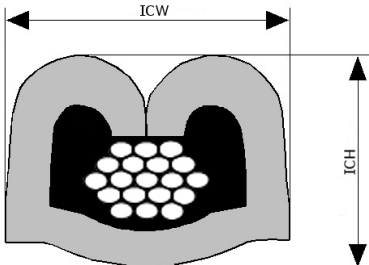

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 9001
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,15 - 2,31
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9001 0,80		2,23	90	1,20	0,05	2,05	0,10	2,10	0,10	2,60	0,10

Cable type code legend:

9001:

Industry Designator: MISC
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVDF
Insul. Wall Designator: MIX

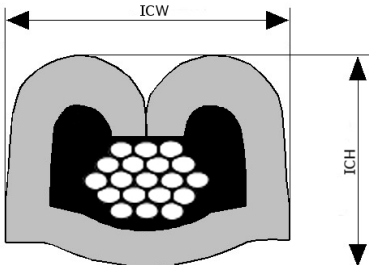

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 1,00

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 9002
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,51 - 2,72
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9002 1,00		2,62	120	1,30	0,05	2,05	0,10	2,20	0,10	2,60	0,10

Cable type code legend:

9002:
Industry Designator: MISC
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVDF
Insul. Wall Designator: MIX

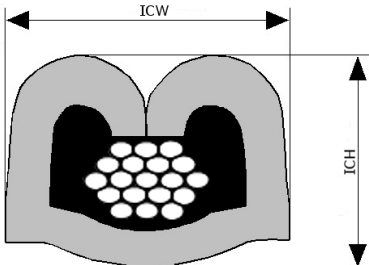

Terminal Part Number: 12124075
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80 | 1,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 9003
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,15 - 2,54
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
9003 0,80		2,25	90	1,20	0,05	2,05	0,10	2,10	0,10	2,60	0,10
9003 1,00		2,46	120	1,30	0,05	2,05	0,10	2,20	0,10	2,60	0,10

Cable type code legend:

9003:

Industry Designator: N/G
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: PVDF
Insul. Wall Designator: MIX

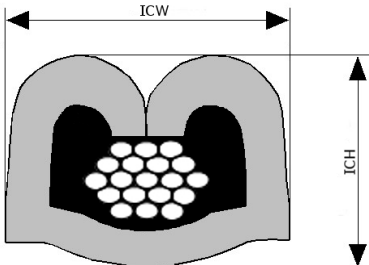

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Aptiv:](#)

[12124075-L](#) [12124075](#)