
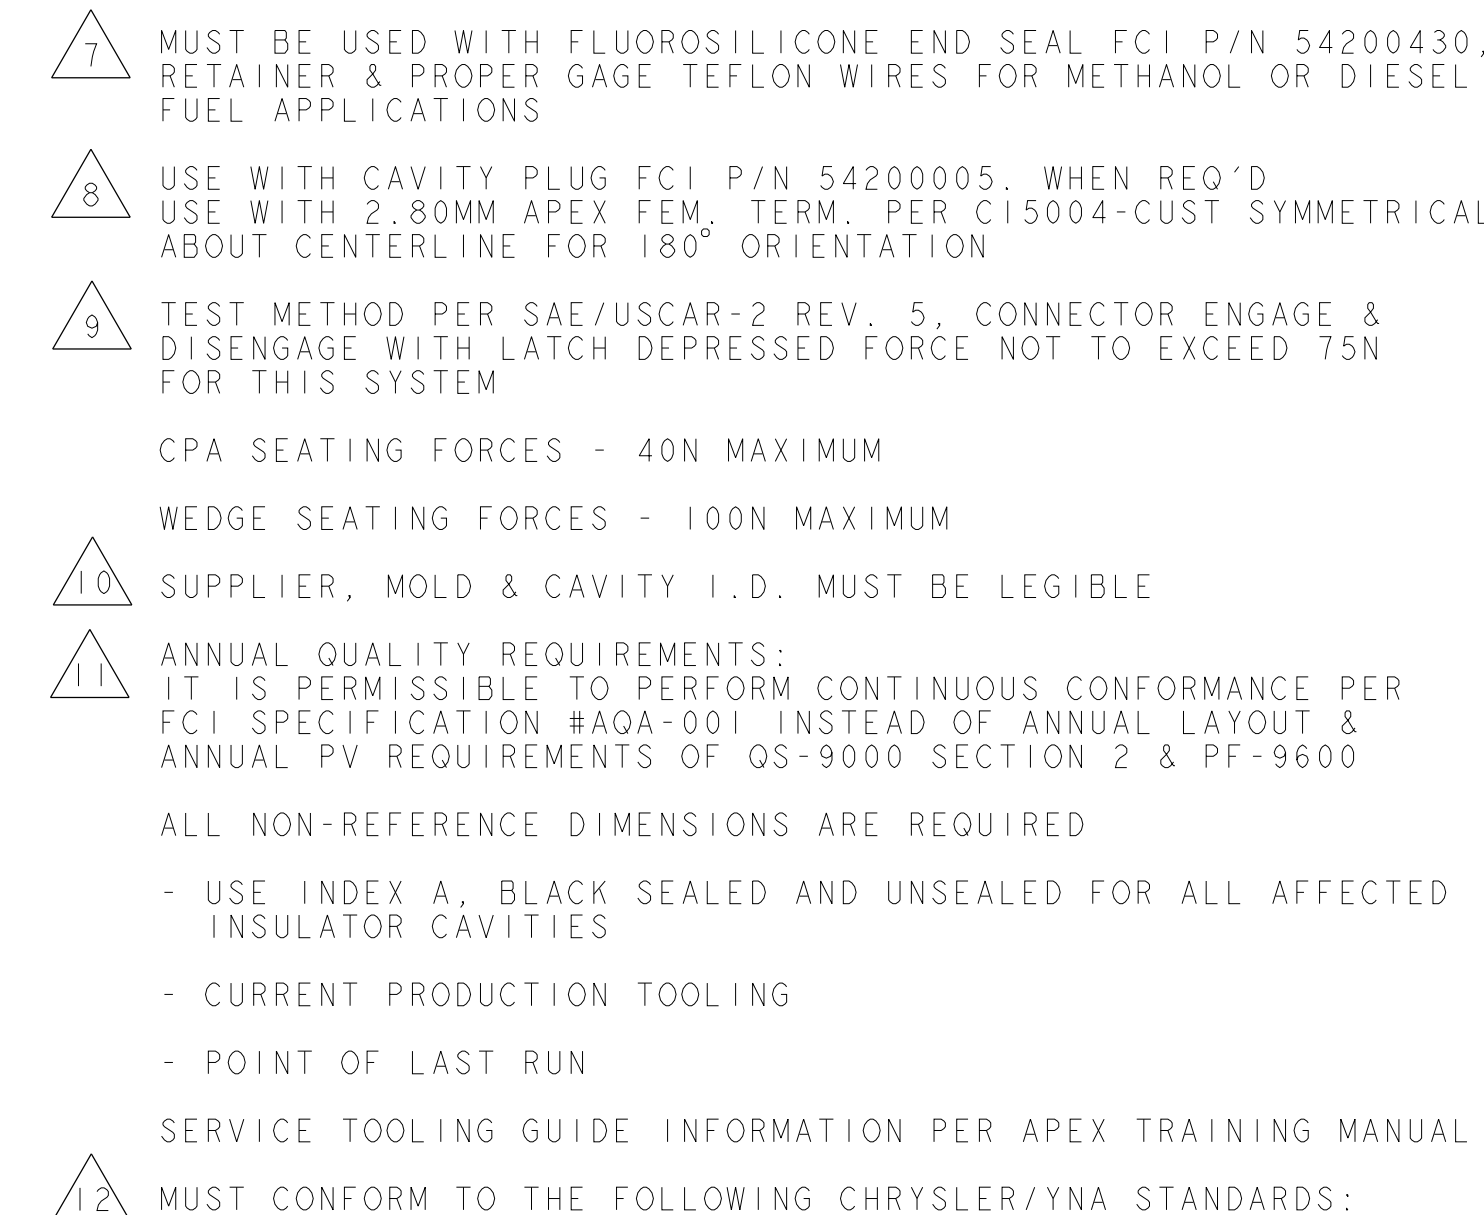
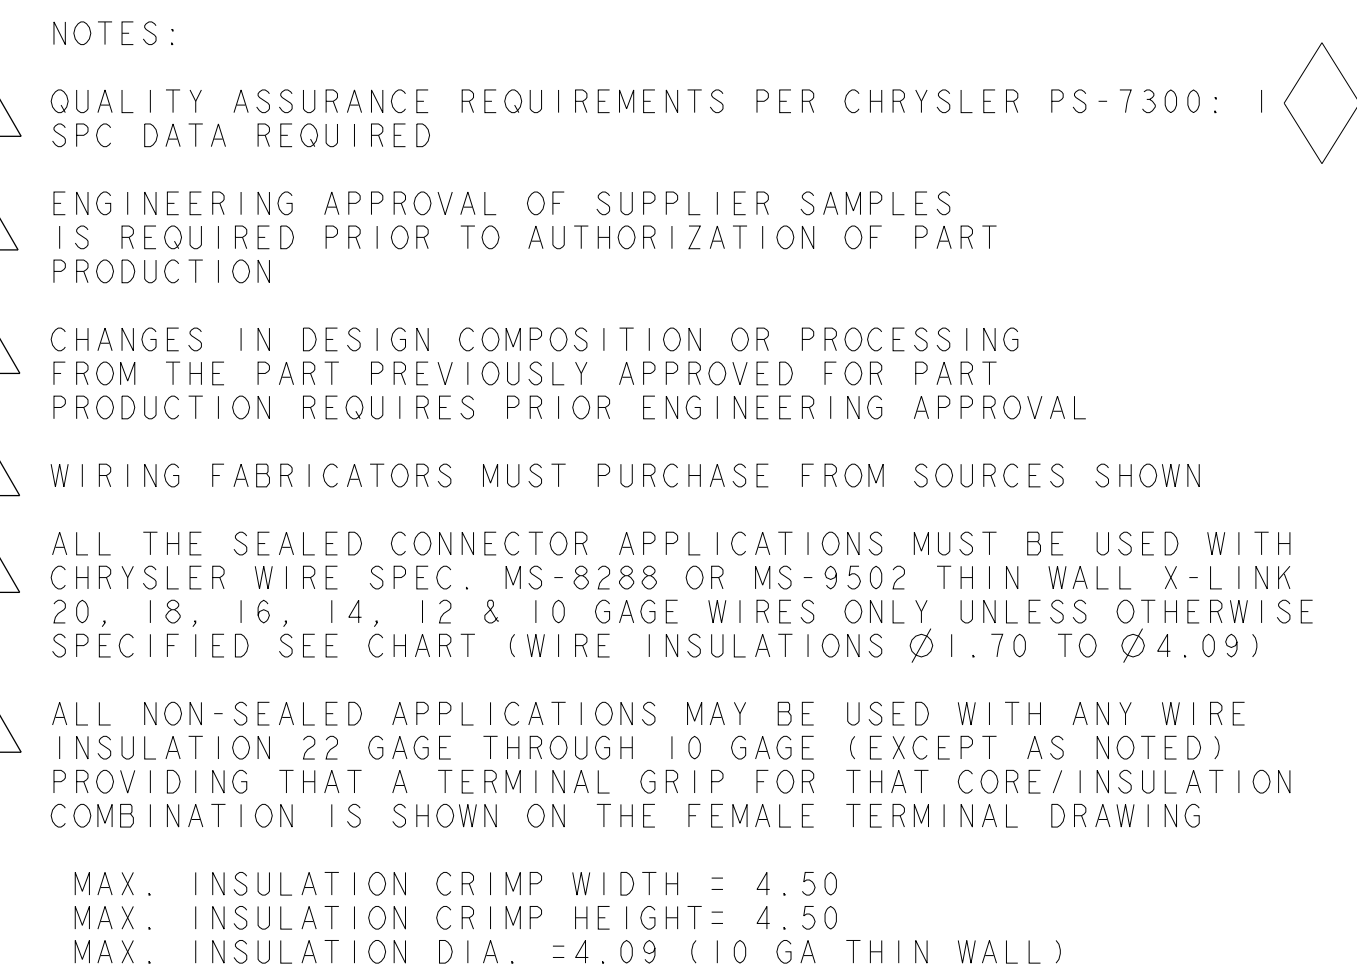
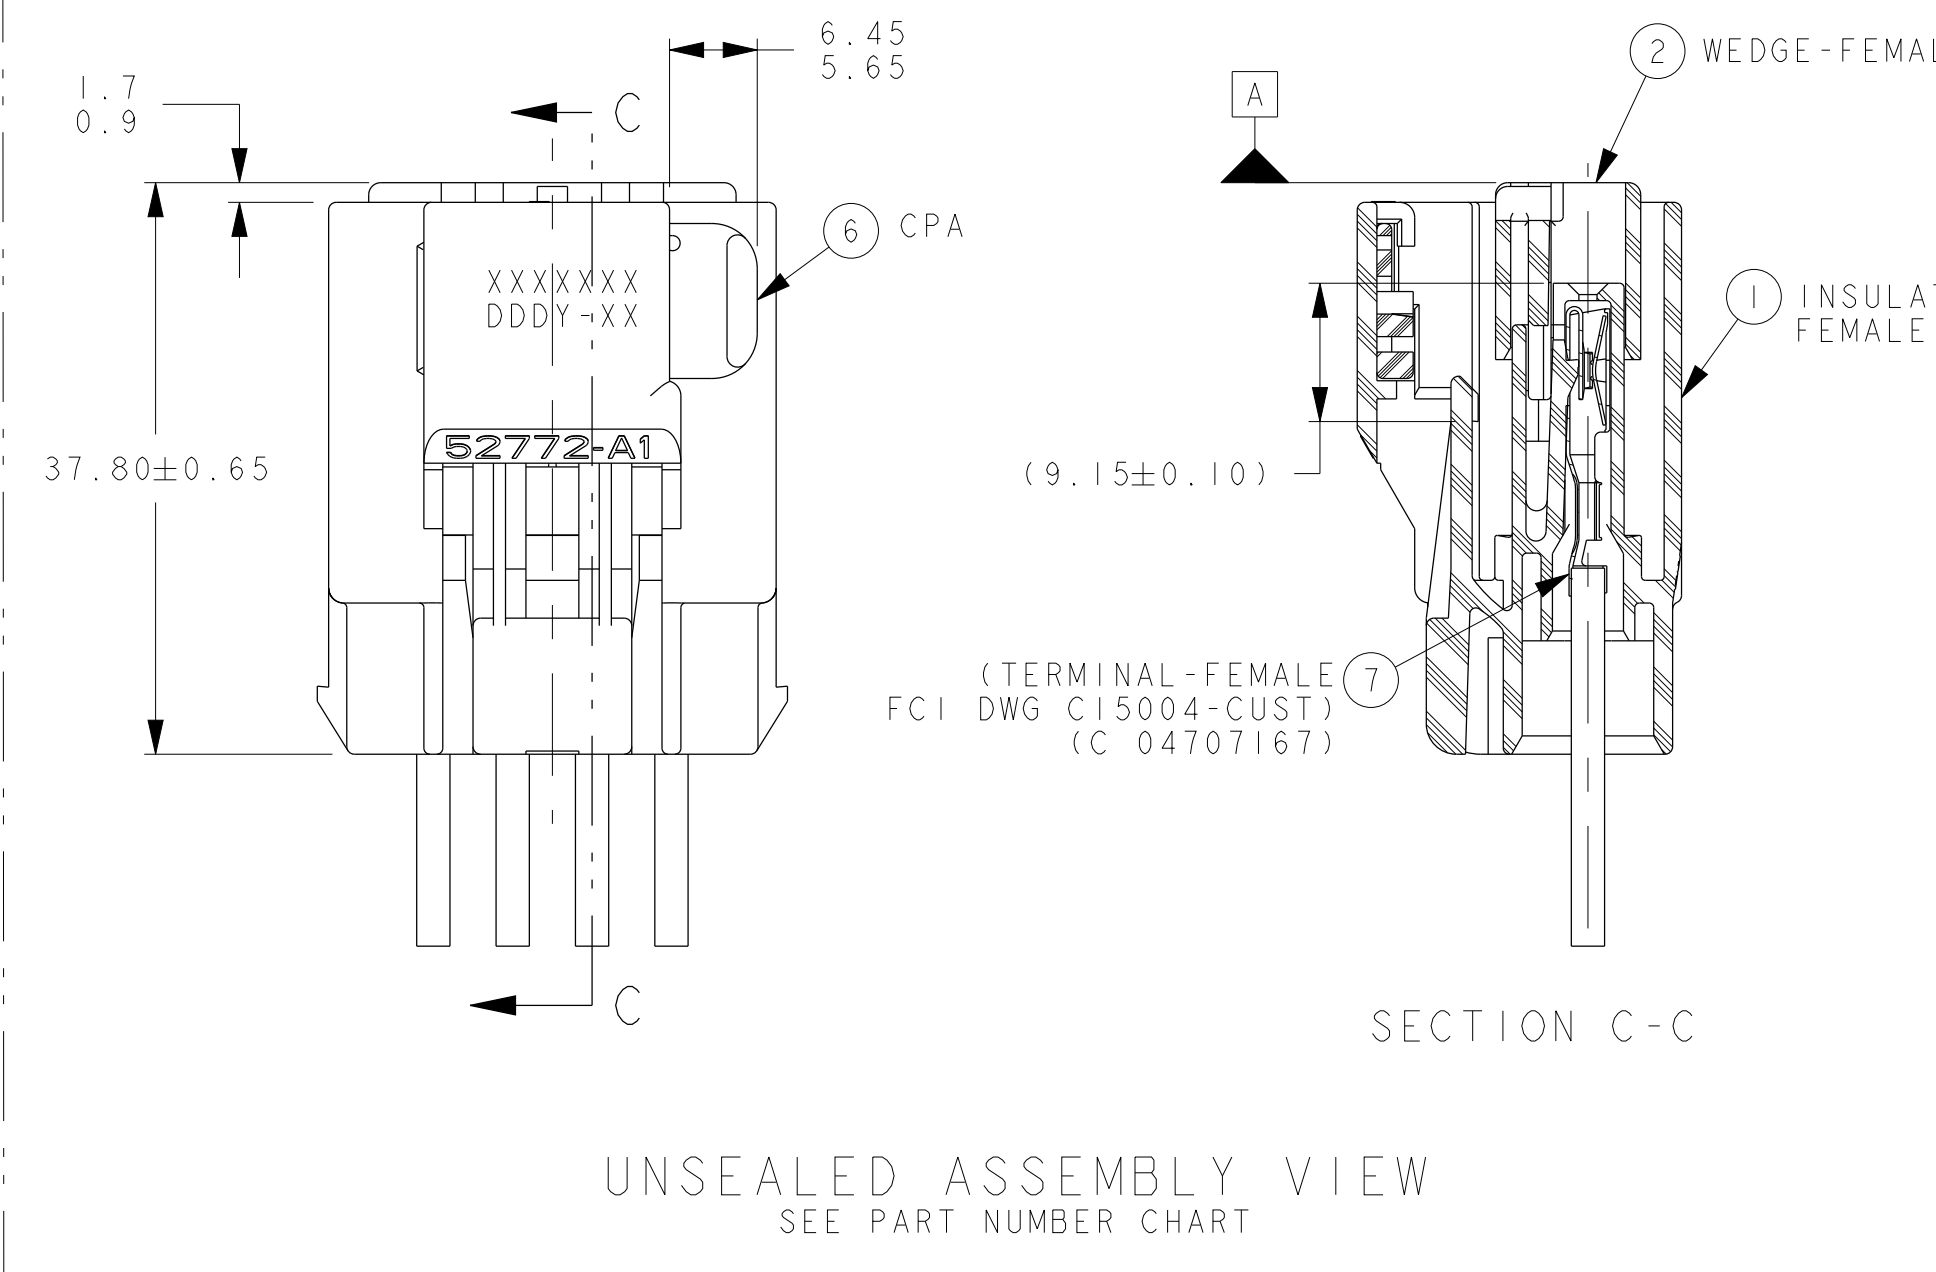
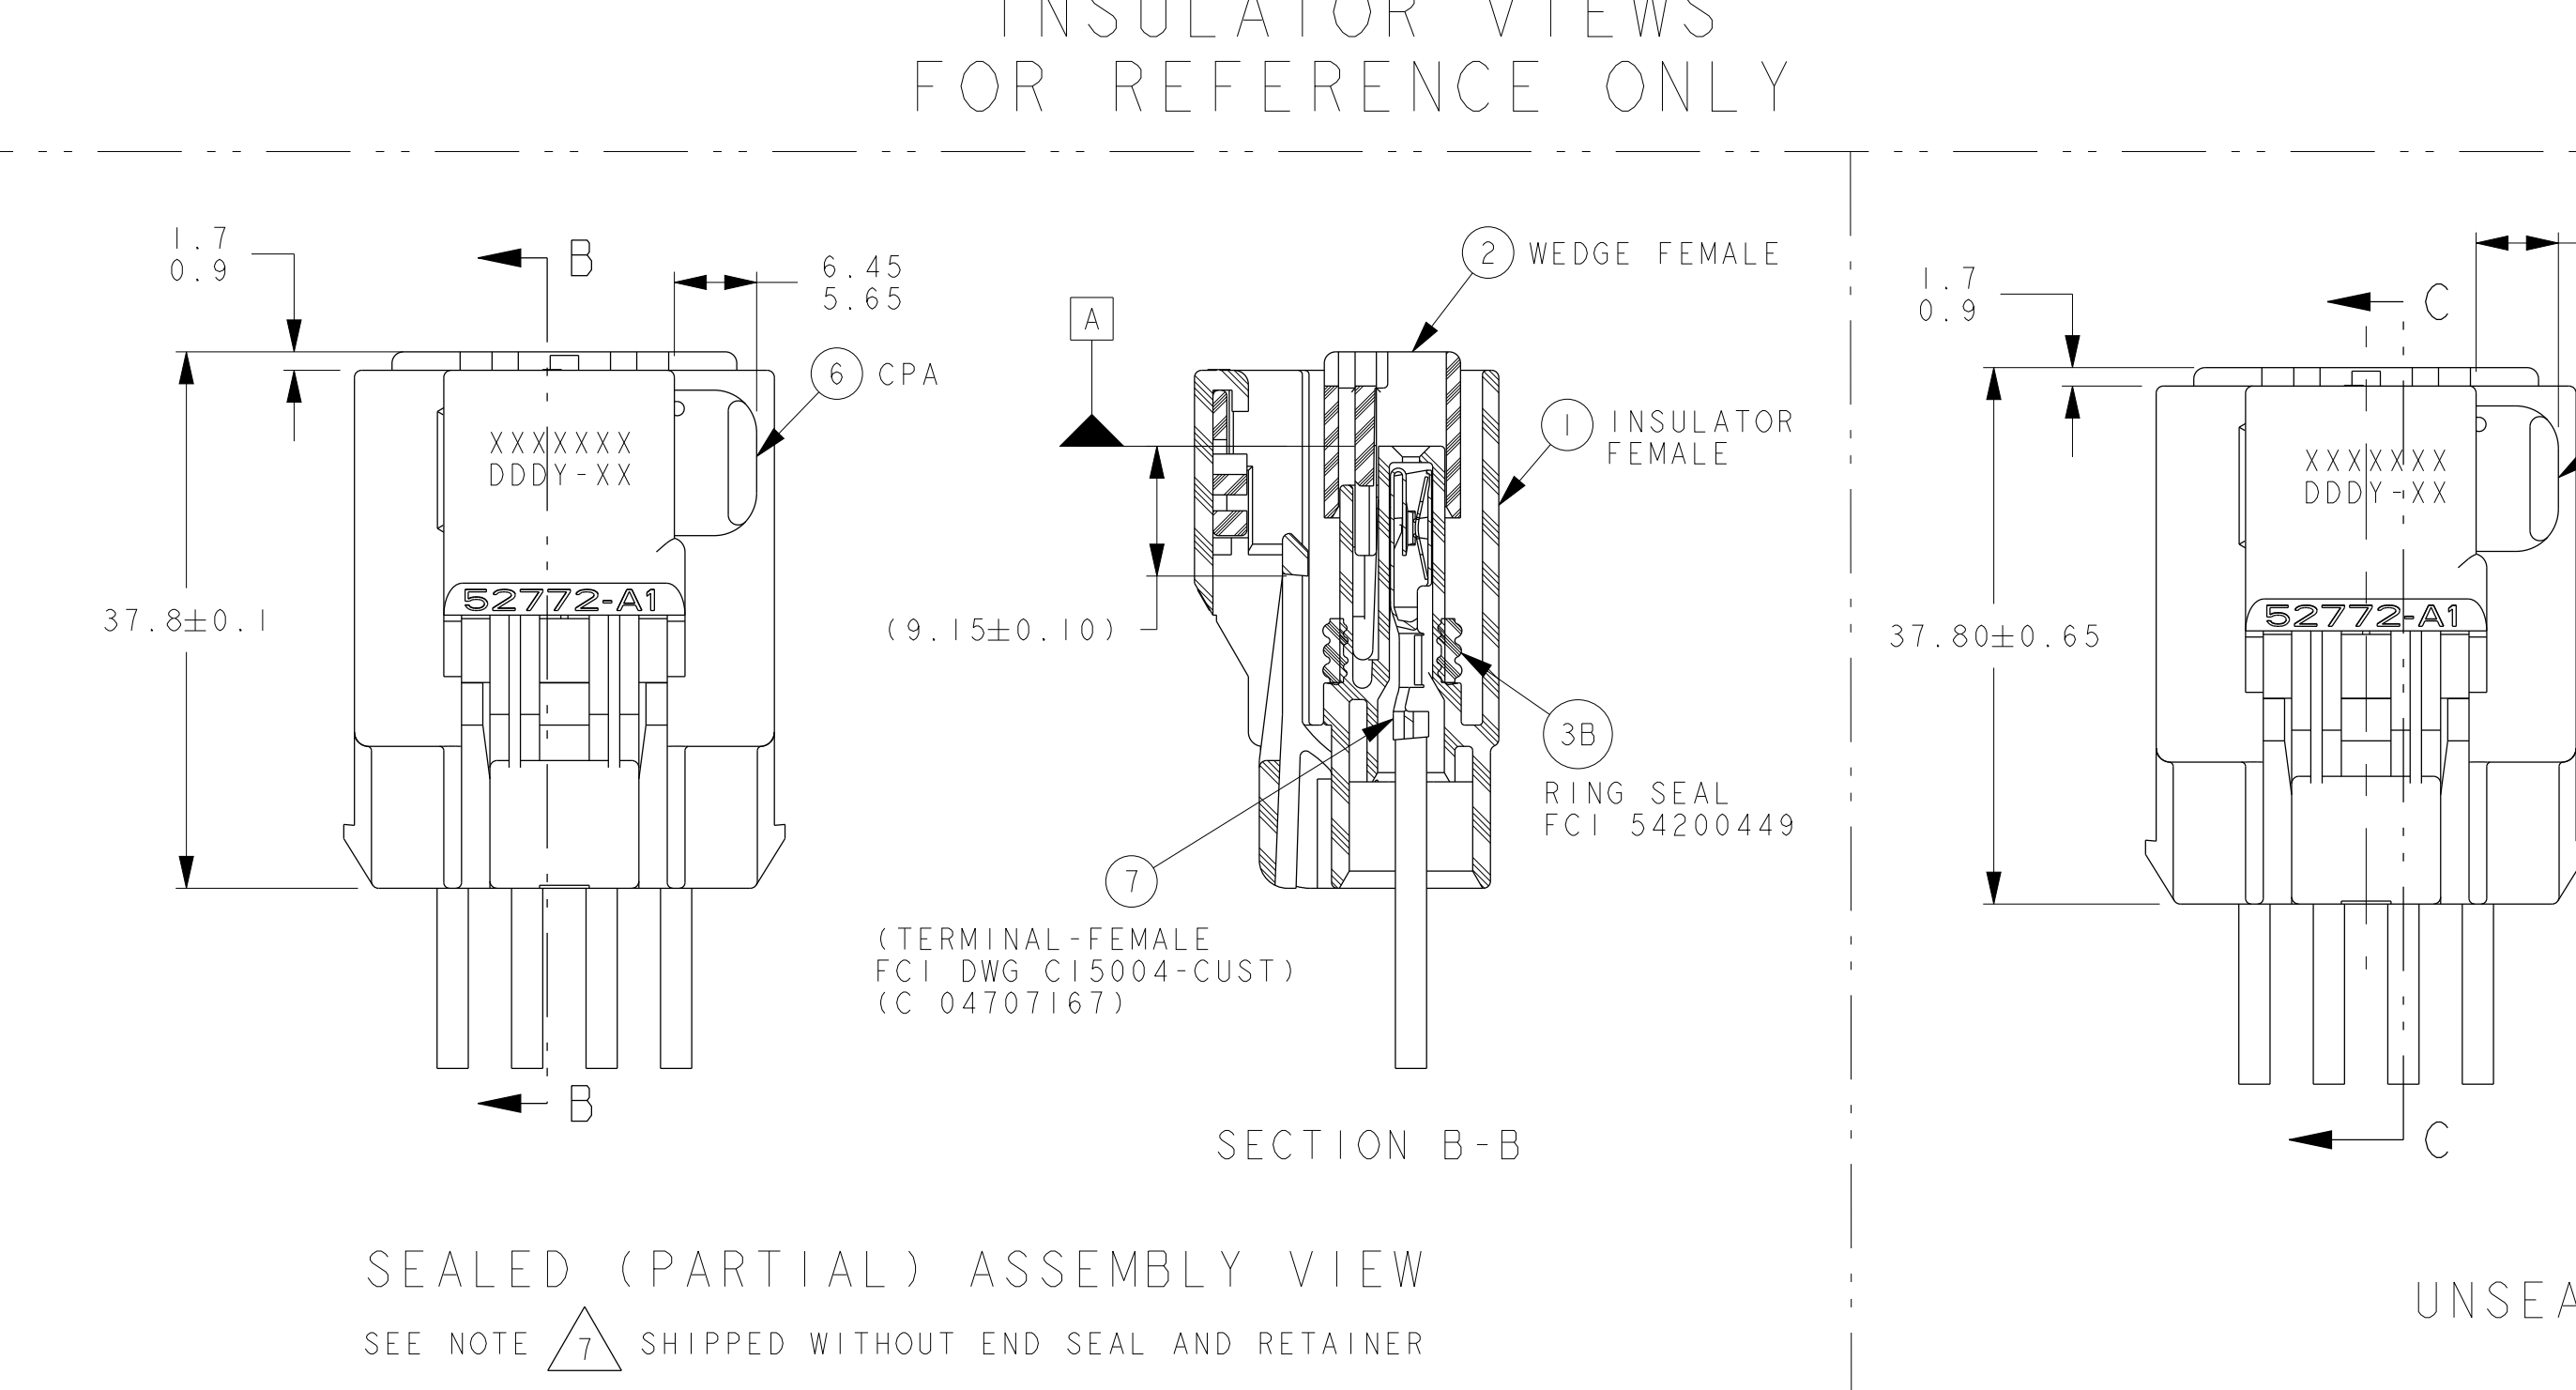
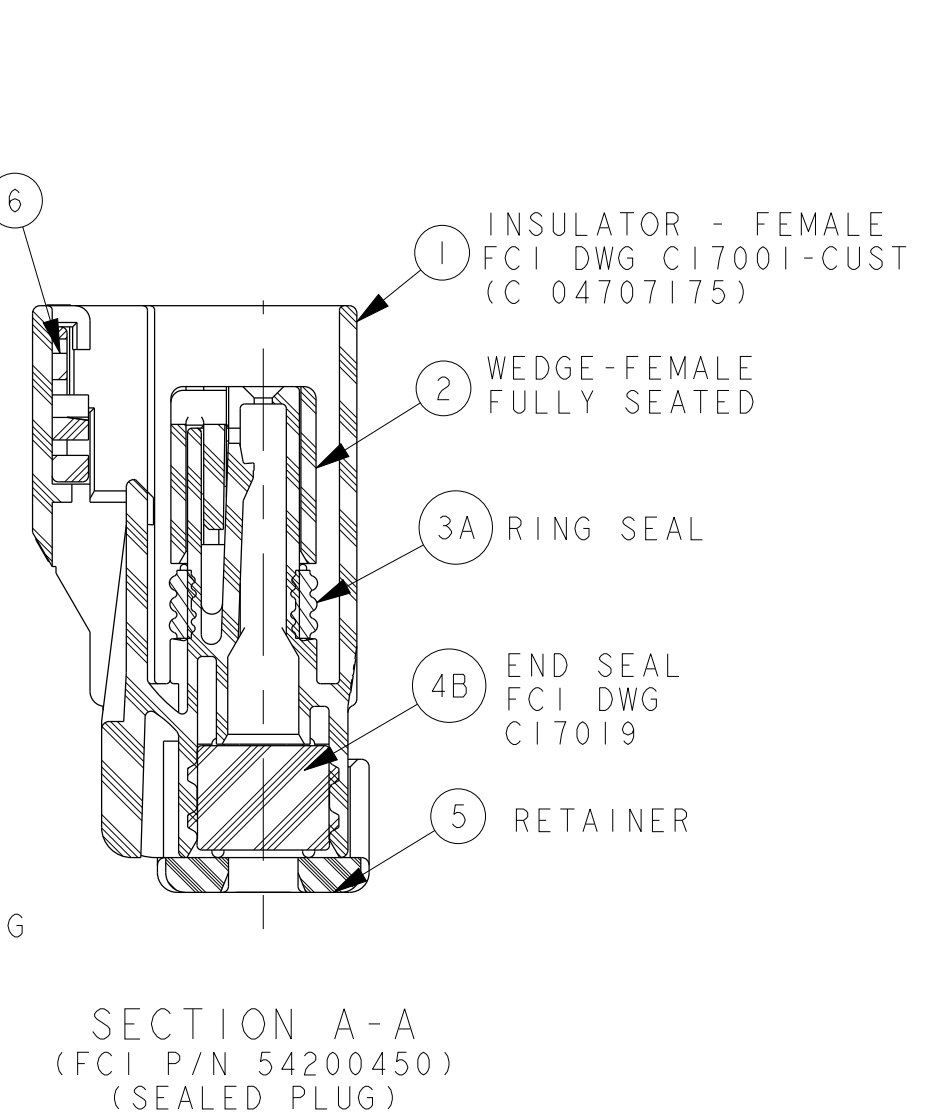


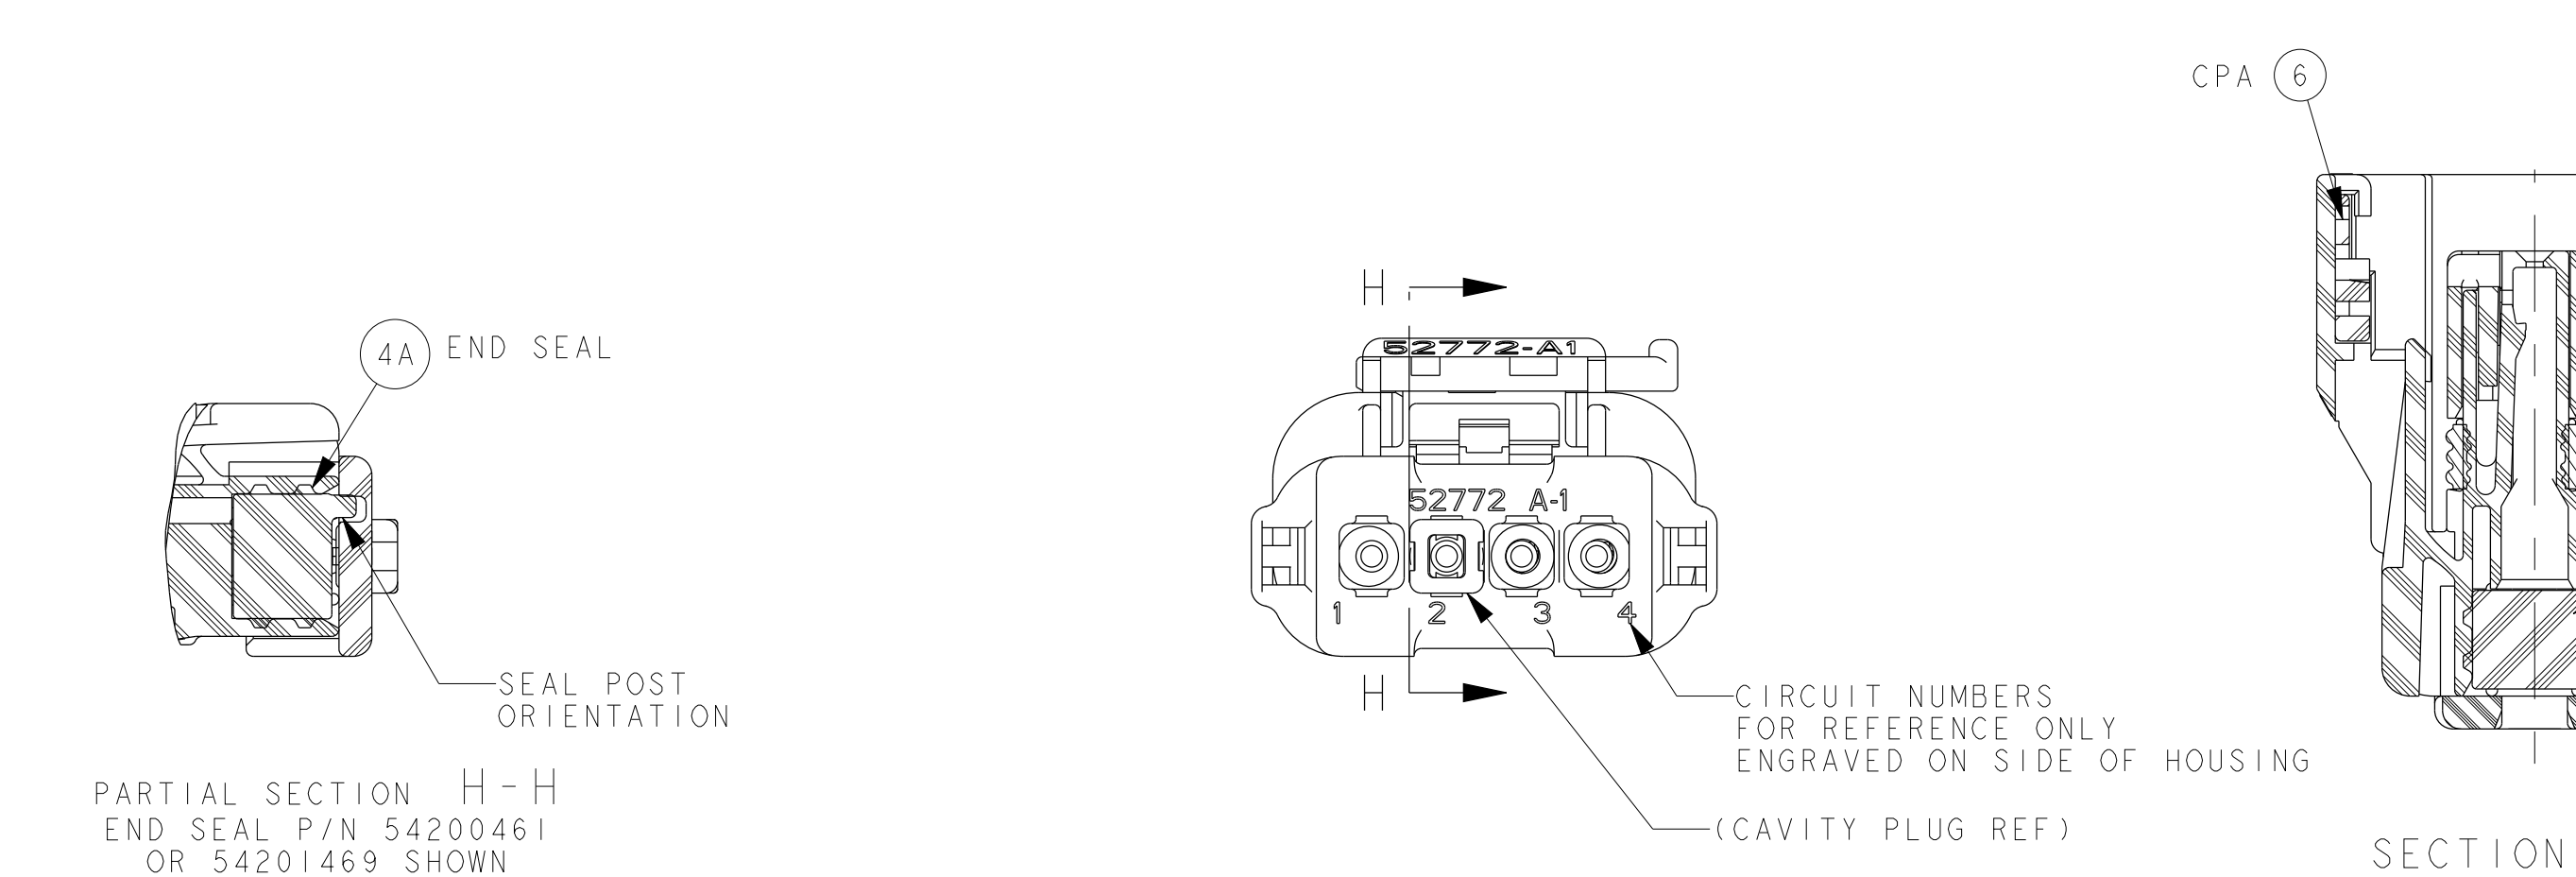

CUSTOMER LEADS: C
CHRYSLER - C
FORD - F
GENERAL MOTORS - GM


FCI	52772 OR 52772 H	SEE CHART
VENDOR	VENDOR CODE	P/N

UNSEALED										SEALED									
W/O CPA					W/CPA					W/O CPA					W/CPA				
54200400N					C 04688849														
54200403N					54200404N														
54200402N					54200400N														
54200400N					54200403N														
54200401N					54200402N														
54200402N					54200401N														
54200403N					54200400N														
54200404N					54200403N														
54200405N					54200402N														
54200406N					54200401N														
54200407N					54200400N														
54200408N					54200403N														
54200409N					54200402N														
54200410N					54200401N														
54200411N					54200400N														
54200412N					54200403N														
54200413N					54200402N														
54200414N					54200401N														
54200415N					54200400N														
54200416N					54200403N														
54200417N					54200402N														
54200418N					54200401N														
54200419N					54200400N														
54200420N					54200403N														
54200421N					54200402N														
54200422N					54200401N														
54200423N					54200400N														
54200424N					54200403N														
54200425N					54200402N														
54200426N					54200401N														
54200427N					54200400N														
54200428N					54200403N														
54200429N					54200402N														
54200430N					54200401N														
54200431N					54200400N														
54200432N					54200403N														

CLASS 3				CLASS 4			
F/C I P/N	CUSTOMER P/N	COLOR	PART NAME (MAT'L)	INDEX	F/C I P/N	COLOR	REQUIRE
54200431	04707186	BLK	INSULATOR-FEMALE (PA66 GF)	A	55200442	BLACK	I
54200435	04688853	LT GRY	INSULATOR-FEMALE (PA66 GF)	B	F325600	BLACK	I
54200433	04707188	DK GRY	INSULATOR-FEMALE (PA66 GF)	C	F425600	BLACK	I
54200434	04707189	NATURAL	INSULATOR-FEMALE (PA66 GF)	D	F525600	BLACK	I
54200442	04707540	AQUA	WEDGE-FEMALE; (PA66 GF)		55200443	NATURAL	I I I I
54200459	04707191	RED	RING SEAL; (SILICONE)		*55200444	DK BLU	I I I I
54200449 (WAS C116091)	N/A	GRN	RING SEAL; (FLUOROSILICONE)				
54200428	N/A	LT BLU	END SEAL; (SILICONE)		*55200439	DK BLU	I I I I
54200429	N/A	BURNT ORD	END SEAL; (SILICONE)				
54200461	N/A	BRT RED	END SEAL; (SILICONE) HYBRID				
54200469	N/A	LT GRY	END SEAL; (SILICONE) HYBRID				
54200458	N/A	BRT YEL	END SEAL; (SILICONE) W/O HOLES				
54200440	N/A	BLK	RETAINER; (PA66 GF)		55200438	NATURAL	I I I I
54200003	04687739	RED	CPA LATCH; (PA66 GF)		54200008	NATURAL	I I I I
54200006	04707429	LT GRY	CPA WITH ARM EXTENSION				

LECTOR ASSEMBLY TEMPERATURE CLASS PER SAE/USCAR-2 REV 5

CHANGE LEVEL (PCL)

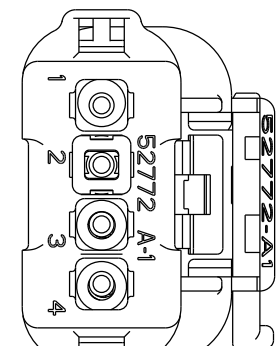


• SEALS BAKED AT 450°F FOR 5 HOURS DURING CONTINUOUSLY INTRODUCED FRESH AIR TO DRIVE OFF VOLATILES

FORD PART NUMBERS ARE LISTED FOR REFERENCE ARE PPAP'D TO FORD 4L3T-14A464-AA DRAWING

MUST USE WIRE SIZES AS SPECIFIED FOR CIRCUIT LOCATION SHOWN: FOR EXAMPLE 12 OR 10 AWG, 20 TO 14 OR 18 TO 14

16	20 TO 14	WIRE GAUGE
17		
18		

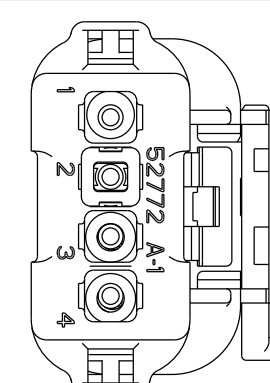

16. SEALS BAND AT 450°F FOR 5 HOURS DURING CONTINUOUSLY INTRODUCED FRESH AIR TO DRIVE OFF VOLATILES

17. FORD PART NUMBERS ARE LISTED FOR REFERENCE ARE PPAP'D TO FORD 4L3T-1A4464-AA DRAWING

18. MUST USE WIRE SIZES AS SPECIFIED FOR CIRCUIT LOCATION SHOWN: FOR EXAMPLE 12 OR 10 AWG, 20 TO 14 OR 18 TO 14 AWG

[illegible]

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Aptiv:](#)

[54200400-B](#)