

## FILTER - TUNABLE, BAND PASS SMT 18.5 - 37.0 GHz



3

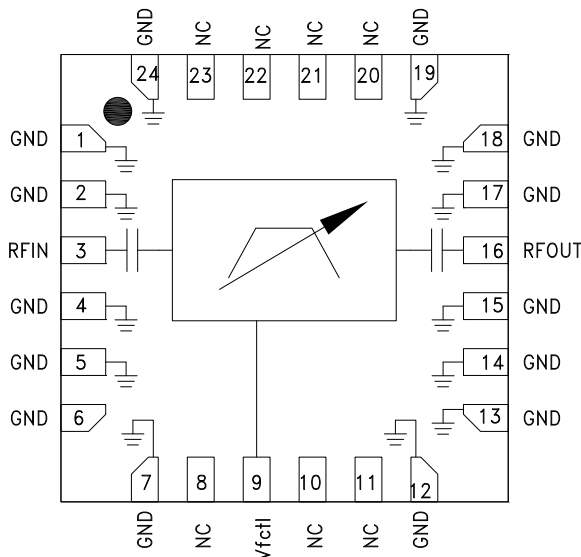
FILTERS - TUNABLE - SMT

### Typical Applications

The HMC899LP4E is ideal for:

- Test & Measurement Equipment
- Military RADAR & EW/ECM
- SATCOM & Space
- Industrial & Medical Equipment

### Functional Diagram



### Features

- Fast Tuning Response
- Excellent Wideband Rejection
- Single Chip Replacement  
for Mechanically Tuned Designs
- 24 Lead 4x4 mm SMT Package

### General Description

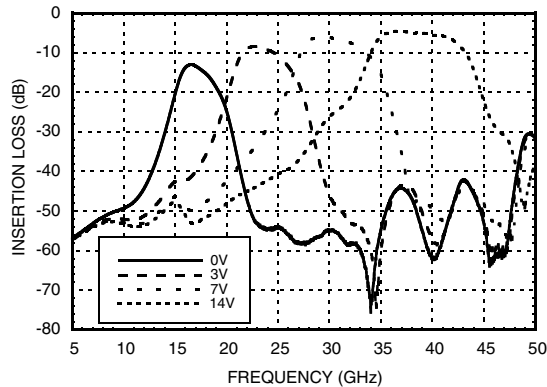
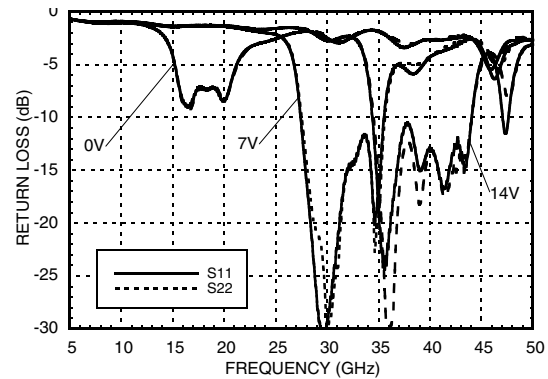
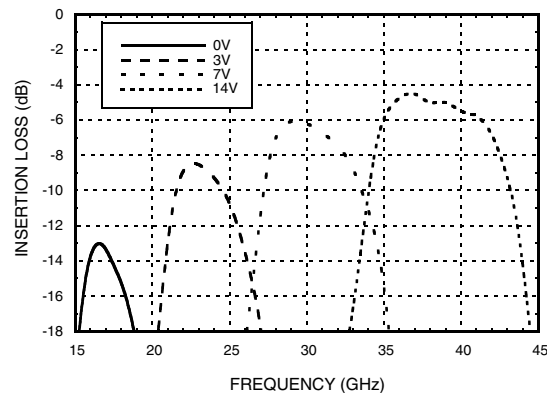
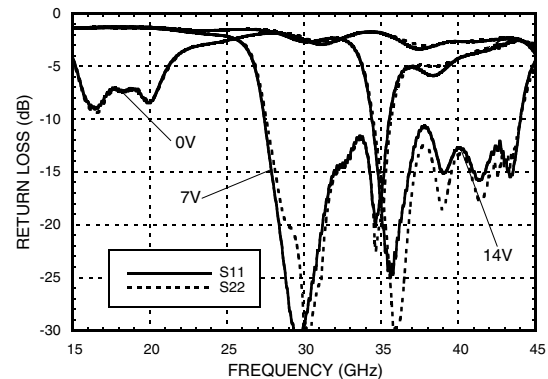
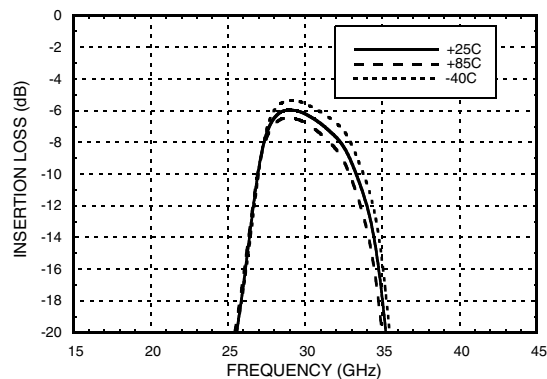
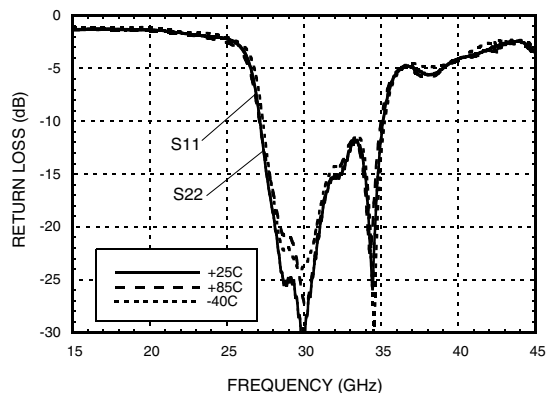
The HMC899LP4E is a MMIC band pass filter which features a user selectable passband frequency. The 3 dB filter bandwidth is approximately 18%. The 20 dB filter bandwidth is approximately 35%. The center frequency can be varied between 18.5 and 37.0 GHz by applying an analog tune voltage between 0 and 14V. This tunable filter can be used as a much smaller alternative to physically large switched filter banks and cavity tuned filters. The HMC899LP4E has excellent microphonics due to the monolithic design, and provides a dynamically adjustable solution in advanced communications applications.

### Electrical Specifications, $T_A = +25^\circ\text{C}$

Parameter	Min.	Typ.	Max.	Units
$F_{\text{center}}$ Tuning Range	18.5		37.0	GHz
3 dB Bandwidth		18		%
Low Side Rejection Frequency (Rejection >20 dB)		$0.81 \cdot F_{\text{center}}$		GHz
High Side Rejection Frequency (Rejection >20 dB)		$1.20 \cdot F_{\text{center}}$		GHz
Low Side Sub-Harmonic Rejection (Rejection >40 dB)		$0.54 \cdot F_{\text{center}}$		GHz
High Side Sub-Harmonic Rejection (Rejection >40 dB)		$1.32 \cdot F_{\text{center}}$		GHz
Re-entry Frequency (Rejection <30 dB)		>50		GHz
Insertion Loss		7		dB
Return Loss		10		dB
Input IP3 (Pin = 0 to +20 dBm)		25		dBm
Input Power @ 5° Shift In Insertion Phase ( $V_{\text{ctrl}} = 0.5\text{V}$ )		14		dBm
Input Power @ 5° Shift In Insertion Phase ( $V_{\text{ctrl}} > 1\text{V}$ )		16		dBm
Frequency Control Voltage ( $V_{\text{ctrl}}$ )	0		14	V
Source/Sink Current ( $I_{\text{ctrl}}$ )			±1	mA
Residual Phase Noise [1] (100 kHz Offset)		-157		dBc/Hz
$F_{\text{center}}$ Drift Rate		-3.4		MHz/°C
Tuning Speed, Phase Settling to within 10° [2]		< 100		ns

[1] Optimum residual phase noise performance requires the use of a low noise driver circuit.

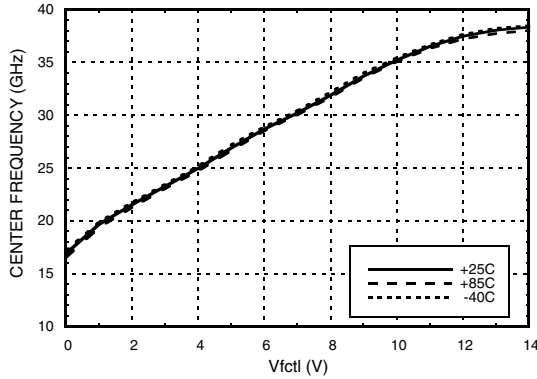
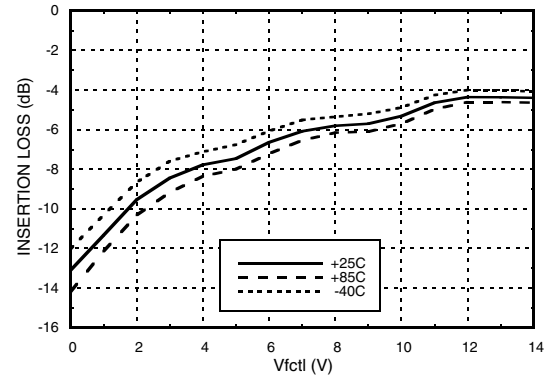
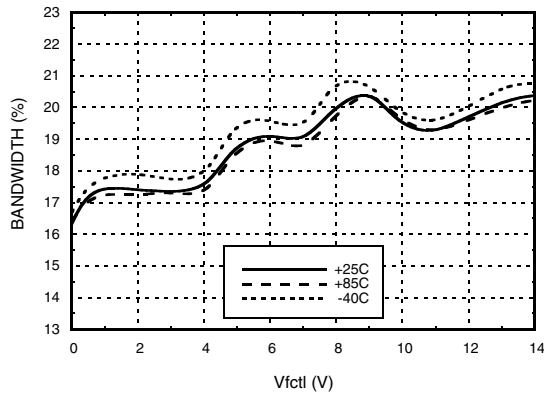
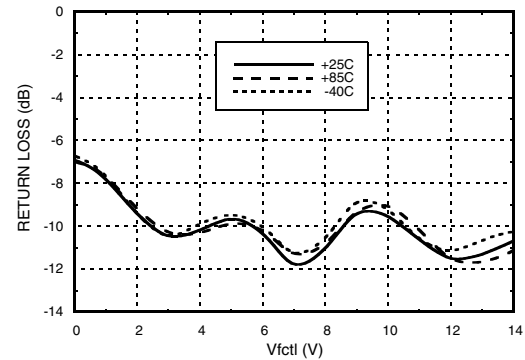
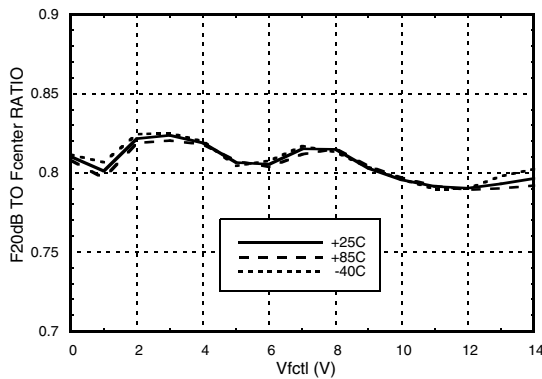
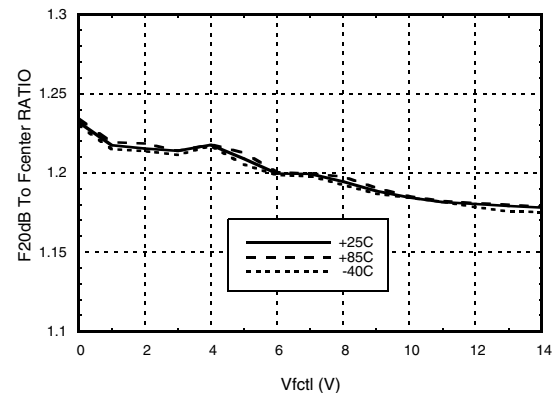
[2] Tuning speed includes 40 ns tuning voltage ramp from driver.


**FILTER - TUNABLE, BAND PASS SMT**  
**18.5 - 37.0 GHz**
**3**
**FILTERS - TUNABLE - SMT**
**Broadband Insertion Loss vs.  $V_{fctl}$** 

**Broadband Return Loss vs.  $V_{fctl}$** 

**Insertion Loss vs.  $V_{fctl}$** 

**Return Loss vs.  $V_{fctl}$** 

**Insertion Loss vs. Temperature,  $V_{fctl} = 7V$** 

**Return Loss vs. Temperature,  $V_{fctl} = 7V$** 


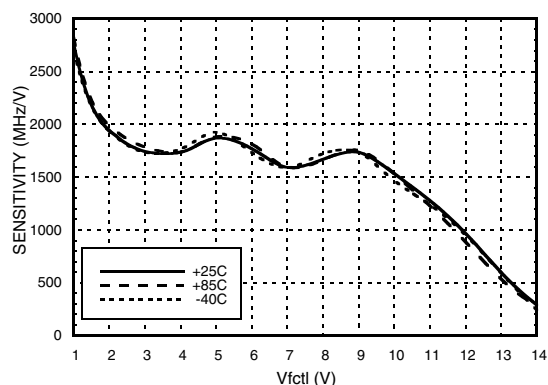
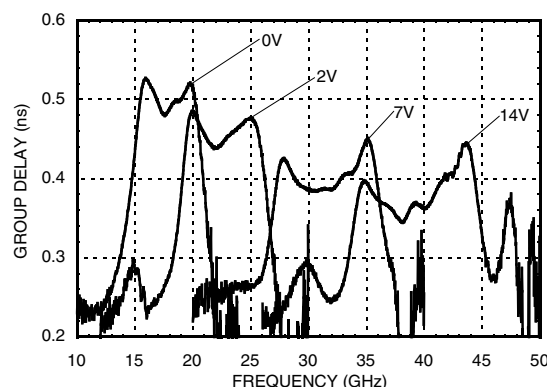
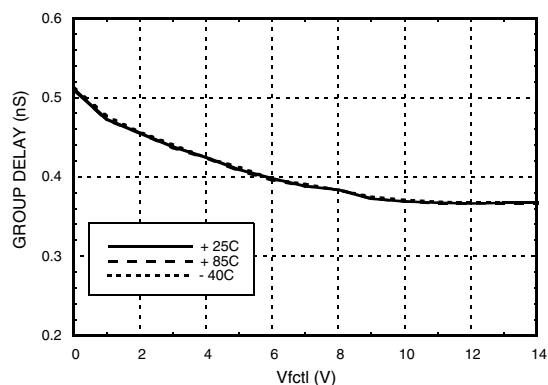
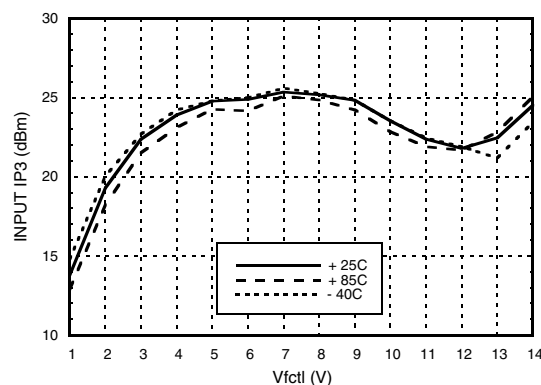
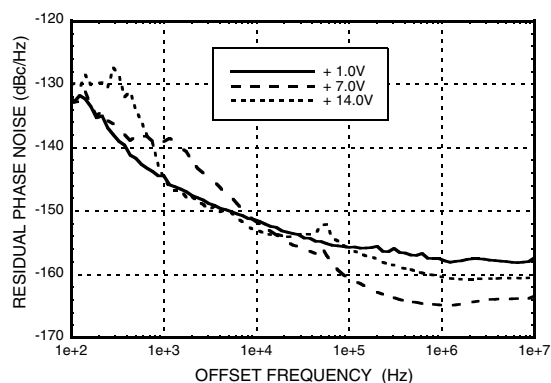
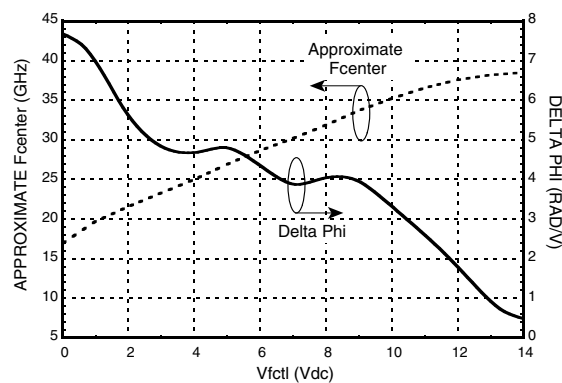

**FILTER - TUNABLE, BAND PASS SMT**  
**18.5 - 37.0 GHz**

3

FILTERS - TUNABLE - SMT

**Center Frequency vs. Temperature**

**Insertion Loss vs. Temperature**

**3 dB Bandwidth vs. Temperature**

**Maximum Return Loss in a 2 dB Bandwidth vs. Temperature**

**Low Side Rejection Ratio vs. Temperature <sup>[1]</sup>**

**High Side Rejection Ratio vs. Temperature <sup>[1]</sup>**


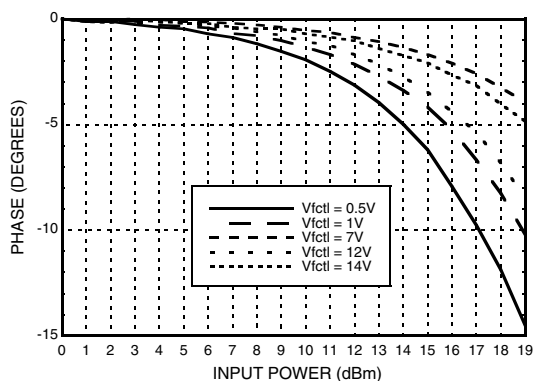
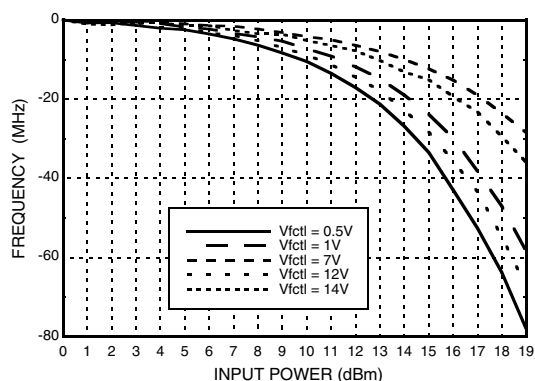
[1] Rejection ratio is defined as the ratio of the frequency at which the relative insertion loss is 20 dB to  $f_{center}$


**FILTER - TUNABLE, BAND PASS SMT**  
**18.5 - 37.0 GHz**
**3**
**FILTERS - TUNABLE - SMT**
**Tuning Sensitivity vs. Temperature**

**Group Delay**

**Group Delay vs. F<sub>center</sub> vs. Temperature**

**Input IP3 vs. Temperature**

**Residual Phase Noise**

**Phase Sensitivity vs. V<sub>tctl</sub>**



**FILTER - TUNABLE, BAND PASS SMT**  
**18.5 - 37.0 GHz**

3

FILTERS - TUNABLE - SMT

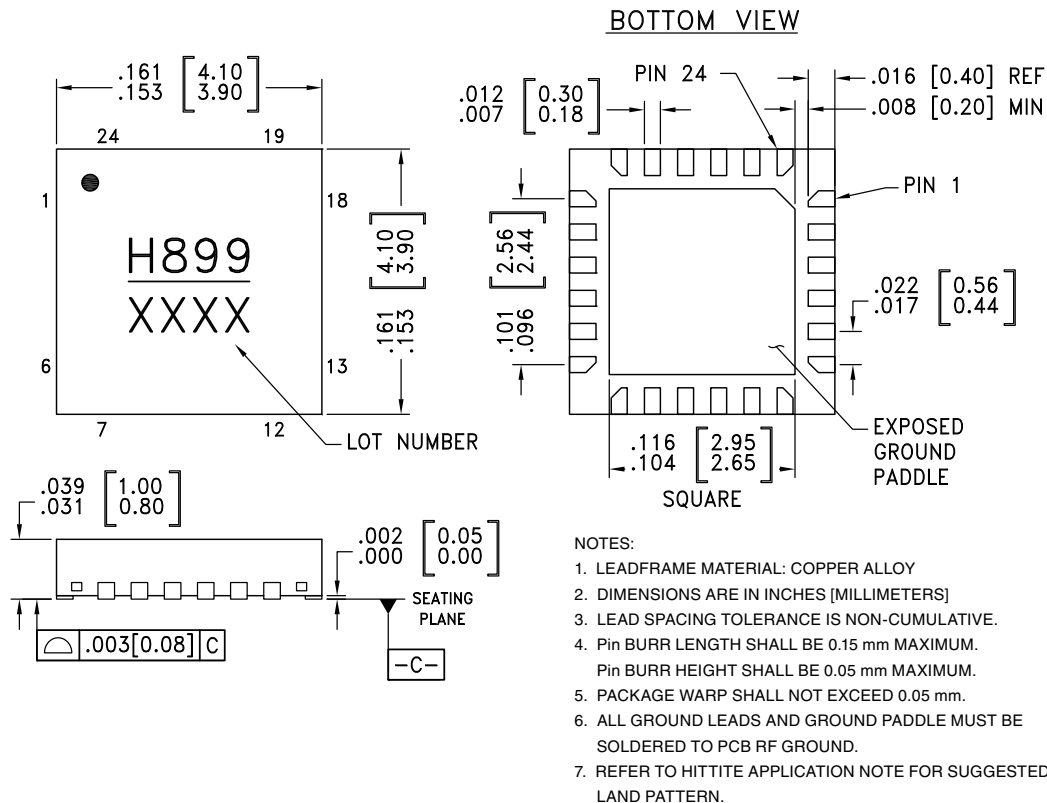
**Phase Shift vs. Pin**

**Frequency Shift vs. Pin**

**Absolute Maximum Ratings**

Frequency Control Voltage (Vctl)	-0.5 to +15V
RF Power Input	27 dBm
Storage Temperature	-65 to +150 °C
ESD Sensitivity (HBM)	Class 1 A

**Reliability Information**

Junction Temperature to Maintain 1 Million Hour MTTF	150 °C
Nominal Junction Temperature (T= 85 °C and Pin = 27 dBm)	103 °C
Operating Temperature	-40 to +85 °C


**ELECTROSTATIC SENSITIVE DEVICE**  
**OBSERVE HANDLING PRECAUTIONS**


**FILTER - TUNABLE, BAND PASS SMT**  
**18.5 - 37.0 GHz**
**Outline Drawing**

**Package Information**

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking <sup>[1]</sup>
HMC899LP4E	RoHS-compliant Low Stress Injection Molded Plastic	100% matte Sn	MSL1 <sup>[2]</sup>	H899 XXXX

[1] 4-Digit lot number XXXX





[2] Max peak reflow temperature of 260 °C

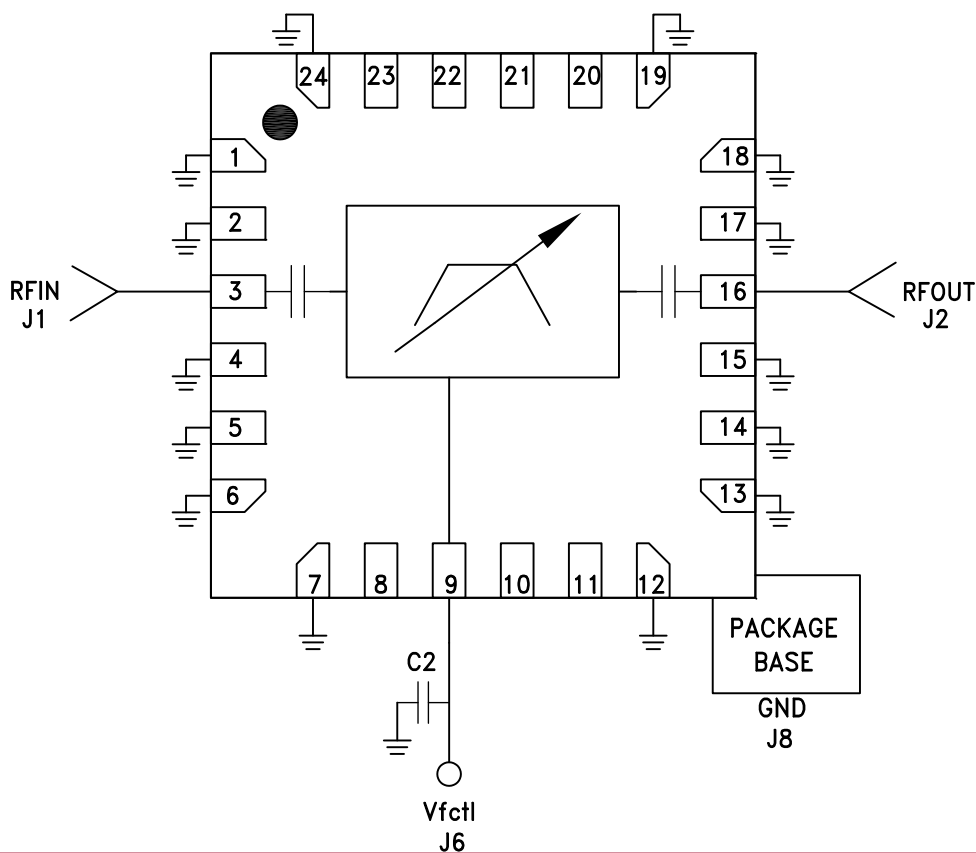

**FILTER - TUNABLE, BAND PASS SMT**  
**18.5 - 37.0 GHz**

3

FILTERS - TUNABLE - SMT

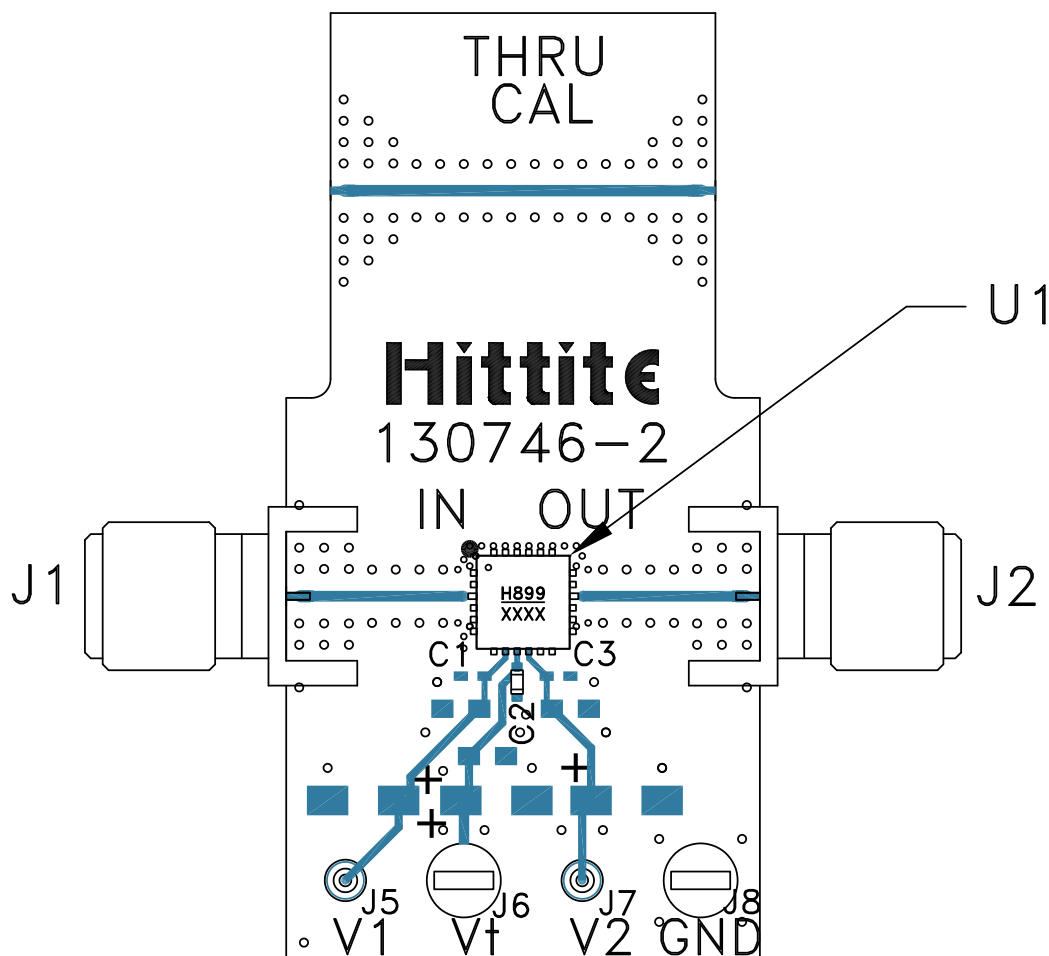
**Pin Descriptions**

Pin Number	Function	Description	Interface Schematic
8, 10, 11, 20 - 23	N/C	The pins are not connected internally; however, all data shown herein was measured with these pins connected to RF/DC ground externally.	
1, 2, 4 - 7, 12 - 15, 17 - 19, 24	GND	These pins and exposed paddle must be connected to RF/DC ground.	
3	RFIN	This pin is AC coupled and matched to 50 Ohms.	
9	Vfctl	Center frequency control voltage.	
16	RFOUT	This pin is AC coupled and matched to 50 Ohms.	

**Application Circuit**


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106  
 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com)  
 Application Support: Phone: 1-800-ANALOG-D


**FILTER - TUNABLE, BAND PASS SMT**  
**18.5 - 37.0 GHz**
**Evaluation PCB**

**List of Materials for Evaluation PCB 131087 [1]**

Item	Description
J1, J2	Connector, 2.4 mm, 50 GHz Jack
J6, J8	DC Pin
C2	100 pF Capacitor, 0402 Pkg.
U1	HMC899LP4E Filter - Tunable
PCB [2]	130746 Evaluation PCB

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Arlon 25FR or Rogers 25FR

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohms impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[HMC899LP4E](#) [131087-HMC899LP4E](#)