


Product Specification

100m Parallel MMF 100G QSFP28 Optical Transceiver FTLC9551REPM

PRODUCT FEATURES

- Hot-pluggable QSFP28 form factor
- Supports 103.1Gb/s aggregate bit rate
- Power dissipation < 3.5W
- RoHS-6 compliant
- Commercial case temperature range of 0°C to 70°C
- Single 3.3V power supply
- Maximum link length of 100m on OM4 Multimode Fiber (MMF)
- 4x25Gb/s 850nm VCSEL-based transmitter
- 4x25G electrical interface
- Single MPO12 receptacle
- I2C management interface

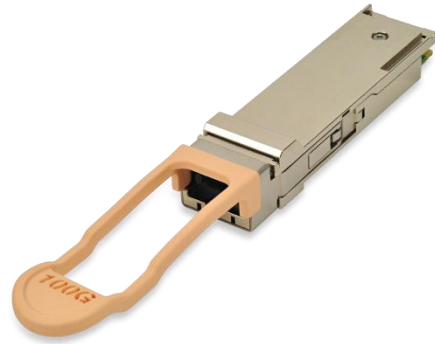

APPLICATIONS

- 100GBASE-SR4 100G Ethernet

Finisar's FTLC9551REPM 100G QSFP28 transceiver modules are designed for use in 100 Gigabit Ethernet links over multimode fiber. They are compliant with the QSFP28 MSA¹ and IEEE 802.3bm 100GBASE-SR4² and CAUI-4². Digital diagnostics functions are available via the I2C interface, as specified by the QSFP28 MSA¹ and Finisar Application Note AN-2141³. The transceiver is RoHS-6 compliant per Directive 2011/65/EU⁴ and Finisar Application Note AN-2038⁵.

PRODUCT SELECTION

FTLC9551REPM

- R: 100G Ethernet maximum bit rate (103.1Gb/s)
- E: 4x25G parallel optics
- P: Pull tab release
- M: MPO receptacle

I. Pin Descriptions

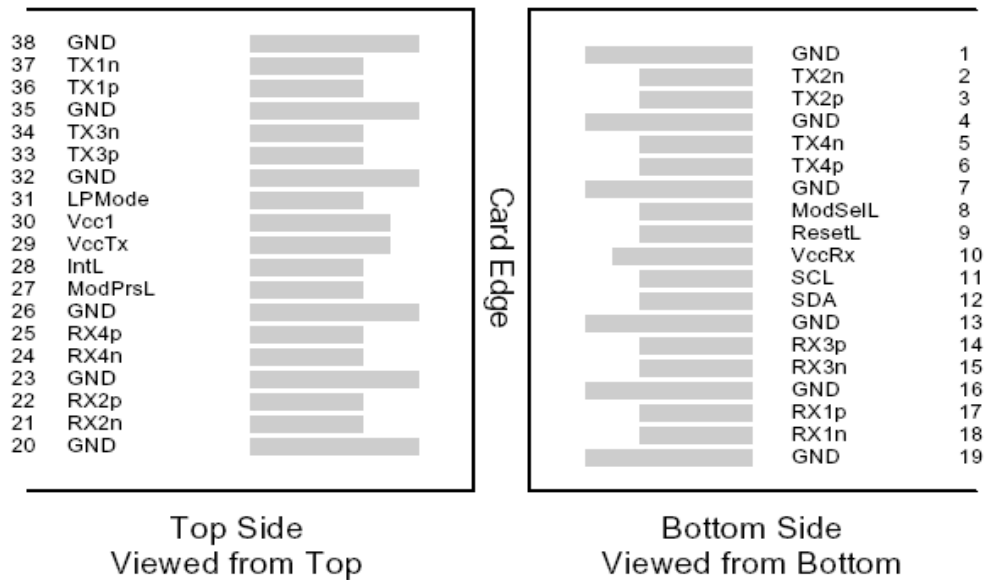


Figure 1 – QSFP28-compliant 38-pin connector (per SFF-8679)

| Pin | Symbol | Name/Description | Notes |
|-----|---------|-------------------------------------|-------|
| 1 | GND | Ground | 1 |
| 2 | Tx2n | Transmitter Inverted Data Input | |
| 3 | Tx2p | Transmitter Non-Inverted Data Input | |
| 4 | GND | Ground | 1 |
| 5 | Tx4n | Transmitter Inverted Data Input | |
| 6 | Tx4p | Transmitter Non-Inverted Data Input | |
| 7 | GND | Ground | 1 |
| 8 | ModSelL | Module Select | |
| 9 | ResetL | Module Reset | |
| 10 | Vcc Rx | +3.3 V Power supply receiver | |
| 11 | SCL | 2-wire serial interface clock | |
| 12 | SDA | 2-wire serial interface data | |
| 13 | GND | Ground | 1 |
| 14 | Rx3p | Receiver Non-Inverted Data Output | |
| 15 | Rx3n | Receiver Inverted Data Output | |
| 16 | GND | Ground | 1 |
| 17 | Rx1p | Receiver Non-Inverted Data Output | |
| 18 | Rx1n | Receiver Inverted Data Output | |
| 19 | GND | Ground | 1 |
| 20 | GND | Ground | 1 |
| 21 | Rx2n | Receiver Inverted Data Output | |
| 22 | Rx2p | Receiver Non-Inverted Data Output | |
| 23 | GND | Ground | 1 |
| 24 | Rx4n | Receiver Inverted Data Output | |
| 25 | Rx4p | Receiver Non-Inverted Data Output | |
| 26 | GND | Ground | 1 |
| 27 | ModPrsL | Module Present | |
| 28 | IntL | Interrupt | |
| 29 | Vcc Tx | +3.3 V Power supply transmitter | |
| 30 | Vcc1 | +3.3 V Power Supply | |

| | | | |
|----|--------|-------------------------------------|---|
| 31 | LPMODE | Low Power Mode | |
| 32 | GND | Ground | 1 |
| 33 | Tx3p | Transmitter Non-Inverted Data Input | |
| 34 | Tx3n | Transmitter Inverted Data Input | |
| 35 | GND | Ground | 1 |
| 36 | Tx1p | Transmitter Non-Inverted Data Input | |
| 37 | Tx1n | Transmitter Inverted Data Input | |
| 38 | GND | Ground | 1 |

Notes

1. Circuit ground is internally isolated from chassis ground.

II. Absolute Maximum Ratings

Module performance is not guaranteed beyond the operating range (see Section VI). Exceeding the limits below may damage the transceiver module permanently.

| Parameter | Symbol | Min | Typ | Max | Unit | Ref. |
|-------------------------------------|-------------------|------|-----|-----|------|------|
| Maximum Supply Voltage | V _{CC} | -0.5 | | 4.0 | V | |
| Storage Temperature | T _S | -40 | | 85 | °C | |
| Case Operating Temperature | T _{OP} | -5 | | 75 | °C | 1 |
| Relative Humidity | RH | 15 | | 85 | % | 2 |
| Receiver Damage Threshold, per Lane | P _{Rdmg} | 3.4 | | | dBm | |

Notes:

1. 48-hour excursions, maximum
2. Non-condensing.

III. Electrical Characteristics (EOL, T_{OP} = 0 to 70 °C, V_{CC} = 3.135 to 3.465 Volts)

| Parameter | Symbol | Min | Typ | Max | Unit | Ref. |
|--|---------------------------------|-------------------------------------|-----|-------|------|------|
| Supply Voltage | V _{CC} | 3.135 | | 3.465 | V | |
| Supply Current | I _{CC} | | | 1.5 | A | |
| Module total power | P | | | 3.5 | W | 1 |
| Transmitter | | | | | | |
| Signaling rate per lane | | 25.78125 ± 100ppm | | | Gb/s | |
| Differential pk-pk input voltage tolerance | V _{in,pp,diff} | | | 900 | mV | |
| Single-ended voltage tolerance | V _{in,pp} | -0.35 | | +3.3 | V | |
| Module stress input test | | Per Section 83E.3.4.1, IEEE 802.3bm | | | | |
| Receiver | | | | | | |
| Signaling rate per lane | | 25.78125 ± 100ppm | | | Gb/s | |
| Differential data output swing | V _{out,pp} | 100 | | 400 | mVpp | 2 |
| | | 300 | | 600 | | |
| | | 400 | 600 | 800 | | |
| | | 600 | | 1200 | | |
| Eye width | | 0.57 | | | UI | |
| Eye height, differential | | 228 | | | mV | |
| Vertical eye closure | VEC | 5.5 | | | dB | |
| Transition time (20% to 80%) | t _r , t _f | 12 | | | ps | |

Notes:

- Maximum total power value is specified across the full operational temperature and voltage range when CDRs are locked or a lack of input signal results in squelch being activated. If incorrect frequencies cause the CDRs to continuously attempt to lock, maximum power dissipation may reach 4.5 W.
- Output voltage is settable in 4 discrete ranges via I2C. Default range is Range 2 (400 – 800 mV).

IV. Optical Characteristics (EOL, T_{OP} = 0 to 70°C, V_{CC} = 3.135 to 3.465 Volts)

| Parameter | Symbol | Min | Typ | Max | Unit | Ref. |
|--|------------------|---------------------------------|------|------|------|------|
| Transmitter | | | | | | |
| Signaling Speed per Lane | | 25.78125 ± 100ppm | | | Gb/s | 1 |
| Center wavelength | | 840 | 850 | 860 | nm | |
| RMS Spectral Width | SW | | | 0.6 | nm | |
| Average Launch Power per Lane | TXP _x | -8.4 | | 2.4 | dBm | |
| Transmit OMA per Lane | TxOMA | -6.4 | | 3 | dBm | |
| Launch Power [OMA] minus TDEC per Lane | P-TDEC | -7.3 | | | dBm | |
| TDEC per Lane | TDEC | | | 4.3 | dBm | |
| Optical Extinction Ratio | ER | 2 | | | dB | |
| Optical Return Loss Tolerance | ORL | | | 12 | dB | |
| Encircled Flux | FLX | >86% at 19 um <30% at 4.5 um | | | | |
| Average Launch Power of OFF Transmitter, per Lane | | | | -30 | dBm | |
| Transmitter Eye mask definition {X1, X2, X3, Y1, Y2, Y3} | | {0.3,0.38,0.45,0.35,0.41,0.5} | | | | 2 |
| Receiver | | | | | | |
| Signaling Speed per Lane | | 25.78125 ± 100ppm | | | GBd | 3 |
| Center wavelength | | 840 | | 860 | nm | |
| Damage Threshold | DT | 3.4 | | | dBm | |
| Average Receive Power per Lane | RXP _x | -10.3 | | 2.4 | dBm | 4 |
| Receive Power (OMA) per Lane | RxOMA | | | 3 | dBm | |
| Receiver Reflectance | Rfl | | | -12 | dB | |
| Stressed Receiver Sensitivity (OMA) per Lane | SRS | | | -5.2 | dBm | |
| Stressed Conditions: | | | | | | |
| Stressed Eye Closure | SEC | | 4.3 | | dB | |
| Stressed Eye J2 Jitter | J2 | | 0.39 | | UI | |
| Stressed Eye J4 Jitter | J4 | | 0.53 | | UI | |
| OMA of each aggressor lane | | | 3 | | dBm | |
| Stressed Receiver Eye Mask Definition {X1, X2, X3, Y1, Y2, Y3} | | {0.28,0.5,0.5,0.33,0.33,0.4} | | | | 5 |
| LOS De-Assert | LOS _D | | | -13 | dBm | |
| LOS Assert | LOS _A | -30 | | | dBm | |
| LOS Hysteresis | | 0.5 | 2 | | dB | |

Notes:

- Transmitter consists of 4 lasers operating at a maximum speed of 25.78125Gb/s ±100ppm each.
- Hit Ratio 1.5 x 10⁻³ hits/sample.
- Receiver consists of 4 photodetectors operating at a maximum speed of 25.78125Gb/s ±100ppm each.
- Minimum value is informative only and not the principal indicator of signal strength.
- Hit Ratio 5 x 10⁻⁵ hits/sample.

V. General Specifications

| Parameter | Symbol | Min | Typ | Max | Units | Ref. |
|-------------------------------------|--------|-----|-----|--------------------|-------|------|
| Bit Rate (all wavelengths combined) | BR | | | 103.1 | Gb/s | 1 |
| Bit Error Ratio (pre-FEC) | BER | | | 5×10^{-5} | | 2 |
| Maximum Supported Distances | | | | | | |
| Fiber Type | | | | | | |
| OM3 MMF | Lmax1 | | | 70 | m | 3 |
| OM4 MMF | Lmax2 | | | 100 | m | 3 |

Notes:

1. Supports 100GBASE-SR4 per IEEE 802.3bm.
2. Tested with a $2^{31} - 1$ PRBS.
3. Requires FEC on the host to support maximum distance, per 100GBASE-SR4.

VI. Environmental Specifications

Finisar FTLC9551 QSFP28 transceivers have a commercial operating case temperature range of 0°C to +70°C. They can support temporary excursions to case temperatures of -5°C and +75°C without permanent damage (see Section II).

| Parameter | Symbol | Min | Typ | Max | Units | Ref. |
|----------------------------|------------------|-----|-----|-----|-------|------|
| Case Operating Temperature | T _{op} | 0 | | 70 | °C | |
| Storage Temperature | T _{sto} | -40 | | 85 | °C | |

VII. Regulatory Compliance

Finisar FTLC9551 QSFP28 transceivers are Class 1 Laser Products. They are certified per the following standards:

| Feature | Agency | Standard |
|-------------------|----------|--|
| Laser Eye Safety | FDA/CDRH | CDRH 21 CFR 1040 and Laser Notice 50 |
| Laser Eye Safety | TÜV | EN 60825-1:2007 EN 60825-2:2004+A1+A2 |
| Electrical Safety | TÜV | EN 60950 |
| Electrical Safety | UL/CSA | CLASS 3862.07 CLASS 3862.87 |

Copies of the referenced certificates will be available at Finisar upon request. Complies with FDA performance standards for laser products except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007.

VIII. Digital Diagnostics Functions

FTLC9551 QSFP28 transceivers support the I2C-based diagnostics interface specified by the QSFP28 MSA¹. See Finisar Application Note AN-2141³.

IX. Memory Contents

Per the QSFP28 MSA¹. See Finisar Application Note AN-2141³.

XI. Mechanical Specifications

Finisar FTLC9551 QSFP28 transceivers are compatible with the QSFP28 MSA specification¹.

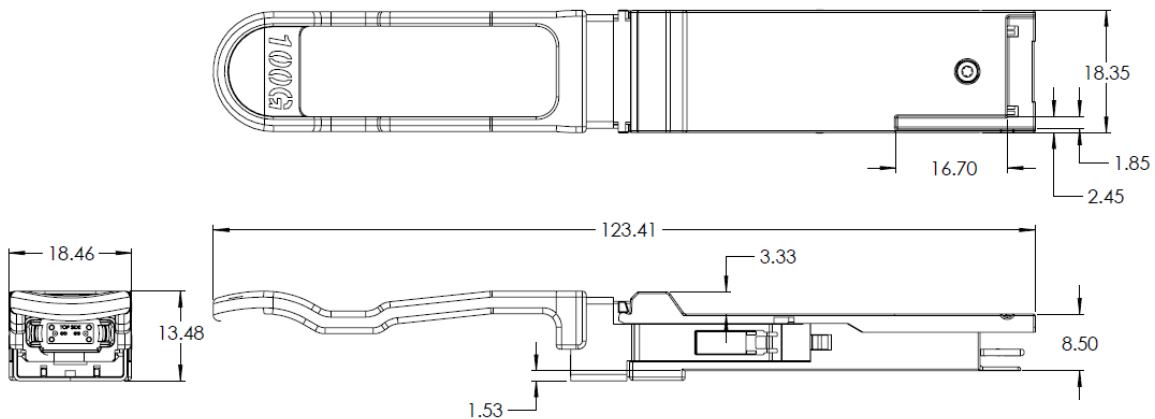


Figure 2. FTLC9551REPM Mechanical Dimensions.

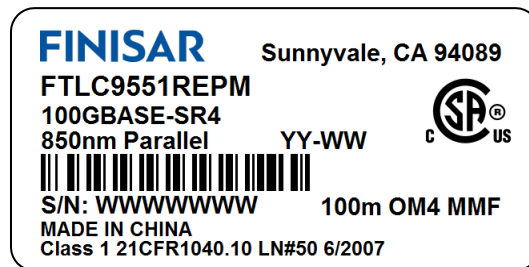


Figure 3. Standard Product Label

XII. References

1. SFF-8665: “QSFP+ 28Gb/s 4X Pluggable Transceiver Solution (QSFP28)”, Rev 1.9, June 29, 2015 (and associated SFF documents)
 - i. SFF-8661
 - ii. SFF-8679
 - iii. SFF-8636
 - iv. SFF-8662
 - v. SFF-8663
 - vi. SFF-8672
 - vii. SFF-8683
2. IEEE 802.3bm, PMD Type 100GBASE-SR4 and CAUI-4.
3. Application Note AN-2141, “100G QSFP28 SR4 NVR Application Note”, Finisar Corporation.
4. Directive 2011/65/EU of the European Parliament and of the Council, “on the restriction of the use of certain hazardous substances in electrical and electronic equipment,” July 1, 2011.
5. “Application Note AN-2038: Finisar Implementation Of RoHS Compliant Transceivers”, Finisar Corporation, January 21, 2005.

For More Information:

Finisar Corporation
1389 Moffett Park Drive
Sunnyvale, CA 94089-1133
Tel. 1-408-548-1000
Fax 1-408-541-6138
sales@finisar.com
www.finisar.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Finisar:

[FTLC9551REPM](#)