Component-to-wire connectors



HPCS

2/3/4/5/6 way sealed female housings for 2.8 mm terminals

Features

- 2 to 6 position housing available
- Waterproof application with single wire seal
- Lateral secondary lock for terminal position assurance (T.P.A.)
- Circumferential interface seal
- Plastic locking feature
- Mechanical polarization
- Several codings available



Performance characteristics

•	Temperature range:		
	from -40°C to +120°C		

• Contact retention force: > 80 N

• Contact insertion force: < 20 N

• Connector mating force: < 100 N

Construction

•	Housing	material:	PBT

• Circumferential interface seal: Silicone

Tooling

• Terminal removal tool:	Consult us
Mini-applicator:	Consult us

Connector compatibility

Usable terminals:HPCS 2.8 mm female terminals

Part Numbers	No. of position	Terminal size	Colour
6 040 40 01	2	2.8 mm	Black
6 040 40 11	2	2.8 mm	Black
6 040 40 21	2	2.8 mm	Black
6 040 41 01	3	2.8 mm	Black
6 040 42 01	4	2.8 mm	Black
6 040 43 21	5	2.8 mm	Black
6 040 43 11	5	2.8 mm	Black
6 040 43 01	5	2.8 mm	Black
6 040 44 01	6	2.8 mm	Black


Component-to-wire connectors FS

2/3/4/5/6 way sealed female housings for 2.8 mm terminals

2 way female housing


2 34.5

2 11.6

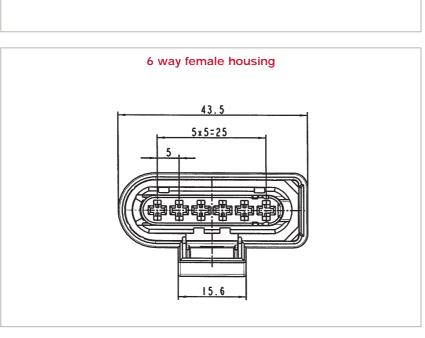

Notes:

Product Detail Page Page 1 of 2

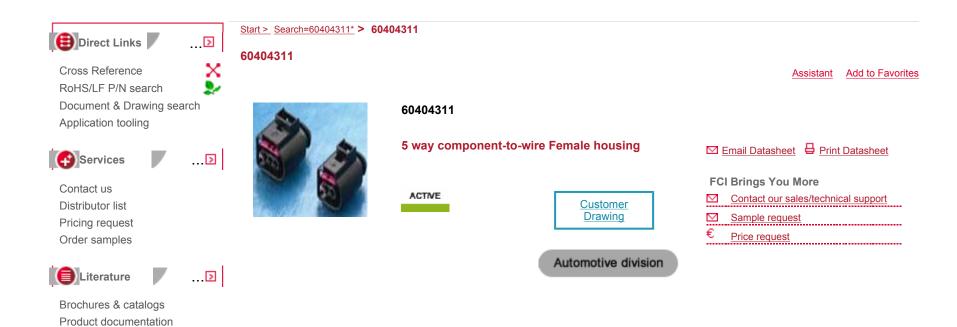



Technical library

General Mechanical Physical Terminal 1 Type Environmental Other Features

General

Application	Component to Wire
Ways	5
Coding version	Black
Product Type	Housing
Coding	Yes
Family	Engine Compartment Connectors
	Mechanical Polarization Circumferential Interface Seal

Product Detail Page Page 2 of 2

Features	Waterproof Application with Single Wire Seal (S.W.S.) Lateral Secondary Lock for Terminal Position Assurance (T.P.A.) Plastic Locking Feature			
Hybrid	No			
Main Terminal family	HPCS			
Main Terminal size	2.8 mm			
Sealed	Yes			
Terminal Size	2.8			
Mechanical				
Connector mating force	< 100N			
Physical				
Color	Black			
Material	PBT			
Temperature (Range)	-40°C to+120°C			
Terminal 1 Type				
Terminal type 1	HPCS Female 2.8 mm Terminal			
Ways for Terminal Type 1	5			
Contact insertion force for Terminal Type 1	< 20N			
Retention force (Contact) for Terminal Type 1	> 80N			
Environmental				
IMDS	Yes			
Other Features				
Туре	Female			
	Displayed data is for information purposes only.			
Disclaimer	For more information, please contact your local sales office.			
	The supply of some products might be limited to some customers.			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Aptiv: 60404011