

## SERIES 60AD

### Optical Encoder with integrated Joystick and Pushbutton





#### FEATURES

- Dome contacts provide excellent tactile feedback in all directions
- Choices of actuation force, cable length and termination
- Customized solutions available

#### APPLICATIONS

- Aerospace
- Automotive
- Medical devices

#### DIMENSIONS in inches (and millimeters)

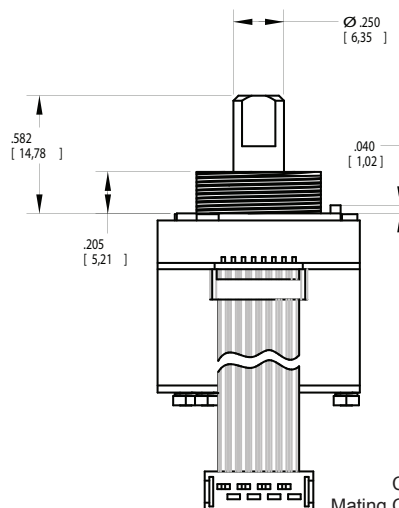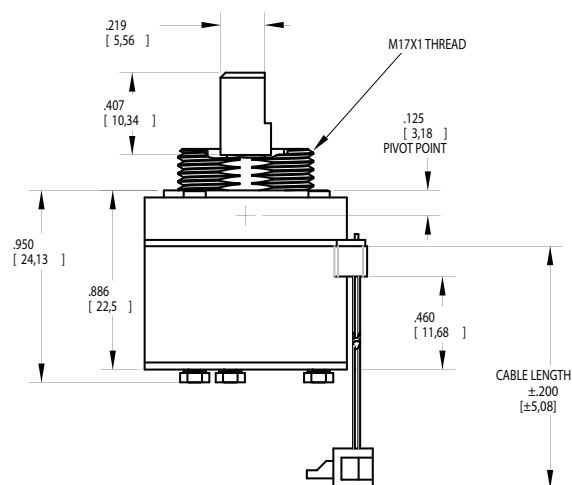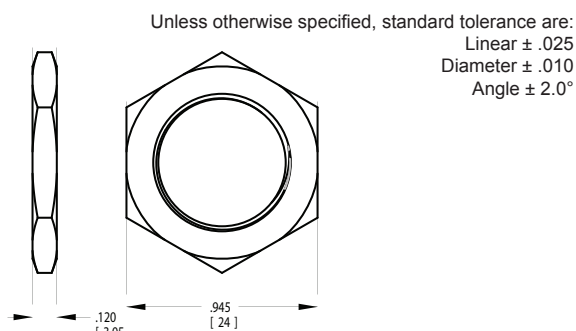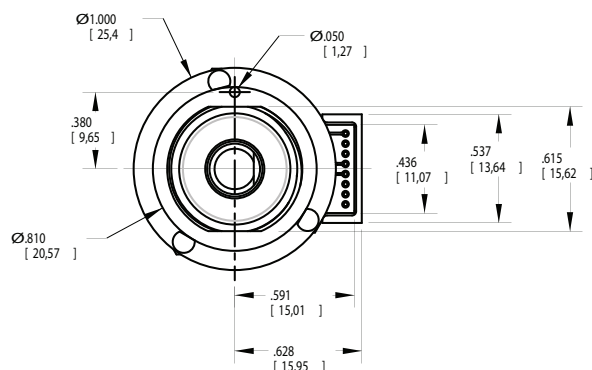

Connector: Amp 215083-8  
Mating Connector: Amp 215079-8

#### ORDERING INFORMATION

**60AD18-4-M-060S**


**Angle of Throw:** 18= 18° or 20 positions  
**Joystick:** 4= Four contacts & directions;  
8= Four contacts & eight directions

**Termination:** 0.050" center P= pin header; C= connector; S= stripped cable  
**Cable Length:** 020 thru 250 in 1/2 inch increments, 060= 6.0 inch cable  
**Force Option:** (see table) L=low, M=medium, H=high

	OPTION		
	L	M	H
1 ACTUATION FORCE (JOYSTICK) [g]	550±200	725±200	1050±250
2 ACTUATION FORCE (PUSHBUTTON) [g]	625±200	800±200	1100±250
3 AVERAGE ROTATIONAL TORQUE [in-oz]	1.50±0.75	3.50±1.75	5.00±2.00

For prices and custom configurations, contact a local sales office, an authorized distributor, or Grayhill's sales department.


**JOYSTICK OPERATION + ENCODER WAVEFORM AND TRUTH TABLE** Standard Quadrature 2-Bit Code

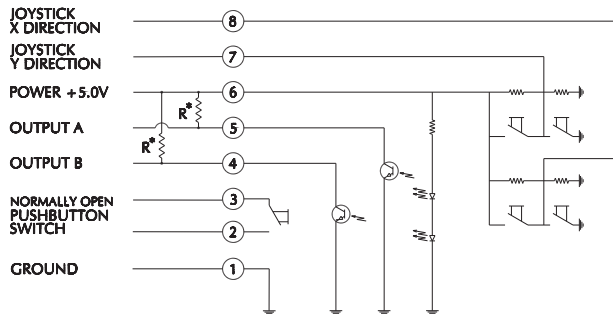**SWITCH SCHEMATIC**


\*EXTERNAL PULL-UP RESISTORS REQUIRED FOR OPERATION (2.2k $\Omega$ ).

**JOYSTICK POSITION DIAGRAM**

\* INDICATES DIRECTION OF D-FLAT ON BUSHING


**ENCODER WAVEFORM [C.W. ROTATION]**

**ENCODER TRUTH TABLE [C.W. ROTATION]**

POSITION	OUTPUT A	OUTPUT B
#1	○	○
#2	○	○
#3	○	○
#4	○	○

○ INDICATES LOGIC-HIGH  
○ INDICATES LOGIC-LOW  
CODE REPEATS EVERY FOUR POSITIONS

**JOYSTICK TRUTH TABLE**

POSITION	X OUTPUT	Y OUTPUT
1	NEUTRAL	HIGH
2	HIGH	HIGH
3	HIGH	NEUTRAL
4	HIGH	LOW
5	NEUTRAL	LOW
6	LOW	LOW
7	LOW	NEUTRAL
8	LOW	HIGH
9	NEUTRAL	NEUTRAL

**SPECIFICATIONS**
**Rotary Specifications**

**Operating Voltage:** 5.00  $\pm$  0.25 Vdc  
**Supply Current:** 20mA max at 5 Vdc  
**Minimum Sink Current:** 2.0mA at 5 Vdc  
**Power Consumption:** 0.1mW max at 5 Vdc  
**Output:** Open collector phototransistor, 2.2k  $\Omega$  external pull-up resistors are required  
**Output Code:** 2-Bit quadrature, channel A leads channel B by 90° in clockwise rotation  
**Logic Output Characteristics:**

High: No less than 3.5 Vdc

Low: No greater than 1.0 Vdc

**Mechanical Life:** 1 million rotational cycles (through all positions and a full return)

**Rotational Torque:** see table

**Maximum Rotational Speed:** 100 RPM

**Mounting Torque:** 15 in-lbs. maximum

**Shaft Push/Pull Out Force:** 45 lbs min.

**Shaft Side-Load Force:** 20 lbs. max.

**Terminal Strength:** 15 lbs pull-out force min.

**Pushbutton Specifications**

**Rating:** 10 mA at 5 Vdc resistive

**Contact Resistance:** less than 10 ohms

**Contact Bounce:** < 4ms make, <10 ms break

**Mechanical Life:** 1 million actuations min.

**Actuation Force:** see table

**Pushbutton Travel:** .027  $\pm$  .010 in.

**Joystick Specifications**

**Supply Current:** 5mA max

**Output Code:** 2-Bit

**Logic Output Characteristics:**

Neutral Position: 2.5  $\pm$  0.5 Vdc

High-State Position: >4.5 Vdc

Low-State Position: <0.5 Vdc

**Mechanical Life:** 500k cycles min.

**Actuation Force:** see table

**Angle of Throw:** 3.5° +2°/-1°

**Environmental Ratings**

**Operating Temp. Range:** -40°C to 85°C

**Storage Temp. Range:** -55°C to 100°C

**Relative Humidity:** 96 hours at 90-95% humidity at 40°C

**Vibration:** Harmonic motion with amplitude of 15g, within 10 to 2000 Hz for 12 hours

**Mechanical Shock:**

Test 1: 100g for 6ms half-sine wave with a velocity change of 12.3 ft/s

Test 2: 100g for 6ms sawtooth wave with a velocity change of 9.7 ft/s

**Materials and Finishes**

**Detent Housing:** Nylon 6/10

**Shaft:** Nylon 6/10

**Shaft Insert:** 303 stainless steel

**Joystick Housing:** Nylon 6,10

**Centering Plate:** Nylon 6,10

**Detent Balls:** Carbon steel

**Detent Springs:** Music wire

**Dome Contacts:** Stainless steel

**Dome Housings:** Polycarbonate over brass-lead frame

**Dome Retainers:** Nylon 6,0; 30% glass-filled

**Joystick Actuators:** Polyphthalamide; 50% glass filled

**Pushbutton Dome Retainer:** Polycarbonate

**Printed Circuit Board:** NEMA grade FR-4.

Glass-cloth epoxy, double clad with copper

**Infrared Emitter:** Gallium arsenide

**Phototransistor:** Planar silicon

**Resistors:** Metal oxide on ceramic substrate

**Solder:** 95.5% SN, 3% AG, 0.5% CU

**OPTIONS**

Contact Grayhill for custom terminations, rotational torque, number of positions, shaft configurations, and resolutions.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Grayhill:

<a href="#"><u>60AD18-4-M-020C</u></a>	<a href="#"><u>60AD18-8-M-100S</u></a>	<a href="#"><u>60AD18-8-L-025C</u></a>	<a href="#"><u>60AD18-4-H-050C</u></a>	<a href="#"><u>60AD18-8-M-250C</u></a>	<a href="#"><u>60AD18-4-H-040C</u></a>
<a href="#"><u>60AD18-8-L-100S</u></a>	<a href="#"><u>60AD18-4-L-020C</u></a>	<a href="#"><u>60AD18-8-M-040C</u></a>	<a href="#"><u>60AD18-8-M-020C</u></a>	<a href="#"><u>60AD18-4-H-120S</u></a>	<a href="#"><u>60AD18-4-L-050C</u></a>
<a href="#"><u>60AD18-8-M-030S</u></a>	<a href="#"><u>60AD18-4-M-050C</u></a>	<a href="#"><u>60AD18-4-H-020C</u></a>	<a href="#"><u>60AD18-8-L-020C</u></a>	<a href="#"><u>60AD18-8-H-020S</u></a>	<a href="#"><u>60AD18-8-L-030C</u></a>
<a href="#"><u>60AD18-4-M-030C</u></a>	<a href="#"><u>60AD18-8-H-120S</u></a>	<a href="#"><u>60AD18-4-H-030C</u></a>	<a href="#"><u>60AD18-4-H-040S</u></a>	<a href="#"><u>60AD18-8-H-020C</u></a>	<a href="#"><u>60AD18-4-L-040C</u></a>