

# Smart Box (part no. 73-00001.2)

## **Technical specifications**

## Description

Housing with two Series 84 white illuminated pushbuttons, directly wired to a 5 pin M12 plug. The housing and switches are sealed to IP67 and are fitted with one red and one green pushbutton lens.

## Shipped:

- with lenses (red and green)
- with mounting adapter
- with marking plate



#### Equipment

Connection: M12 5-pin plug, male, A-coding

S84 button with red lens / white LED Control element position [S1]:

Base product: Part no. 84-1101.0 / lens part no. 84-7111.200

Control element position [S2]: S84 button with lens / white LED

Base product: Part no. 84-1101.0 / lens part no. 84-7111.500

#### Connector pin assignment

Pin 1: LED1

Positive terminal


Pin 2: LFD2

Positive terminal

Pin 3: S1 button terminal Pin 4: S2 button terminal

Shared terminal Pin 5:

> Button S1 / S2 / LED1 / LED2

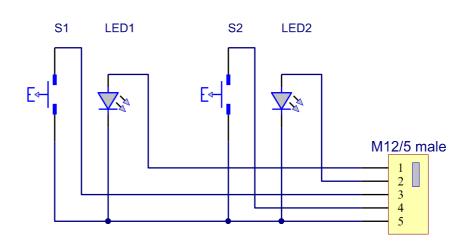

#### Electrical characteristics

Maximum 30VDC Button operating voltage:

 $10\mu A \dots 100 mA$  / Maximum 2W 24VDC Switching rate:

LED operating voltage:

10mA ±10% at 24VDC White LED operating current:

Please refer to EAO Series 84 for more technical data on the mounted switches / LEDs.


Created: Reviewed: Approved: Doc. No. Version / status Page 2017-09-27 / KRJ 2017-09-27 / KRJ 2017-09-27 / KRJ 19003064094 C / 2590 Series - released 1/3 **EAO Systems AG** CH-4600 Olten Fax +41 62 296 21 62 Telephone +41 62 286 91 11 www.eao.com




### Mechanical characteristics

Dimensions:

See dimensional diagram (Female M12 connector not included)

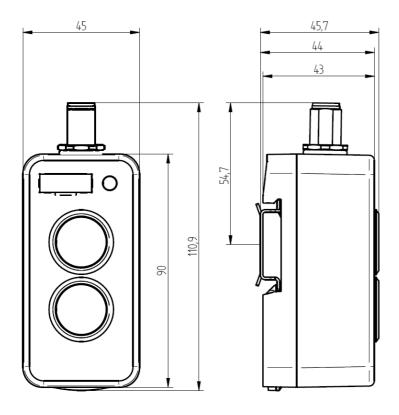

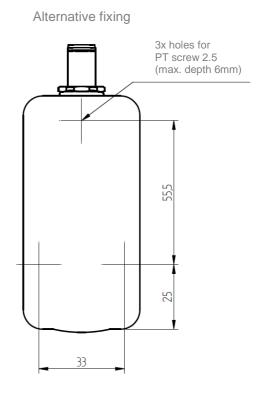


## Mounting

- · Mount mounting adapter onto mounting surface
- Mount Smart Box on one side (note direction of mounting adapter on the housing)
- Push the housing down onto the adaptor on the other side until the Smart Box audibly clicks into place
- Alternatively, the module can be mounted on a standard top hat rail, or it can be mounted on a base using screws on the rear (see dimensional diagrams).

## Dismantling

- Pull out spring element using screwdriver and lift Smart Box
- Remove Smart Box from the other side

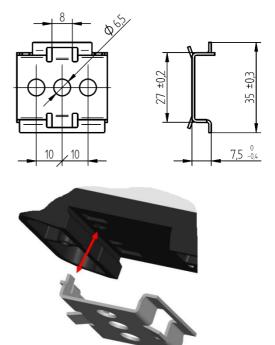

Created: 2017-09-27 / KRJ

Reviewed: 2017-09-27 / KRJ Approved: 2017-09-27 / KRJ

Doc. No. 19003064094 Version / status C / 2590 Series - released Page 2/3



#### Operating temperatures

Temperature range: Rated temperature: 25°C

Operating temperature: -25 ... 60°C Storage temperature: -40 ... 85°C

**Materials** 

Upper part of housing: PBT / UL-V0 / colour similar to RAL9010 Lower part of housing: PBT / UL-V0 / colour similar to RAL9011

Spring element (for restraint): POM (nature)

Seal: MVQ silicone foam bright

Blind plug: PC / glass clear
Mounting adaptor: Stainless steel
Housing screws: Stainless steel

Marking plate: Plastic / black / surface aluminium-coloured, adhesive

M12 connector housing: Zinc die cast

**Standards** 

Degree of protection: IP67 (with mounted female connector / lenses)

EN 60664-1:2008 / degree of contamination I / insulation material

Insulation: IIIa/b

EMC: Defined based on components of EAO Series 84

Vibrations: EN 60068-2-6:2008-10 / 10 – 150Hz / 2g Shock: EN 60068-2-27:2010-02 / 15g / 11ms

Conformity CE

EAO reference number: Part no. 73-00001.2

EAO reserves the right to change specifications without further notice.

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EAO: 73-00001.2