

Series 95

Characteristics

The Series 95 PCB pushbuttons can be used in combination with 1.5 to 2.5 mm PCBs. The buttons are self-attaching until they are soldered. Depending on the design, they can be equipped with 2 or 3 SMD LEDs. The series is available in the following sizes:

- 19.05 × 19.05 mm
- 15.88 × 15.88 mm
- 12.7 × 12.7 mm

Functions

The Series 95 incorporates the following functions:


- Pushbutton
- Illuminated pushbutton

Market segments

The EAO Series 95 is especially suited for applications in the segment:

- Audio and video

Please refer to the EAO website to obtain detailed information regarding this series www.products.eao.com
Configure a product to your exact needs and request a quotation.

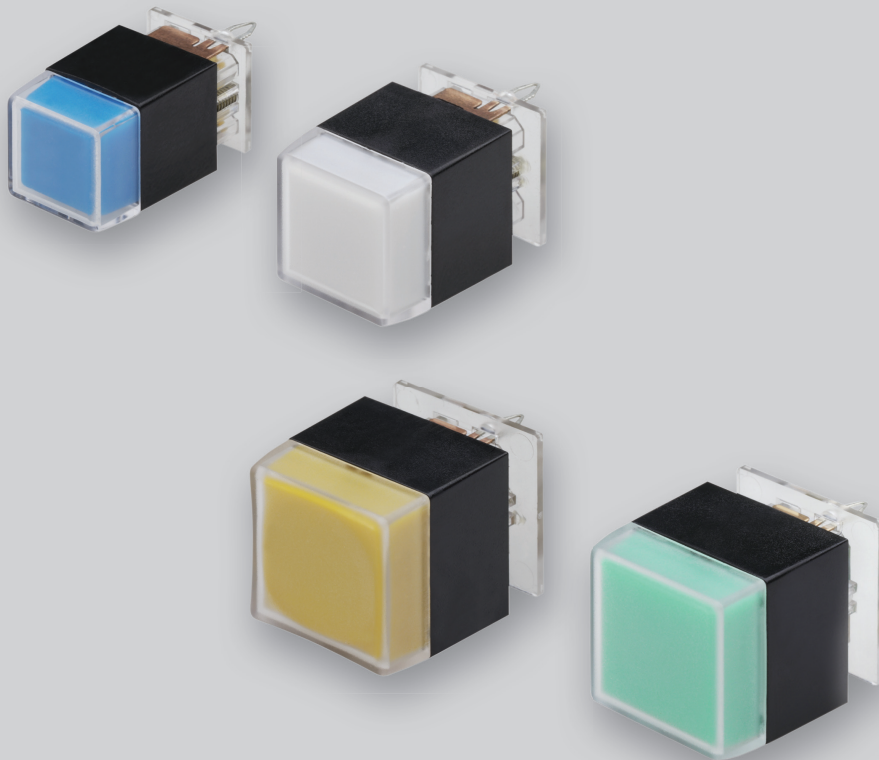

Overview

Printtasten

Illuminated pushbutton

4

Accessories

5

Drawings

9

Technical data

10

Application guidelines

11

Index


12

95 PCB pushbuttons

Illuminated pushbutton, IP 40



Product can differ from the current configuration.

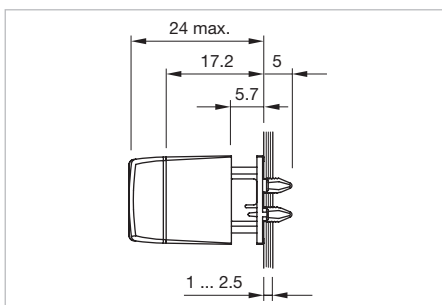

Dimensions [mm]

Equipment consisting of (schematic overview)



Lens



Diffuser






Switching element

Each Part Number listed below includes all the black components shown in the 3D-drawing.

Additional Information

- Lens plastic, colourless, transparent
- Suitable for PCB thickness 1.5 to 2.5 mm
- Special spring clip contacts position and hold the pushbutton in place during the soldering process. The soldering provides the contacting and the mechanical strength. The pushbutton is designed for panel mounting only.

Lens	Contacts	Switching action	Terminal	Part No.	Component layout	Weight
 Illuminated pushbutton, Front dimension 19.05 x 19.05 mm						
convexe mat	1 NO	B	PCB	95-414.730	1	0.004 kg
concave mat	1 NO	B	PCB	95-414.740	1	0.004 kg
flat high gloss finished	1 NO	B	PCB	95-414.750	1	0.004 kg
concave high gloss finished	1 NO	B	PCB	95-414.770	1	0.004 kg
 Illuminated pushbutton, Front dimension 15.88 x 15.88 mm						
flat mat	1 NO	B	PCB	95-515.720	2	0.004 kg
concave mat	1 NO	B	PCB	95-515.740	2	0.004 kg
flat high gloss finished	1 NO	B	PCB	95-515.750	2	0.004 kg
concave high gloss finished	1 NO	B	PCB	95-515.770	2	0.004 kg
 Illuminated pushbutton, Front dimension 12.7 x 12.7 mm						
flat mat	1 NO	B	PCB	95-313.720	3	0.003 kg
flat high gloss finished	1 NO	B	PCB	95-313.750	3	0.003 kg





Contacts: NO = Normally open

Switching action: B = Momentary



The component layouts you will find from page 9

Front**Lens****Additional Information**

- Lens plastic, colourless, transparent

Dimension	Lens	Part No.	Weight
 Lens	15.88 x 15.88 mm	flat mat	95-705.720 0.001 kg
	19.05 x 19.05 mm	flat mat	95-704.720 0.001 kg
		flat high gloss finished	95-704.750 0.001 kg
	12.7 x 12.7 mm	flat mat	95-703.720 0.001 kg
		flat high gloss finished	95-703.750 0.001 kg
 Lens	15.88 x 15.88 mm	convexe mat	95-705.730 0.001 kg
	19.05 x 19.05 mm	convexe mat	95-704.730 0.001 kg
		convexe high gloss finished	95-704.760 0.001 kg
 Lens	15.88 x 15.88 mm	concave mat	95-705.740 0.001 kg
		concave high gloss finished	95-705.770 0.001 kg
	19.05 x 19.05 mm	concave mat	95-704.740 0.001 kg
		concave high gloss finished	95-704.770 0.001 kg
 Lens	19.05 x 38.1 mm	concave mat	95-724.740 0.002 kg

Diffuser




Dimension	Diffuser	Part No.	Weight
 Diffuser	19.05 x 19.05 mm	Plastic red translucent	95-804.220 0.001 kg
		Plastic yellow translucent	95-804.420 0.001 kg
		Plastic green translucent	95-804.520 0.001 kg
		Plastic colourless transparent	95-804.720 0.001 kg
		Plastic white translucent	95-804.920 0.001 kg
	15.88 x 15.88 mm	Plastic white translucent	95-805.920 0.001 kg
 Diffuser	12.7 x 12.7 mm	Plastic yellow translucent	95-803.420 0.001 kg
		Plastic green translucent	95-803.520 0.001 kg
		Plastic colourless transparent	95-803.720 0.001 kg
		Plastic white translucent	95-803.920 0.001 kg
19.05 x 38.1 mm	Plastic white translucent	95-824.920	0.001 kg

Rear side

Switching element

Additional Information

- Switching system slow-make element
- For combining with lens and diffuser
- Suitable for PCB thickness 1.5 to 2.5 mm
- Special spring clip contacts position and hold the pushbutton in place during the soldering process. The soldering provides the contacting and the mechanical strength. The pushbutton is designed for panel mounting only.

Contacts	Switching action	Terminal	Part No.	Component layout	Weight
 Switching element square, 19.05 x 19.05 mm					
1 NO	B	PCB	95-414.000	1	0.003 kg
 Switching element square, 15.88 x 15.88 mm					
1 NO	B	PCB	95-515.000	2	0.002 kg
 Switching element square, 12.7 x 12.7 mm					
1 NO	B	PCB	95-313.000	3	0.002 kg

Contacts: NO = Normally open

Switching action: B = Momentary


The component layouts you will find from page 9

Mounting


Lens remover

Additional Information

- In case a lens gets damaged when being removed, it has to be replaced


Part No.	Weight
<div> Lens remover</div>	
95-900.005	0.003 kg

Mounting tool

Part No.	Weight
<div> Mounting tool</div>	
95-900.009	0.003 kg


Drawings

Layout (element side)

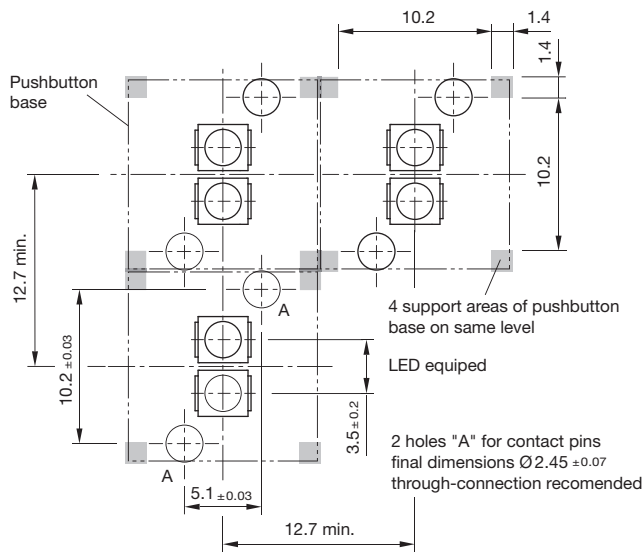


Component layout 3

Layout (element side)

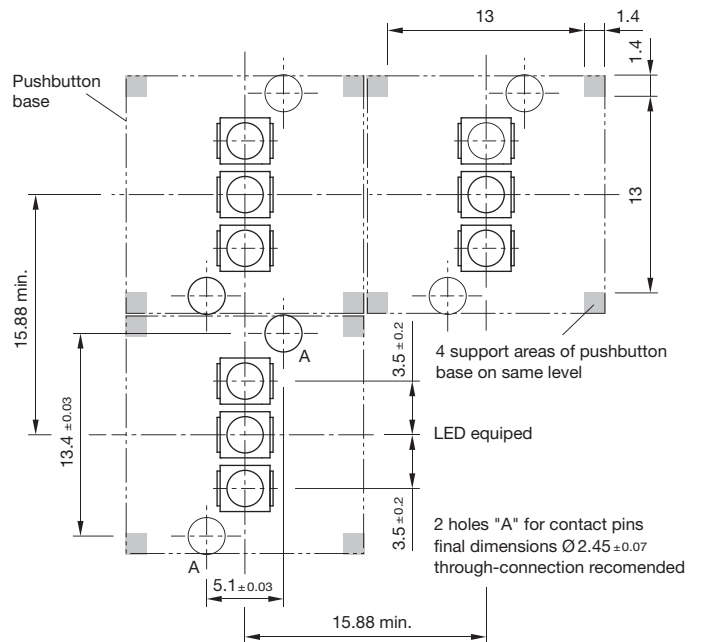

Component layout 2

Layout (element side)

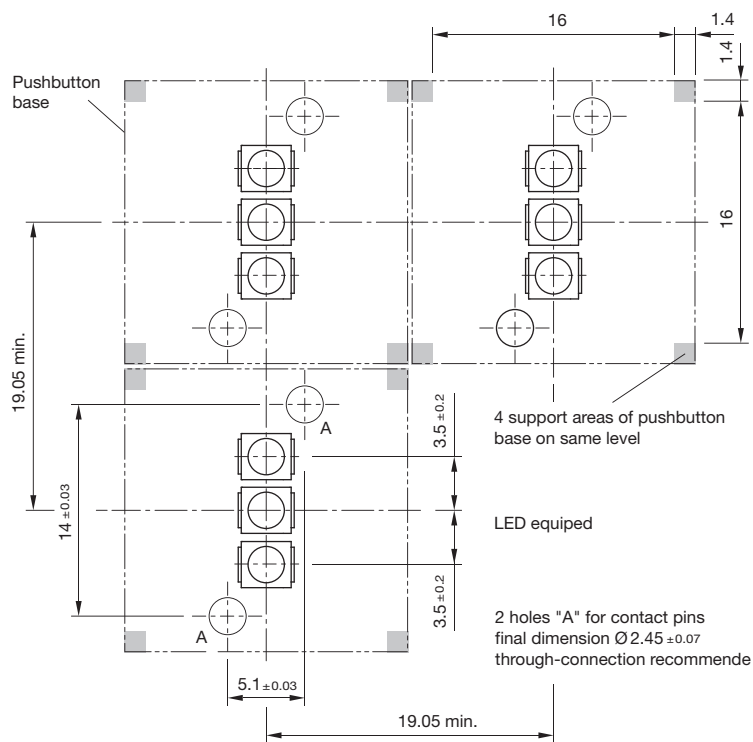

Component layout 1

Pushbutton and Illuminated pushbutton

Switching system

Gold plated momentary contact, 1 normally open, self-cleaning

Material

Plastic parts

PC, as per UL 94 HB, Cd-free

Material of contacts

CuSn, contact gold-plated, soldering terminal tinned

Mechanical characteristics

Actuating travel

4.5 mm

Actuating force

2.5 N ... 4 N

Switching point

2.3 mm \pm 0.8 mm at operation

Resistance to heat of soldering

260 °C, 5 s, per IEC60068-2-20

Life time

> 5 million operations, as per IEC 60512-5-9a

Electrical characteristics

Illumination

recommended SMD-LED types:
P-LCC package or similar, radiation angle approx. 120°;
use of smaller SMD-LED is possible.

SMD-LED configurations size:

max. 2 SMD-LEDs for switch size 12.7 mm

max. 3 SMD-LEDs for switch size 15.88 mm and 19.05 mm,
single colour or multi-colour.

Height of SMD-LED:

max. 2.1 mm

Electric strength

\leq 100 m Ω , as per IEC 60512-2-2b at new state

Isolation resistance

> 1 T Ω , as per IEC 60512-2-3a between contacts

Switch rating

min. 1 mVDC, 100 μ A

max. 48 VDC, 50 mA

Electric strength

2.5 kVAC, as per IEC 60512-2-11

Environmental conditions

Front protection

IP 40 before front plate for complete switch

Operating temperature

-25 °C ... +70 °C

Storage temperature

-40 °C ... +80 °C

Vibration resistance

10g, at 10–2000 Hz, 0.75 mm, as per IEC 60512-4-4

Shock resistance

Pushbutton and Illuminated pushbutton 50g, 11 ms,
as per IEC 60512-4-3

Approvals

Declaration of conformity

CE

EAO reserves the right to alter specifications without further notice.

Suppressor circuits


When switching inductive loads such as relays, DC motors, and DC solenoids, it is always important to absorb surges (e.g. with a diode) to protect the contacts. When these inductive loads are switched off, a counter emf can severely damage switch contacts and greatly shorten lifetime.

Fig. 1 shows an inductive load with a free-wheeling diode connected in parallel. This free-wheeling diode provides a path for the inductor current to flow when the current is interrupted by the switch. Without this free-wheeling diode, the voltage across the coil will be limited only by dielectric breakdown voltages of the circuit or parasitic elements of the coil. This voltage can be kilovolts in amplitude even when nominal circuit voltages are low (e.g. 12VDC) see Fig. 2.


The free-wheeling diode should be chosen so that the reverse breakdown voltage is greater than the voltage driving the inductive load. The DC blocking voltage (V_R) of the free-wheeling diode can be found in the datasheet of a diode. The forward current should be equal or greater than the maximum current flowing through the load.

To get an efficient protection, the free-wheeling diode must be connected as close as possible to the inductive load!

Switching with inductive load
Fig. 1

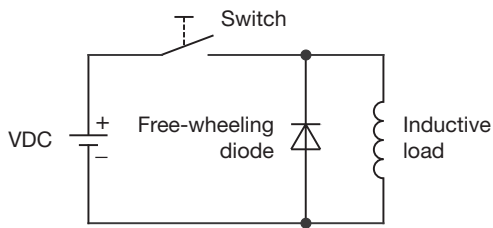

Counter EMF
over load without free-wheeling diode
Fig. 2

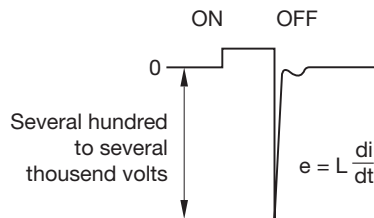

Index

Index from Part No.

Part No.	Page
95-313.000	7
95-313.720	4
95-313.750	4
95-414.000	7
95-414.730	4
95-414.740	4
95-414.750	4
95-414.770	4
95-515.000	7
95-515.720	4
95-515.740	4
95-515.750	4
95-515.770	4
95-703.720	5
95-703.750	5
95-704.720	5
95-704.730	5
95-704.740	5
95-704.750	5
95-704.760	5
95-704.770	5
95-705.720	5
95-705.730	5
95-705.740	5
95-705.770	5
95-724.740	5
95-803.420	6
95-803.520	6
95-803.720	6
95-803.920	6
95-804.220	6
95-804.420	6
95-804.520	6
95-804.720	6
95-804.920	6
95-805.920	6
95-824.920	6
95-900.005	8
95-900.009	8

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EAO:

[95-703.750](#) [95-705.770](#) [95-704.730](#) [95-804.720](#) [95-703.720](#) [95-704.770](#) [95-803.120](#)