



Antenna Datasheet

Product OC: YEMA300QXA

Version: 1.1

Date: 2023-11-29

Status: Released

Product Name: 4G & Wi-Fi & GNSS 3IN1 Combo Antenna

Key Features:

Frequency Band: 4G: 700–960 MHz, 1700–2700 MHz

Wi-Fi: 2400–2500 MHz, 5150–5850 MHz

GNSS: 1559–1606 MHz

Dimensions: 143.73 mm × 51.33 mm × 15 mm

Efficiency: Up to 50 % (4G), Up to 50 % (Wi-Fi)

GNSS LNA Gain: 18 ±3 dB

RoHS Compliant

IP67

Overview

To meet customers' requirements for the high performance, high integration, and integrated appearance of their products, Quectel provides a combined antenna box series. The antenna box can integrate a variety of antennas, such as 5G, 4G, GNSS, Wi-Fi antennas, to achieve communication functions of 5G MIMO, 4G, GNSS, and Wi-Fi. These antenna boxes can be mounted on the surface of devices via screw, adhesive or other methods, supports multiple connector types and cable lengths. It is a more flexible and reliable high-performance antenna solution for outdoor applications.

Contents

Overview.....	1
Contents	2
1 Specification.....	3
1.1. Electrical.....	3
1.1.1. 4G.....	4
1.1.2. Wi-Fi	4
1.1.3. GNSS	5
1.2. Mechanical & Environmental	6
1.3. Block Diagram (Active Antenna)	7
1.4. Supported GNSS Frequency Bands.....	8
2 Drawing	9
3 Detailed Performance	10
3.1. S-Parameter Test	10
3.1.1. VSWR.....	10
3.1.2. Return Loss	13
3.1.3. Isolation	16
3.1.4. GNSS LNA Gain.....	19
3.1.5. GNSS Noise Figure.....	20
3.2. Radiation Performance Test.....	21
3.2.1. Efficiency	21
3.2.2. Average Gain	24
3.2.3. Peak Gain.....	26
3.2.4. 3D & 2D Radiation Pattern.....	29
4 Packaging	35
Contact Us.....	37
Legal Notices	38
Revision History	40

1 Specification

Test Condition: In Free Space

1.1. Electrical

Electrical Specifications		
Frequency Range	4G	700–960 MHz, 1700–2700 MHz
	Wi-Fi	2400–2500 MHz, 5150–5850 MHz
	GNSS	1559–1606 MHz
Radiation Pattern	4G	Omni-directional
	Wi-Fi	Omni-directional
	GNSS	Directional
Polarization	4G	Linear
	Wi-Fi	Linear
	GNSS	RHCP
Impedance		50 Ω
Isolation		≤ -11.9 dB

1.1.1. 4G

Electrical - Detail												
SPEC	Band	B71	B12 /B13 /B28	B5 /B8 /B26	n74 /n75 /n76	B1 /B2 /B3	B40	Wi-Fi 2G	B38 /B41	B42 /B48 /n77	n79	Wi-Fi 5G
	Freq. (MHz)	600– 700	700– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	3300– 4200	4400– 5000	5150– 5850
Max. VSWR		-	3.7	5.2	-	1.9	1.7	1.7	1.6	-	-	-
Max. Return Loss (dB)		-	-4.8	-3.4	-	-9.9	-11.6	-12.0	-12.6	-	-	-
AVG Eff. (%)		-	42.2	45.6	-	55.4	49.0	51.0	51.5	-	-	-
AVG AVG Gain (dB)		-	-3.8	-3.5	-	-2.6	-3.1	-2.9	-2.9	-	-	-
Max. Peak Gain (dBi)		-	2.3	2.3	-	4.1	1.7	1.3	2.1	-	-	-
VSWR						≤ 5.2						
Return Loss						≤ -3.4 dB						
Peak Gain						≤ 4 .1 dBi						

1.1.2. Wi-Fi

Specification	Band	Band	Wi-Fi 2G	Wi-Fi 5G	Wi-Fi 7G
	Freq. (MHz)		2400–2500	5150–5850	5925–7125
Max. VSWR			1.7	1.5	-
Max. Return Loss (dB)			-11.4	-14.6	-
AVG Eff. (%)			51.0	50.4	-
AVG AVG Gain (dB)			-2.9	-3.0	-
Max. Peak Gain (dBi)			2.2	2.7	-
VSWR			≤ 1.7		
Return Loss			≤ -11.4 dB		
Peak Gain			≤ 2.7 dBi		

1.1.3. GNSS


Band Frequency (MHz)	GPS L5 GALILEO E5a BEIDOU B2a-B2I QZSS L5 IRNSS L5	GALILEO E5b BEIDOU B2b	GPS L2 QZSS L2C	GLONASS G2	BEIDOU B3	BEIDOU B1I	GPS L1 GALILEO E1 BEIDOU B1C QZSS L1	GLONASS G1
	1176	1207	1227	1248	1268	1561	1575	1602
VSWR						1.86	1.55	1.91
Return Loss (dB)						-10.4	-13.2	-10.1
Efficiency (%)						50.1	70.3	75.9
Peak Gain (dBi)						0.66	2.31	2.42

LNA Electrical	
LNA Gain	18 ±3 dB
Noise Figure	≤ 2.5 dB
Output VSWR	< 2.0
Input VSWR	< 2.0
Filter Out-of-Band Attenuation	36 dB f0 ±100 MHz f0 (1588 MHz)
Working Voltage	DC 3–5 V
Working Current	8.8 ±2 mA
Impedance	50 Ω

1.2. Mechanical & Environmental

Mechanical		
Antenna Dimensions		143.73 mm × 51.33 mm × 15 mm
Casing Material & Color		PC & Black
Cable Type & Color & Length	4G	RG174LL & Black & 1028 ±28 mm
	Wi-Fi	RG174LL & Black & 1028 ±28 mm
	GNSS	RG174 & Black & 1028 ±28 mm
Connector Type	4G	SMA Male (The current state of the SMA connector is not waterproof. If a waterproof connector is needed, it can be customized.)
	Wi-Fi	RP SMA Male (The current state of the SMA connector is not waterproof. If a waterproof connector is needed, it can be customized.)
	GNSS	SMA Male (The current state of the SMA connector is not waterproof. If a waterproof connector is needed, it can be customized.)
Mounting Type		Adhesive
Weight		Typ. 125.5 g
Environmental		
Operation Temperature		-40 °C to +85 °C
Storage Temperature		-40 °C to +85 °C
Ingress Protection (IP) Rating		IP67
RoHS Compliant		Yes


1.3. Block Diagram (Active Antenna)

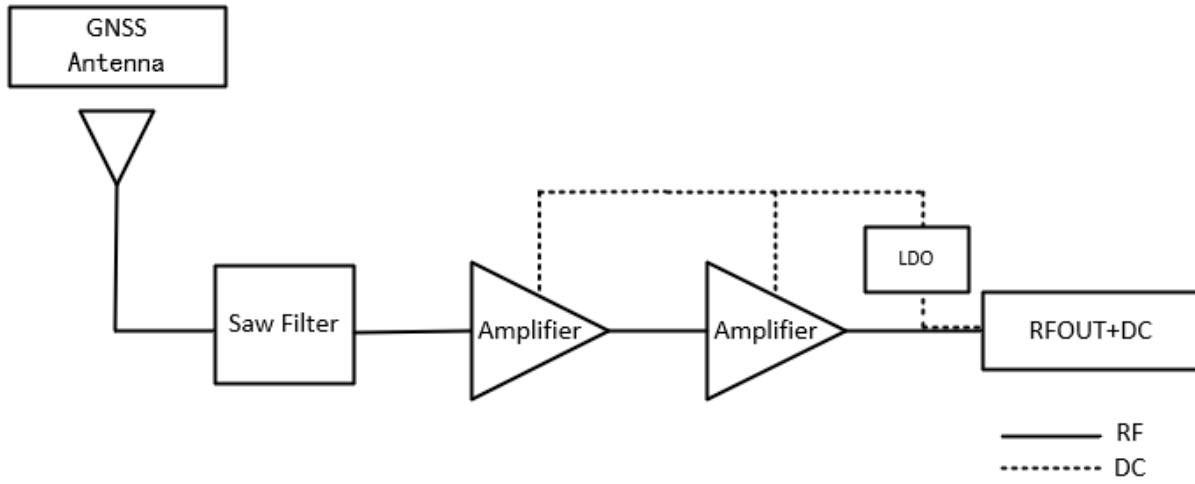

1.4. Supported GNSS Frequency Bands

GNSS Frequency Bands (MHz)					
GPS	L1 Centre 1575.42 (1565–1586)	L2 Centre 1227.6 (1217–1238)	L5 Centre 1176.45 (1164–1189)		
	√	-	-		
GLONASS	G1-L10C-L10F Centre 1601 (1595–1606)	G2-L20C-L20F Centre 1248.06 (1241–1255)	G3-L30C Centre 1202.025 (1189–1213)		
	√	-	-		
GALILEO	E1 Centre 1575.42 (1563–1588)	E5a Centre 1176.45 (1166–1187)	E5b Centre 1207.14 (1197–1218)	E6 Centre 1278.75 (1258–1300)	
	√	-	-	-	
BEIDOU	B1I Centre 1561.098 (1559–1564)	B1C (BeiDou-3) Centre 1575.42 (1559–1592)	B2a-B2I Centre 1176.45 (1166–1187)	B2b Centre 1207.14 (1197–1217)	B3 Centre 1268.52 (1258–1279)
	√	√	-	-	-
QZSS	L1 Centre 1575.42 (1573–1578)	L2C Centre 1227.6 (1226–1229)	L5 Centre 1176.45 (1166–1187)	L6 Centre 1278.75 (1257–1300)	
	√	-	-	-	
IRNSS	L5 Centre 1176.45 (1164–1189)				
	-				


2 Drawing

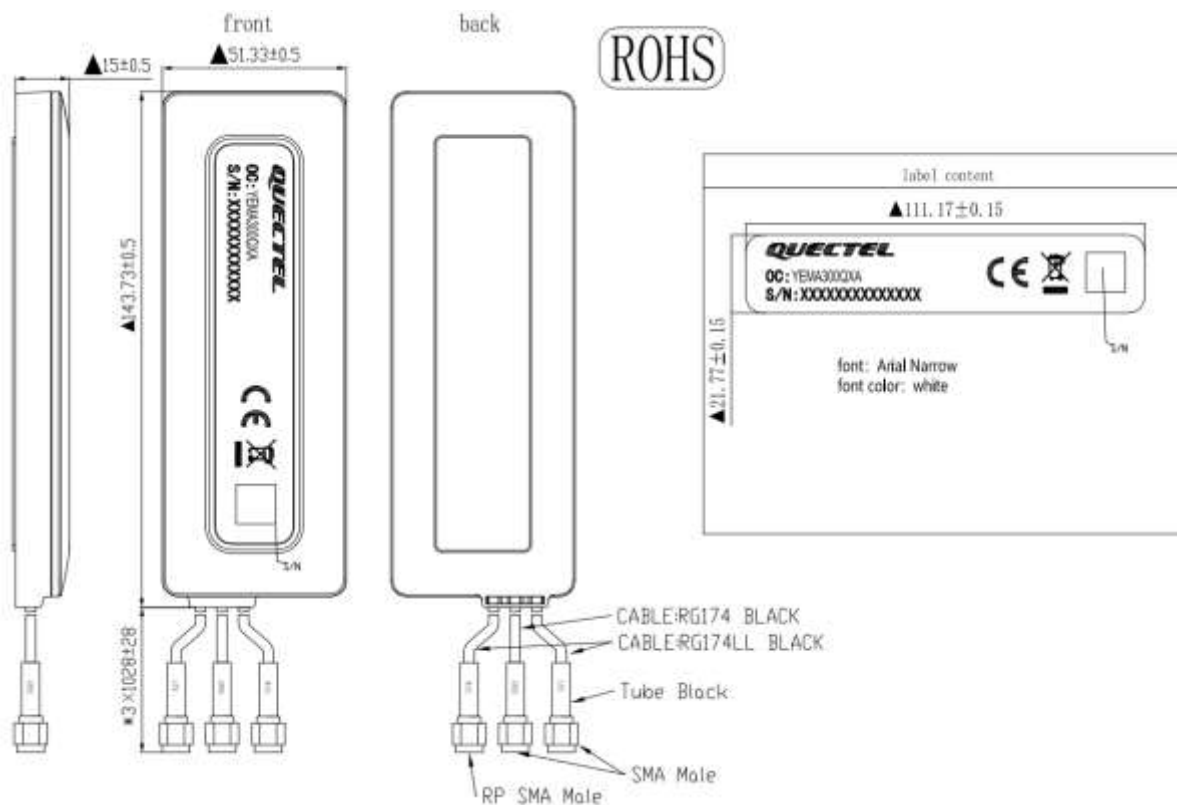

3 Detailed Performance


3.1. S-Parameter Test

3.1.1. VSWR

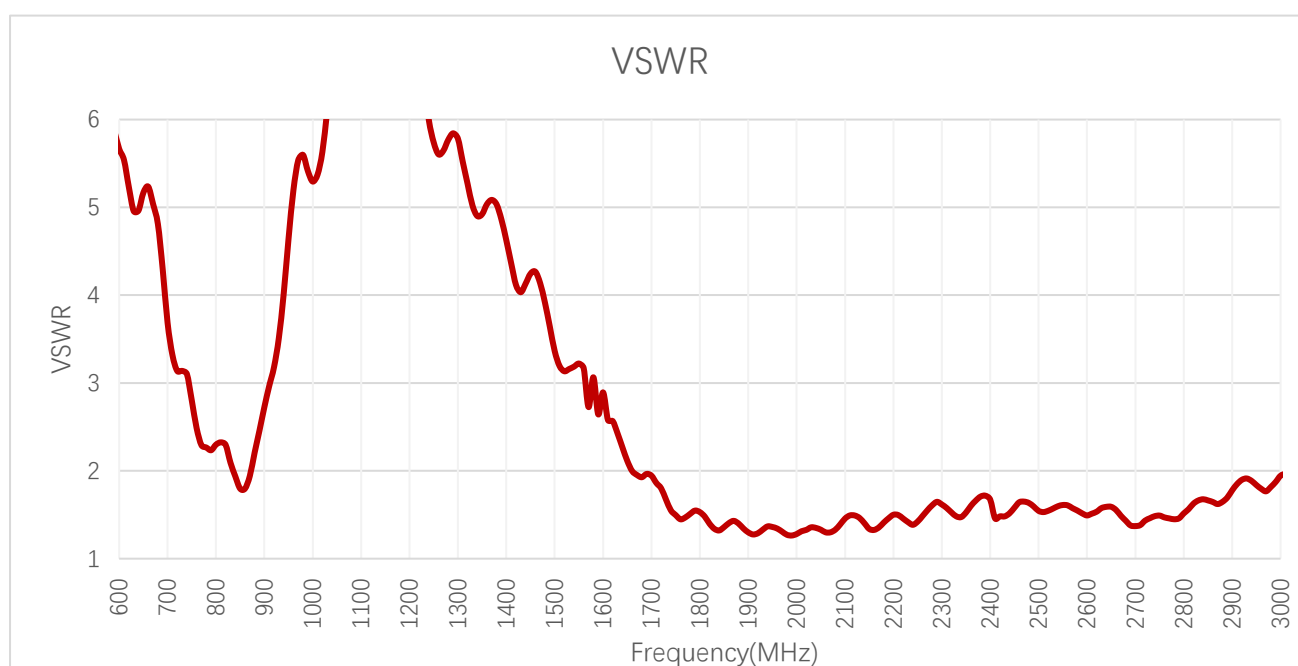


VSWR - 4G

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
VSWR	-	-	3.3	2.1	2.7	5.2	-	1.9	1.6	1.4
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
VSWR	1.4	1.4	1.5	1.6	1.5	1.4	-	-	-	-

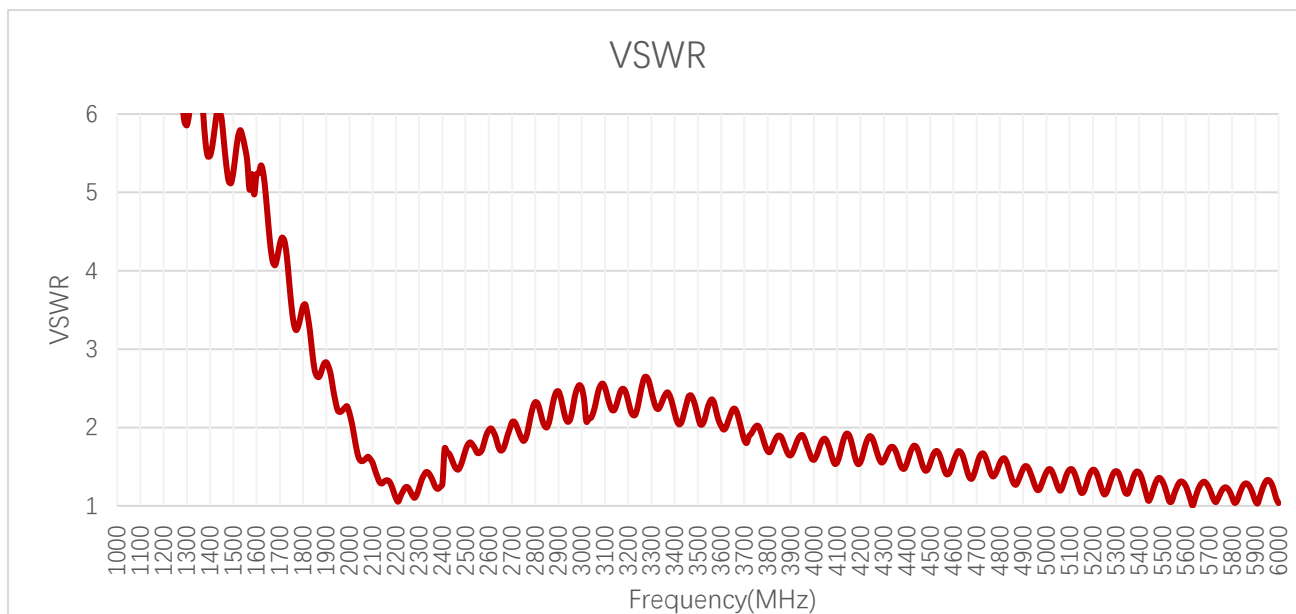

VSWR - Wi-Fi


Frequency (MHz)	2400	2450	2500	5150	5500	5850	5925	6325	6725	7125
VSWR	1.3	1.5	1.7	1.2	1.3	1.3	-	-	-	-

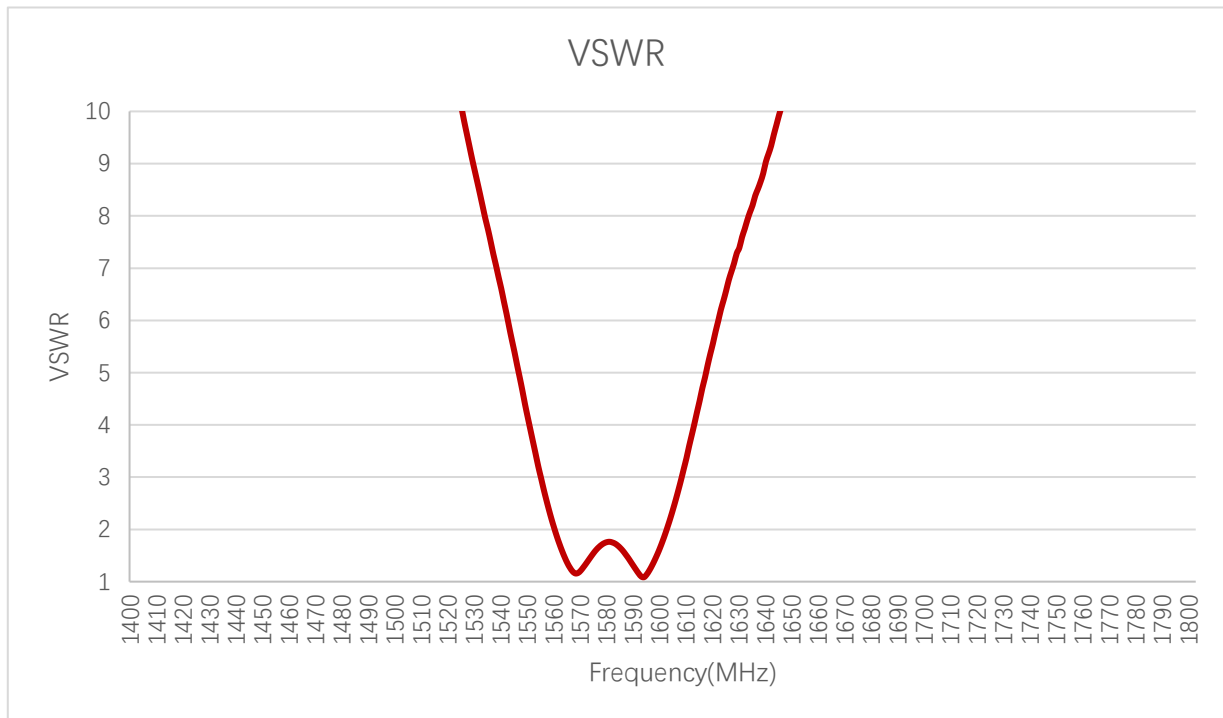

VSWR - GNSS


Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
VSWR	-	-	-	-	-	1.86	1.55	1.9

3.1.2. Return Loss

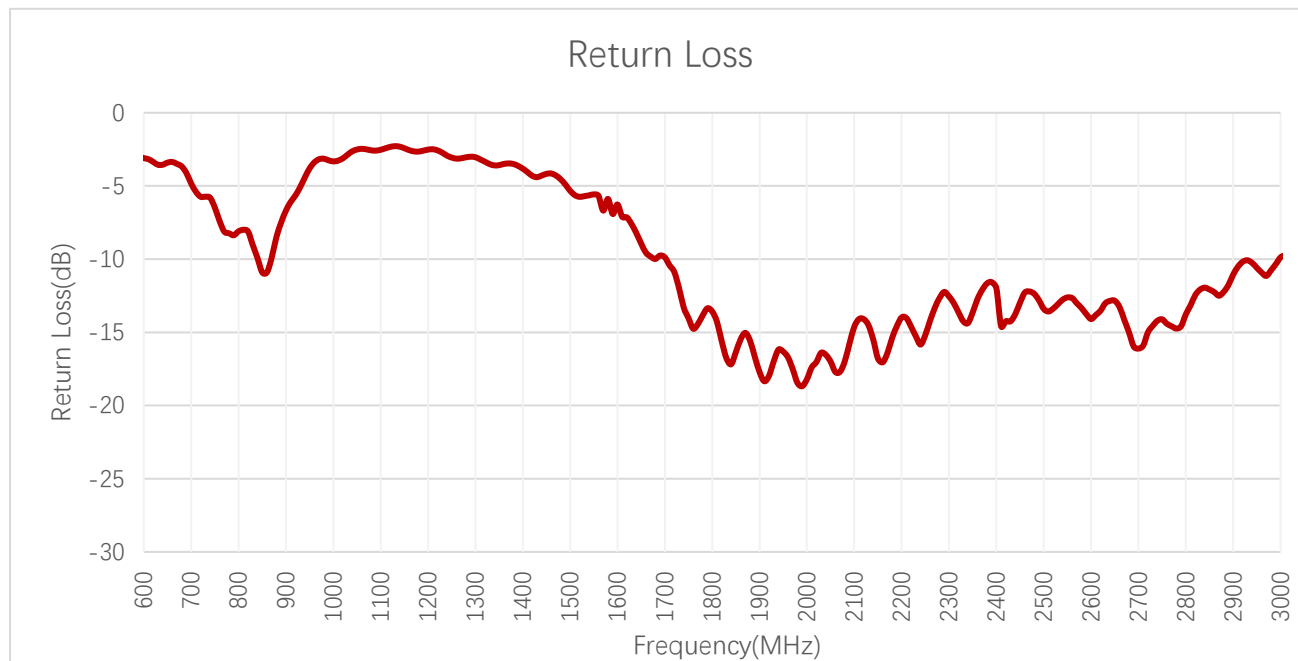


Return Loss (dB) - 4G

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
Return Loss (dB)	-	-	-5.4	-9.0	-6.7	-3.4	-	-10.4	-13.3	-15.6
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
Return Loss (dB)	-16.3	-15.5	-13.6	-13.0	-14.1	-16.0	-	-	-	-

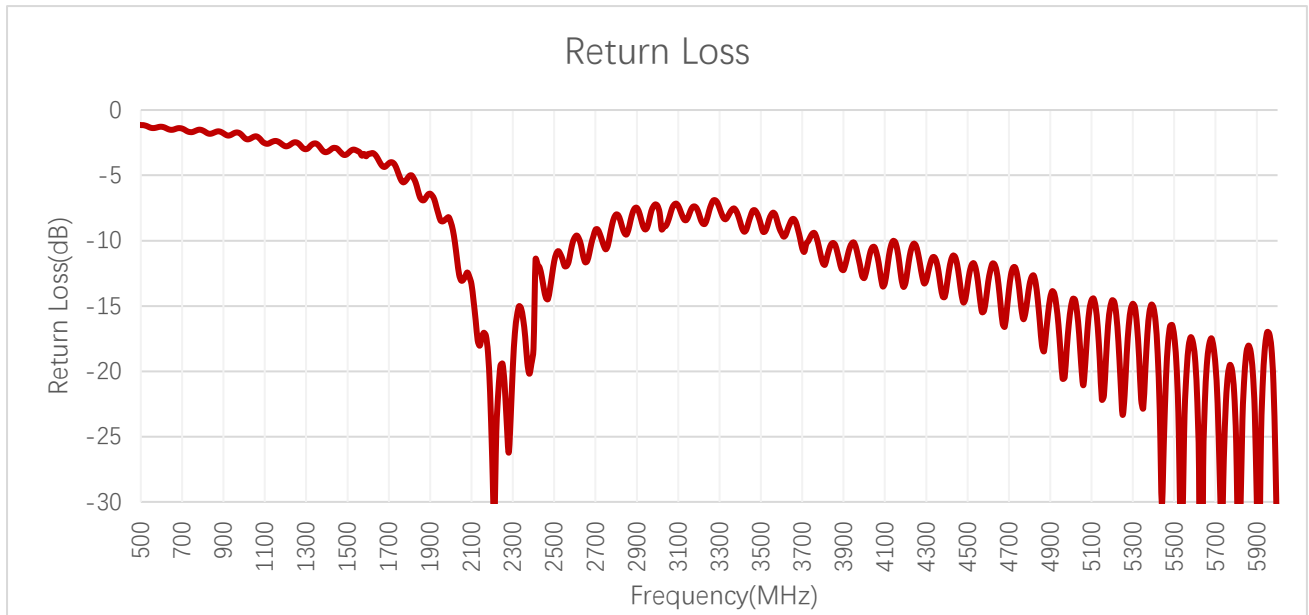

Return Loss - Wi-Fi


Frequency (MHz)	2400	2450	2500	5150	5500	5850	5925	6325	6725	7125
Return Loss	-18.3	-13.7	-11.6	-22.2	-17.3	-18.5	-	-	-	-

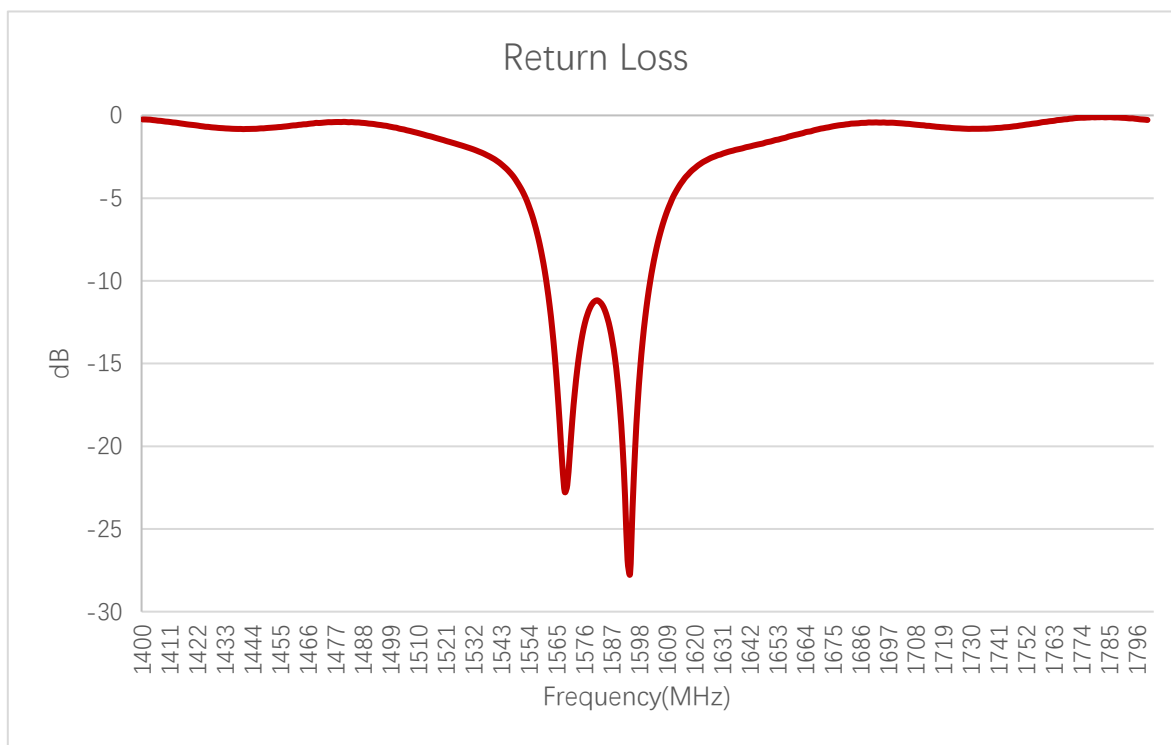


Return Loss (dB) - GNSS

Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
Return Loss (dB)	-	-	-	-	-	-10.3	-13.2	-10.1

3.1.3. Isolation

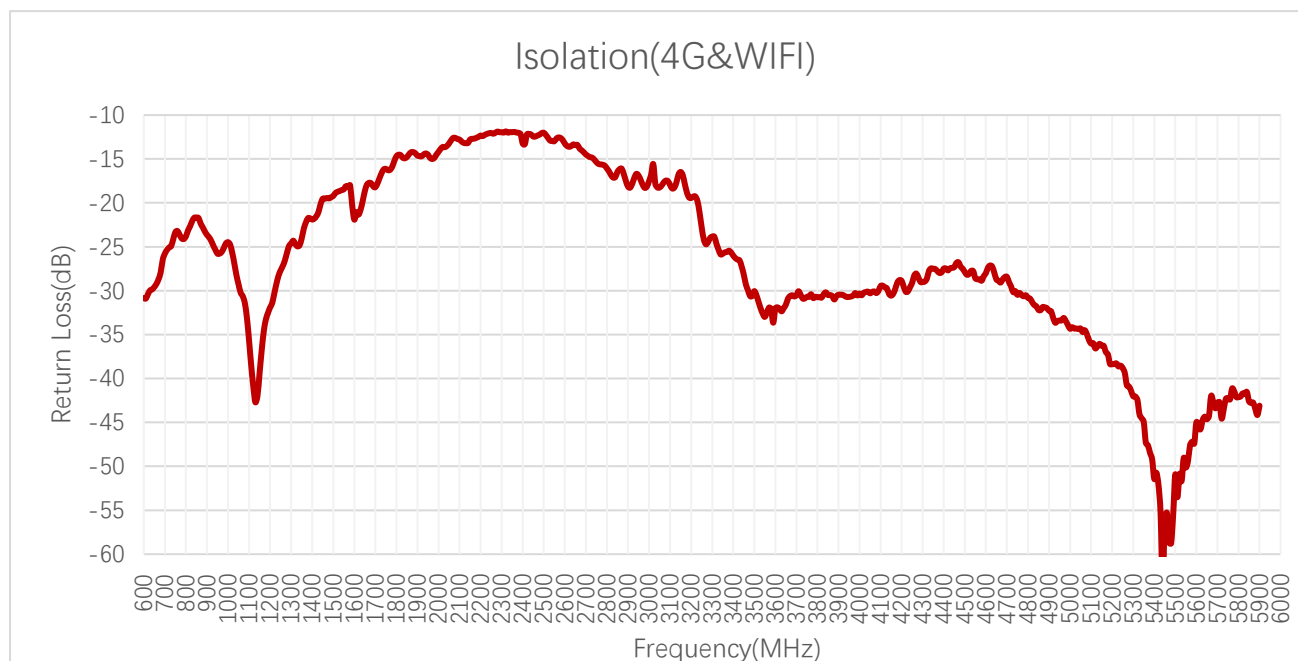


Band	B71	B12/ B13/ B28	B5/ B8/ B26	n74/ n75/ n76	B1/ B2/ B3	B40	Wi-Fi 2G	B38/ B41	Wi-Fi 5G
Freq. (MHz)	600– 700	700– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	5150– 5850
Isolation (dB)	-	-23.1	-21.7	-	-12.6	-11.9	-12.0	-12.0	-36.3

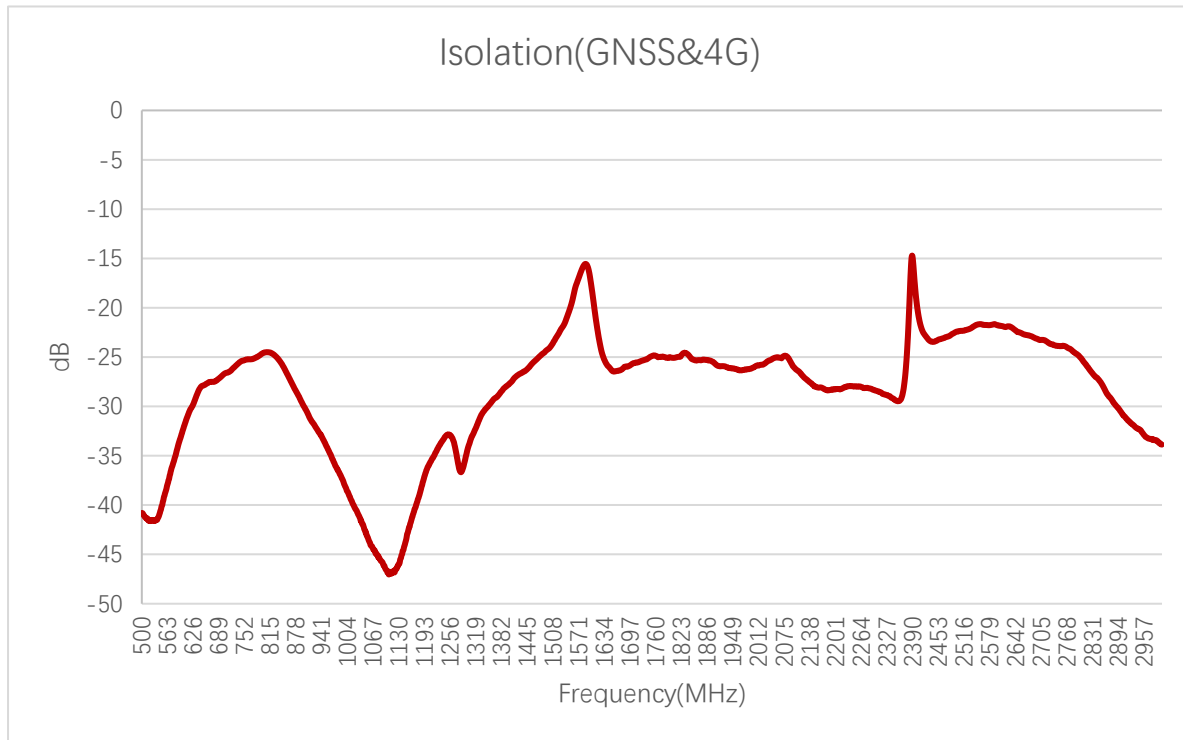

Max Isolation (dB) - GNSS & 4G


Band	B71	B12/ B13/ B28	B5/ B8/ B26	n74/ n75/ n76	B1/ B2/ B3	B40	Wi-Fi 2G	B38/ B41	Wi-Fi 5G	BEIDOU B1I	GPS L1	GLONASS G1
Freq. (MHz)	600– 700	700– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	515–5850	1559– 1564	1565– 1586	1595–1606
Isolation (dB)	-									-18	-16.4	-18

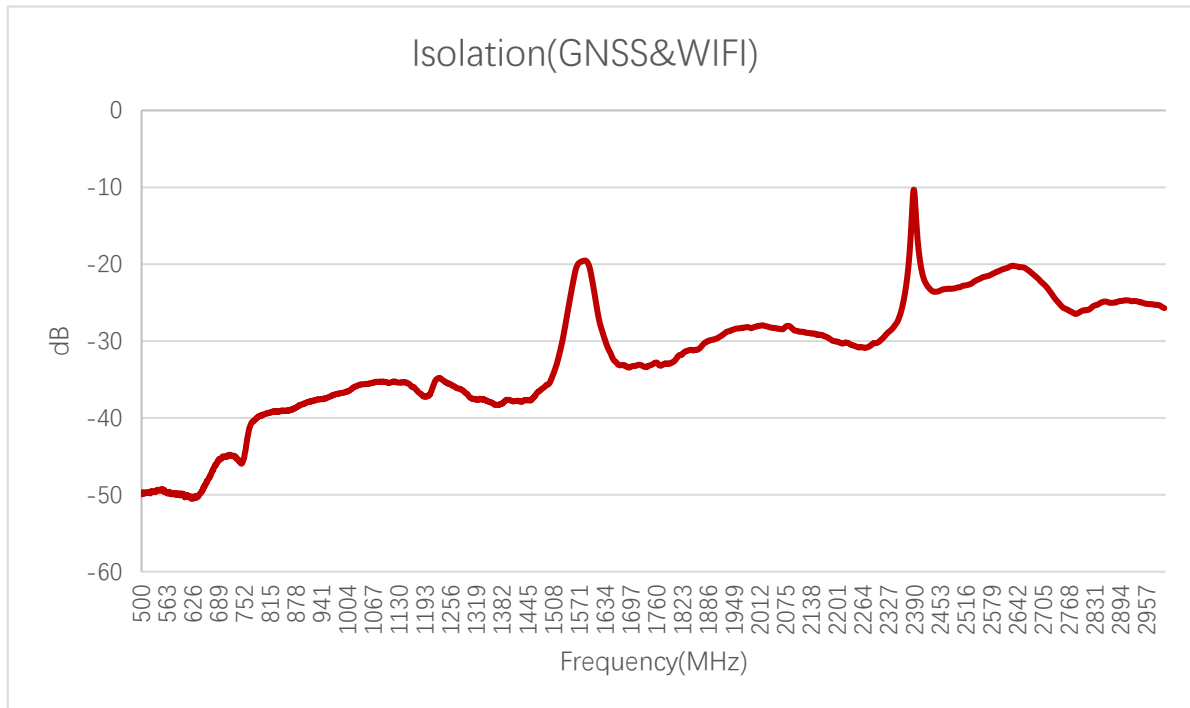

Max Isolation (dB) - GNSS & Wi-Fi

Band	B71	B12/ B13/ B28	B5/ B8/ B26	n74/ n75/ n76	B1/ B2/ B3	B40	Wi-Fi 2G	B38/ B41	Wi-Fi 5G	BEIDOU B1I	GPS L1	GLONASS G1
Freq. (MHz)	600– 700	700– 810	820– 960	1420– 1520	1700–2170	2300– 2400	2400– 2500	2500–2690	5150– 5850	1559– 1564	1565– 1586	1595–1606
Isolation (dB)	-	-	-	-	-	-	-	-	-	-20.7	-19.6	-22.3


3.1.4. GNSS LNA Gain

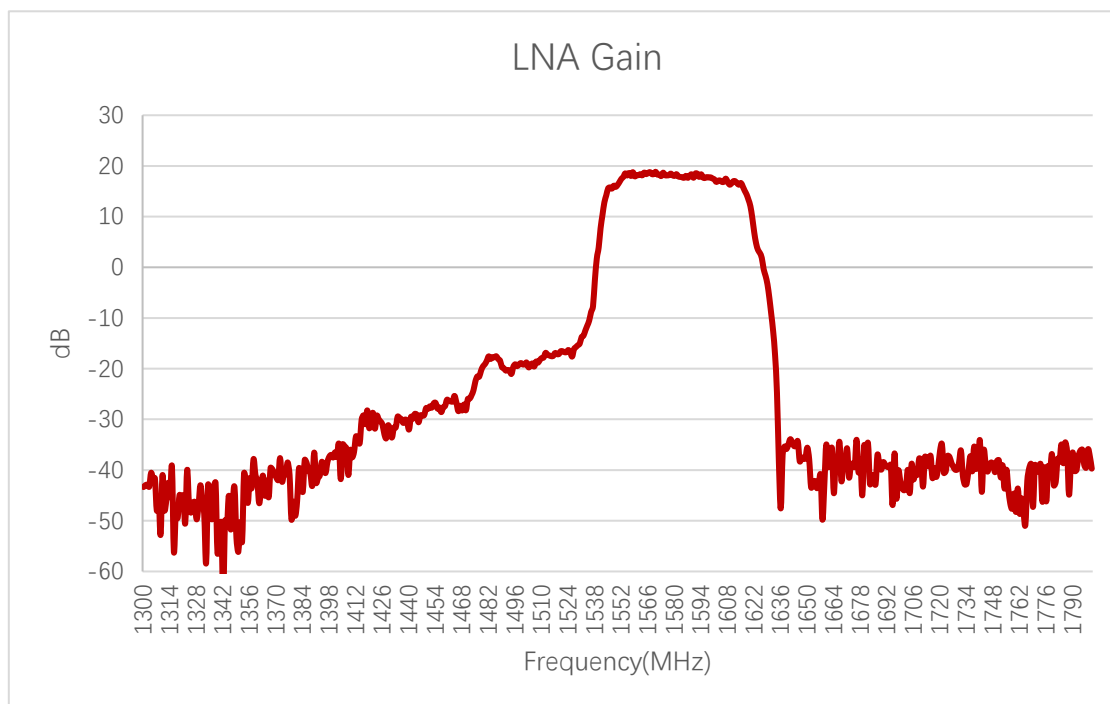

LNA Gain (dB)

Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
LNA Gain (dB)	-	-	-	-	-	18.1	18.1	16.8

3.1.5. GNSS Noise Figure

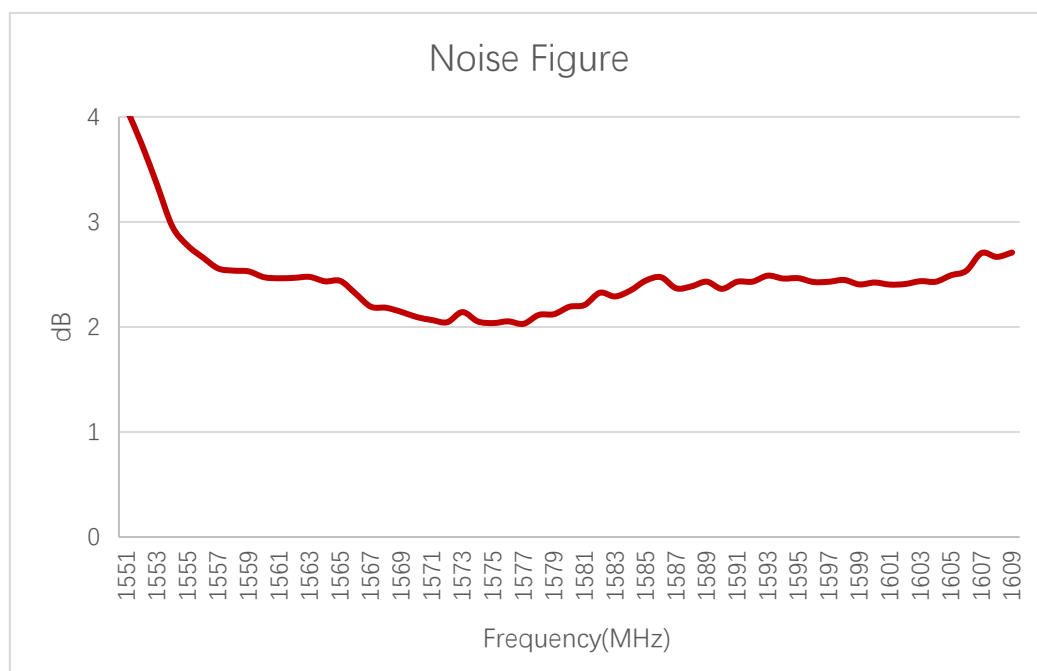


Noise Figure (dB)

Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
Noise Figure (dB)	-	-				2.46	2.03	2.4


3.2. Radiation Performance Test

3.2.1. Efficiency

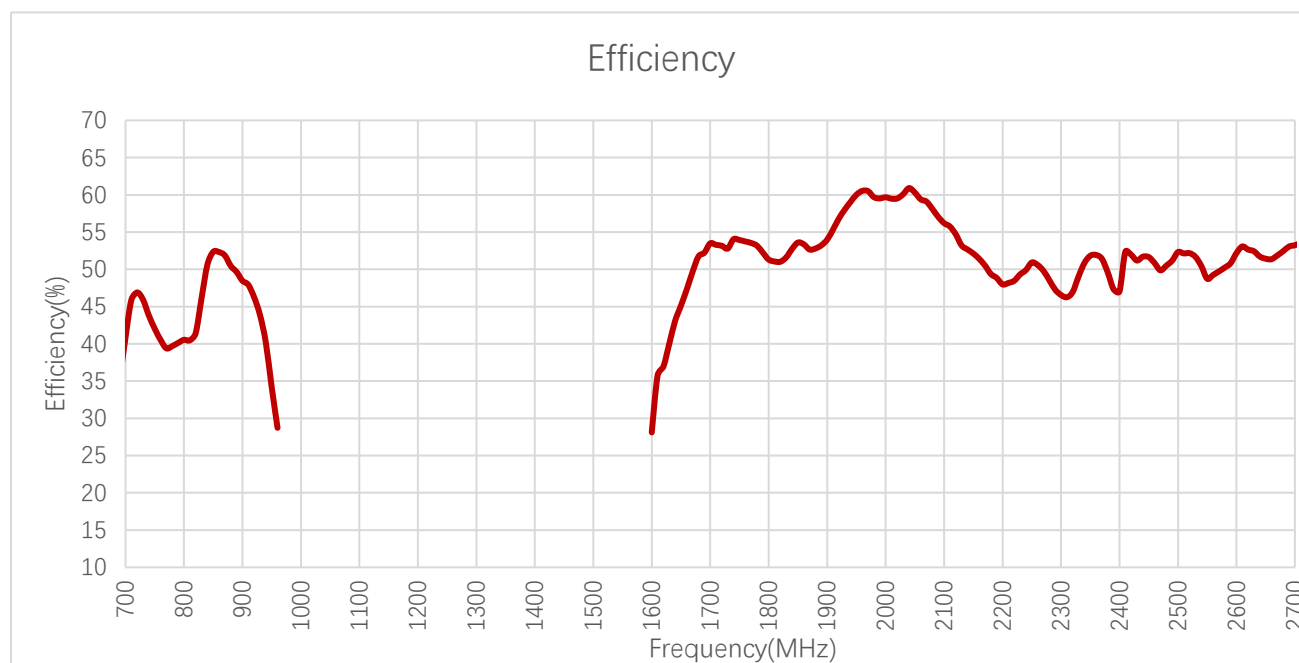


Efficiency (%) - 4G

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
Efficiency (%)	-	-	45.9	46.1	48.5	28.7	-	53.3	54.1	52.8
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
Efficiency (%)	60.0	52.7	51.8	51.7	52.2	53.1	-	-	-	-

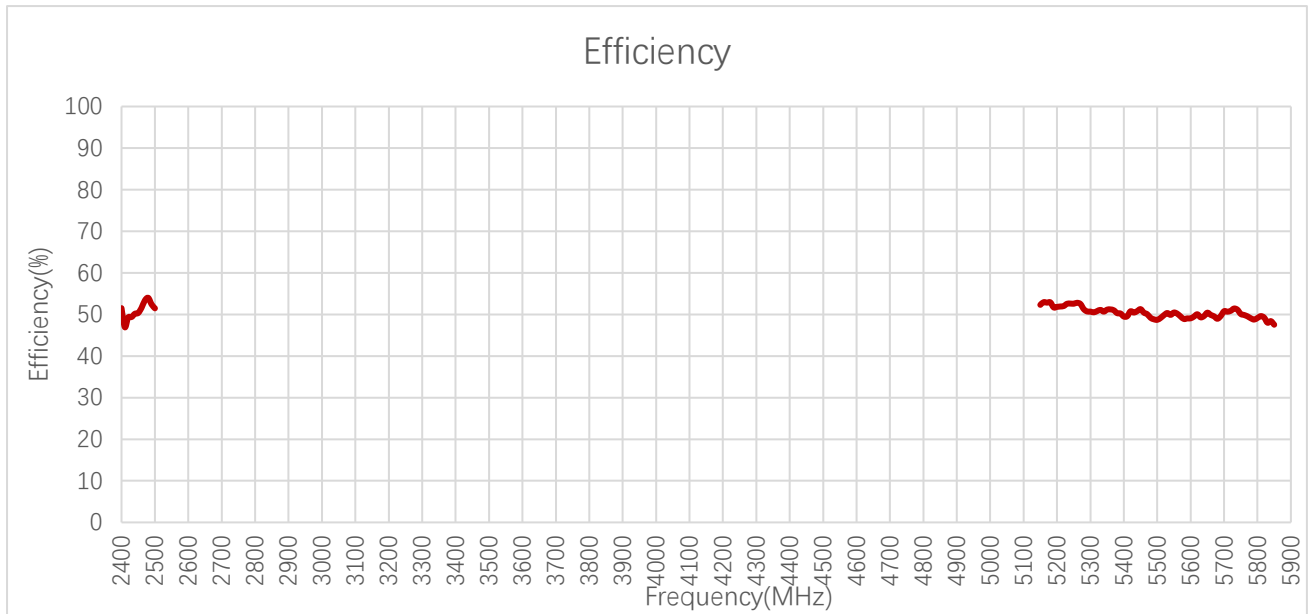

Efficiency (%) - Wi-Fi


Frequency (MHz)	2400	2450	2500	5150	5500	5850	5925	6325	6725	7125
Efficiency (%)	51.5	50.4	51.5	52.3	48.7	47.5	-	-	-	-

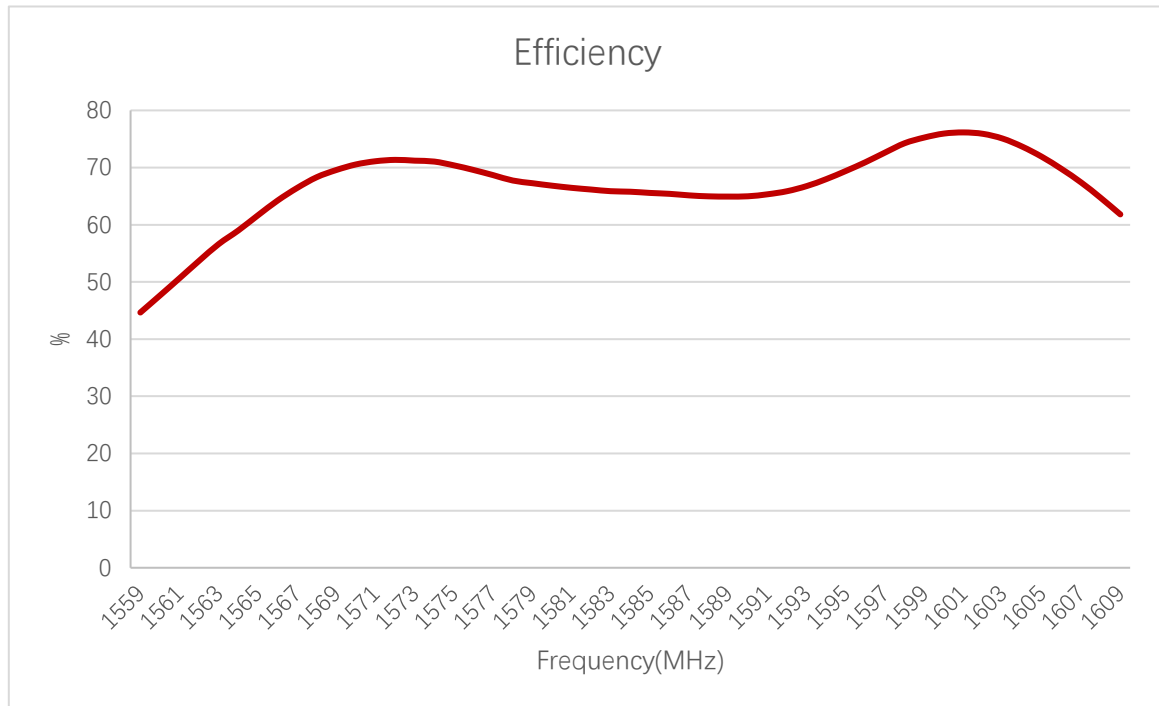

Efficiency (%) - GNSS


Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
Efficiency	-	-	-	-	-	50.6	70	75.9

3.2.2. Average Gain

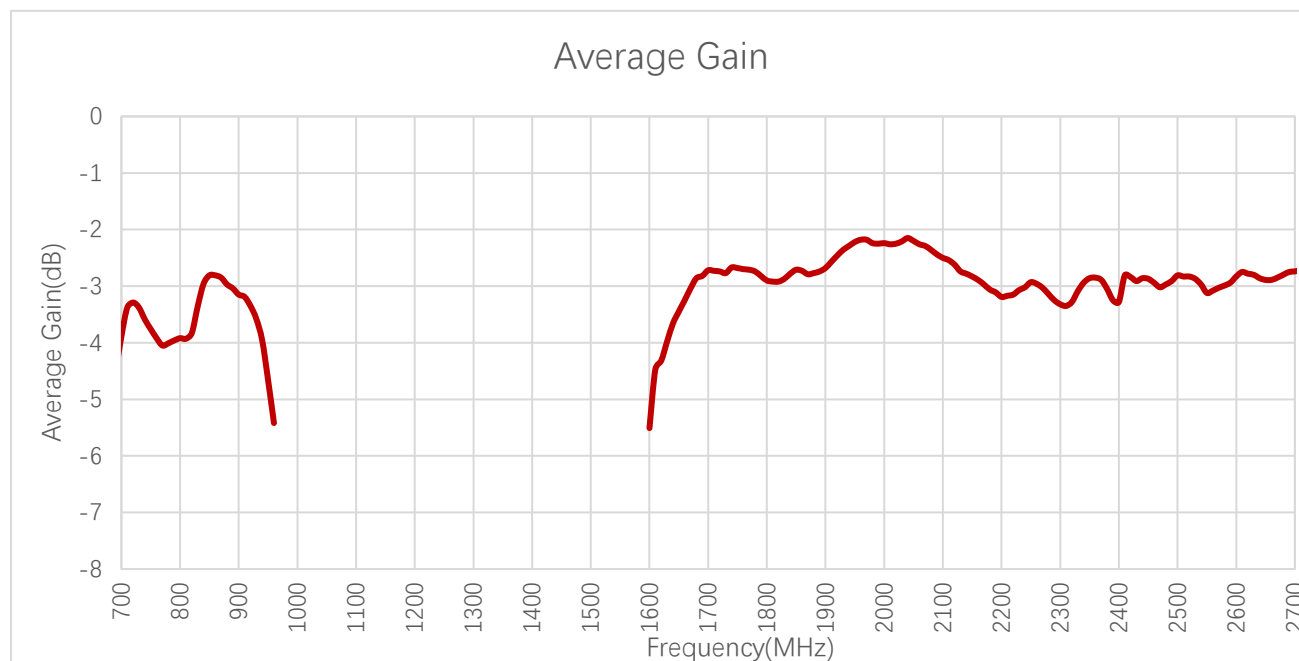

Average Gain (dB) - 4G


Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
Average Gain (dB)	-	-	-3.4	-3.4	-3.2	-5.4	-	-2.7	-2.7	-2.8
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
Average Gain (dB)	-2.2	-2.8	-2.9	-2.9	-2.8	-2.8	-	-	-	-

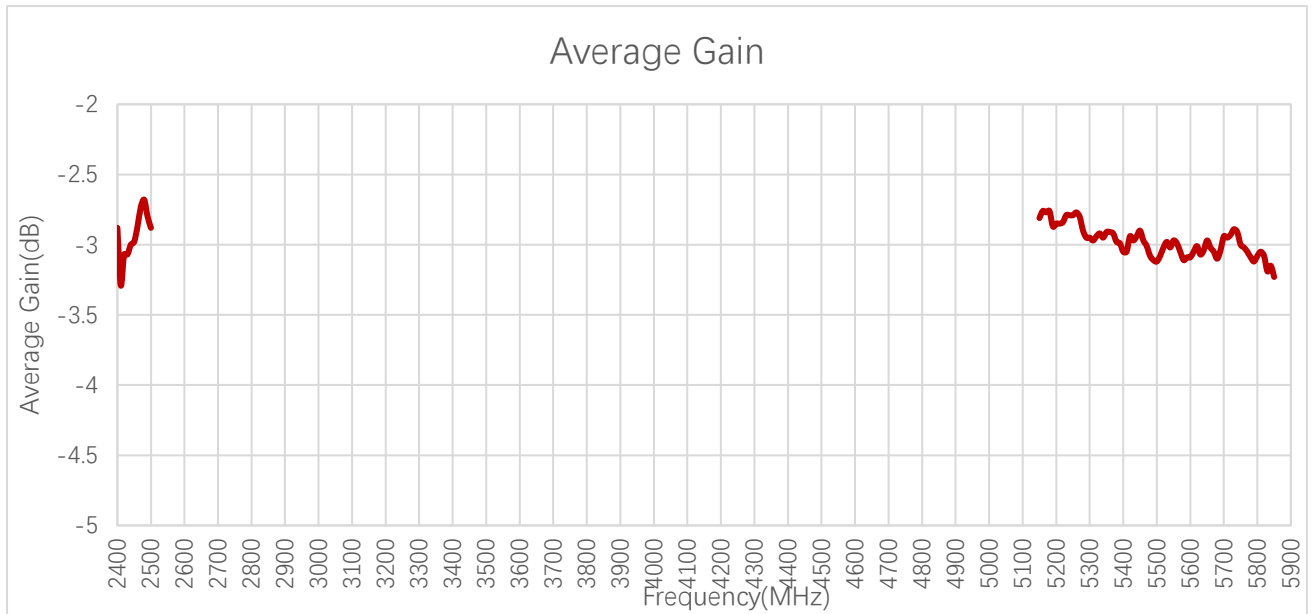

Average Gain (dB) - Wi-Fi


Frequency (MHz)	2400	2450	2500	5150	5500	5850	5925	6325	6725	7125
Average Gain (dB)	-2.9	-3.0	-2.9	-2.8	-3.1	-3.2	-	-	-	-

3.2.3. Peak Gain

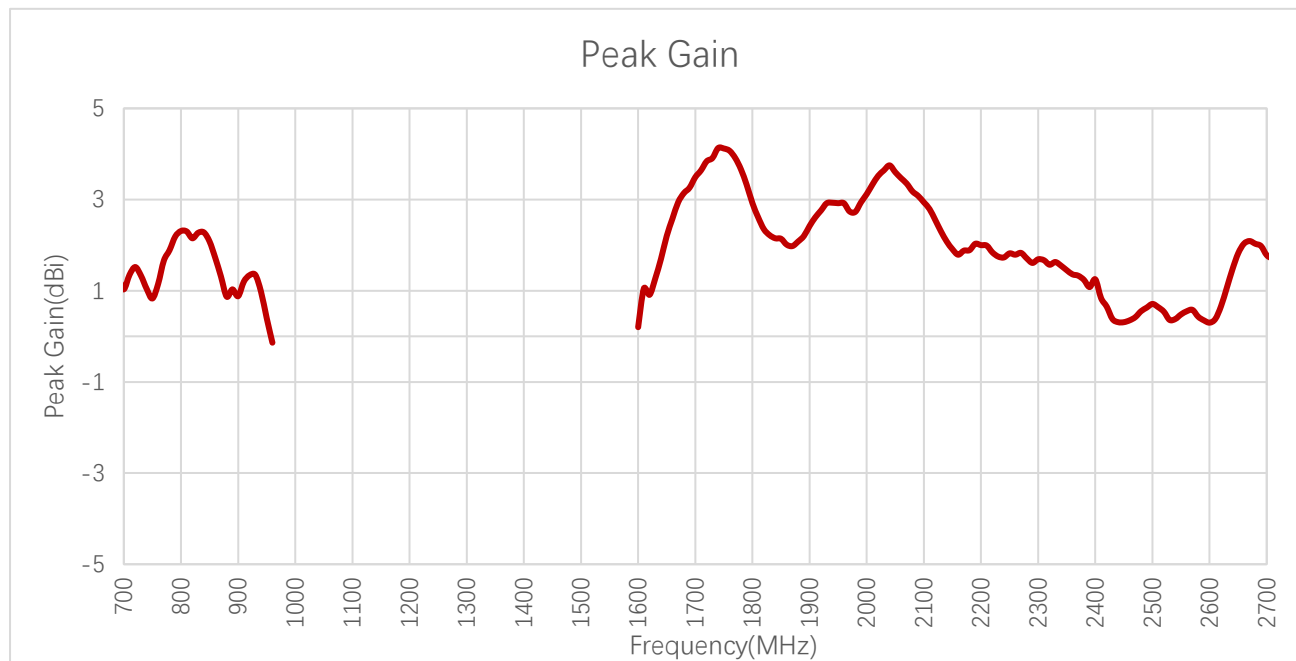


Peak Gain (dBi) - 4G

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
Peak Gain (dBi)	-	-	1.4	2.3	0.9	-0.1	-	3.6	4.1	2.1
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
Peak Gain (dBi)	2.9	2.1	1.5	0.3	0.3	2.0	-	-	-	-

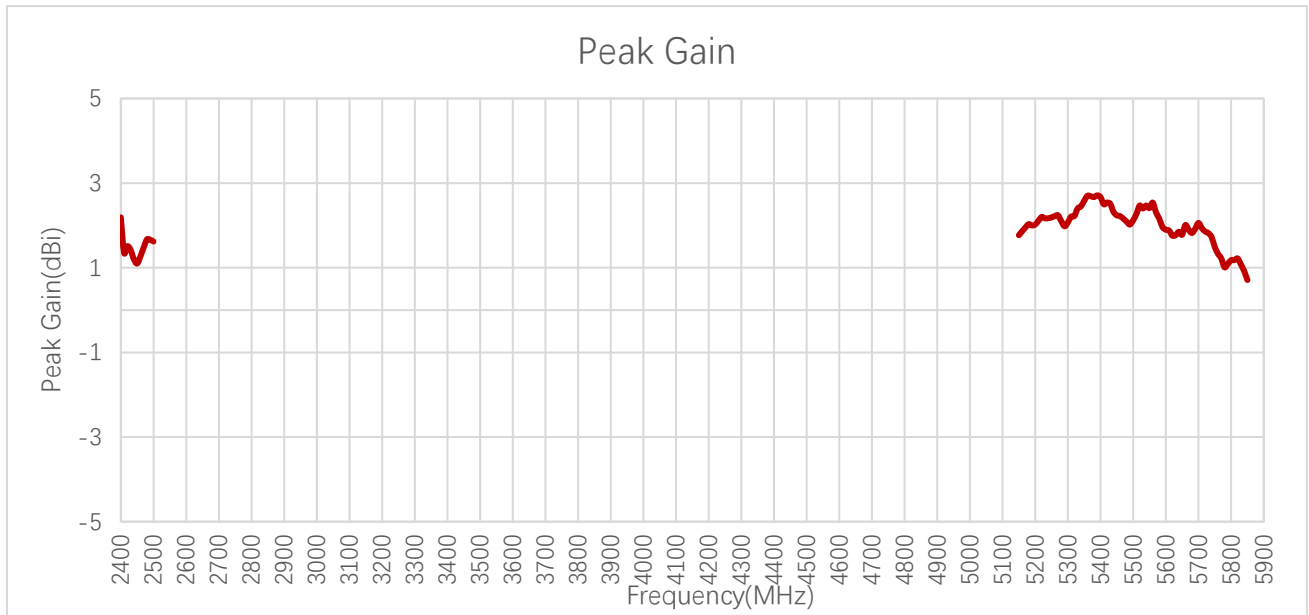

Peak Gain (dB) - Wi-Fi

Frequency (MHz)	2400	2450	2500	5150	5500	5850	5925	6325	6725	7125
Peak Gain (dB)	2.2	1.1	1.6	1.8	2.1	0.7	-	-	-	-

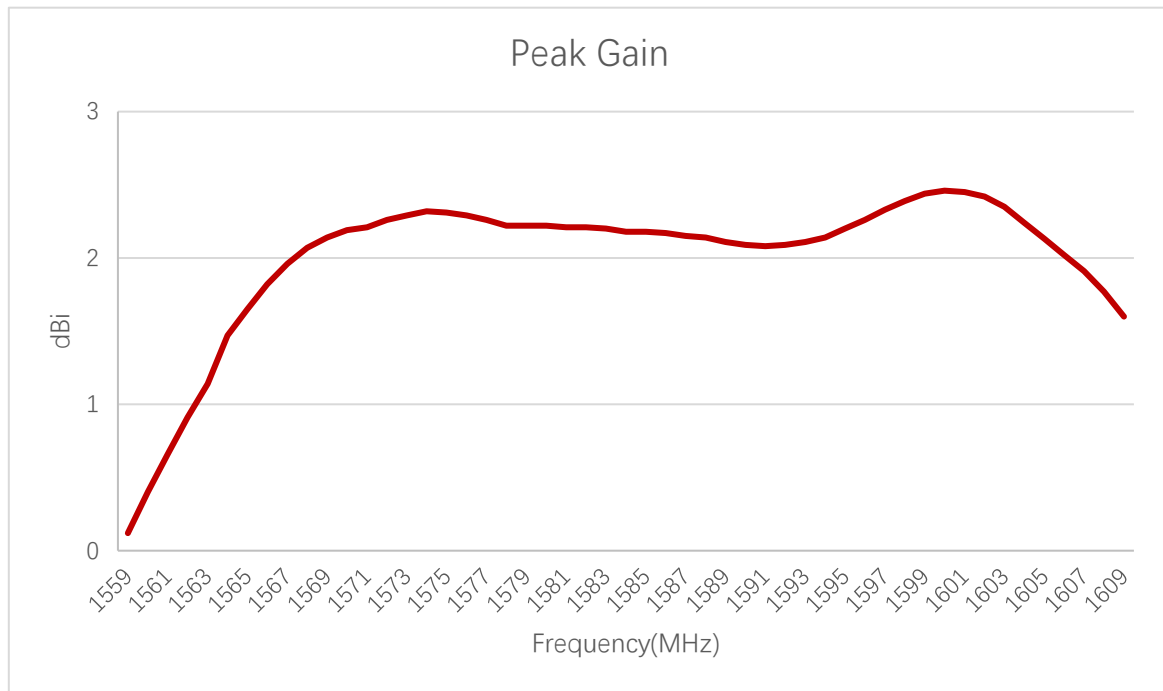


Peak Gain (dBi) - GNSS

Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
Peak Gain (dBi)	-	-	-	-	-	0.66	2.31	2.42



3.2.4. 3D & 2D Radiation Pattern

- Test Chamber: SH-SY-16M (GNSS)
- Test Chamber: HF-G-1 (4G + Wi-Fi)
- Test Condition: In Free Space






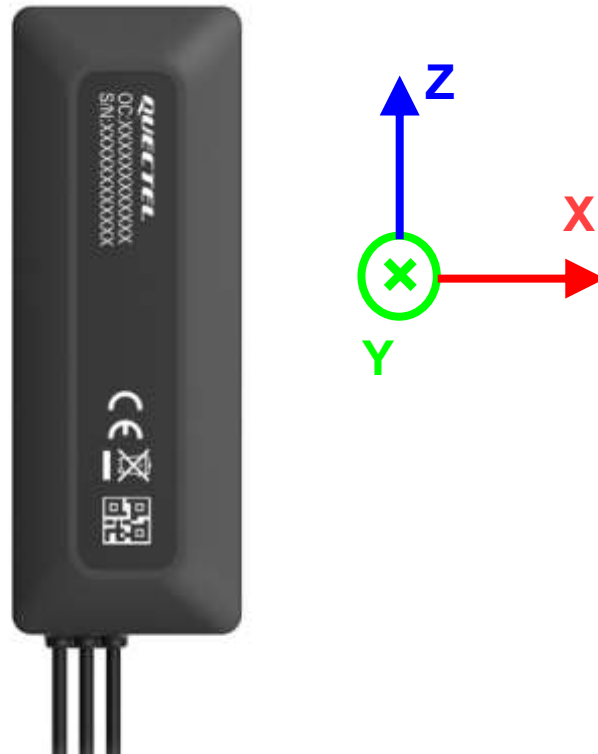


● 4G









710 MHz









830 MHz





900 MHz




1740 MHz




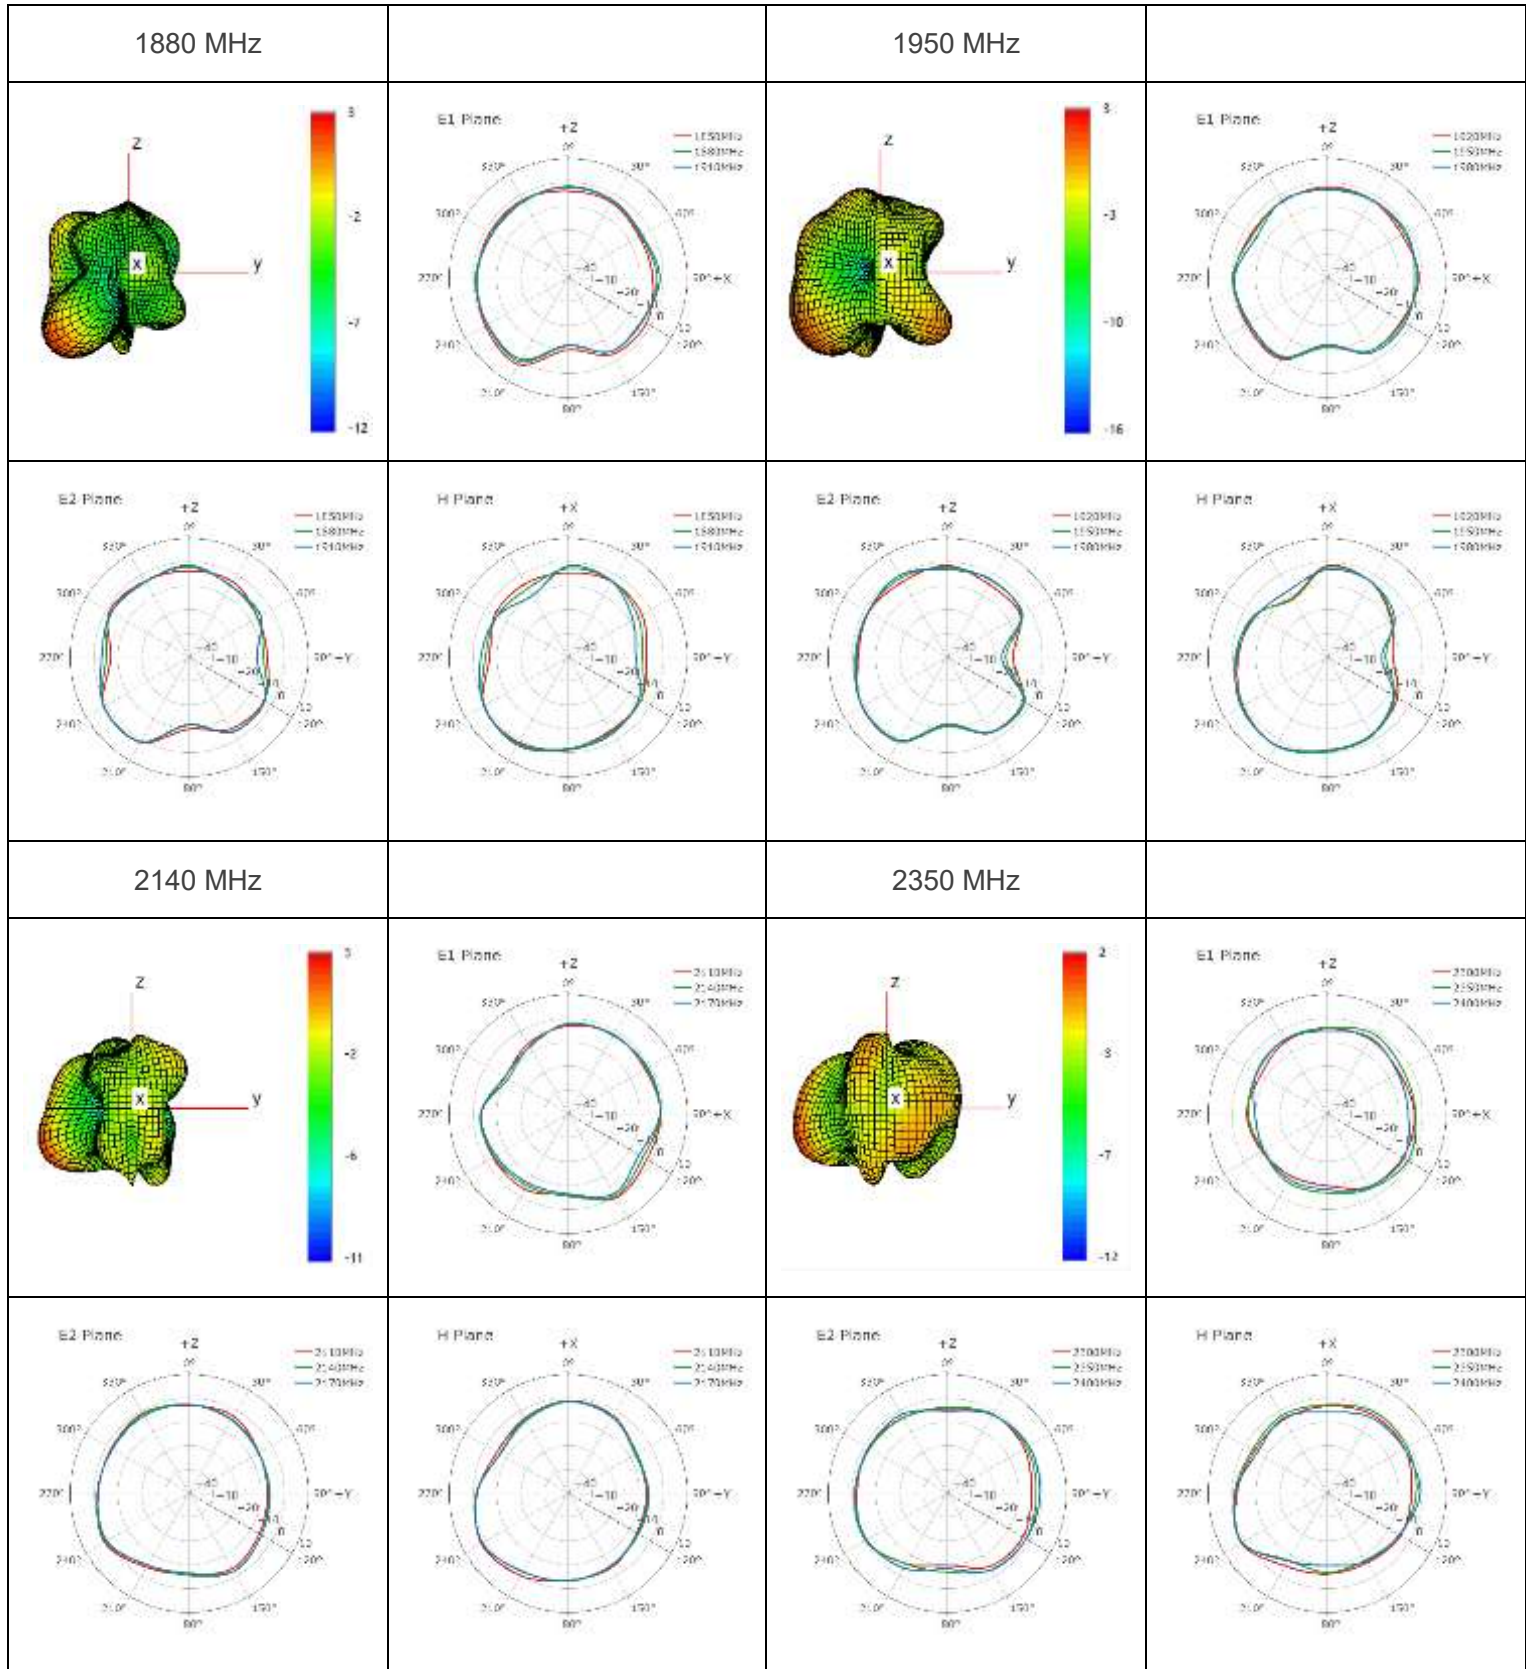

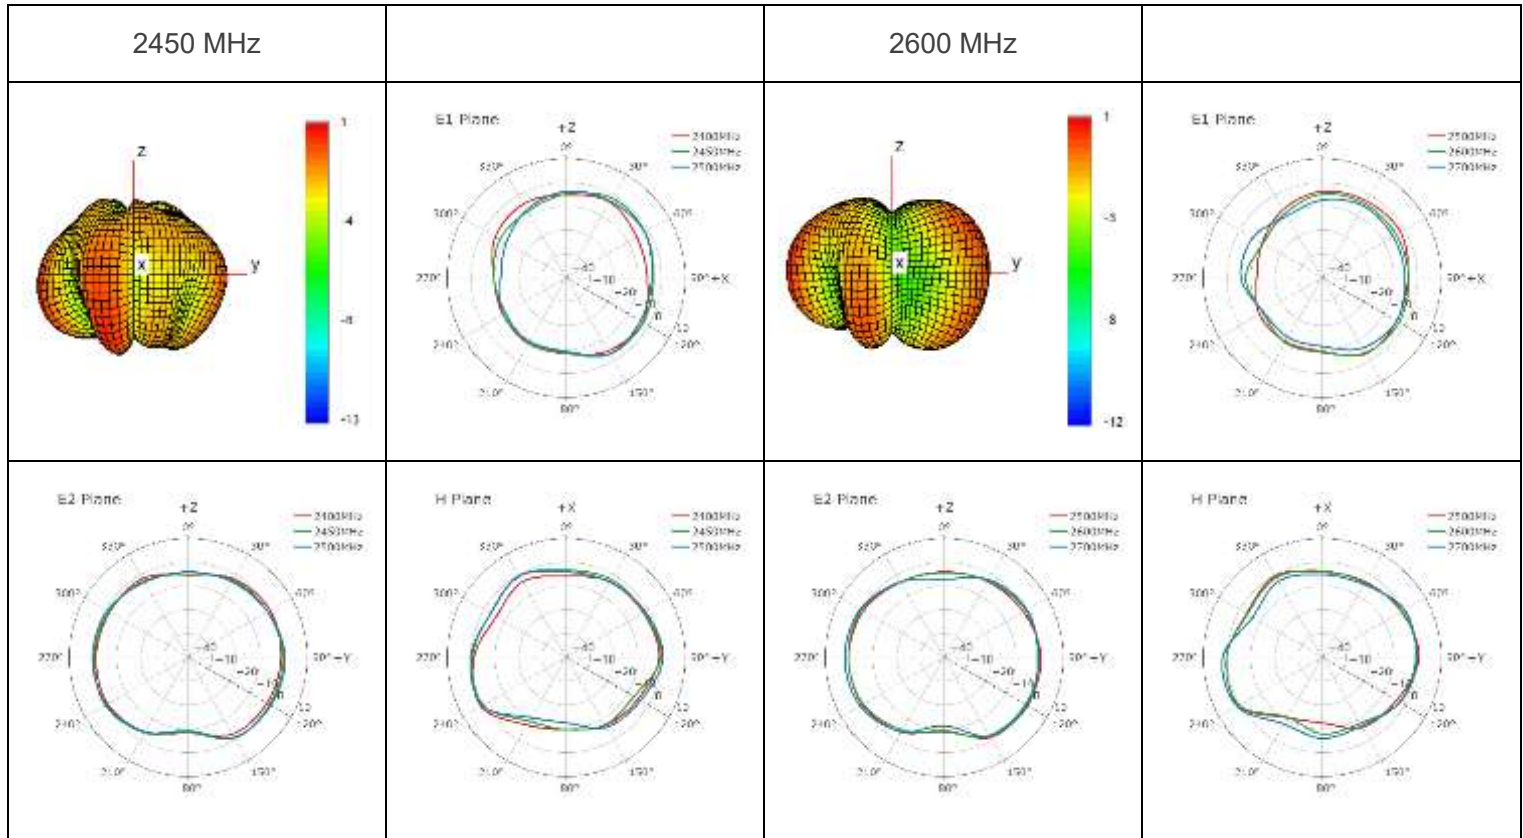


● **Wi-Fi**

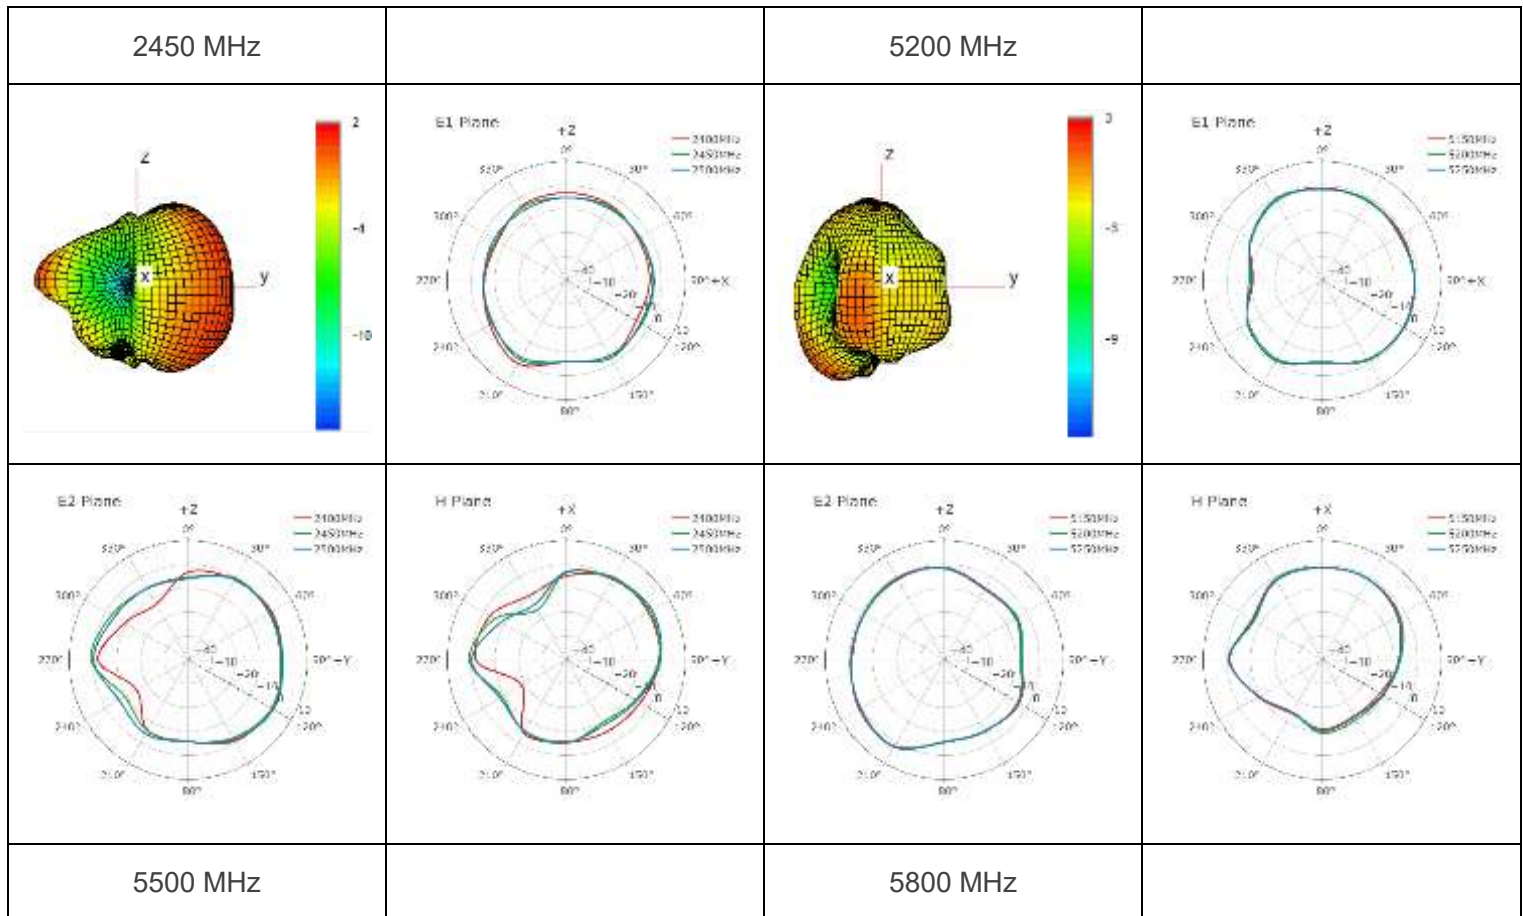

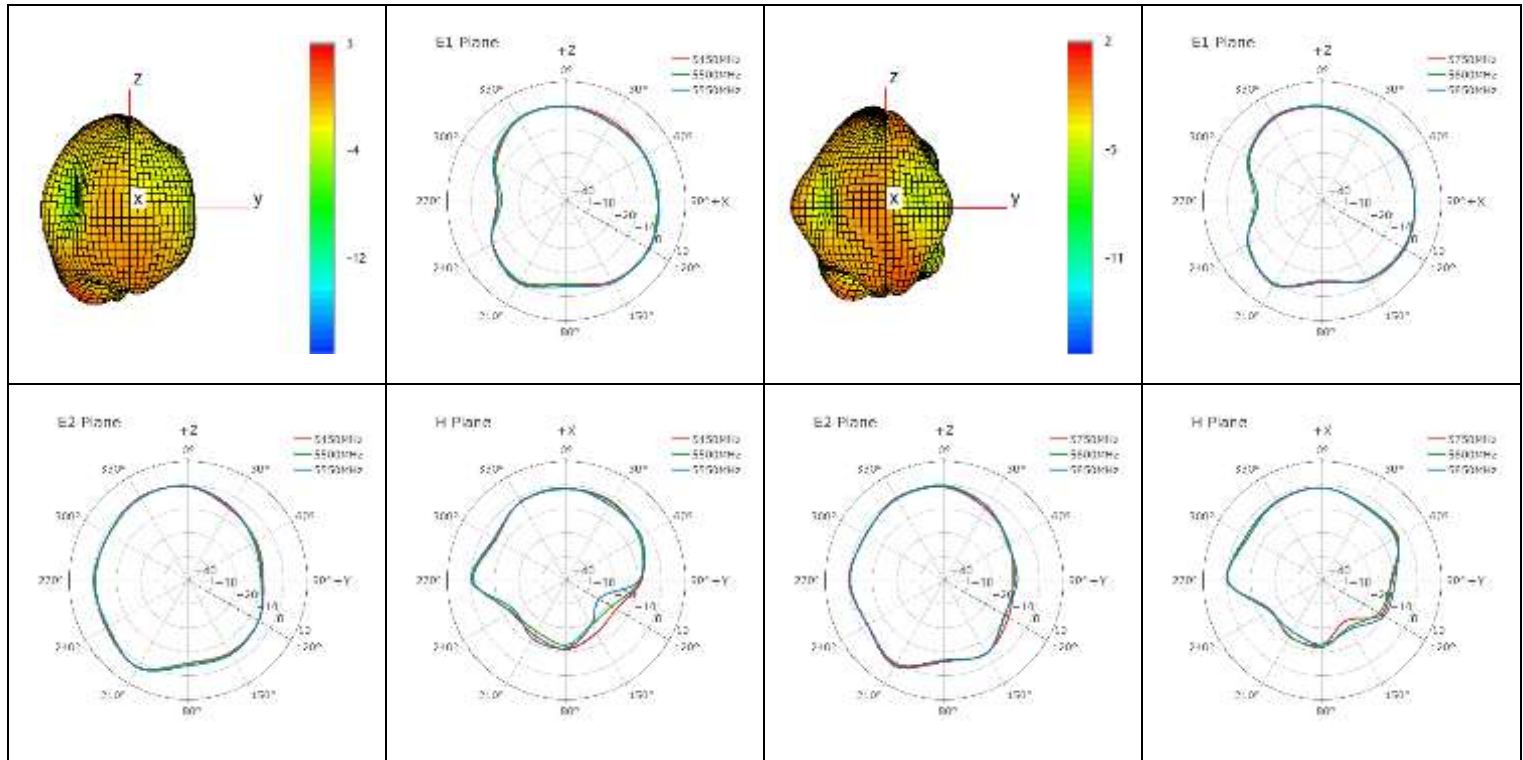


● GNSS


1561 MHz

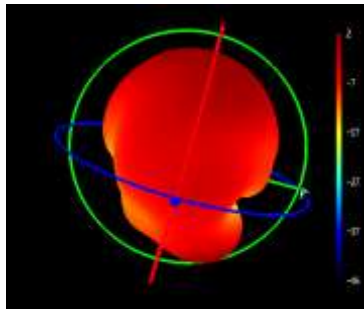


Phi=0 freq=1561MHz

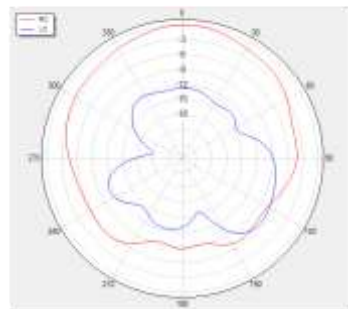


1575 MHz

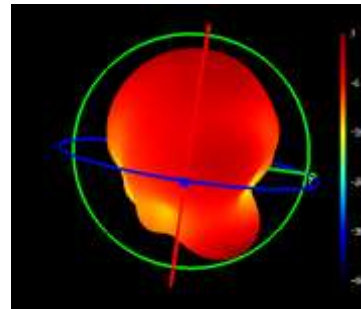


Phi=0 freq=1575MHz

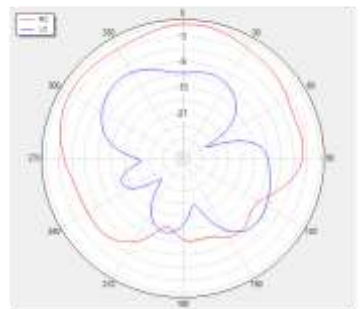


Phi=90 freq=1561MHz

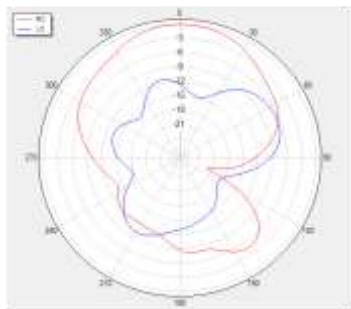


Theta=90 freq=1561MHz

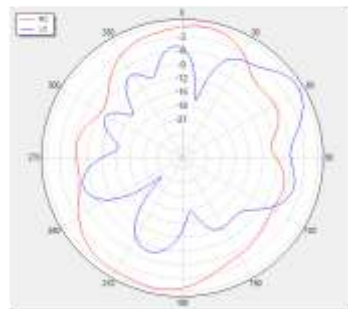


Phi=90 freq=1575MHz

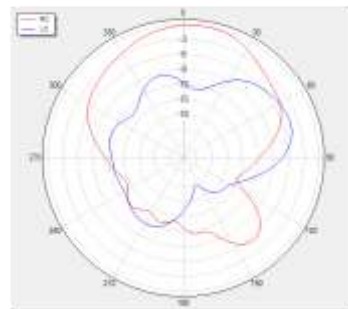


Theta=90 freq=1575MHz

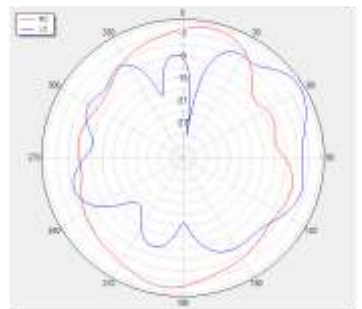


1602 MHz

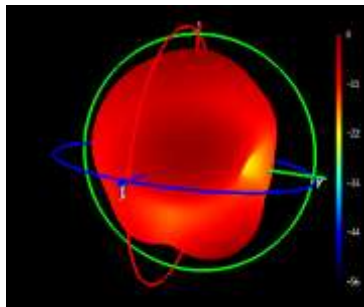


Phi=0 freq=1602MHz

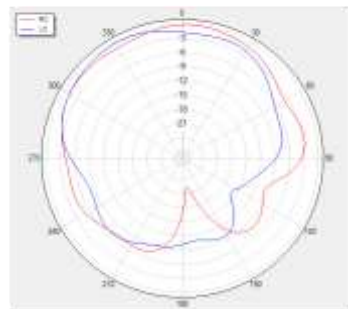

Phi=90 freq=1602MHz


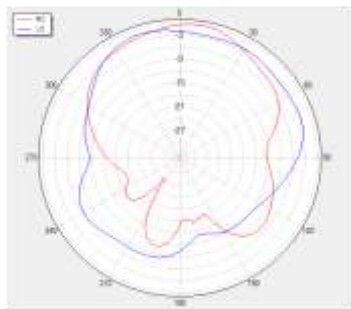


Theta=90 freq=1602MHz

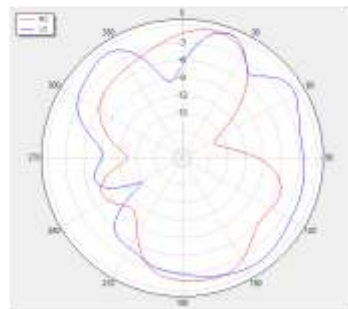

4 Packaging

Step	Packaging Picture / 2D Picture	Description
1		The product is wrapped in a bubble bag and placed in a ziplock bag. (1 PC / Small PE Bag)
2		8 pcs small PE bags are put into a big PE bag. (8 PCS / Big PE Bag)
3	 	Put the bubble bag on the top of the product. (5 Big PE Bags / Carton Box) (40 PCS / Carton Box) <u>Carton Size:</u> <u>L × W × H = 405 × 293 × 185 mm</u>

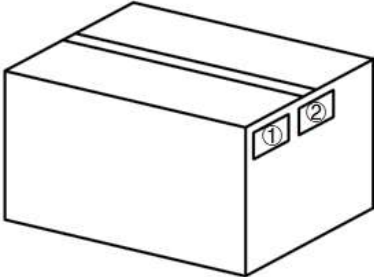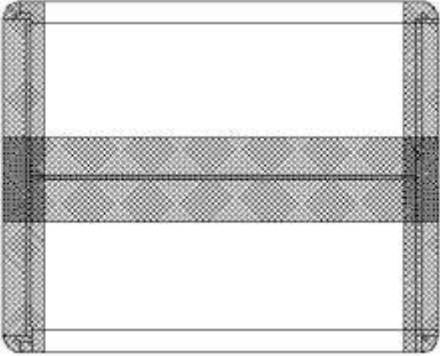4		Position for Attaching Labels ① Carton Label ② Quality Label
5		Sealing Cartons “工” type sealing cartons

Contact Us

At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

Tel: +86 21 5108 6236

Email: info@quectel.com

Or our local offices. For more information, please visit:

<http://www.quectel.com/support/sales.htm>.

For technical support, or to report documentation errors, please visit:

<http://www.quectel.com/support/technical.htm>.

Or email us at: support@quectel.com.

Legal Notices

We offer information as a service to you. The provided information is based on your requirements and we make every effort to ensure its quality. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. We may revise or restate this document from time to time at our sole discretion without any prior notice to you.

Use and Disclosure Restrictions

License Agreements

Documents and information provided by us shall be kept confidential, unless specific permission is granted. They shall not be accessed or used for any purpose except as expressly provided herein.

Copyright

Our and third-party products hereunder may contain copyrighted material. Such copyrighted material shall not be copied, reproduced, distributed, merged, published, translated, or modified without prior written consent. We and the third party have exclusive rights over copyrighted material. No license shall be granted or conveyed under any patents, copyrights, trademarks, or service mark rights. To avoid ambiguities, purchasing in any form cannot be deemed as granting a license other than the normal non-exclusive, royalty-free license to use the material. We reserve the right to take legal action for noncompliance with abovementioned requirements, unauthorized use, or other illegal or malicious use of the material.

Trademarks

Except as otherwise set forth herein, nothing in this document shall be construed as conferring any rights to use any trademark, trade name or name, abbreviation, or counterfeit product thereof owned by Quectel or any third party in advertising, publicity, or other aspects.

Third-Party Rights

This document may refer to hardware, software and/or documentation owned by one or more third parties (“third-party materials”). Use of such third-party materials shall be governed by all restrictions and obligations applicable thereto.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing or usage of trade.

Privacy Policy

To implement module functionality, certain device data are uploaded to Quectel's or third-party's servers, including carriers, chipset suppliers or customer-designated servers. Quectel, strictly abiding by the relevant laws and regulations, shall retain, use, disclose or otherwise process relevant data for the purpose of performing the service only or as permitted by applicable laws. Before data interaction with third parties, please be informed of their privacy and data security policy.

Disclaimer

- a) We acknowledge no liability for any injury or damage arising from the reliance upon the information.
- b) We shall bear no liability resulting from any inaccuracies or omissions, or from the use of the information contained herein.
- c) While we have made every effort to ensure that the functions and features under development are free from errors, it is possible that they could contain errors, inaccuracies, and omissions. Unless otherwise provided by valid agreement, we make no warranties of any kind, either implied or express, and exclude all liability for any loss or damage suffered in connection with the use of features and functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage may have been foreseeable.
- d) We are not responsible for the accessibility, safety, accuracy, availability, legality, or completeness of information, advertising, commercial offers, products, services, and materials on third-party websites and third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2023. All rights reserved.

Revision History

Version	Date	Author	Note
-	2023-10-19	Junsen LI/ Christopher YAO/ Rojin LUO/ David LIU/ Aria CHU	Creation of the document
1.0	2023-10-19	Junsen LI/ Christopher YAO/ Rojin LUO/ David LIU/ Aria CHU	First official release
1.1	2023-11-29	Rojin LUO	Updated connector type (Chapter 1.2).



www.quectel.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Quectel:](#)

[YEMA300QXA](#)