


# Quectel BG77

## Ultra-Compact

## LTE Cat M1/Cat NB2 Module

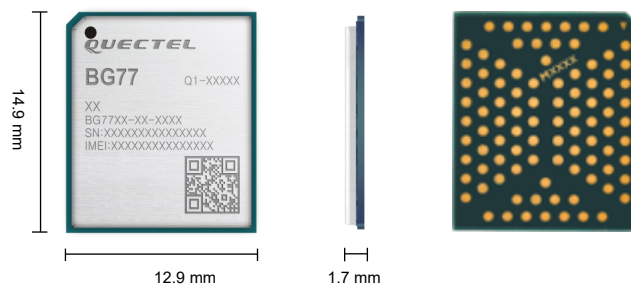

BG77 is an ultra-compact LPWA module supporting LTE Cat M1, LTE Cat NB2 and integrated GNSS. It is fully compliant with 3GPP Rel-14 specification and provides maximum data rates of 588 kbps downlink and 119 kbps uplink. It features ultra-low power consumption by leveraging the integrated RAM/flash as well as the ARM Cortex A7 processor supporting ThreadX, achieving up to 70% reduction in PSM leakage and 85% reduction in eDRX current consumption compared to its predecessor.

BG77 boasts a comprehensive set of hardware-based security features and enables trusted applications to run directly on the Cortex A7 TrustZone engine. With an ultra-compact SMT form factor of 14.9 mm × 12.9 mm × 1.7 mm and high integration level, it enables integrators and developers to easily design their applications and take advantage from the module's low power consumption and mechanical intensity. Its advanced LGA package allows fully automated manufacturing for high-volume applications.

A rich set of Internet protocols, industry-standard interfaces and abundant functionalities extend the applicability of the module to a wide range of M2M applications such as wireless POS, smart metering, tracking, wearable devices, etc.



## Key Features

- ✓ Extremely compact LTE Cat M1/Cat NB2 module with ultra-low power consumption
- ✓ Integrated RAM and flash in baseband chipset
- ✓ Comprehensive set of hardware-based security features
- ✓ Super slim profile in LGA package
- ✓ Support VoLTE\* (Cat M1 only), QuecOpen®, DFOTA, etc.
- ✓ Fast time-to-market: reference designs, evaluation tools and timely technical support minimize design-in time and development efforts
- ✓ Robust mounting and interfaces



LTE Cat M1 & Cat NB2



LGA Package



Super Compact Size



Embedded Abundant Protocols



DFOTA



USB 2.0 Interface



Ultra-low Power Consumption



Quectel Enhanced AT Commands



Integrated RAM/Flash in Chipset

# Quectel BG77

## Ultra-Compact LTE Cat M1/Cat NB2 Module

### Variant for the Global

#### BG77

##### Cat M1:

LTE-FDD: B1/B2/B3/B4/B5/B8/B12/B13/B18/  
B19/B20/B25/B26/B27/B28/B66/B85\*

##### Cat NB2:

LTE-FDD: B1/B2/B3/B4/B5/B8/B12/B13/B18/  
B19/B20/B25/B28/B66/B71/B85\*

### Data

##### Cat M1:

Max. 588 kbps (DL)/ 1119 kbps (UL)

##### Cat NB2:

Max. 127 kbps (DL)/ 158.5 kbps (UL)

##### Cat NB1:

Max. 32 kbps (DL)/ 70 kbps (DL)

### Voice\*

VoLTE (For Cat M1 Only)

### SMS

Point-to-point MO and MT

SMS Cell Broadcast

Text and PDU Mode

### Interfaces

USB 2.0 × 1

UART × 3

PCM\* × 1 (For VoLTE Only)

I2C\* × 1 (For VoLTE Only)

ADC × 2

(U)SIM × 1

GPIO × 7

GRFC × 2

NET\_STATUS × 1 (For Network Status Indication)

STATUS × 1 (For Power ON/OFF Indication)

Antenna × 2 (For LTE & GNSS Antennas)

### Enhanced Features

#### GNSS:

GPS/GLONASS/BeiDou/Galileo/QZSS

#### Firmware Upgrade:

via USB interface

#### DFOTA:

Delta Firmware Upgrade Over-the-Air

#### Processor:

ARM A7 Processor

#### QuecOpen®:

Simplify the Development of Embedded Applications

#### QuecLocator®:

Support Cell ID Positioning

### Electrical Characteristics

#### Output Power:

Max. Power: 21 dBm

#### Consumption @ LTE Cat M1 (Typical):

Power Saving Mode: 3.2  $\mu$ A

Sleep Mode: 1.61 mA @ DRX = 1.28 s

0.61 mA @ e-I-DRX = 81.92 s

Idle Mode: 19.6 mA @ DRX = 1.28 s

19 mA @ e-I-DRX = 81.92 s

Active Mode: 228 mA @ 21dBm, GNSS off

#### Consumption @ LTE Cat NB1 (Typical):

Power Saving Mode: 3.2  $\mu$ A

Sleep State: 1.54 mA @ DRX = 1.28 s

0.66 mA @ e-I-DRX = 81.92 s

Idle State: 15.8 mA @ DRX = 1.28 s

15.3 mA @ e-I-DRX = 81.92 s

Active Mode: 165 mA @ 21dBm, GNSS off

### Software Features

#### USB Serial Driver:

Windows 7/8/8.1/10,

Linux 2.6–5.4\*,

Android 4.x–10.x\*

#### GNSS/RIL Driver:

Android 4.x–10.x\*

#### Protocols:

PPP/TCP/UDP/SSL/TLS/FTP(S)/HTTP(S)/NITZ/

PING/MQTT/LwM2M/CoAP/IPv6

### General Features

LGA Package

3GPP E-UTRA Release 14

Supply Voltage<sup>①</sup>: 2.6–4.8 V, Typ. 3.3 V

Operating Temperature Range: -35 °C to +75 °C

Extended Temperature Range: -40 °C to +85 °C

Dimensions: 14.9 mm × 12.9 mm × 1.7 mm

3GPP TS27.007, 3GPP TS 27.005 and Quectel

Enhanced AT Commands

### Approvals

#### Carrier:

Vodafone\*/Deutsche Telekom\* (Europe)

Verizon/ AT&T/ Sprint/T-Mobile\* (America)

China Telecom\*/China Mobile\*/China Unicom\*  
(China)

#### Regulatory:

GCF (Global)

CE (Europe)

PTCRB (North America)

FCC (America)

IC (Canada)

SRRC\*/NAL\*/CCC\* (China)

KC\* (South Korea)

NCC\* (Taiwan, China)

JATE/TELEC (Japan)

RCM (Australia/New Zealand)

NBTC\* (Thailand)

#### Others:

RoHS

\* means development/on-going/planning.

① please refer to the hardware design manual for more specific requirements on the minimum power supply voltage.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Quectel:

[BG77LATEA-64-SGNS](#)