

LED Driver

EUCO ARENA SPORT Series



EUCO ARENA SPORT

Highlights & Features

- Dimmable built-in constant current 2-channel LED Driver with DALI 2 or DMX / RDM control interface
- Each channel independently programmable with output channels max output power of 500W (1000W total)
- Adjustable output current between 500mA to 1400 mA for each channel via I-programming tool
- Very low pk-pk current ripple to 1% for stadium lighting
- Dimming range 0.1% to 100 %
- Max remote distance 200 meters
- In compliance with Erp (EU) 2019/2020
- Constant Light Output (CLO) function
- Autonomous dimming via Midnight Centric Timer

Safety Standards



Model Number: EUCO-□□□140G□A
Unit Weight: 5.4kg
Dimensions (L x W x H): 500x152x77 mm

General Description

Delta EUCO ARENA SPORT series with DALI 2 / RDM / DMX control function are constant current non-isolated LED drivers. Compatible with wide input voltage range 220~400Vac for diverse applications from any system manufacturer in EU market's indoor and outdoor application. With IP66 ingress protection and wide operating temperature range from -40°C to +50°, the driver can fulfill any harsh condition. The extremely low output current ripple makes the driver a typical application for outdoor stadium lighting.

Model Information

| Model Number | Input Voltage Range | Rated Output Power | Output Current Channel | Control Interface |
|----------------|---------------------|--------------------|------------------------|-------------------|
| EUCO-1K0140GLA | 220/400Vac Typical | 1000W | 2 | DALI 2 |
| EUCO-1K0140GDA | 198~440Vac Range | 1000W | 2* | RDM/DMX |

*Default setting is a single address. Optionally, user could be able to assign a dedicated DMX address per each channel via GUI programming tool.

Model Numbering

| EU | C | O | 1K0 | □□□ | G | □ | A |
|--------|------------------|---------|------------------------|---------------------------|---------------|-------------------------------------|--------------------------|
| Europe | Constant Current | Outdoor | Output power 1K0:1000W | Output Current 140:1400mA | i-Programming | Function L: DALI 2 D: RDM/DMX | Variable A - Standard |

LED Driver

EUCO ARENA SPORT Series

Specifications

| Model Number | EUCO-1K0140GLA | EUCO-1K0140GDA |
|--------------|----------------|----------------|
|--------------|----------------|----------------|

Input Ratings / Characteristics

| | | |
|---------------------------------|--|-------|
| Normal Input Voltage | 220/400Vac | |
| Input Voltage Range | 198-440Vac | |
| Normal Input Frequency | 50/60 Hz | |
| Input Frequency Range | 47-63 Hz | |
| Normal Input Current | 220Vac | 4.8A |
| | 400Vac | 2.7A |
| Efficiency ¹ Typical | 220Vac | 95.2% |
| | 400Vac | 96% |
| Standby Power Consumption | <0.5W at 230Vac, in compliance with Erp (EU) 2019/2020 | |
| Inrush Current (Apk / 50%-us) | <=25 A, pulse width<8mS @400Vac | |
| Power Factor | > 0.95 @ 198-440Vac, full load | |
| Total Harmonic Distortion | <20% @ 198-440Vac, full load | |
| Leakage Current | < 1mA @400Vac | |

1. 100% Load (Typ) and tested after 30 minutes warming up.

Output Ratings / Characteristics

| | |
|---------------------------------------|--|
| Factory default output current | 1400mA |
| Output Current Programmable Range | 500-1400mA, refer to Appendix 1. |
| Typical Output Voltage | 360Vdc |
| Output Voltage Range | 260-500Vdc |
| Max. No Load Output Voltage | 600Vdc |
| Max Output Power Range | 500W per channel, 1.0kW total |
| Output Current Tolerance ² | ±3% |
| Line Regulation | ±1% |
| Load Regulation | ±3% |
| Output Current Ripple ³ | 1% (Typ) , <2% (ripple = (pk-pk)/avg) |
| Max Output Remote Distance | 200m, ensure a total voltage drop on the cable of each channel within 5V |
| Turn on Delay Time | < 1s |
| Rise Time | < 2s |

2. Output Current Tolerance tested at 1400mA.

3. Output Current Ripple could be affected by the parasitic capacitance of LED fixture, more details are given in Appendix 8.

Dimming Control

| | | |
|-------------------|-----------|-----------|
| Control Interface | DALI 2 | RDM/DMX |
| Dimming Range | 0.1%-100% | 0.4%-100% |

LED Driver

EUCO ARENA SPORT Series

| Model Number | EUCO-1K0140GLA | EUCO-1K0140GDA |
|--------------|----------------|----------------|
|--------------|----------------|----------------|

Additional Dimming Features⁴


| | |
|--|--|
| Autonomous dimming middle of the night | 3 different configurable dimming profiles over the night are available for users to select and set in GUI. Details refer to GUI manual. |
| Constant lumen output(CLO) | CLO function is to compensate the ageing of the light source, and so to get constant Lumen Output over the lifetime of the product. It's available in GUI to set starting dimming level (for example 90%) and end of life of the product (for example 50,000hrs), so that the driver by counting its functioning hours can do a linear interpolation in between starting dimming level at t=0hrs, and go to 100% at t=end of life. Details refer to GUI manual. |

4. These are additional features and have been introduced in product since Sept. 2023.

Mechanical

| | | | |
|------------------------|--------------|---|------------------------------|
| Casing | | Aluminum case, Color : Dark Gray | |
| Dimensions (L x W x D) | | 500x152x77 mm | |
| Unit Weight | | 5.4 kg | |
| Cooling System | | Natural Convection | |
| INPUT | Wago 264-103 | With the sign of L, N, PE | |
| OUTPUT | Wago 264-111 | With the sign of PE, NTC, V3+ V3-, V2+, V2-, V1+, V1- | |
| DIMMING | | With the sign of DA+,DA- | With the sign of COM,D1+,D1- |

Environment
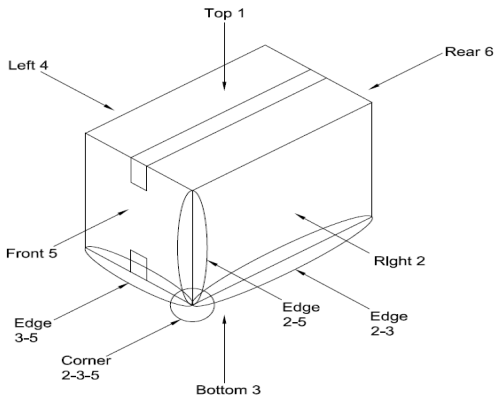
| | | |
|-----------------------------------|-----------|---|
| Ambient Temperature | Operating | -40 ~+50°C |
| | Storage | -40°C to +85°C |
| Maximum Case Temperature | | +75°C |
| Lifetime Case Temperature | | +70°C |
| Relative Humidity | Operating | 10 to 100% RH (Non-Condensing) |
| | Storage | 10 to 100% RH (Non-Condensing) |
| Audible Noise (30cm distance) | | Sound Pressure Level (SPL) < 24dBA |
| Ingress Protection classification | | IP66 |
| Impact Protection classification | | IK08 |
| Drop Test (Non-Operating) | | According to ASTM D-775, 40cm height drop to concrete floor as below drawing, total 10 times.  |
| Vibration (Non-Operating) | | IEC 60068-2-6, Random: 5 Hz to 10 Hz (1G); 30 min per axis for all X, Y, Z direction |
| Packing | | 1pcs per carton |

LED Driver

EUCO ARENA SPORT Series

| Model Number | EUCO-1K0140GLA | EUCO-1K0140GDA |
|--------------|----------------|----------------|
|--------------|----------------|----------------|

Protections

| | |
|-------------------------------|--|
| Over Voltage | Output voltage limited, 600Vdc |
| Over Load | Output power limited, 520W(Typ) |
| Output Short Circuit | Auto-Recovery when the fault is removed |
| Driver Over Temperature | Output power derating, not less than 20% in the worst case, auto-recovery when the fault is clear. |
| LED Fixtures Over Temperature | Output power derating, not less than 20% in the worst case, auto-recovery when the fault is clear, refer to Appendix 7 "Over Temperature Protection on LED fixtures" |
| Suitable for Luminaires Class | Class I. Insulation Class according to IEC60598 |

Reliability Data

| | |
|----------|--|
| Lifetime | 50,000 hours applicable for 220Vac to 400Vac(50/60Hz) @100% of load, @ ta 45°C |
| MTBF | 475khrs. at ta=+45°C Telcordia SR-332 |

Safety

| | |
|--------------------|---|
| Safety Approvals | ENEC — IEC/EN61347-2-13 electronic control gear for LED Modules, independent type. — IEC/EN62384 DC or AC supplied electronic control gear for LED modules. CE Declaration of Conformity. UL/CCC Compliant only. CB report. |
| Material and Parts | RoHS 2.0 Directive (EU) 2015/863 |
| Isolation | Class I, input/output non-isolation |

Electro-Magnetic Compatibility (EMC)

| EMC-Emission Characteristics | | |
|--|--------------|--|
| Radiated Emission | EN55015 | Test at 230Vac/400Vac |
| Conducted Emission | EN55015 | Test at 230Vac/400Vac |
| Harmonic Current Emission | EN61000-3-2 | |
| Voltage Fluctuation & Flicker | EN61000-3-3 | |
| EMC-Immunity Characteristics | | |
| Electrostatic Discharge(ESD) | EN 61000-4-2 | |
| Radio Frequency Electromagnetic Fields | EN 61000-4-3 | |
| Electrical Fast Transient (EFT) | EN 61000-4-4 | |
| Surge(AC Mains) | EN 61000-4-5 | - Common Mode: 10kV ⁵ (Line to Earth, Neutral to Earth) - Differential Mode: 10kV ⁵ (Line to Neutral) |
| Surge(Output) | EN 61000-4-5 | - Common Mode: 3kV (V1+/V2+ to Earth, V1-/V2- to Earth) - Differential Mode: 1kV (V1+ to V1-/ V2+ to V2-) |
| Surge(Control terminal) | EN 61000-4-5 | - Common Mode: 3kV (DA+ to Earth, DA- to Earth) - Common Mode: 3kV (D1+ to Earth, D1- to Earth, COM to Earth) - Differential Mode: 1kV (DA+ to DA-) - Differential Mode: 1kV (D1+ to D1-, D1+ to Com,D1- to Com) |


LED Driver

EUCO ARENA SPORT Series


| | | |
|-----------------------------|---------------|--|
| Surge(NTC) | EN 61000-4-5 | - Common Mode: 3kV (NTC to Earth) - Differential Mode: 1kV (NTC to V1+/V2+) |
| Conducted Disturbance | EN61000-4-6 | |
| Voltage Dip & Interruptions | EN 61000-4-11 | |

5. Level B within three times, additional external SPD in AC mains is recommended for the LED fixture common mode surge protection, details refer to Appendix 10.

Physical Dimensions

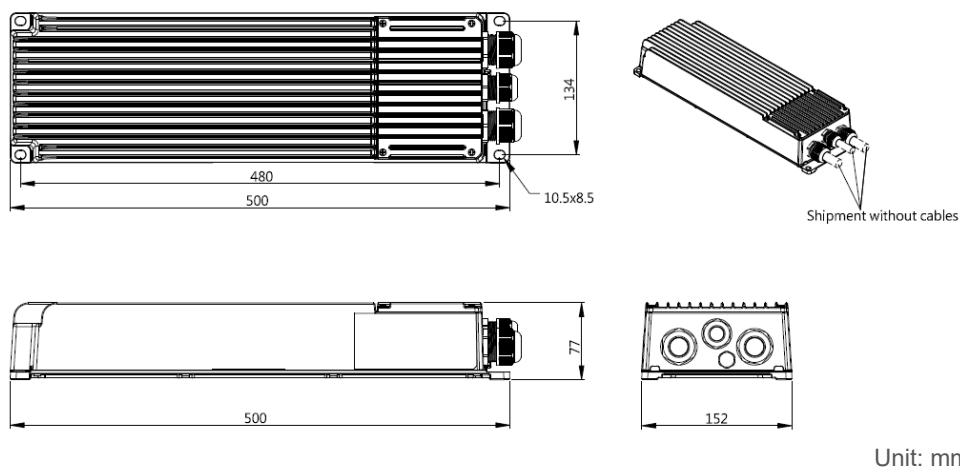

Electrical Connection

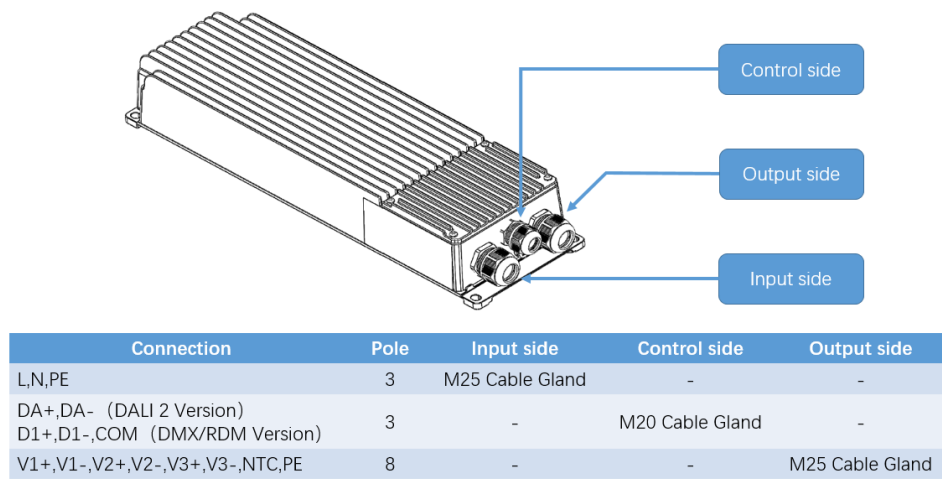

LED Driver

EUCO ARENA SPORT Series

Torque Force Requirement for IP66

M4 six-pointed star head cap screws
for junction box cover.(4x)
Material : stainless steel
Tightening force: 1.6 Nm

Input Section
M25 cable gland to cable
Clamping cable : 10-16.3mm
Tightening force: 5 Nm

Control Section
M20 cable gland to cable
Clamping cable : with plug
Tightening force: 1 Nm

Clamping cable : 6.3-11.3mm
Tightening force: 3.5 Nm

Output Section
M25 cable gland to cable
Clamping cable : 10-16.3mm
Tightening force: 5 Nm


M25 cable gland to Chassis
Tightening force: 3.43 Nm

M20 cable gland to Chassis
Tightening force: 3.43 Nm


LED Driver

EUCO ARENA SPORT Series

The Feature of Junction Box

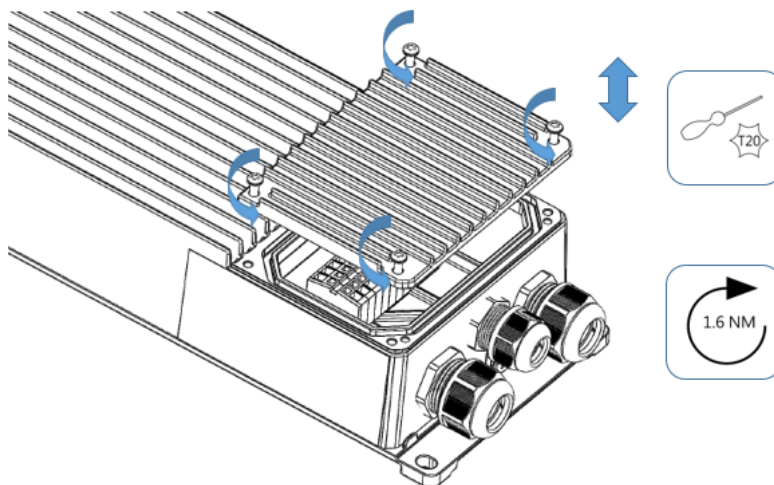


Note: The cap and fastening 4 screws all have the function of anti-falling off.

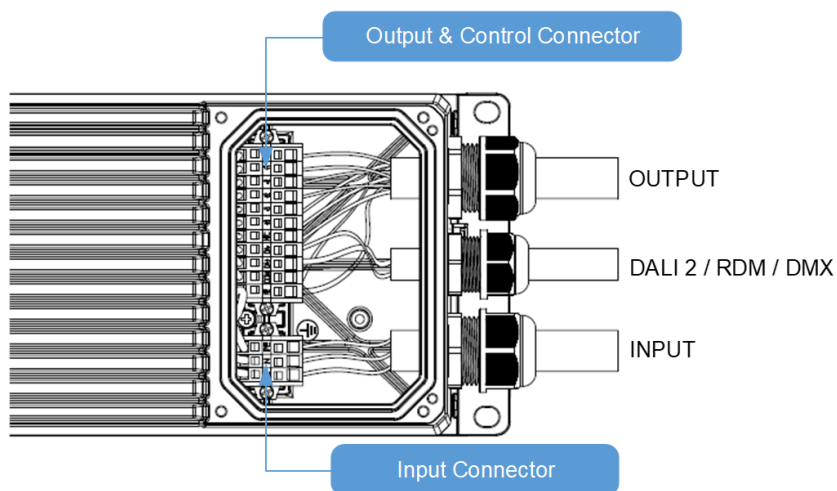


LED Driver

EUCO ARENA SPORT Series

Connection Schematic

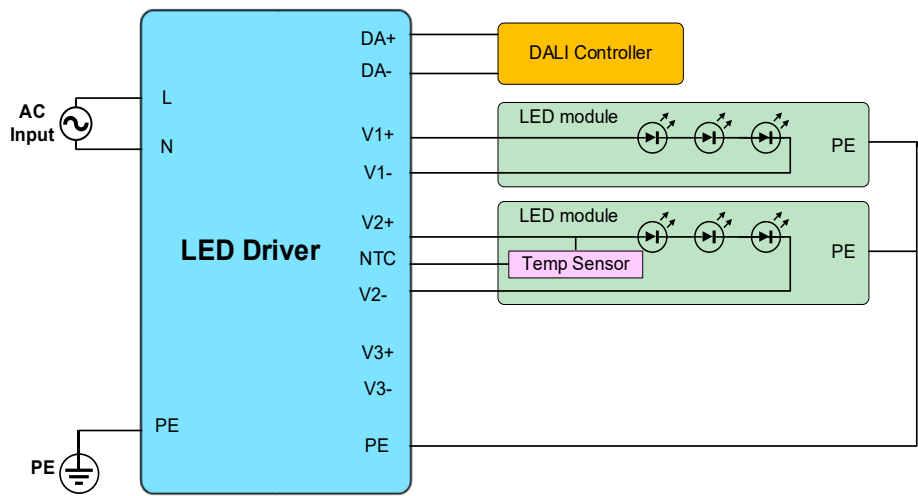

EUCO-1K0140GLA

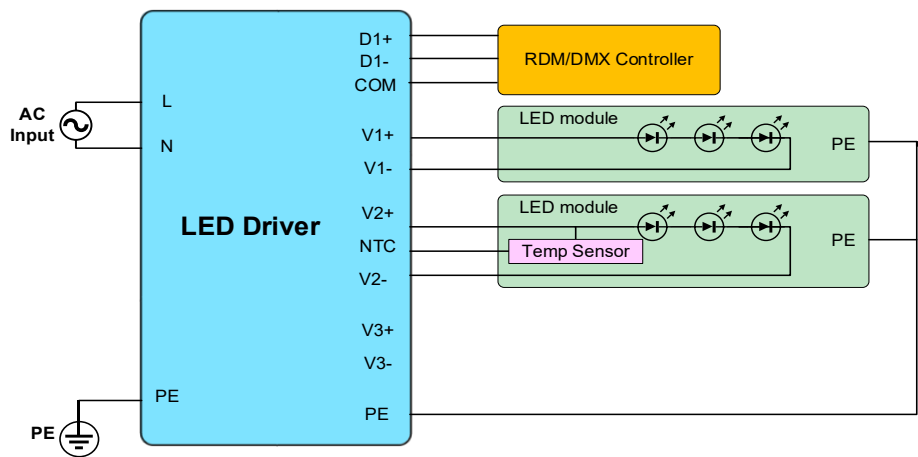

EUCO-1K0140GDA

Note: All the output channels are independent. The user should follow the Connection Schematic. Please refer to Appendix 9 for misconnection examples.

Drivers for each circuit breaker

Referring to the circuit breakers available on the market, the maximum number of the driver connectable for each circuit breaker is as the following table.

| Circuit Breaker Type | MCB B/C 10A | MCB B/C 16A | MCB B/C 20A | MCB B/C 25A | MCB B/C 32A |
|----------------------|-------------|-------------|-------------|-------------|-------------|
| Input: 220~240Vac | 1 | 2 | 2 | 3 | 4 |
| Input: 380~400Vac | 1 | 2 | 2 | 3 | 4 |




LED Driver


EUCO ARENA SPORT Series

Appendix

1. Operating Range Curve

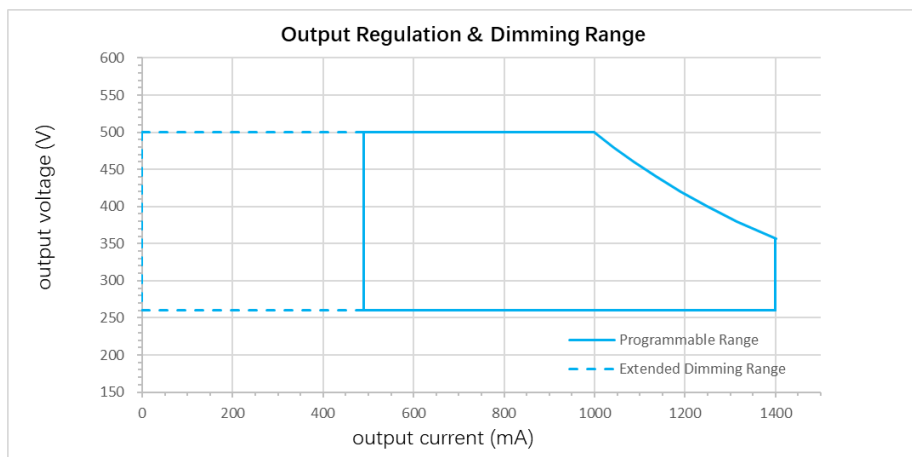


2. Dimming Range Curve

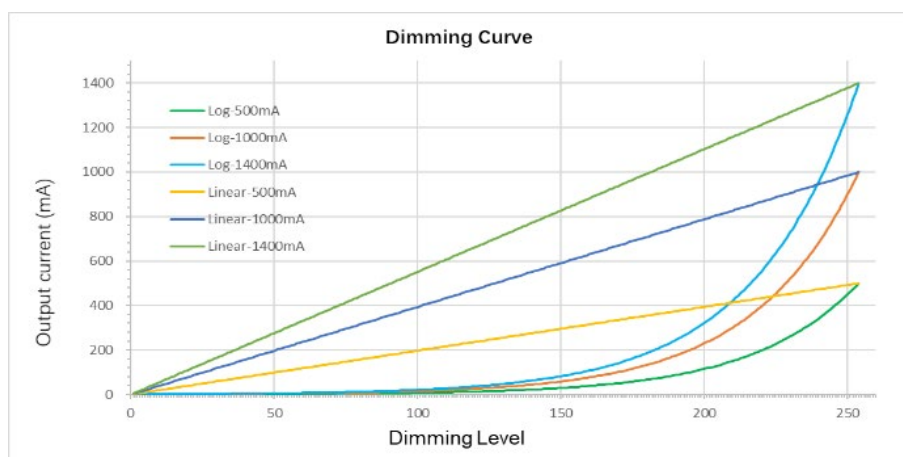

Note: EUCO ARENA SPORT series can program the output current through computer and programming tool. More details please refer to DALI programming User Manual or RDM/DMX programming User Manual.

3. Life Time VS Case Temperature Curve

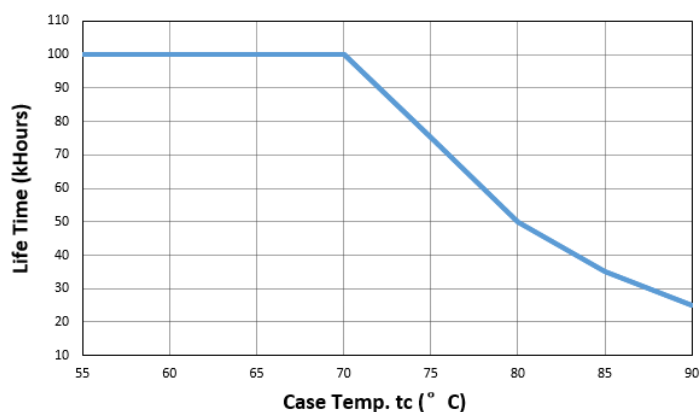


Note: Test at input voltage 220Vac & 400Vac, at full Load with 1.4A/360V.

All parameters are specified at 25°C ambient for all products unless otherwise indicated.
www.DeltaPSU.com (Jan. 2024, Rev. 04)


LED Driver

EUCO ARENA SPORT Series


4. Efficiency versus Output Power

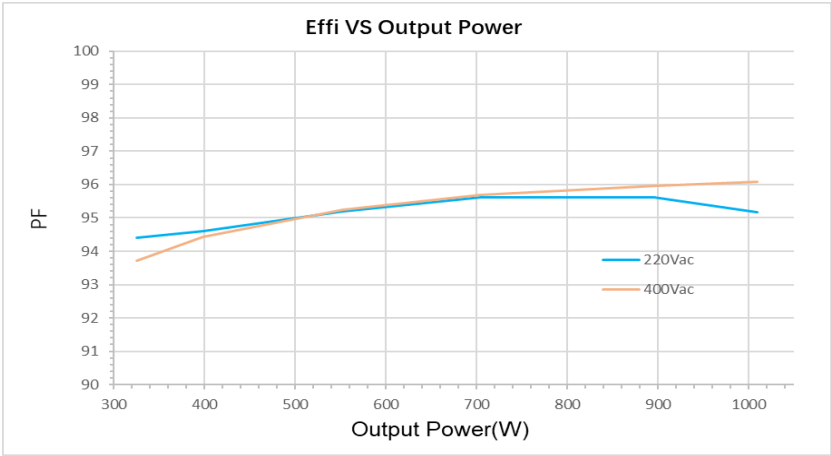

5. Power Factor versus Output Power

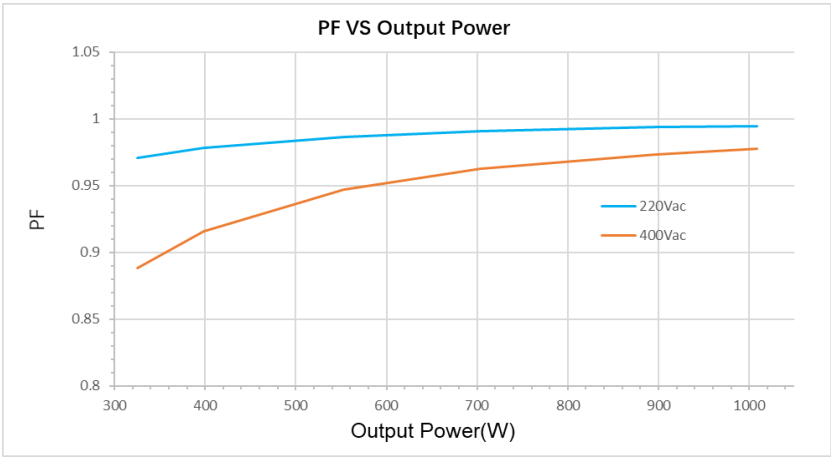

6. THD versus Output Power

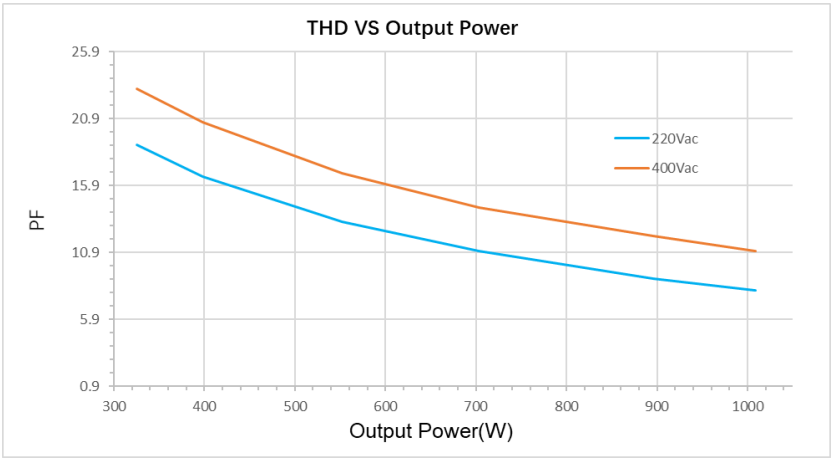


LED Driver

EUCO ARENA SPORT Series

7. Over Temperature Protection on LED Fixtures


This protection is an optional feature and user can ignore it without connecting to NTC connector in the junction box. An external temperature detection circuit as shown below is required to achieve the NTC terminal function to prevent the LED fixture from overheating. Strongly recommended that the temperature detection circuit be placed on the hottest LED module in the three channels to monitor its temperature.

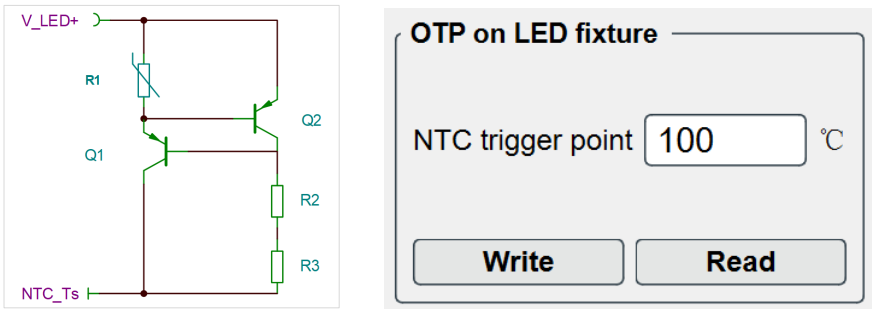

Bill of recommended materials

| Reference | Part | Manufacturer | Description |
|-----------|------------------|--------------|--|
| Q1/Q2 | PBHV9050T | NEXPERIA | 500V 150 mA PNP high-voltage low VCEsat transistor |
| R1 | TSM1A333F3952RZA | THINKING | RES NTC 33Kohm F 3950K +/-1% SMD 0603 TP |
| R2/R3 | RC1206FR-07 5M1L | YAGEO | RES SMD 1/4W 5.1Mohm F 1206 |

The trigger point of this protection can be set easily according to the actual conditions of the LED fixtures, the user can set the trigger point between 80 °C and 110 °C by the tool (from Delta), and the default value is 100 °C. When the temperature exceeds the trigger point (T_{OTP}), the output current of each channel will decrease automatically within 10 seconds to bring the temperature of the LED module back to safe value. Note that the temperature measurement accuracy depends on the load condition. More details about parameter setting please refer to DALI programming User Manual or RDM/DMX programming User Manual.


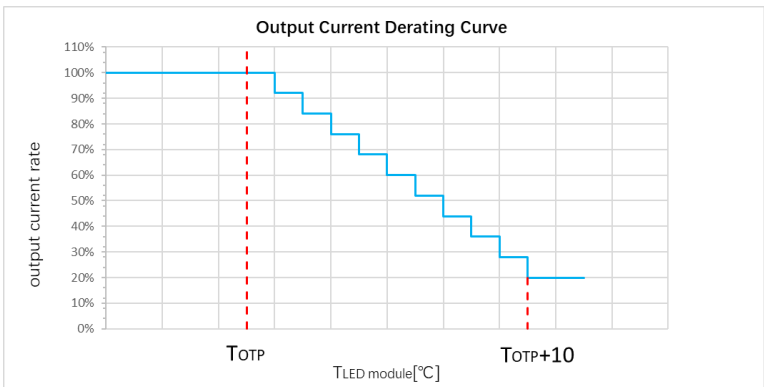


8. Effect of Parasitic Capacitance in LED Fixture

The simplified structure of LED fixtures and leakage current effect are illustrated as following figures. As the driver is non-isolated between input and output, there could be an inevitable leakage current path through LED and equivalent parasitic capacitor C_p (C_{p1} and C_{p2}) to the PE (protective earth) in case that Heat Sink of the LED fixture grounds to the PE. This leakage current ip could impact on the output current ripple and the performance at low dimming level or dimming OFF. The equivalent C_p should be kept as low as possible for low leakage current and accordingly optimized performance of the driver.


LED Driver

EUCO ARENA SPORT Series

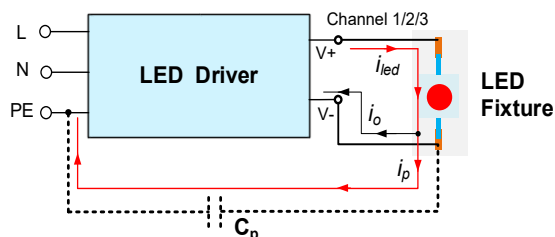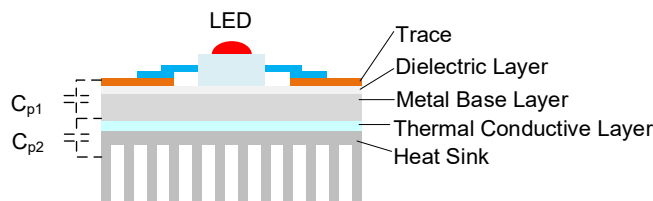


9. Misconnection Warning


Since the output channels of the driver are independent with each other, any wiring misconnection should not be allowed, otherwise the driver could perform abnormally or even fail after a period of operation. Following are some examples of misconnections.

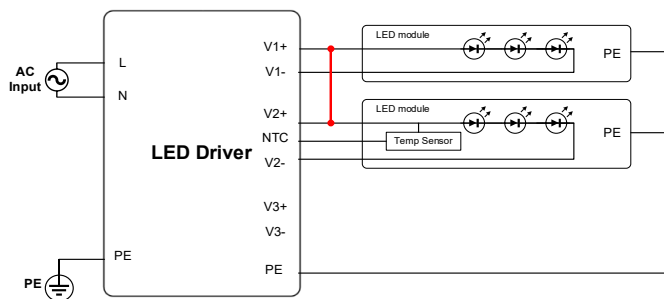

Misconnection of all 2 output positive terminals together.

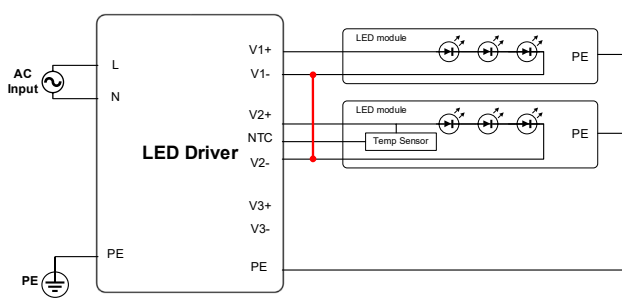

Misconnection of all 2 output negative terminals together.

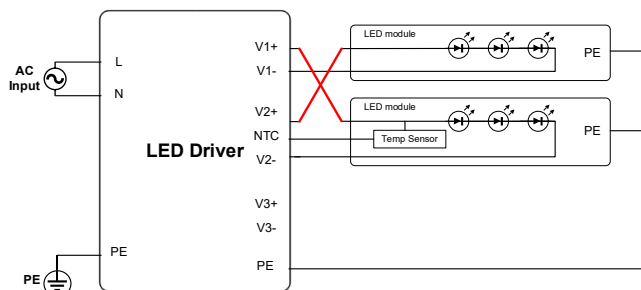

Cross misconnections between all 2 channels.

10. External SPD requirement for extra LED fixture common mode surge protection

Although the EUCO Arena Sport driver features the common mode surge protection capability of 10kV against unexpected surge pulses like Lightning phenomenon through AC mains. The peak of residual common mode voltage pulses between the LED+ and PE or LED- and PE terminals of the luminaire could still be around or over 5kV, an unexpected surge pulses possibly will damage the safety insulation in the LED module board (LED+/- to PE). In addition, in the event the LED module heat-sink insulation is not robust enough, the driver possibly will get damaged due to the high common mode short circuit current induced by the LED board insulation breakdown. Therefore, Delta Electronics proposes for Class I luminaire to install an external surge protector device (SPD) in the AC mains side to improve the robustness surge capability of the luminaire against unexpected surge pulses. In such way, the luminaire would retain a strong common mode surge residual voltage within LED modules capability and it can be easily marketed globally by attributing different surge protector device (SPD) to meet differing surge level requirements.

11. Others

Warranty Policy

Please reach out our [Warranty Policy](#) should you require any further clarification.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Delta Electronics:](#)

[EUCO-1K0140GDA](#)