



# MEAX-5GNR-WM

5GNR Wall Mount  
Part #: 100-00234-01

## Description

The MEA-5GNR-WM Wall Mount Antenna is a 5GNR antenna solution, with high gain and efficiency ideal for maintaining constant mobile connectivity. The MEA-5GNR-WM covers all 5G, 4G, 3G and 2G frequencies. This is an ideal antenna for telematics systems, remote surveillance, asset tracking and any IOT system applications. The high performance make this antenna ideal for the most challenging installations.

This wall mount antenna is easy to install with maximum durability. The MEA-5GNR-WM has one cable with a SMA-Male standard connector, 3m standard cable length and is fully customizable by offering additional connector types, cable lengths and cable types.

## Electrical Specification

Parameter	Specification	
Center Frequency	617-960 MHz	1427-2690 MHz
Band	600, 700, 850, 900 MHz	1500, 1600, 1700, 1800, 1900, 2000, 2100, 2300, 2500, 2600 MHz
Return Loss	-8.3 dB	-13.0 dB
VSWR	2.4:1	1.8:1
Efficiency	66.6%	62.6%
Peak Gain	3.9 dBi	4.0 dBi
Average Gain	-1.8 dB	-2.1 dB
Center Frequency	3300-5000 MHz	5150-5925 MHz
Band	3300, 3500, 3600, 3700, 4500 MHz	5200, 5500, 5800 MHz
Return Loss	-14.1 dB	-11.9 dB
VSWR	1.7:1	1.9:1
Efficiency	40.6%	32.4%
Peak Gain	3.9 dBi	3.9 dBi
Average Gain	-4.1 dB	-4.9 dB
Impedance	50 Ω	
Polarization	Linear	
Radiation Pattern	Omni-Directional	
Max. Input Power	35 W	



## Features



- 5GNR Frequency Range
- Easy mounting: Wall Mount
- High Performance
- Ground Plane Independent
- Customized Cable and Connector
- Dimensions 325 × 36 × 155 (220 × Ø 16) mm
- IP67

## Applications





- Asset Tracking
- Telematics
- Container & Logistics
- Automotive
- Industrial Applications
- IOT Applications

## Mechanical Specification

Parameter	Specification
Antenna Dimensions	325 × 36 × 155 (220 × Ø 16) mm
Weight	200 g
Operating Temperature	-40°C to + 85°C
Mounting Type	Wall Mount
Connector	SMA-Male
Cable	LL195
Radome	ASA / Black
Antenna Base	Brass
Substance Compliance	RoHS
Certificates	IP67

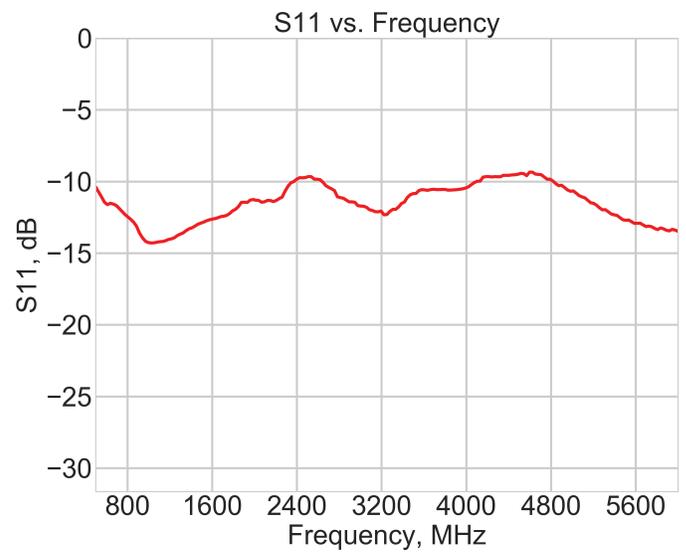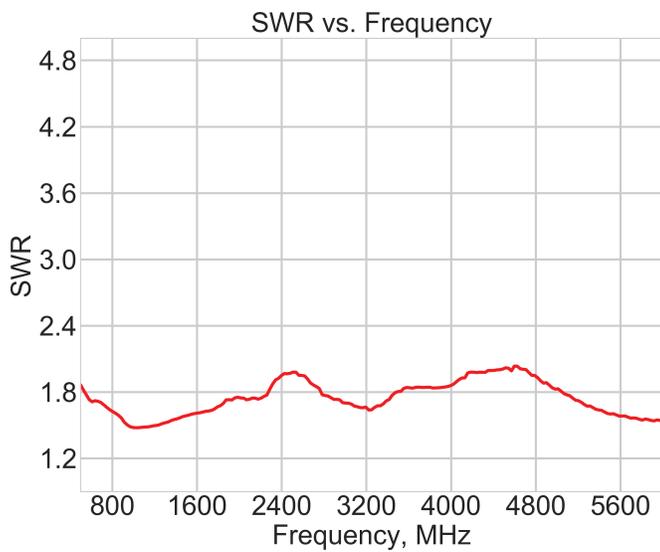

DRAWING REVISION HISTORY			
REV	DESCRIPTION	DATE	BY
A	INITIAL RELEASE	2022-01-21	JET

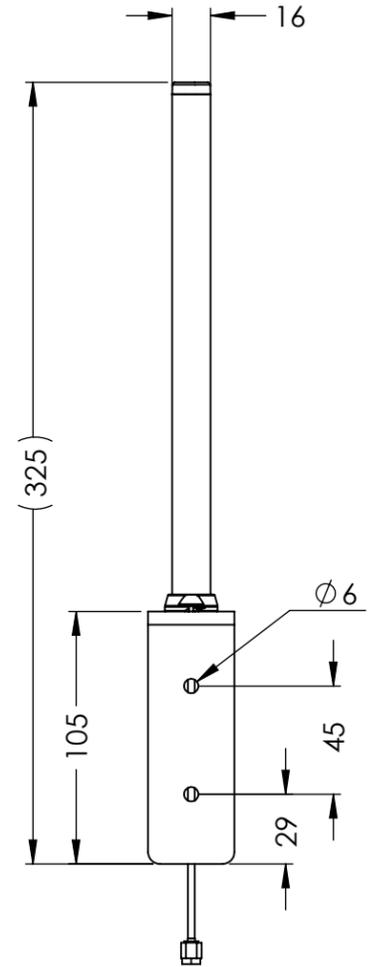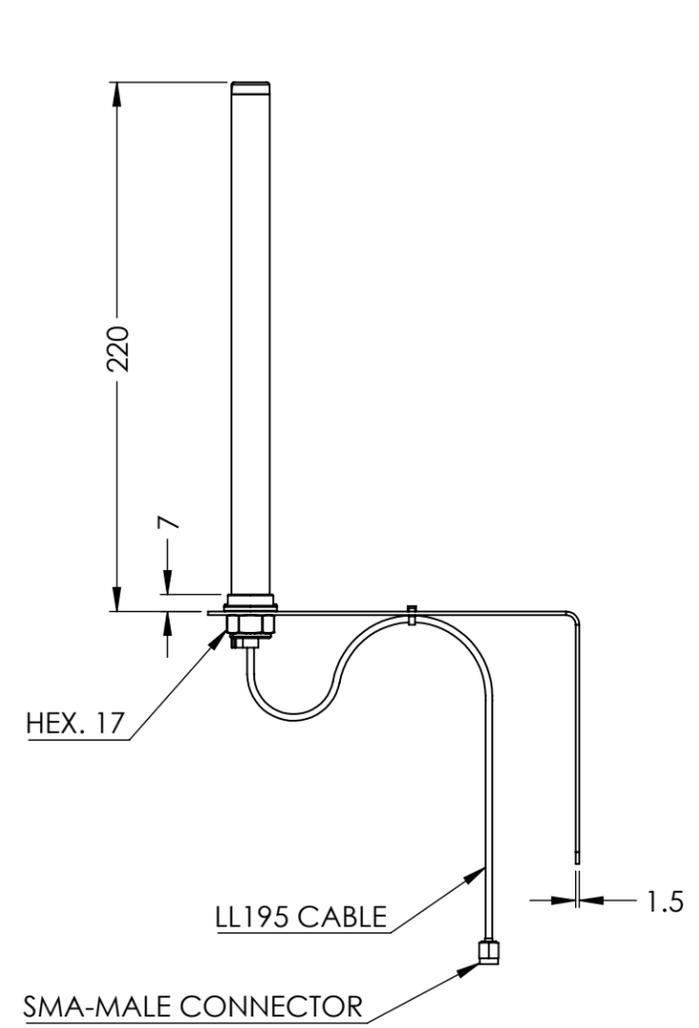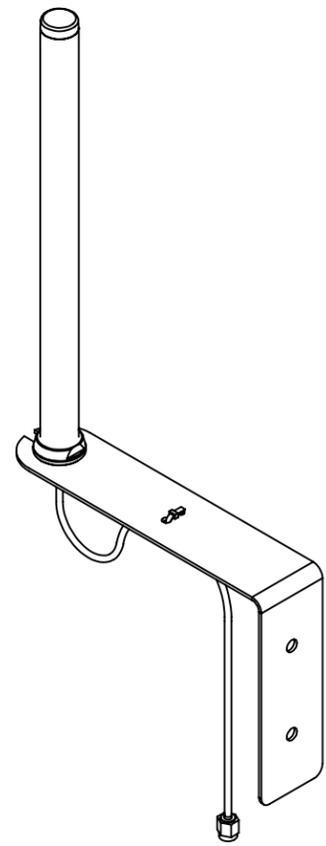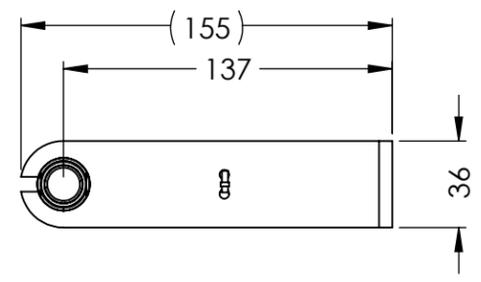

- NOTES:
- FREQUENCY (5G, 4G, 3G, 2G):
    - 617-960 MHz
    - 1427-2690 MHz
    - 3300-5000 MHz
    - 5150-5925MHz
  - DIMENSIONS ARE AFTER MOUNTING
  - CUSTOMIZABLE CABLE AND CONNECTOR TYPE
  - MOUNTING TYPE: WALL MOUNT
  - MATERIALS:
    - RADOME: ASA
    - RADOME COLOR: BLACK
    - ANTENNA BASE: BRASS
    - BRACKET: STAINLESS STEEL
  - OPERATING TEMPERATURE: -40° C ~ +85° C
  - STORAGE TEMPERATURE: -40° C ~ +85° C
  - CERTIFICATION: IP67

UNLESS OTHERWISE SPECIFIED:	NAME	DATE
DIMENSIONS ARE IN MM	DRAWN	JET 2022-01-21
TOLERANCES:	CHECKED	ZX 2022-01-21
FRACTIONAL ±	ENG APPR.	NPC 2022-01-21
ANGULAR: MACH ± .5° BEND ±	MFG APPR.	
ONE PLACE DECIMAL ± 1.0	Q.A.	
TWO PLACE DECIMAL ± .50		
INTERPRET GEOMETRIC TOLERANCING PER:	CAD MAINTAINED. CHANGES SHALL BE INCORPORATED BY THE DESIGN ACTIVITY.	
	DO NOT SCALE DRAWING	

100-00234 CONFIGURATION TABLE				
DASH NO	CABLE TYPE	CABLE LENGTH	CONNECTOR TYPE	RADOME COLOR
-01	LL195	100 CM	SMA-MALE GOLD	BLACK

ITEM 100-00234 REVISION HISTORY			
REV	DESCRIPTION	DATE	BY
A	INITIAL RELEASE	2022-01-21	JET

MAXTENA, INC		
TITLE: 100-00234 MEA-5GNR-WM		
SIZE <b>B</b>	DWG. NO. <b>117-00569-01</b>	REV <b>A</b>
CAGE CODE: 5KQH7	SCALE: NONE	SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MAXTENA, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MAXTENA, INC IS PROHIBITED.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Maxtena:](#)

[MEA-5G NR-WM](#)