

LDD960-UU

960W DIN Rail Combo DC-UPS DC-DC Converter

LDD960-UU is a microprocessor-controlled unit that can perform two functions:

- DC-UPS rated 960 W / 20 A usable in any system 12 – 48 VDC
- DC/DC converter (non-isolated) rated 960 W / 20 A usable in any combination of IN/OUT voltages 12 – 48 VDC

For the UPS function it may use one 12 V battery, independently of the operating load voltage. For any supply voltages (12 – 48 VDC) it may use also multiple battery configuration (10 – 60 VDC).

LDD960-UU monitors the voltage coming from a DC power supply and in case of power failure a backup storage source supplies the energy to the load. In normal condition the battery is kept charged by an integrated battery charger supporting various battery chemistries.

As a DC/DC converter (no battery present), the input voltage is converted to any output voltage as per the set-up (programmable by front keys or communication interfaces).



Key Features & Benefits

- Digital power regulation, LCD interface
- Integrated battery charger for 12 – 48 V multi-chemistries batteries with a charging current up to 20 A
- Can operate with super capacitors modules
- Battery voltage independent of input and output voltage
- 20 A or 960 W rated load
- Multiple protections
- Remote ON/OFF or other remote control functions possible through INHIBIT input
- Measures voltages and currents on input, output and battery.
- Battery protection against reverse polarity connection and overcurrent
- Battery health monitoring system: measuring battery internal resistance, battery temperature, charge/discharge cycles and Coulomb counter
- User settable maximum backup time
- Auxiliary output with same voltage as battery (5A max.), protected against overcurrent/short-circuit
- Suitable for Powermaster software

Embedded User Interface

- 4 keys and 1 color graphic TFT LCD display
- Allows online device configuration
- Displays the LDD960-UU status and alarms
- Modbus over RS-485 and USB interfaces for control and monitoring
- Dry contacts for programmable status signals

1. INPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Input DC Voltage	Nominal Range	12 - 48 VDC 10 - 60 VDC (UL Certified)
Input DC Current		20 A
Standby Power		< 4 W

2. MAIN OUTPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Output Power		960 W
Voltage	Vin for use as UPS; according to set-up for use as DC/DC converter	12 - 48 VDC (Nominal)
Maximum Current / Power		20 A / 960 W
Short-Circuit Current	Constant current limited only in DC-UPS Mode	21 A
Load Regulation		± 1%
Efficiency at Full Load Power Loss	UPS mode with Vin present	> 98% < 7 W
Efficiency at Full Load Power Loss	UPS mode during backup	> 97% < 15 W
Efficiency at Full Load Power Loss	DC-DC mode	> 97% < 15 W

3. AUXILIARY OUTPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Voltage	U battery – non-regulated	12 - 48 VDC (Nominal)
Continuous Current		5 A
Overload Limit		6 A

4. BATTERY SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Battery Voltage (or to be used as input for DC/DC conversion)	Nominal Range	12 - 48 VDC 10 - 60 VDC
Battery Chemistries	Lead Acid; Nickel; Lithium; Supercap capacitors	
Maximum Battery Charge Current		20 A
Maximum Battery Discharge Current		20 A
Allowed Battery Capacity		up to 400 Ah
Battery Protections	Overcurrent Deep Discharge Reverse Polarity	
Battery Charge Efficiency Power Loss		> 96% < 20 W
Maximum Backup Time	User programmable, up to battery deep discharge threshold	
Battery Health Monitoring		
Battery Internal Resistance Range		1 mΩ – 300 mΩ
Additional Monitoring Functions	Coulomb counter Battery temperature through 10 kΩ NTC sensor (optional WNTC-2MT) Battery operating time since installation Number of cycles	

5. USER INTERFACE

PARAMETER	DESCRIPTION / CONDITION
1.5 inch Color Graphic LCD	Used to display the unit's status and to access the configuration menus
4 Keys	Used to program the unit and to access various menus
Red LED	Constantly ON: generic failure on the system, details on the LCD Blinking: battery backup function active
2 Dry Contact Relays (NO, 24 VDC / 1 A)	RL1 / RL2 - Configurable RL COM - Common Pin
Other Interfaces	INH - (INHIBIT) Isolated remote ON/OFF input, active for 5 – 30 VDC T SENSE - optional, remote temperature sensor for battery charging (WNTC-2MT) Modbus over USB and RS-485 interfaces

6. ENVIRONMENTAL, EMC & SAFETY SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Operating Temperature ^{1,2}	UL certified up to 60°C at 12 – 24 VDC or up to 50°C at 48 VDC	- 40 to + 70°C
Storage Temperature		- 40 to + 80°C
Temperature and Voltage Derating	(See Figure 1 and 2)	
Humidity	Non-condensing	5 - 95% RH
Life Time Expectancy	At 25°C ambient, full load	281 904 h (32.2 years)
MTBF	MIL-HDBK-217F	> 600 000 h at 25°C ambient full load
Overvoltage Category	EN50178	I
Pollution Degree	IEC60664-1	2
Isolation Against Enclosure		0.75 kVDC
Safety Standards & Approvals	UL508 Certified EN60950 (reference)	
EMC Standards	Emission	EN55022 (CISPR11) EN55011 (CISPR22)
	Immunity	Class B
		Class B
		Level 3
		Level 3
		Level 3
		Level 3
		Level 3
		Level 1
Protection Degree	EN60529	IP20
Vibration Sinusoidal	IEC 60068-2-6	5 - 17.8 Hz: ±1.6 mm; 17.8 - 500 Hz: 2 g, 2 hours / axis (X, Y, Z)
Shock	IEC 60068-2-27	30 g 6 ms, 20 g 11 ms; 3 bumps / direction, 18 umps total

¹ Start-up type tested: - 40°C, possible at nominal voltage with load derating

² For temperature ≤ - 20°C the LCD is not operating, for temp. ≥ +60°C the display reduces its life time, but the unit will operate correctly.

NOTES:

- For more details, performance and descriptions regarding all parameters not indicated in the above table, please refer to the user manual downloadable from belfuse.com/power-solutions
- Technical parameters are typical, measured in laboratory environment at 25°C, 24 VDC input and 24 V lead acid battery, at nominal values, after minimum 5 minutes of operation.
- Power rating, losses, efficiency, ripple, thermal behaviour and start-up may change outside of the nominal rated input range. Contact factory for details.

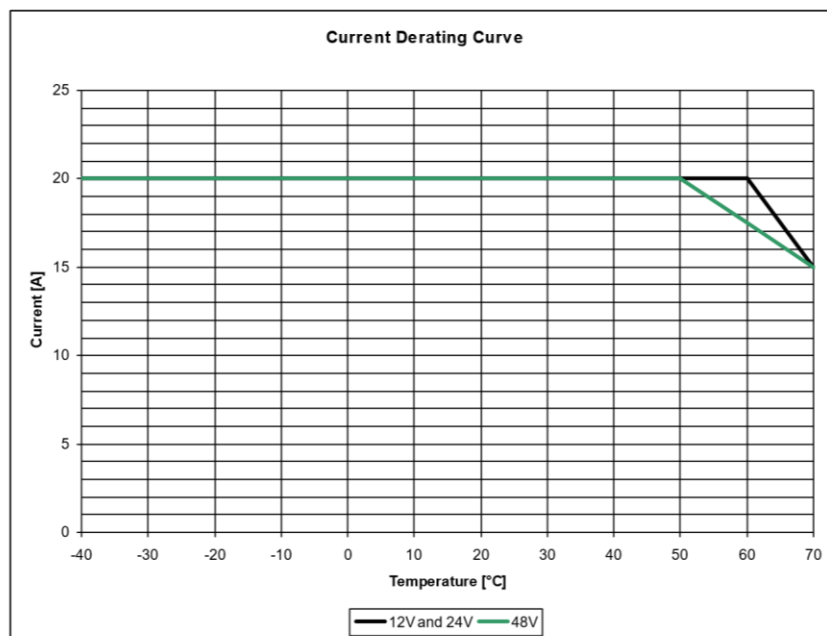


Figure 1. Current Derating Curve

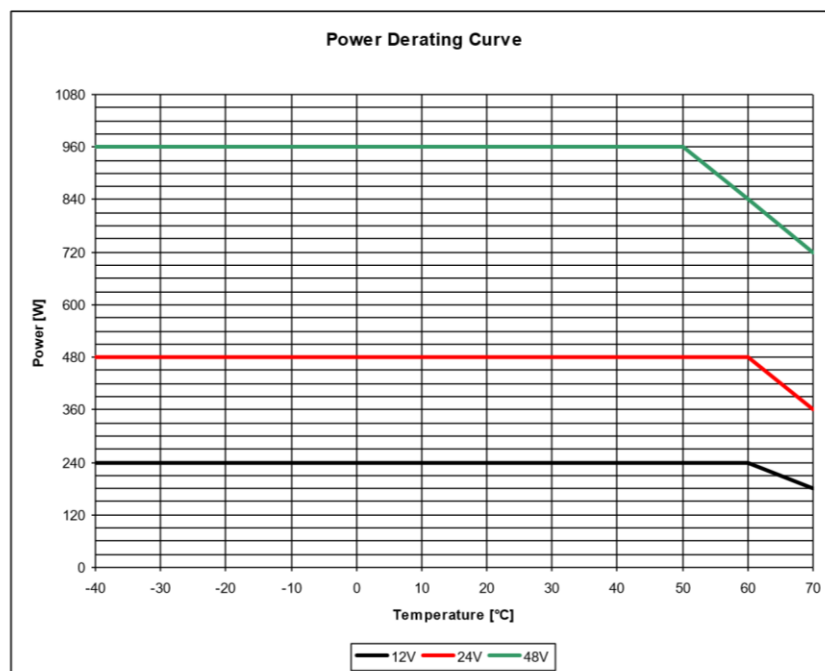


Figure 1. Power Derating Curve

7. MECHANICAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Weight		500 g
Dimensions		54 x 115 x 110 mm
IN/Battery/OUT Connection Terminals	Screw type, pluggable	2.5 mm ² (24 – 12 AWG)
Auxiliary Connection Terminals	Spring type, pluggable	Up to 0.75 mm ² (18 AWG)
Temperature Sensor Connector	Friction lock connector	
Communication Interface Connector	Mini USB-B Type (virtual Com Port) RS-485 through auxiliary connector	
Case Material	Aluminum	


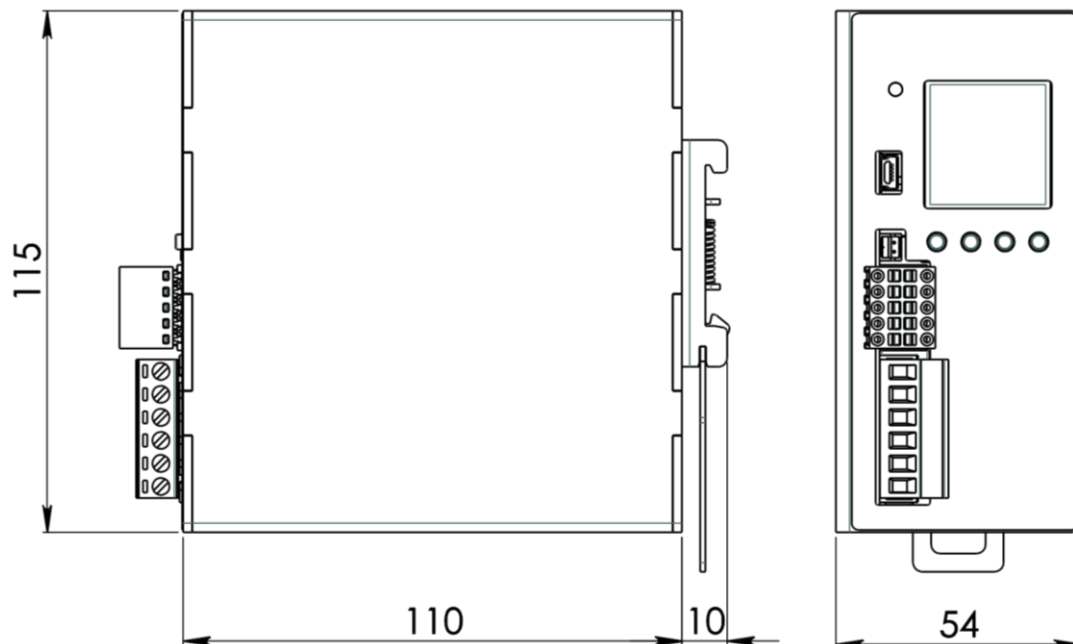


Figure 3. Mechanical Drawing

8. PIN LAYOUT & DESCRIPTION

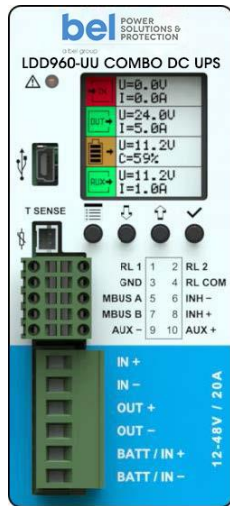

MAIN CONNECTIONS

IN:
(connect to power supply
in UPS mode)

+ = Positive DC
- = Negative DC

BATT/IN:
(connect to battery in UPS
mode or power supply in
DC/DC mode)

+ = Positive DC
- = Negative DC

OUT:
(connect to load)

+ = Positive DC
- = Negative DC

AUXILIARY CONNECTIONS

RL1 / RL2:
(programmable dry contact)

RL1 = NO
RL2 = NO
RL COM = COM

Modbus:
(over RS-485, 2 wire interface)

MBUS A = RX/TX
MBUS B = RX/TX
GND = Common

INHIBIT:
(5 – 30 VDC)

▪ INH+ = Positive DC
▪ INH- = Negative DC

AUX:
(12 – 48 VDC not regulated
5 A Max.)


AUX + = Positive DC
AUX - = Negative DC

T SENSE:
(remote temperature sensor
for battery charging)

Optional WNTC-2MT

MINI USB TYPE

1 = VBUS (+5V)
2 = Data (D-)
3 = Data (D+)
4 = Not connected (ID)
5 = GND



For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Bel Power Solutions:](#)

[LDD960-UU](#)