

BCL25-700-8

22/25 kW Liquid Cooled On-Board Battery Charger

The Bel Power Solutions BCL25-700-8 is a 22/25 kW bi-directional liquid-cooled on-board inverter battery charger with export functionalities for hybrid (HEV) or full electric (EV) vehicles.

With the BCL25-700-8, it is possible to connect this inverter charger directly to an EVSE charging station or for connection directly to the public grid (Single-Phase 190 – 264 VAC or Three-Phase 330 – 528 VAC) to charge the HV batteries.

The output voltage covers a wide variety of HV batteries in the range from 240 VDC to 800 VDC with constant output current of 60 A. When not running from the engine, but from the HV batteries, up to 22/25 kW can be exported to power three-phase AC equipment.



FEATURES

- Input power up to 22/25 kW @ 400/480 VAC
- Typical efficiency 95%
- AC input range:
 - Three phases: 330 - 528 VAC (L-L)
 - Single phase: 190 – 264 VAC (L-N)
- DC output 240 - 800 VDC
- Bi-directional operation:
 - AC-DC charge mode
 - DC-AC export mode
- Parallelable up to 4 units in charge mode
- Over temperature, output over voltage and over current protections
- Operating temperature -40°C to 60°C at full load
- Active HVDC interlock monitoring
- SAE J1939 compliant CAN control and monitoring
- SAE J1455 compliant environmental standards
- SAE J1772 & EN 61851 compliant
- IEC 61851-21-1 compliant immunity requirements
- IP65 and IP67 Rating

APPLICATIONS

- Hybrid and Electric Vehicles
- Medium through heavy duty, on and off highway vehicles

1. MODEL SELECTION

| MODEL | DESCRIPTION |
|-------------|--|
| BCL25-700-8 | Liquid cooled on-board battery charger |

2. INVERTER CHARGER SUBSYSTEM

2.1 AC SIDE CHARGE MODE INPUT

| PARAMETER | DESCRIPTION / CONDITIONS | MIN | NOM | MAX | UNIT |
|-----------------------|--|------|---------|-----------|-----------------|
| Input Voltage 3-phase | Nominal operating range Absolute operating range | 330 | 400/480 | 528 | V _{AC} |
| Input Voltage 1-phase | Nominal operating range Absolute operating range | 190 | 230 | 264 | V _{AC} |
| Input Current | Charge mode: | | | 32 | A _{AC} |
| Input Frequency | | 47 | 50/60 | 63 | Hz |
| Leakage Current | at 528 V _{AC} , 63 Hz, 3-phase at 264 V _{AC} , 63 Hz, 1-phase | | | 3.5 10 | mA |
| Power Factor | V _{AC,IN} = 400 V _{RMS} , 3-phase, P _{IN} > 11 kW | 0.99 | | | |
| Input Inrush Current | Pre-charge mechanism | | | | |
| Efficiency | V _{AC,IN} = 400 V _{RMS} , 3-phase, P _{IN} > 11 kW | | 95 | | % |

2.2 AC SIDE EXPORT MODE OUTPUT

| PARAMETER | DESCRIPTION / CONDITIONS | MIN | NOM | MAX | UNIT | |
|---------------------------|---|---------------------------------|--------------|--------------|------------------|-----------------|
| Output Voltage | 3-phase | | 400 480 | | V _{AC} | |
| Output Current | Export mode: | | 3x 32 | | A _{RMS} | |
| Output Power | at 400 V _{AC} at 480 V _{AC} | | | 20.5 23.5 | kVA | |
| Frequency | CAN selectable 50 or 60 Hz | Mode: 50 Hz Mode: 60 Hz | 49.9 59.9 | 50 60 | 50.1 60.1 | Hz |
| Efficiency | at V _{HV} = 350 V _{DC} (nom), P _{IN} > 11 kW | | 95 | | % | |
| Load Step Response | Load Step 1: 3 A _{AC} to 15 A _{AC} and back Load Step 2: 15 A _{AC} to 30 A _{AC} and back | Voltage deviation | -10 % | 0 | +10 % | V _{AC} |
| Total Harmonic Distortion | Load 0 – 32 A _{AC} | U _{THD} | | 3 | % | |
| Turn On/Off Delay | Export Mode: | Turn-On Delay Turn-Off Delay | | 5 0.1 | s | |

2.3 HV DC SIDE CHARGE/EXPORT MODE

| PARAMETER | DESCRIPTION / CONDITIONS | MIN | NOM | MAX | UNIT |
|-----------------------|---|-----|-----|----------|------------------------------------|
| Output Type | DC current source with 100/120 Hz sine wave ripple component | | | | |
| Output Voltage | Not regulated; depends on battery voltage | 250 | | 800 | V _{DC} |
| Output Current | Average output charging current adjustable via CAN Including AC ripple component (AC + DC) | | | 60 66 | A _{DC} A _{AC} |
| Output Current Ripple | 100/120 Hz, 3-phase 100/120 Hz, 1-phase | | | 6 60 | A _{PK-PK} |
| Input Capacitance | | | 50 | | μF |
| Inrush Current | Use external pre-charge resistor 50 Ohm | | | 20 | A |

2.4 PROTECTIONS

| PARAMETER | DESCRIPTION / CONDITIONS | MIN | NOM | MAX | UNIT |
|--------------------------------|--|------------|---------|------------|------------------|
| AC Over Current Protection | Export mode: 10 s current limit Phase - L1, L2, L3 | | | 32 | A _{RMS} |
| AC Over Voltage Protection | at 528 V _{RMS} , 3-phase at 264 V _{RMS} , 1-phase | 528 264 | | 535 275 | V _{RMS} |
| AC Under Voltage Protection | at 330 V _{RMS} , 3-phase at 190 V _{RMS} , 1-phase | 320 180 | | 330 190 | V _{RMS} |
| HV DC Over Current Protection | CAN adjustable | | | 60 | A |
| HV DC Over Voltage Protection | Latch type, CAN adjustable, max. OVP duration 1 ms | 250 | | 800 | V _{DC} |
| HV DC Under Voltage Protection | UVP duration 1 s | 230 | | 250 | V _{DC} |
| Input & Output Fuse Protection | AC input fuse internal, EVSE external circuit breaker Type C | | 32 | | |
| | HV external input fuse (800 V _{DC} minimum): Aux_Supply_12/24 V fuse: external automotive fuse | | 80 5 | | A |
| Over Temperature Protection | Converter shutdown at T_coolant higher than | | 75 | | °C |

3. MONITORING AND CONTROL SIGNALS

| PARAMETER | DESCRIPTION / CONDITIONS |
|---------------------|---|
| IGN (Key Switch) | CAN communication enable Level High = Enable (connected to +VBAT) |
| Control Pilot | Function and levels according to SAE J1772 Duty cycle accuracy ± 2% in range 20 – 96%. Duty cycle accuracy -2/+5% in range 10 – 20%. |
| Proximity Detection | Function and levels according to SAE J1772 |
| VBAT | 12/24 V battery voltage input. Used to supply internal aux converter. Input protected against reverse connected. |
| EVSE_WAKE_OUT | Energy taken from VBAT. High side switch to wake VCU (Vehicle Control Unit) and other vehicle control modules. Output is protected by resettable PTC fuse. |
| CAN_BAUD_RATE | CAN bus speed; CAN speed settings is detected only at start up when 12 V voltage is applied. 500 kbit/s – signal not connected / left floating 250 kbit/s – signal grounded; connected to 12V_RTN |

4. ENVIRONMENTAL SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITIONS | MIN | NOM | MAX | UNIT |
|-----------------------|--|-----|-----|-------|------|
| Operating Temperature | T_coolant at full load | -40 | | +60 | °C |
| | T_coolant at 50% power derating | +60 | | +75 | |
| | T_ambient at full load | -40 | | +80 | |
| Storage Temperature | | -40 | | +85 | °C |
| Altitude | SAE J1455, Operating: | | | 4000 | m |
| | Non-Operating: 18.6 kPa absolute pressure | | | 12200 | |
| Humidity | SAE J1455 | | | 95 | % |
| Thermal Shock | SAE J1455, Tamb = -40°C to +85°C (no coolant cycling) | | | | |
| Vibration * | ISO 16750-3-2012 (Commercial vehicle, sprung masses) | | | | |
| Protection | IP65 and IP67, when all matting connectors are installed | | | | |

* ISO 16750-3:2012 is a valid standard for the units with the HW revision B or higher. For the units with the older HW revision the valid vibration standard is SAE J1455.

5. COOLING SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITIONS |
|--|---|
| Cooling Type | Liquid cooled |
| Maximum Inlet Coolant Temperature | +75°C (50% derating above +60°C) |
| Maximum Ambient Temperature | +80°C |
| Coolant Medium / Mixture | 50/50 ethylene glycol/distilled water |
| Minimum Coolant Flow | 10 LPM, at coolant temperature +20°C |
| Maximum Coolant Pressure | 29 psi (2 bar) |
| Maximum Pressure Drop | 0.8 psi (0.05 bar) at coolant temperature +20°C, 10 LPM |
| Inlet/Outlet Cooling System Connection | M18 x 1.5 DIN 9974-1 |
| Material of Fittings | Aluminum alloy |

6. SAFETY, REGULATORY AND EMI SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITIONS | CLASS / LEVEL / CRITERION |
|---|---|--|
| Radiated Emission | IEC 61851-21-1:2017 | According norm |
| Conducted Emission | IEC 61851-21-1:2017 | According norm |
| Emission of voltage changes, voltage fluctuations & flicker on AC power lines | IEC 61851-21-1:2017 | According norm |
| Harmonic Input Current | IEC 61000-3-2:2014 and IEC 61000-3-12:2011 | According norm |
| Electrostatic Discharge | IEC 61204-3:2014; Level 3 | Performance Criterion B |
| Radiated Electromagnetic Field | ISO 11452-2:2004, SAE J1113/21 | Performance Criterion B Status 2 |
| Electrical Fast Transient (EFT) /Burst | IEC 61000-4-4; Level 2 (± 5 kHz) | Performance Criterion B |
| Surge Immunity | IEC 61000-4-5; Level 3 surge (± 1 kV DM and ± 2 kV CM) | Performance Criterion C |
| RF Conducted Immunity | IEC 61000-4-6; Level 3 (10 V, 0.15...80 MHz, 80% AM, 1 kHz) | Performance Criterion A |
| Bulk Current Injection (BCI) | ISO 11452-4-5; 20 - 200 MHz, 60 mA, 80% AM | Class B |
| Capacitive Coupling Clamp (CCC) | ISO 7637-3; -60 V, +40 V, | Class A |
| Electrical Transient Conduction Along Supply Lines | ISO 7637-2:2011 | Pulse number 1 C Pulse number 2a A Pulse number 2b C Pulse number 3a A Pulse number 3b A |
| Starting Profile | ISO 16750-2 | A |
| Load Dump | ISO 16750-2 | A |
| Insulation (factory tested) | AC Input to HV output: AC Input to chassis: HV Output to chassis: | 2500 V _{DC} 2500 V _{DC} 2500 V _{DC} |

7. CONNECTORS

| PARAMETER | DESCRIPTION / CONDITIONS | MANUFACTURER | MPN |
|--------------------|---|-----------------|---|
| AC Side Connector | Inverter Charger side Mating connector | TE Connectivity | HVA630-5P : 0-2141619-1 HVA630-5P :114-94114-1 |
| HV Power Connector | Inverter Charger side Mating connector | Amphenol | HVSL600022A1H6 HVSL600062A125 |
| Signal Connector | Inverter Charger side Mating connector | TE Connectivity | DRC23-40PAN012 DRC26-40SA |

7.1 AC SIDE POWER CONNECTOR

Charger side: MFG: TE Connectivity; PN: HVA630-5P : 0-2141619-1
Mating connector: MFG: TE Connectivity; PN: HVA630-5P : 114-94114-1
 Use copper conductors only with an insulation rating of 120°C, 6 mm², OD 16.3 mm
Follow connector MFG instructions for correct connector assembly.

It is highly recommended to use screened connecting cables (e.g. Coroplast, FHRL2GCB2G 5x 6.0 mm² T180).

Note: HVIL pins shall be shorted on mating part.

| PIN | DESCRIPTION | 3 PHASE CONNECTION | 1 PHASE CONNECTION (EU) | 1 PHASE CONNECTION (US) |
|-----|-------------|--------------------|-------------------------|-------------------------|
| 1 | PE | PE | PE | PE |
| 2 | Phase L3 | Phase L3 | | Phase L2 (120 V) |
| 3 | Phase L2 | Phase L2 | | |
| 4 | Phase L1 | Phase L1 | Phase L1 (230 V) | Phase L1 (120 V) |
| 5 | Neutral | | Neutral | Neutral |



AC input connector, Charger side



AC input connector, Cable side

7.2 AC SIDE POWER CONNECTOR

Charger side: MFG: Amphenol; PN: HVSL600022A1H6
Mating connector: MFG: Amphenol; PN: HVSL600062A125
 Use copper conductors only with an insulation rating of 120°C, 25 mm², OD 11.9 mm
Follow connector MFG instructions for correct connector assembly.

It is highly recommended to use screened connecting cables (e.g. Coroplast, FHRL2GCB2G 1x 25 mm² T180).

Note: HVIL pins shall be shorted on mating part.

| PIN | DESCRIPTION |
|-----|----------------|
| 1 | HV DC negative |
| 2 | HV DC positive |



DC output connector, Charger side




DC output connector, Cable side

9.3 SIGNAL CONNECTOR

Charger side: MFG: TE Connectivity; PN: DRC23-40PAN012
Mating connector: MFG: TE Connectivity; PN: DRC26-40SA,
 max. 2 A per pin (wire AWG 20)

Pin PN: 1062-20-0144

It is recommended to use screened connecting cables.

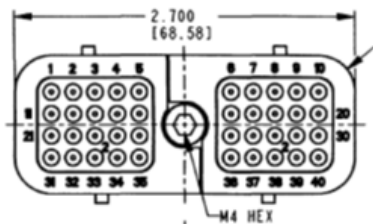

Signal connector, Charger side



Signal connector, Cable side

| PIN | NAME | FUNCTION | REFERENCE PIN |
|-----|-----------------|---|----------------|
| 1 | PROXIMITY | Function and levels according SAE J1772 | PE |
| 2 | SGND | Internally connected with pin 12 | - |
| 3 | EVSE_WAKE_OUT | Wake Output goes high when Control Pilot is active (max. delay 100 ms) and goes low when CAN command from VCU is received or when goes into sleep mode or delayed sleep mode. | Pin 2 |
| 4 | HVIL_IN | Input pin for HVIL loop (To detect if connectors are properly inserted.) | Pin 5 |
| 5 | HVIL_OUT | Output pin for HVIL loop | Pin 4 |
| 6 | +VBAT | Internally connected with pin 16, connect both pins | Pin 26, Pin 36 |
| 7 | LOCK_LOOP_A | Plug motor interlock signal | Pin 8 |
| 8 | LOCK_LOOP_B | | - |
| 9 | LOCK_ACTUATOR_A | Plug motor lock A | Pin 10 |
| 10 | LOCK_ACTUATOR_B | Plug motor lock B | Pin 9 |
| 11 | CONTROL PILOT | Function and levels according SAE J1772 | PE |
| 12 | SGND | Internally connected with pin 2 | - |
| 13 | KEY_SWITCH | This is signal for CAN communication enable (Level HIGH = enable) | Pin 6 |
| 14 | TEMP_EXT+ | External temperature sensor + | Pin 15 |
| 15 | TEMP_EXT- | External temperature sensor - | Pin 14 |
| 16 | +VBAT | Internally connected with pin 6, connect both pin | Pin 26, Pin 36 |
| 17 | SYNC_I/O | Signal for synchronization of the units working in parallel | Pin 18 |
| 18 | SGND | | - |
| 19 | CAN_SPEED | Setting of the CAN baud rate (float 500 kB) | Pin 20 |
| 20 | SGND | | - |
| 21 | SGND | Internally connected with pin 22 and 23 | - |
| 22 | SGND | Internally connected with pin 21 and 23 | - |
| 23 | SGND | Internally connected with pin 21 and 22 | - |
| 24 | BUTTON_A | | Pin 23 |
| 25 | BUTTON_B | | Pin 23 |
| 26 | -VBAT | Internally connected with pin 36, connect both pin | - |
| 27 | ADDR_0 | Inputs to set addresses of 4 parallel units. Internally pulled-up for logic level H. Connection to 12/24V_RTN = logic level L. | Pin 28 |
| 28 | SGND | Internally connected with pin 38 | - |
| 29 | CAN_H_INT | Diagnostic line | - |
| 30 | CAN_L_INT | Diagnostic line | - |
| 31 | LED_A | | Pin 21 |
| 32 | LED_B | | Pin 22 |
| 33 | LED_C | | Pin 23 |
| 34 | BUTTON_LED_A | | Pin 23 |
| 35 | BUTTON_LED_B | | Pin 23 |
| 36 | -VBAT | Internally connected with pin 26, connect both pin | - |
| 37 | ADDR_1 | Inputs to set addresses of 4 parallel units. Internally pulled-up for logic level H. Connection to 12/24V_RTN = logic level L. | Pin 38 |
| 38 | SGND | Internally connected with pin 28 | - |
| 39 | CAN_H_EXT | CAN communication | Pin 40 |
| 40 | CAN_L_EXT | CAN communication | Pin 39 |

8. MECHANICAL SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITIONS | MIN | NOM | MAX | UNIT |
|--------------------|--------------------------|-----|-----------------|-----|----------|
| Dimensions | W x H x D | | 705 x 106 x 359 | | mm in |
| Weight | | | 19 | | kg |
| Enclosure Material | Aluminum alloy | | | | |


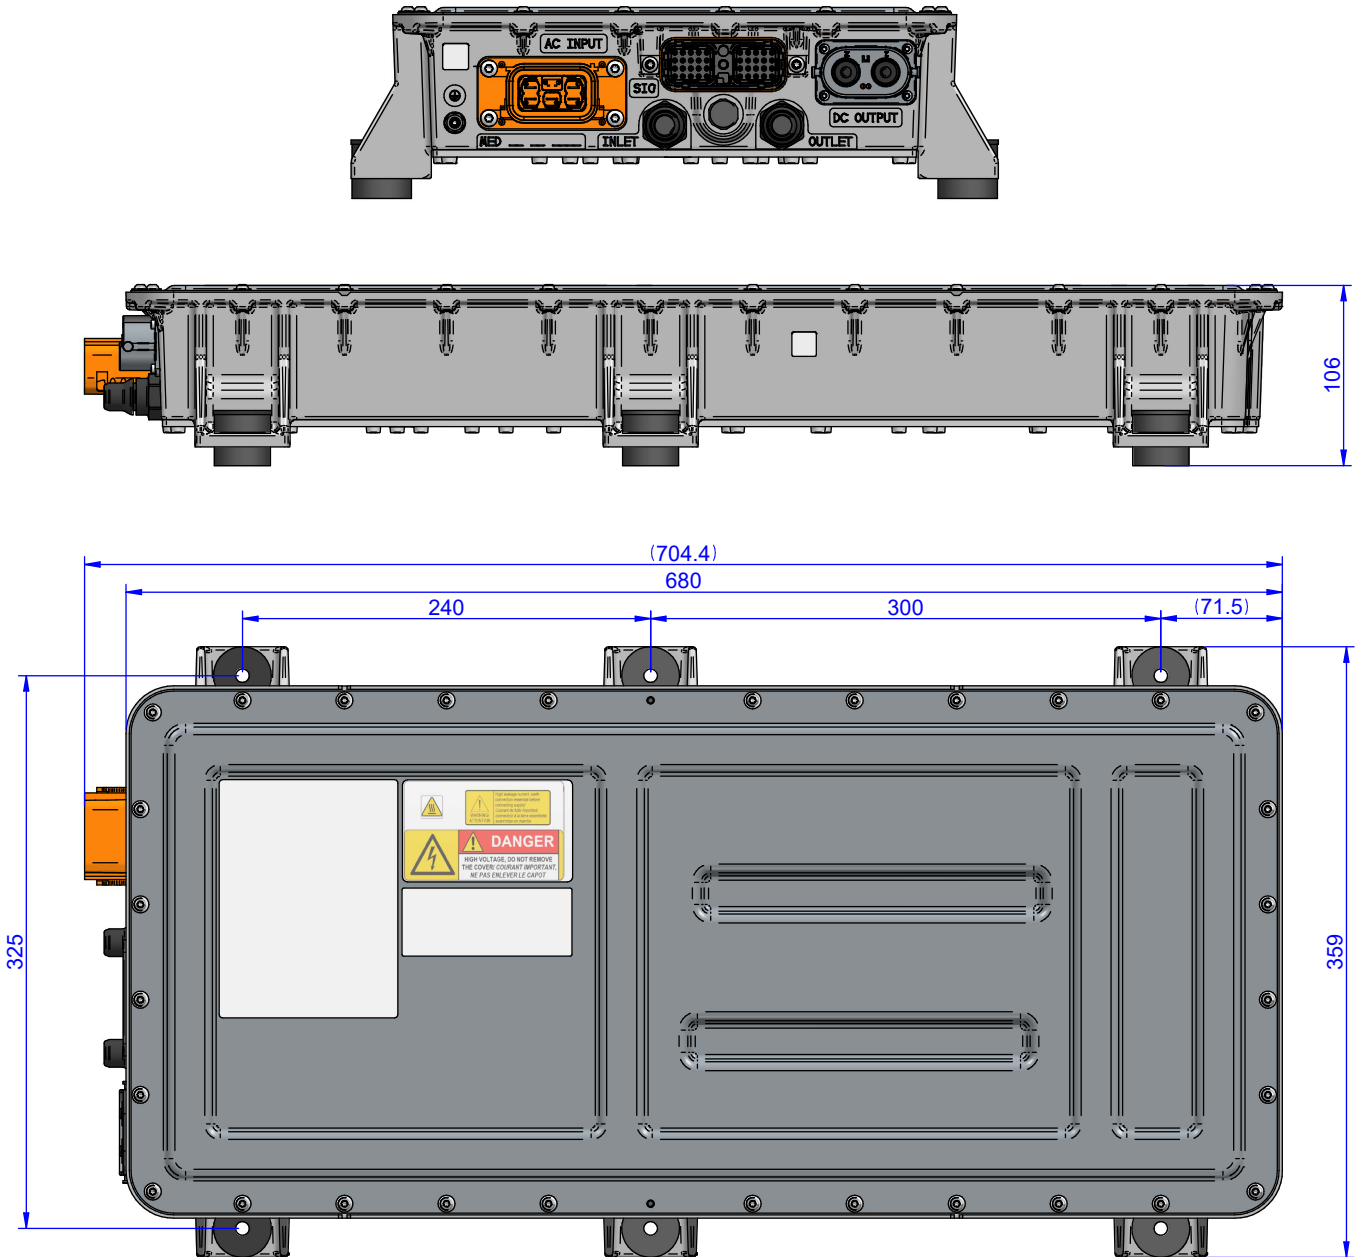


Figure 1. Mechanical Dimensions

9. POWER WIRING DIAGRAM

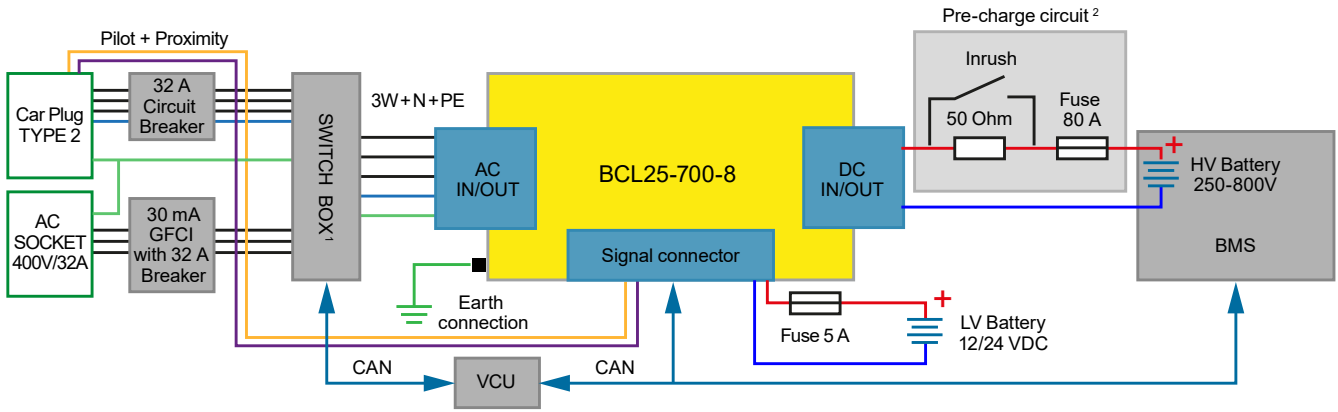

¹ Switch box is required only when the customer is using the BCL25-700-8 in both charge mode & inverter/export mode in an electric vehicle.
² External pre-charge circuit is required only when it is not part of BMS

Figure 2. Power Wiring Diagram

10. SIGNAL CONNECTOR CONNECTION

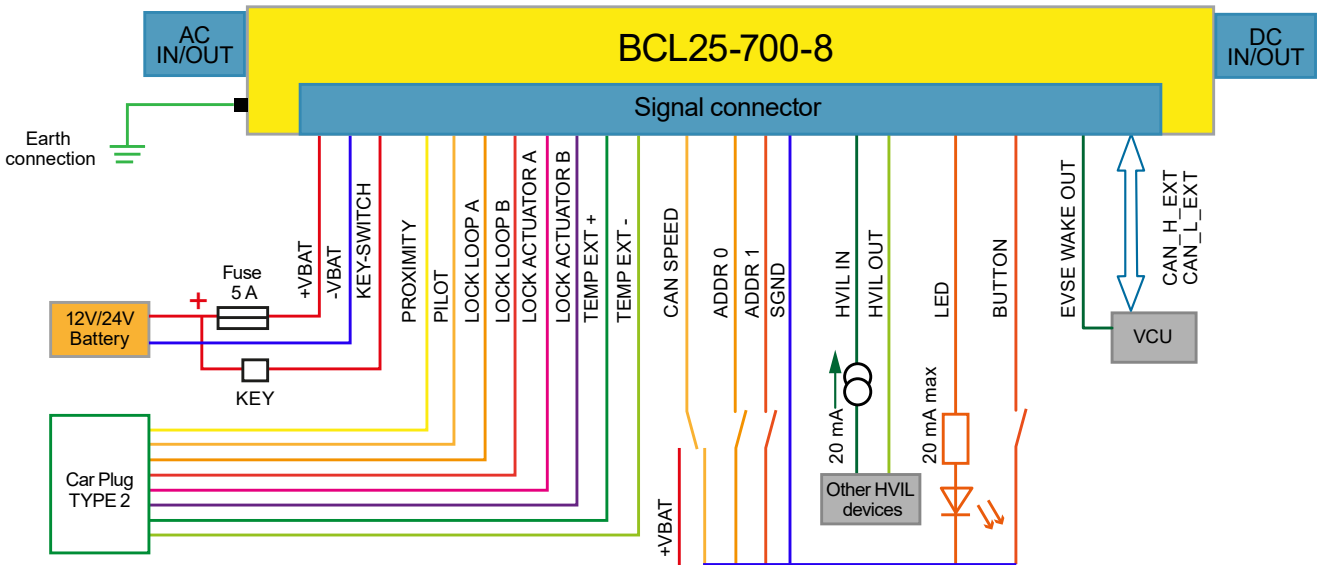


Figure 3. Signal Connector Connection

11. ACCESSORIES

| ACCESSORY | DESCRIPTION |
|-------------------|--|
| BCL25-700-CON-KIT | Connector Kit (AC connector with the 6 m cable, HV DC connector, Signal Connector) |



Figure 4. Connector Kit BCL25-700-CON-KIT

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Bel Power Solutions:](#)

[BCL25-700-8](#)