


E-Series

Hydraulic-Magnetic Circuit Breaker

PRODUCT WEBPAGE

request sample, configure part

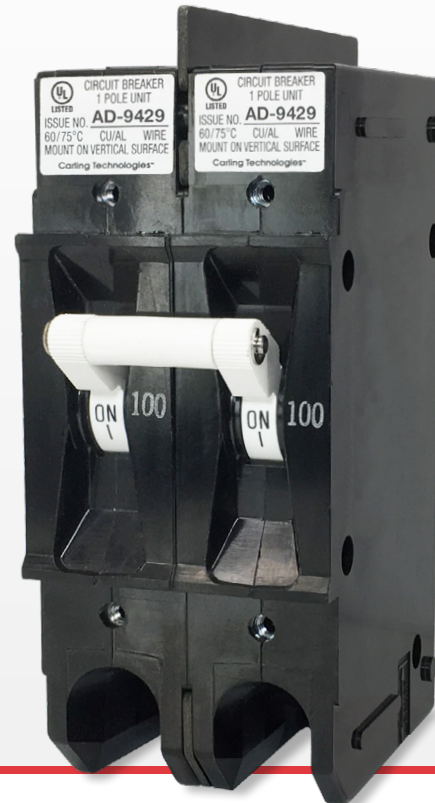

High Current and Voltage Breaker Qualified Supplementary Protector

The E-Series hydraulic-magnetic circuit breaker is designed for higher current and voltage applications and qualified, as per agency approval, for branch circuit protection or as a supplementary protector. E-Series breakers are available as a one to six pole configuration and are rated up to 125 amps and 600VAC or 125VDC, with a max IC of 10,000 amps.

1-6	1-100	600	125
Poles	Amps	VAC Max	VDC Max

Typical Applications


- Renewable Energy
- Industrial Automation
- High Voltage/Current Applications
- Military
- Generators
- Commercial Food

Tech Specs

Electrical


Maximum Voltage	600VAC 50/60 Hz, 125VDC (See Table A)
Current Ratings	Standard current coils: 0.100, 0.250, 0.500, 1.00, 2.50, 5.00, 7.50, 10.0, 15.0, 20.0, 25.0, 30.0, 50.0, 60.0, 70.0 & 100 Amp.
Auxiliary Switch Rating	SPDT; 10.1A 250VAC, 1.0A 65VDC; 0.5A 80VDC, 0.1A 125VAC (with gold contacts).
Insulation Resistance	Minimum of 100 Megohms at 500 VDC.
Dielectric Strength	UL, CSA: 2200 V 50/60 Hz for one minute between all electrically isolated terminals. E-Series Circuit Breakers comply with the 8mm spacing and 3750V 50/60 Hz dielectric requirements from hazardous voltage to operator accessible surfaces, between adjacent poles and from main circuits to auxiliary circuits per Publications EN 60950 and VDE 0805.
Resistance, Impedance	Values from Line to Load Terminal - based on Series Trip Circuit Breaker

RESISTANCE, IMPEDANCE VALUES
from Line to Load Terminals
(Values Based on Series Trip Circuit Breaker)

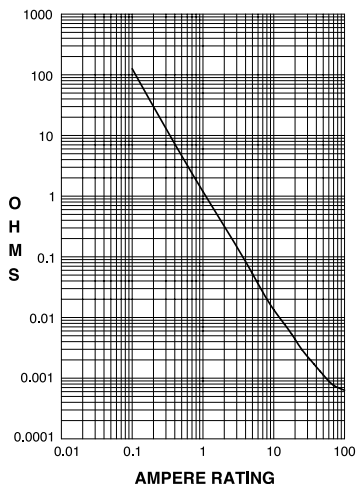

CURRENT (AMPS)	TOLERANCE (%)
0.10 - 5.0	± 15
5.1 - 20.0	± 25
20.1 - 50.0	± 35

Pulse Tolerance Curves

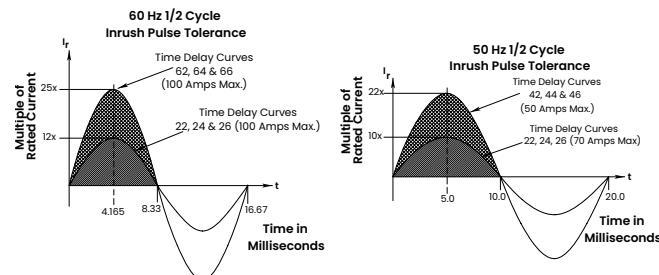

Mechanical

Endurance	10,000 ON-OFF operations @ 6 per minute; with rated current & voltage.
Trip Free	All E-Series circuit breakers will trip on overload, even when Handle is forcibly held in the ON position.
Trip Indication	The operating Handle moves positively to the OFF position when an overload causes the breaker to trip.

Physical

Number of Poles	1-6
Mounting	A 3" minimum spacing must be provided between the circuit breaker arc venting area on back connected E-Series circuit breakers and grounded obstructions. E-Series circuit breakers must be mounted on a vertical surface.
Connectors, Box Type	Front connected E-Series circuit breakers are supplied with box type pressure connectors that accept copper or aluminum conductors as follows: 1/0-14 Copper, 1/0-12 Aluminum.
Internal Circuit Configuration	Series and Switch Only, (with or Configuration without auxiliary switch). Shunt with current coils.
Weight	Approximately 252 grams/pole (Approximately 9 ounces/pole)
Standard Colors	Housing-Black; Actuator - See Ordering Scheme.

Environmental

Designed in accordance with requirements of specification MIL PRF-55629 & MIL-STD-202G as follows:

Shock	Withstands 100 Gs, 6ms, sawtooth while carrying rated current per Method 213, Test Condition "I".
Vibration	Withstands 0.060" excursion from 10-55 Hz, and 10 Gs 55-500 Hz, at rated current per Method 204C, Test Condition A.
Moisture Resistance	Method 106D, i.e., ten 24-hour cycles @ + 25°C to +65°C, 80-98% RH.
Salt Spray	Method 101, Condition A (90-95% RH @ 5% NaCl Solution, 96 hrs).
Thermal Shock	Method 107D, Condition A (Five cycles @ -55°C to +25°C to +85°C to +25°C).
Operating Temperature	-40° C to +85° C

Tech Specs

Tables

Table A: Lists UL Listed (489) & CSA Certified (C22.2 No. 5) configurations & performance capabilities as a Molded Case Circuit Breaker.

UL489 Listed Branch Circuit Breakers						
Circuit Configuration	Voltage			Current Rating	Interrupting Capacity (Amps)	High Interrupting Capacity (Amps)
	Max Rating	Frequency	Phase	Full Load Amps	Without Backup Fuse	
Series	80	DC	-	0.10 – 100	5,000	50,000
	125		-			10,000
			-	101 – 125	10,000	-
	120	50/60	1	0.10 – 125		-
	240			0.10 – 30	5,000	10,000
				31 – 100		-
	120 / 240			0.10 – 30		10,000
				31 – 100		-
				101 – 125	10,000	-
	240		3	0.10 – 100	5,000	-

Table B: Lists UL Recognized & CSA Accepted configurations & performance capabilities as a Component Supplementary Protector.

Component Supplementary Protectors											
Circuit Configuration	Voltage			Current Rating		Short Circuit Capacity (Amps)		Application Codes			
	Max Rating	Frequency	Phase	Full Load Amps	General Purpose Amps	UL/CSA					
						With Backup Fuse	Without Backup Fuse	UL	CSA		
Series & Shunt	125	DC	-	0.02 - 100	-	-	5,000	TC1,2, OL1, UI	TC1,2, OL1, UI		
	125			-	101 - 120			TC1,2, OL0, UI	TC1,2, OL0, UI		
	150			-	0.02 - 125			TC1, OL0, U3	TC1, OL0, U3		
	160			0.02 - 100	-			TC1,2, OL1, UI	TC1,2, OL1, UI		
	150 / 300			-	-			TC1,2, OL1, UI	TC1,2, OL1, UI		
	120 / 240	50/60	1	-	0.02 - 100	10,000	-	TC1,2, OL1, UI	TC1,2, OL1, UI		
	240			0.02 - 100	-			TC1,2, OL0, UI	TC1,2, OL0, UI		
	250				-			5,000	TC1,2, OL1, UI	TC1,2, OL1, UI	
	277				-			5,000	TC1,2, OL1, C1	TC1,2, OL1, C1	
	480				10,000			-	TC1,2, OL1, UI	TC1,2, OL1, UI	
	480 ¹		TC1,2, OL1, C1	TC1,2, OL1, C1							
	600		TC1,2, OL1, C1	TC1,2, OL1, C1							
	600 ²		DC	-	-	0.02 - 125	-	5,000	TC1, OL0, U3	TC1, OL0, U3	
	125	50/60			1	0.02 - 120					
	160										
240											
277											
480											
600	1 & 3										

Notes:

- 1 Per pole opposite polarity rating - Delta Configuration.
- 2 4 Poles connected in series
- 3 Requires branch circuit backup with a UL Listed Type K5 or RK5 fuse rated 15A minimum and no more than 4 times full load amp rating and not to exceed 225A.

Tech Specs

Table C: Lists UL Recognized, CSA Accepted and VDE Certified configurations and performance capabilities as a Component Supplementary Protector.

Component Supplementary Protectors With VDE										
Circuit Configuration	Voltage			Current Rating	Short Circuit Capacity (Amps)			Application Codes		Construction Notes
	Max Rating	Frequency	Phase	Full Load Amps	UL/CSA		VDE (Icn)			
					With Backup Fuse	Without Backup Fuse	Without Backup Fuse	UL	CSA	
Series & Shunt	125	DC	-	0.1 - 100	-	5,000	5,000	TC1,2, OLI, UI	TC1,2, OLI, UI	1 or 2 Poles
	240	50/60	1 & 3		10,000	-	4,000	TC1,2, OLI, CI	TC1,2, OLI, CI	1-5 poles. Up to 4 Current Poles, 1 Voltage Pole
	415									2-5 poles. Up to 4 Current Poles, 1 Voltage Pole
Switch Only	125	DC	-	0.1 - 125						
	240	50/60	1 & 3	0.1 - 100						
	415									

Notes:
 1 Requires branch circuit backup with a UL LISTED Type K5 or RK5 fuse rated 15A minimum and no more than 4 times full load amp rating and not to exceed 225 amps.

Table D: Lists UL Recognized, CSA Accepted configurations and performance capabilities as Protectors, Supplementary for Marine Electrical and Fuel Systems (Guide PEQZ2, File E75596). Ignition Protected per UL 1500. UL Classified Small Craft Electrical Devices, Marine in accordance with ISO 8846 (Guide UZMK, File MQ1515) as Marine Supplementary Protectors.

UL1500 (Marine Ignition Protection)							
Circuit Configuration	Voltage			Current Rating	Short Circuit Capacity (Amps)	Application Codes	
	Max Rating	Frequency	Phase	Full Load Amps	With Backup Fuse	UL	CSA
Series	65	DC	-	0.2 - 100	5,000	TC1,2, OLI, UI	TC1,2, OLI, UI
	125	50/60	1		1,500		
	250						

Agency Approvals

UL 1077	Component Recognition Program as Protectors, Supplementary (Guide QVNU2, File E75596)
UL 1500	Component Recognition Program as Manual Motor Controls (Guide NLRV2, File E135367)
UL 489	Protectors, Supplementary for Marine Electrical & Fuel Systems (Guide PEQZ2, File E75596) Ignition Protection
CSA Accepted	Component Supplementary Protector (Class 3215 30, File 047848 0 000) CSA Standard C22.2 No. 235
CSA Certified	Circuit Breaker Molded Case (Class 1432 01, File 093910), CSA Standard C22.2 No. 5.1 - M
TUV Certified	EN60934 under License No. R72031056
VDE Certified	EN60934, VDE 0642 under File No. 10537

Time Delay Specs

To view all hydraulic-magnetic circuit breaker time delay values, please visit www.carlingtech.com/sites/default/files/documents/Carling-HM-CB-Time-Delays.pdf

Ordering Scheme

UL 1077 Recognized

Sample
Part Number

E A 2 - B 0 - 24 - 450 - 1 2 A - C B

Selection

1

2

3

4

5

6

7

8

9

10

11

12

1. SERIES

E

2. ACTUATOR

A Handle, one per pole

3. POLES

1

1	One	3	Three	5	Five
2	Two	4	Four	6	Six

4. CIRCUIT

2

A	Switch Only (no coil)	E	Shunt Trip (voltage)
B	Series Trip (current)	F	Relay Trip (current)
C	Series Trip (voltage)	G	Relay Trip (voltage)
D	Shunt Trip (current)		

5 AUXILIARY SWITCH

4

0	without Auxiliary Switch	6	S.P.S.T. 0.110 Q.C. Terminals
2	S.P.D.T. 0.110 Q.C. Terminals	7	S.P.S.T. 0.110 Q.C. Terminals (Gold Contacts)
3	S.P.D.T. 0.139 Solder Lug	8	S.P.S.T. 0.187 Q.C. Terminals
4	S.P.D.T. 0.110 Q.C. Terminals (Gold Contacts)	9	S.P.D.T. 0.187 Q.C. Terminals

6. FREQUENCY & DELAY

03	DC 50/60Hz, Switch Only	36	DC, 50/60Hz Long
10	DC Instantaneous	62	50/60Hz Short, High-inrush
12	DC Short	64	50/60Hz Medium, High-inrush
14	DC Medium	66	50/60Hz Long, High-inrush
16	DC Long	74	DC, Medium, High-inrush
20	50/60Hz Instantaneous	76	DC, Long, High-inrush
22	50/60Hz Short	92	DC, 50/60Hz Short, High-inrush
24	50/60Hz Medium	94	DC, 50/60Hz Medium, High-inrush
26	50/60Hz Long	96	DC, 50/60Hz Long, High-inrush
30	DC, 50/60Hz Instantaneous		
32	DC, 50/60Hz Short		
34	DC, 50/60Hz Medium		

7. CURRENT RATING (AMPERES)

4

CODE	AMPERES					
020	0.020	235	0.350	430	3.000	614
025	0.025	240	0.400	435	3.500	615
030	0.030	245	0.450	440	4.000	616
035	0.035	250	0.500	445	4.500	617
040	0.040	255	0.550	450	5.000	618
045	0.045	260	0.600	455	5.500	620
050	0.050	265	0.650	460	6.000	622
055	0.055	270	0.700	465	6.500	624
060	0.060	275	0.750	470	7.000	625
065	0.065	280	0.800	475	7.500	630
070	0.070	285	0.850	480	8.000	635
075	0.075	290	0.900	485	8.500	640
080	0.080	295	0.950	490	9.000	650
085	0.085	410	1.000	495	9.500	660
090	0.090	512	1.250	610	10.000	670
090	0.095	415	1.500	710	10.500	680
210	0.100	517	1.750	611	11.000	690
215	0.150	420	2.000	711	11.500	810
220	0.200	522	2.250	612	12.000	811
225	0.250	425	2.500	712	12.500	812
230	0.300	527	2.750	613	13.000	912

OR VOLTAGE COIL

CODE	RATING	TRIP VOLTS			
A06	6DC	5DC	A65	65DC	55DC
A12	12DC	10DC	B25	120DC	100DC
A18	18DC	15DC	J06	6AC	5AC
A24	24DC	20DC	J12	12AC	10AC
A32	32DC	25DC	J18	18AC	15AC
A48	48DC	40DC	J24	24AC	20AC
			J48	48AC	40AC
			J65	65AC	55AC
			K20	120AC	65AC
			L40	240AC	130AC

8. TERMINAL

12

	BACK CONNECTED (FRONT MOUNTED ONLY)	MAX. RATING
1 ⁹	10-32 Stud (All Terminals)	50 A
2 ⁹	1/4-20 Stud (All Terminals)	120 A
A ⁹	M5 Stud (Line & Load)	50 A
B ⁹	M6 Stud (Line & Load)	100 A
	FRONT CONNECTED (BACK MOUNTED ONLY)	
3 ¹⁰	Box Wire Connector (Line & Load)	100 A
C ¹¹	Box Wire Connector with Pressure Plate (Line & Load)	100 A
4	10-32 Screw (Line & Load)	50 A
D	M5 Screw (Line & Load)	50 A
5	10-32 "Bus-Type" Screw (Line), 10-32 Screw (Load)	50 A
E	M5 "Bus-Type" Screw (Line), 10-32 Screw (Load)	50 A
6 ¹⁰	10-32 "Bus-Type" Screw (Line), Box Wire Connector (Load)	100 A
F ¹¹	10-32 "Bus-Type" Screw (Line), Box Wire Connector with Pressure Plate (Load)	100 A
7	1/4-20 Screw (Line & Load)	100 A
G	M6 Screw (Line & Load)	100 A
8	1/4-20 "Bus-Type" Screw (Line), 1/4-20 Screw (Load)	100 A
H	M6 "Bus-Type" Screw (Line), M6 Screw (Load)	100 A
9 ¹⁰	1/4-20 "Bus-Type" Screw (Line), Box Wire Connector (Load)	100 A
J ¹¹	1/4-20 "Bus-Type" Screw (Line), Box Wire Connector with Pressure Plate (Load)	100 A

9 ACTUATOR COLOR & LEGEND

13

Actuator Color	I-O	ON-OFF	Dual	Legend Color
White	A	B	1	Black
Black	C	D	2	White
Red	F	G	3	White
Green	H	J	4	White
Blue	K	L	5	White
Yellow	M	N	6	Black
Gray	P	Q	7	Black
Orange	R	S	8	Black

10. MOUNTING / BARRIERS

	BACK CONNECTED (FRONT MOUNTED ONLY)	
	Mounting Inserts	
A	6-32	
B	ISO M3	
	FRONT CONNECTED (BACK MOUNTED ONLY)	
	14	
	Back Mounting Foot Type	Front Mounting Inserts (Optional Use)
C	Short	6-32
D	Short	ISO M3
E	Long	6-32
F	Long	ISO M3

11. MAXIMUM APPLICATION RATING

15

A	65VDC, 120A	G	600VAC, 100A
B	125VDC, 120A	H	480VAC, 100A
C	120/240VAC, 100A	J	415VAC, 100A
D	240VAC, 100A	L	160VDC, 100A
E	277/480VAC, 100A	T	125VDC/240VAC, 100A
F	277VAC, 100A	W	125VDC/415VAC, 100A

12. AGENCY APPROVAL

B	UL 1077 / UL 508 Recognized & CSA Accepted
D	UL 1077 Recognized, CSA Accepted, & VDE Certified

Notes:

- VDE approval on 1-5 poles only. Standard multi-pole units identical poles except when specifying auxiliary switch (Note 4). For mixed ratings, consult factory.
- Switch Only & Series Trip construction available with either front or back connected terminals. Shunt construction available with back connected terminals. (Terminal Codes 1 & 2) only. Circuit Codes B, C & D are VDE approved.
- Switch Only construction: 30 amps or less select Current Rating Code 630; 31-70 amps, select Current Rating code 670; 71-100 amps, select Current Rating Code 810; 101-125 amps Select Current Rating Code 912. Switch Only is VDE approved only if tied to a protected pole.
- Auxiliary Switch available on Switch Only and Series Trip units. On multi-pole units, only one auxiliary switch is normally supplied mounted in the extreme right pole. Back mounted units require special mounting provisions when auxiliary switch is specified. VDE approval on Auxiliary Switch Codes 0, 2, 3 & 4 only.
- Voltage trip coils are not rated for continuous duty. Available only with frequency & delay codes 10 & 20. Series trip construction with a voltage coil is VDE approved only if tied to a protected pole.
- Frequency & delay codes 92, 94 & 96 are not VDE Certified.
- Current Coil Ratings 0, 100 - 100 amps are VDE Certified.
- 125 A rating (Code 912) available as a Switch Only (Circuit Code A), rated 125 VDC (Code B).
- An Anti-Flash Over Barrier is supplied between poles on multi-pole units with 10-32 (Terminal Code 1), 1/4-20 (Code 2), M5 (Code A), and M6 (Code B) terminals per UL requirement.
- Box Wire Connector will accept #14 through 0 AWG. copper wire or #12 through 0 AWG. aluminum wire.
- Box wire connector with pressure plate for stranded wire. Consult factory
- Terminal Codes A, B, D, E, G & H are not VDE Certified.
- VDE approvals require Dual (I-O, ON-OFF) or I-O markings on all handles.
- Back Mounted breakers can also be front mounted by utilizing the proper front panel mounting inserts normally supplied. However, terminal connections must be made prior to mounting.
- Application ratings B, D, J, T & W are available with VDE.
- 415, 480 & 600 VAC ratings require 3 or 4 pole break 30 and 2 pole break 10.

Configure Complete Part Number >

Browse Standard Parts >

Ordering Scheme

UL 489 Listed

Sample
Part Number

E A 2 - B 0 - 24 - 450 - 1 2 A - C C

Selection

1

2

3

4

5

6

7

8

9

10

11

12

1. SERIES

E

2. ACTUATOR

A Handle, one per pole

3. POLES ¹

1	One	3	Three	5	Five
2	Two	4	Four	6	Six

4. CIRCUIT ²

B	Series Trip (current)	C	Series Trip (voltage) ³
---	-----------------------	---	------------------------------------

5 AUXILIARY SWITCH ⁴

0	without Auxiliary Switch	6	S.P.S.T. 0.110 Q.C. Terminals
2	S.P.D.T. 0.110 Q.C. Terminals	7	S.P.S.T. 0.110 Q.C. Terminals
3	S.P.D.T. 0.139 Solder Lug		(Gold Contacts)
4	S.P.D.T. 0.110 Q.C. Terminals	8	S.P.S.T. 0.187 Q.C. Terminals
	(Gold Contacts)	9	S.P.D.T. 0.187 Q.C. Terminals

6. FREQUENCY & DELAY

10	DC Instantaneous ⁵	24	50/60Hz Medium
12	DC Short	26	50/60Hz Long
14	DC Medium	62	50/60Hz Short, High-inrush
16	DC Long	64	50/60Hz Medium, High-inrush
20	50/60Hz Instantaneous ⁵	66	50/60Hz Long, High-inrush
22	50/60Hz Short	74	DC, Medium, High-inrush
		76	DC, Long, High-inrush

7. CURRENT RATING (AMPERES) ⁷

CODE	AMPERES						
020	0.020	235	0.350	430	3.000	614	14.000
025	0.025	240	0.400	435	3.500	615	15.000
030	0.030	245	0.450	440	4.000	616	16.000
035	0.035	250	0.500	445	4.500	617	17.000
040	0.040	255	0.550	450	5.000	618	18.000
045	0.045	260	0.600	455	5.500	620	20.000
050	0.050	265	0.650	460	6.000	622	22.000
055	0.055	270	0.700	465	6.500	624	24.000
060	0.060	275	0.750	470	7.000	625	25.000
065	0.065	280	0.800	475	7.500	630	30.000
070	0.070	285	0.850	480	8.000	635	35.000
075	0.075	290	0.900	485	8.500	640	40.000
080	0.080	295	0.950	490	9.000	650	50.000
085	0.085	410	1.000	495	9.500	660	60.000
090	0.090	512	1.250	610	10.000	670	70.000
090	0.095	415	1.500	710	10.500	680	80.000
210	0.100	517	1.750	611	11.000	690	90.000
215	0.150	420	2.000	711	11.500	810	100.000
220	0.200	522	2.250	612	12.000	811	110.000
225	0.250	425	2.500	712	12.500	812	120.000
230	0.300	527	2.750	613	13.000	912	125.000 ⁸

OR VOLTAGE COIL ⁵

CODE	RATING	TRIP VOLTS					
A06	6DC	5DC	A65	65DC	55DC	J48	48AC 40AC
A12	12DC	10DC	B25	120DC	100DC	J65	65AC 55AC
A18	18DC	15DC	J06	6AC	5AC	K20	120AC 65AC
A24	24DC	20DC	J12	12AC	10AC	L40	240AC 130AC
A32	32DC	25DC	J18	18AC	15AC		
A48	48DC	40DC	J24	24AC	20AC		

8. TERMINAL ⁷

	BACK CONNECTED (FRONT MOUNTED ONLY)	MAX. RATING
1 ⁸	10-32 Stud (All Terminals)	50 A
2 ⁸	1/4-20 Stud (All Terminals)	125 A
	FRONT CONNECTED (BACK MOUNTED ONLY)	
3 ⁹	Box Wire Connector (Line & Load)	100 A
C ¹⁰	Box Wire Connector with Pressure Plate (Line & Load)	100 A
4	10-32 Screw (Line & Load)	50 A
5	10-32 "Bus-Type" Screw (Line), 10-32 Screw (Load)	50 A
6 ⁹	10-32 "Bus-Type" Screw (Line), Box Wire Connector (Load)	100 A
F ¹⁰	10-32 "Bus-Type" Screw (Line), Box Wire Connector with Pressure Plate (Load)	100 A
7	1/4-20 Screw (Line & Load)	125 A
8	1/4-20 "Bus-Type" Screw (Line), 1/4-20 Screw (Load)	100 A
9 ⁹	1/4-20 "Bus-Type" Screw (Line), Box Wire Connector (Load)	100 A
J ¹⁰	1/4-20 "Bus-Type" Screw (Line), Box Wire Connector with Pressure Plate (Load)	100 A

9 ACTUATOR COLOR & LEGEND ¹²

Actuator Color	ON-OFF	Dual	Legend Color
White	B	1	Black
Black	D	2	White
Red	G	3	White
Green	J	4	White
Blue	L	5	White
Yellow	N	6	Black
Gray	Q	7	Black
Orange	S	8	Black

10. MOUNTING / BARRIERS

	BACK CONNECTED (FRONT MOUNTED ONLY)	
A	Mounting Inserts	
B	6-32 ISO M3	
	FRONT CONNECTED (BACK MOUNTED ONLY) ¹¹	
C	Back Mounting Foot Type	Front Mounting Inserts (Optional Use)
D	Short	6-32
E	Long	ISO M3
F	Long	6-32
		ISO M3

11. MAXIMUM APPLICATION RATING

1	120 VAC	C	120/240 VAC, 100A ¹³
B	125 VDC	D	240 VAC, 100A

12. AGENCY APPROVAL

C	UL 489 Listed & CSA Certified
F	UL 489 Listed, CSA Certified, & VDE Certified

Notes:


- Standard multi-pole units identical poles except when specifying auxiliary switch (Note 4). For mixed ratings, consult factory. VDE Certification on 1-5 poles only.
- Series Trip construction available with either front or back connected terminals.
- Series Trip construction with a voltage coil is not available as a single pole unit and must be tied to a protected pole.
- On multi-pole units, only one auxiliary switch is normally supplied mounted in the extreme right pole per Figure A. Back mounted units require special mounting provisions when auxiliary switch is specified. VDE Certification on auxiliary switch codes 0, 2, 3 & 4 only.
- Voltage Trip Coils are not rated for continuous duty. Available only with Fre quency & Delay Codes 10 & 20.
- Frequency & Delay Codes 92, 94 & 96 are not VDE Certified.
- Current Ratings under 0.100 amps are not VDE Certified.
- An Anti-Flash Over Barrier is supplied between poles on multi-pole units with 10-32 Stud (Terminal Code 1) or 1/4-20 Stud (Code 2) terminals per UL requirement.
- Box Wire Connector will accept #14 through 0 AWG. copper wire or #12 through 0 AWG. aluminum wire.
- Box Wire Connector with Pressure Plate for stranded wire. Consult factory.
- Back Mounted breakers can also be front mounted by utilizing the proper front panel mounting inserts normally supplied. However, terminal connections must be made prior to mounting.
- VDE Certification requires dual (I-O , ON-OFF) markings on all handles.
- Not available with VDE Certification.

[Configure Complete Part Number >](#)

[Browse Standard Parts >](#)

inches [millimeters]

#6-32[M3]THREADx.220[5.59]
MIN. DEEP (2 PLCS)/POLE7

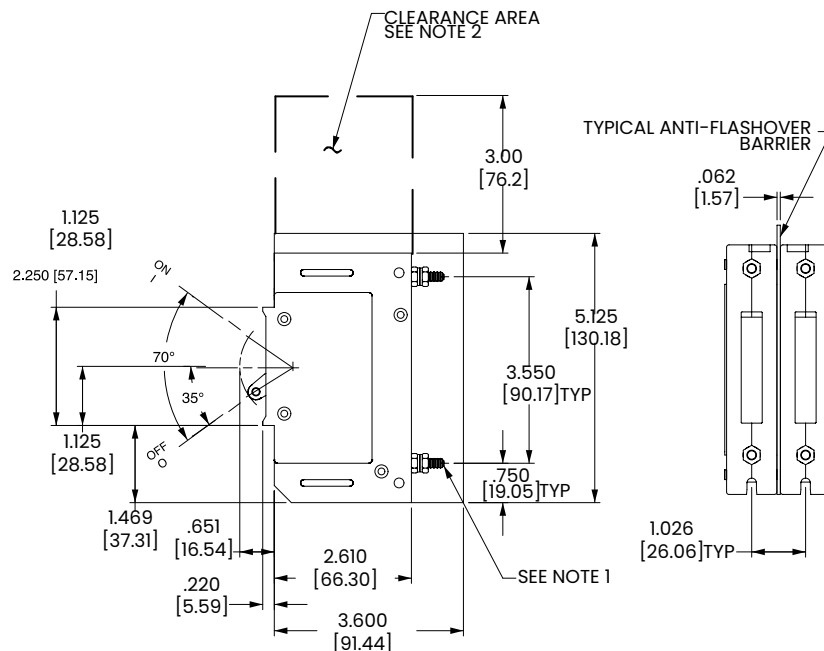

Technical drawing of the multi-pin connector assembly. The top part shows a plan view with dimensions for the pin pitch and overall width. The bottom part shows a cross-sectional view of the assembly.


Dimensions (mm):

- Pin pitch: 2.54
- Overall width: 6.276 [159.40] MAX
- Distance from center to edge: 5.230 [132.85] MAX
- Distance from center to edge: 4.185 [106.3] MAX
- Distance from center to edge: 3.138 [79.70] MAX
- Distance from center to edge: 2.092 [53.15] MAX
- Pin diameter: 1.026 [26.06]
- Pin spacing: 1.026 [26.06] TYP

Cross-sectional view labels:

- MULTI-POLE ASSEMBLY WITH COM

MULTI-POLE UNITS ARE
— ASSEMBLED AT FACTORY
WITH COMMON HANDLE TIE


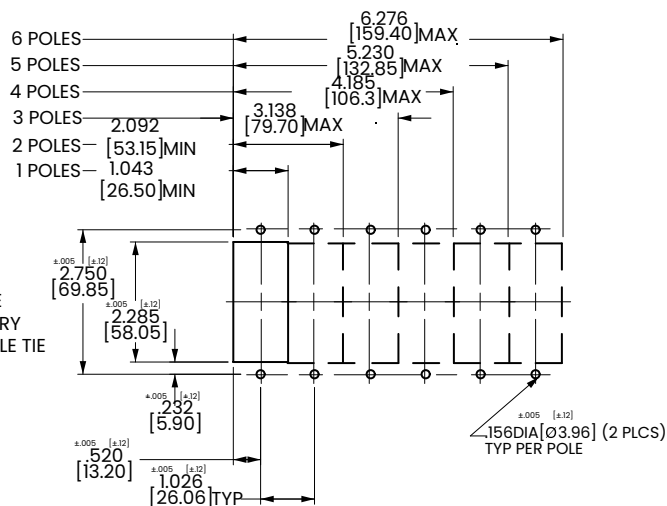


- 1 1/4 - 20 stud terminal in Series Trip circuit configuration shown.
- 2 A 3" min spacing must be provided between the circuit breaker arc venting area
- 3 of back connected E-Series circuit breaker and grounded obstructions.
- 4 Tolerance $\pm .020$ [.51] unless otherwise specified.
- 5 Circuit breakers must be mounted on vertical surface.


Dimensional Specs

inches [millimeters]

MOUNTING INSERTS:

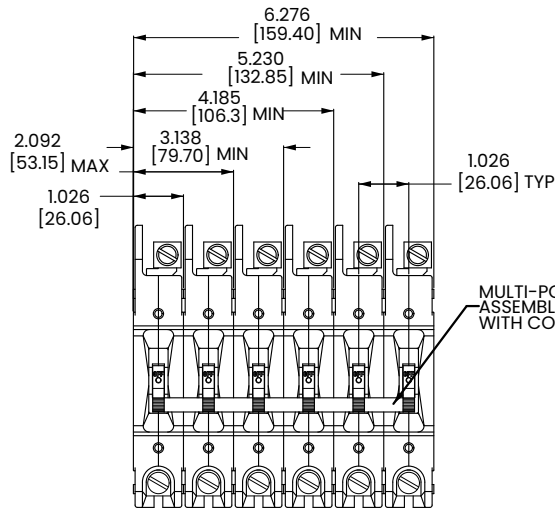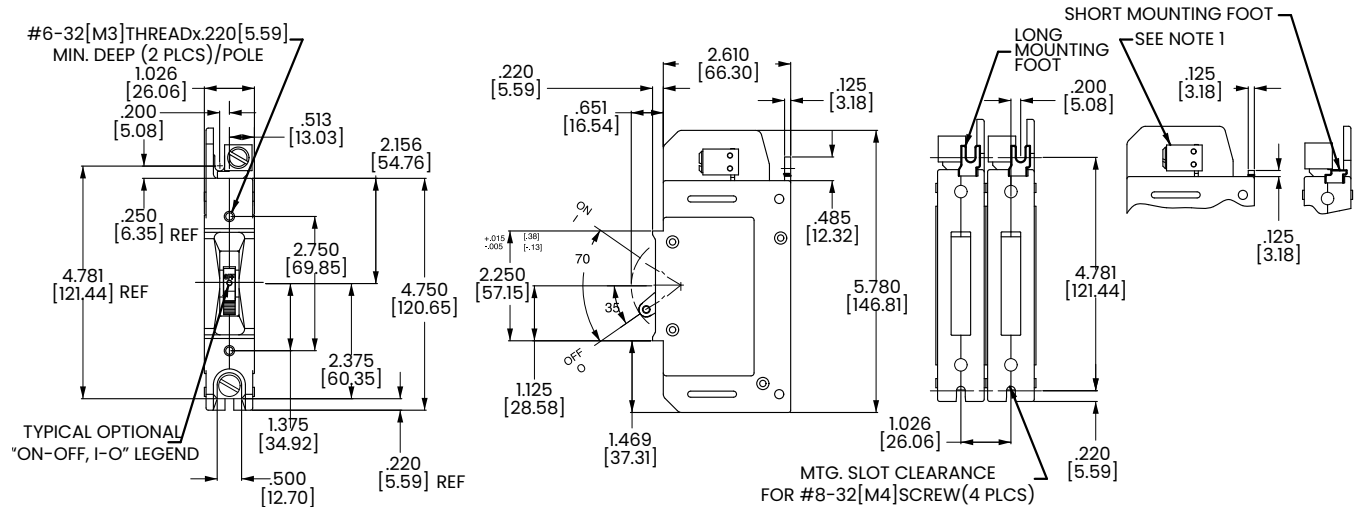

PANEL CUTOUT DETAIL

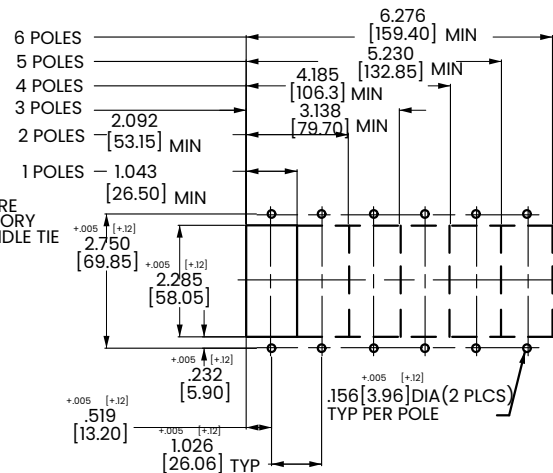

Notes:

- 1 Tolerance $\pm .020$ [.5] unless otherwise specified.
- 2 Box wire connector terminal in Series Trip circuit configuration shown.
- 3 Circuit breakers must be mounted on vertical surface.

Circuit & Terminal Diagram

inches [millimeters]

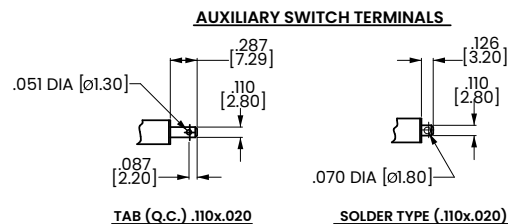
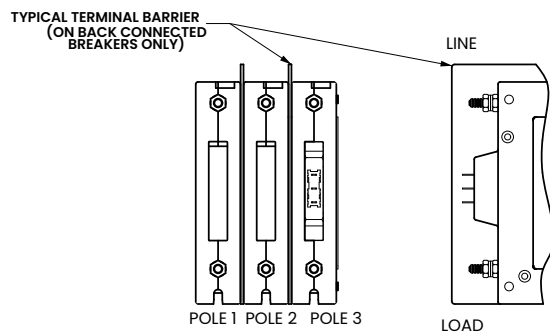
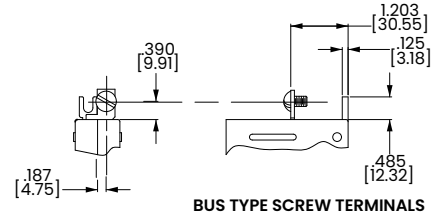
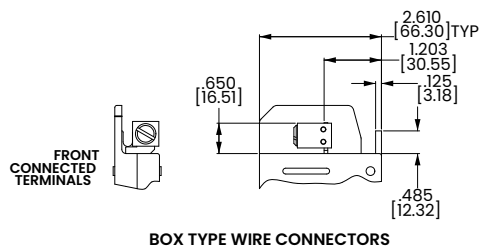
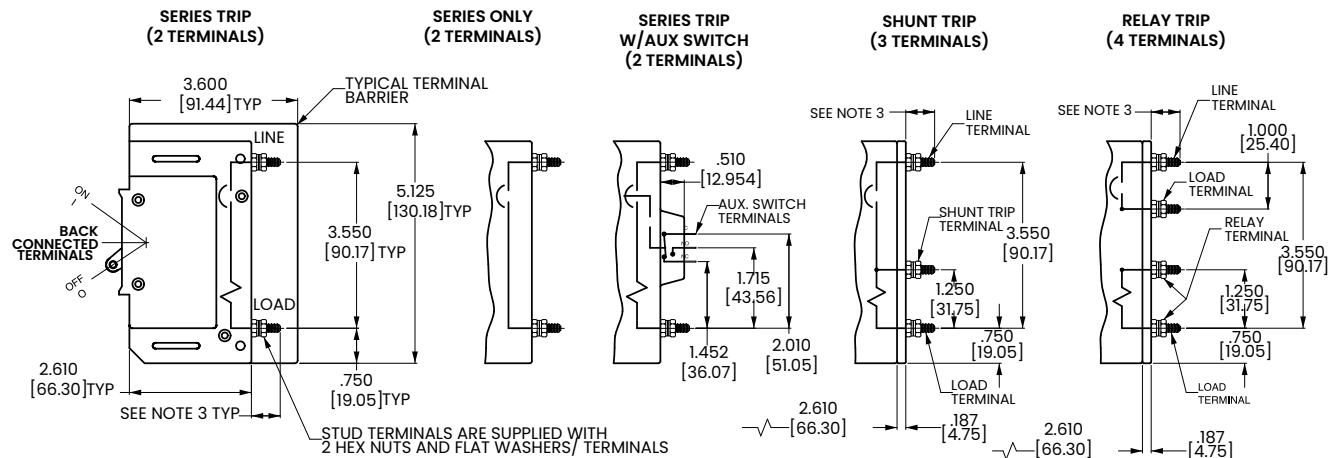


TABLE A TIGHTENING TORQUE SPECIFICATIONS		
THREAD SIZE TERMINAL TYPE	WIRE SIZE	TORQUE
#6-32 [M3] HARDWARE	—	7-9 IN-LBS [0.8-1.0 NM]
#10-32 THD TERMINAL SCREW	ALL	15-20 IN-LBS [1.7-2.3 NM]
1/4-20 THD TERMINAL SCREW	ALL	30-35 IN-LBS [3.4-4.0 NM]
#10-32 STUD	ALL	15-20 IN-LBS [1.7-2.3 NM]
1/4-20 STUD	ALL	30-35 IN-LBS [3.4-4.0 NM]
BOX WIRE CONNECTOR	14-10 AWG	35 IN-LBS [4.0 NM]
	8 AWG	40 IN-LBS [4.5 NM]
	6-4 AWG	45 IN-LBS [5.1 NM]
	3-1/0 AWG	50 IN-LBS [5.7 NM]

Notes:

- 1 Tolerance $\pm .020$ [.51] unless otherwise specified.
- 2 0-50 amps: 10-32 & M5 Studs .625 $\pm$.062/15.88 $\pm$ 1.574 long.
- 3 51-120 amps: 1/4-20 & M6 Studs .750 $\pm$.062/19.05 $\pm$ 1.574 long.


Time Delay

E-SERIES TIME DELAY VALUES											
TRIP TIME (SECONDS)	PERCENT OF RATED CURRENT										
	Delay	100%	125%	135%	150%	200%	400%	600%	800%	1000%	1200%
	10	No Trip	May Trip	--	.001 - .038	.001 - .032	.001 - .021	.001 - .019	.001 - .019	.001 - .019	.001 - .019
	12, 72	No Trip	.600 - 7.00	--	.330 - 2.00	.150 - .800	.033 - .160	.016 - .071	.010 - .048	.008 - .040	.008 - .040
	14, 74	No Trip	11.0 - 110	--	6.00 - 45.0	3.00 - 18.0	.280 - 3.50	.013 - 1.50	.010 - .130	.009 - .090	.009 - .080
	16, 76	No Trip	100 - 800	--	50.0 - 360	20.0 - 120	3.00 - 25.0	.020 - 11.0	.010 - .700	.009 - .230	.009 - .200
	20	No Trip	May Trip	--	.001 - .040	.001 - .031	.001 - .020	.001 - .020	.001 - .020	.001 - .020	.001 - .020
	22, 62	No Trip	.800 - 5.00	--	.400 - 2.30	.150 - .900	.034 - .170	.020 - .080	.012 - .051	.010 - .040	.009 - .040
	24, 64	No Trip	7.20 - 90.0	--	4.40 - 35.0	2.00 - 15.0	.500 - 3.50	.025 - 1.60	.012 - .330	.010 - .070	.009 - .050
	26, 66	No Trip	50.0 - 500	--	32.0 - 250	14.0 - 120	2.50 - 24.0	.320 - 7.00	.0125 - 3.10	.011 - .130	.010 - .055
	30	No Trip	May Trip	--	.001 - .040	.001 - .032	.001 - .020	.001 - .020	.001 - .020	.001 - .020	.001 - .020
	32, 92	No Trip	May Trip	.450 - 5.20	.330 - 2.30	.150 - .900	.033 - .170	.016 - .080	.009 - .051	.008 - .040	.008 - .040
	34, 94	No Trip	May Trip	5.80 - 73.0	4.40 - 45.0	2.00 - 18.0	.280 - 3.60	.013 - 1.60	.010 - .330	.009 - .090	.009 - .080
	36, 96	No Trip	May Trip	42.0 - 600	32.0 - 360	14.0 - 120	2.50 - 25.0	.020 - 11.0	.010 - 4.10	.009 - .330	.009 - .200


NOTES
Delay Curves 10,20,30: Breakers to hold 100% and must trip at 150% of rated current and greater within the time limit shown in these curves.
Delay Curves 12,14,16,22,24,26,62,64,66,72,74,76: Breakers to hold 100% and must trip at 125% of rated current and greater within the time limit shown in these curves. All curves: Data shown represents breaker response at ambient temperature of 77°F (25°C) with no preloading; Breakers are mounted in standard wall-mount position. The minimum inrush pulse tolerance handling capacity on the above standard delays is 16 times rated current & 20 times rated current for high inrush delays based on a 60Hz 1/2 cycle, 8.33 ms pulse.

Instantaneous



AC

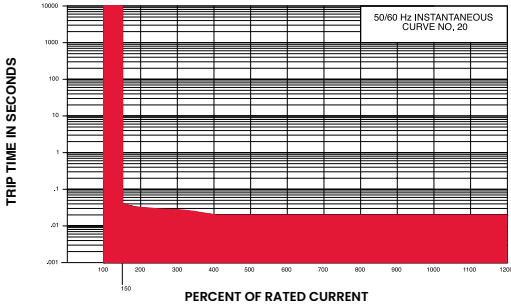



DC

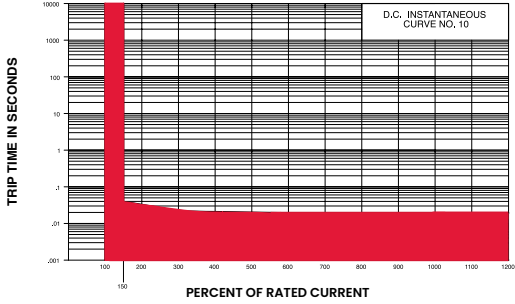



Short

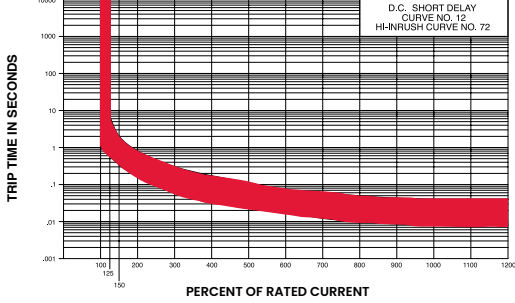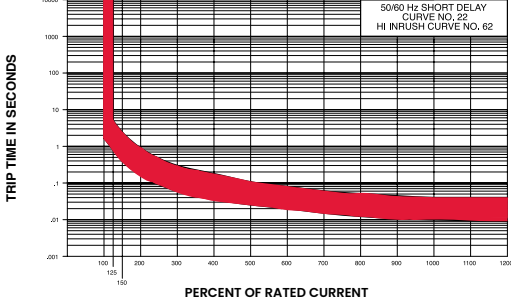

Medium

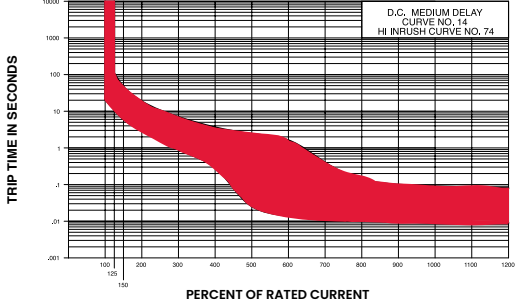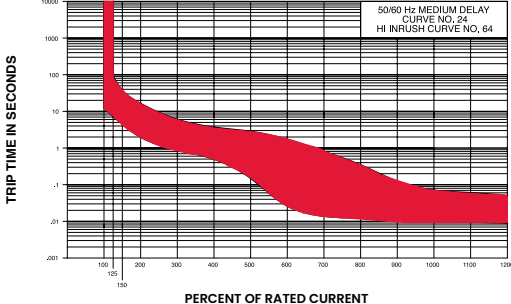


Long

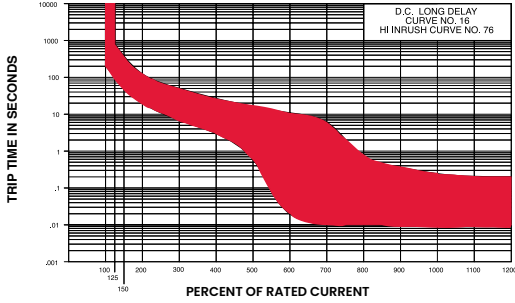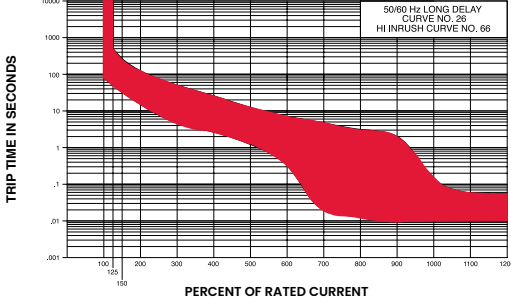


Time Delay

AC/DC


Instantaneous

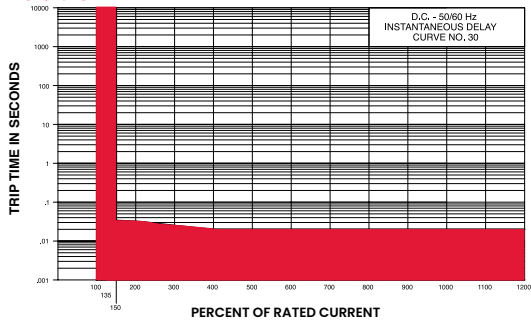


Short

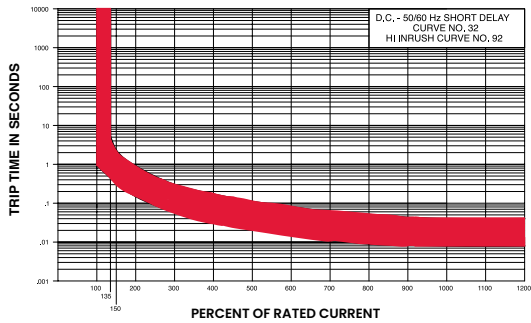

Medium

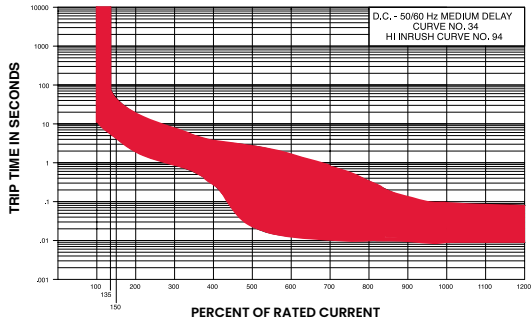

Long

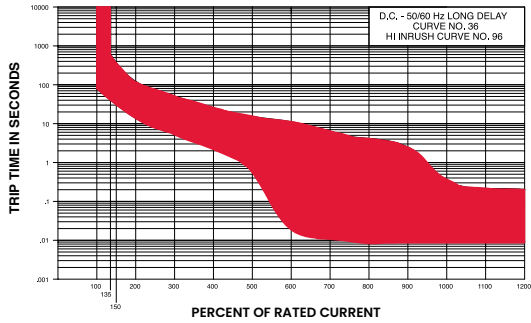

Authorized Sales Representatives and Distributors

Click on a region of the map below to find your local representatives and distributors or visit www.carlingtech.com/findarep.



About Carling

Founded in 1920, Carling Technologies is a leading manufacturer of electrical and electronic switches and assemblies, circuit breakers, electronic controls, power distribution units, and multiplexed power distribution systems. With six ISO9001 and IATF16949 registered manufacturing facilities and technical sales offices worldwide, Carling Technologies Sales, Service and Engineering teams do much more than manufacture electrical components, they engineer powerful solutions! To learn more about Carling please visit www.carlingtech.com/company-profile.

To view all of Carling's environmental, quality, health & safety certifications please visit www.carlingtech.com/environmental-certifications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Carling Technologies:](#)

[EA1-B0-24-615-12A-CC](#) [EA1-B0-12-650-21A-BB](#) [EA3-B0-22-625-12A-DC](#) [EA1-B0-14-630-32E-BC](#) [EA1-B0-26-450-32E-FB](#) [EA3-B0-24-655-22A-DC](#) [EA3-B0-26-620-32E-HB](#) [EA3-B0-26-625-1DA-EB](#) [EA3-B0-26-630-32E-HB](#) [EA3-X0-02-564-12A-BB](#) [EA3-B0-66-490-11A-GB](#) [EA3-B2-24-640-22A-EB](#) [EA3-B2-24-660-22A-EB](#) [EA3-B2-24-810-22A-EB](#) [EA1-B0-14-810-2DA-BB](#) [EA3-B0-26-615-32E-GB](#) [EA3-B0-26-615-1DA-GB](#) [EA1-B0-24-620-52E-CC](#) [EA3-B0-26-630-1DA-GB](#) [EA3-B0-26-640-1-DA-GB](#) [EA3-B3-66-490-11A-GB](#) [EA1-B2-12-812-22A-AB](#) [EA1-B0-26-630-1DA-CC](#) [EA1-B0-66-810-22A-1C](#) [EA3-B0-24-640-22A-EB](#) [EA3-B0-24-650-22A-EB](#)