

## HLMP-Yxxx

### T-1 (3 mm) AlInGaP LED Lamps

#### Description

This family of Broadcom® T-1 lamps is widely used in general-purpose indicator and backlighting applications. The optical design is balanced to yield superior light output and wide viewing angles. Several intensity choices are available in each color for increased design flexibility.


#### Features

- Low power consumption
- High efficiency
- Versatile mounting on PCB or panel
- I.C. compatible/low current requirement
- Popular T-1 package
- RoHS compliant

#### Applications

- Status indicator
- Backlighting front panels
- Light pipe sources
- Lighted switches

**Figure 1: Package Dimension**

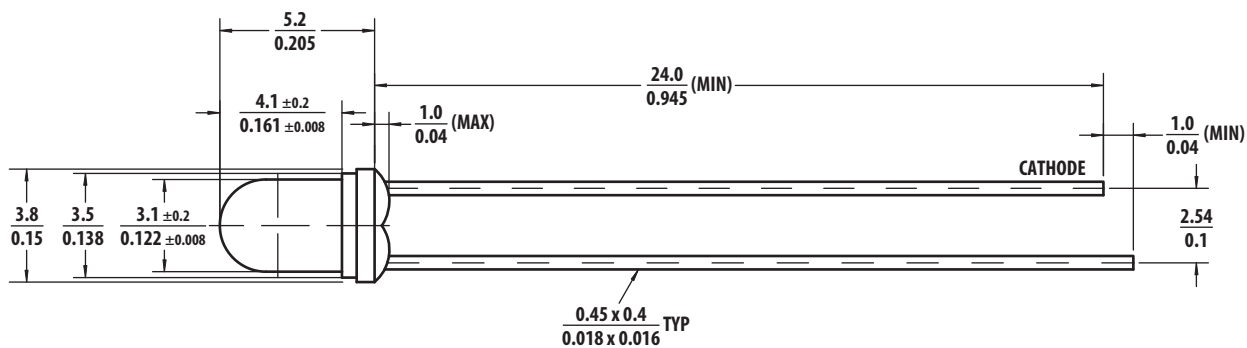

**NOTE:**

1. All dimensions are in millimeter (inches).
2. Tolerance is ±0.25 mm (.010 in.) unless otherwise stated.
3. Lead spacing is measured where the leads emerge from the package.

## Device Selection Guide

Part Number	Color	Package Description	Luminous Intensity, $I_v$ (mcd) at 10 mA			Viewing Angle, $2\theta_{1/2}$ (°)
			Min.	Typ.	Max.	
HLMP-Y301-F00xx	Red	Tinted, Non-diffused	6.1	19	—	45
HLMP-Y402-G00xx	Orange		9.7	29	—	45
HLMP-Y502-F00xx	Green		12	40	—	55

## Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

Parameter	HLMP-Y301	HLMP-Y402	HLMP-Y502	Units
DC Forward Current <sup>a</sup>	20	20	20	mA
Peak Forward Current (1/10 Duty Cycle, 0.1 ms Pulse Width)	90	60	120	mA
Reverse Voltage ( $I_R = 100\ \mu\text{A}$ )	5	5	5	V
Junction Temperature	110	110	110	°C
Power Dissipation	50	50	50	mW
Storage Temperature Range	-40 to +100			°C
Operating Temperature Range	-40 to +100			°C

a. Derate linearly as shown in [Figure 5](#).

## Electrical/Optical Characteristics at $T_A = 25^\circ\text{C}$

Parameter	Symbol	Part Number	Min.	Typ.	Max.	Units	Test Conditions
Peak Wavelength	$\lambda_{\text{PEAK}}$	HLMP-Y301 HLMP-Y402 HLMP-Y502	— — —	632 614 570	— — —	nm	Peak of wavelength of spectral distribution at $I_F = 10\ \text{mA}$
Dominant Wavelength <sup>a</sup>	$\lambda_d$	HLMP-Y301 HLMP-Y402 HLMP-Y502	615 599.5 561.5	626 605 569	632 613.5 576.5	nm	$I_F = 10\ \text{mA}$
Spectrum Half Width	$\Delta\lambda$	HLMP-Y301 HLMP-Y402 HLMP-Y502	— — —	14 13 13	— — —	nm	
Forward Voltage	$V_F$	HLMP-Y301 HLMP-Y402 HLMP-Y502	— — —	1.9 1.9 2.0	2.4 2.4 2.4	V	$I_F = 10\ \text{mA}$
Reverse Voltage	$V_R$	HLMP-Y301 HLMP-Y402 HLMP-Y502	5 5 5	— — —	— — —	V	$I_R = 100\ \mu\text{A}$
Thermal Resistance	$R_{\theta\text{J-PIN}}$	HLMP-Y301 HLMP-Y402 HLMP-Y502	— — —	310 310 310	— — —	°C/W	Junction to Cathode Lead

a. The dominant wavelength,  $\lambda_d$ , is derived from the Chromaticity Diagram and represents the color of the lamp.

## Part Numbering System

H   L   M   P   -   
 

x <sub>1</sub>	x <sub>2</sub>	x <sub>3</sub>	x <sub>4</sub>
----------------	----------------	----------------	----------------

 -   
 

x <sub>5</sub>	x <sub>6</sub>	x <sub>7</sub>	x <sub>8</sub>	x <sub>9</sub>
----------------	----------------	----------------	----------------	----------------

Code	Description	Option	
x <sub>1</sub>	Package type	Y	T-1 (3mm)
x <sub>2</sub> x <sub>3</sub> x <sub>4</sub>	Color	301	Red
		402	Orange
		502	Green
x <sub>5</sub>	Minimum intensity bin	See the <a href="#">Intensity Bin Limits</a> table	
x <sub>6</sub>	Maximum intensity bin	0	Open bins (no maximum I <sub>V</sub> bin limit)
x <sub>7</sub>	Color bin selection	0	Full range
x <sub>8</sub> x <sub>9</sub>	Packaging option	00	Bulk packaging

## Bin Information

### Intensity Bin Limits

Color	Bin	Intensity Range (mcd)	
		Min.	Max.
Red/Orange	F	6.1	9.7
	G	9.7	15.5
	H	15.5	24.8
	I	24.8	39.6
	J	39.6	63.4
	K	63.4	101.5
	L	101.5	162.4
	M	162.4	234.6
	N	234.6	340.0
	O	340.0	540.0
	P	540.0	850.0
Green	F	12.0	19.1
	G	19.1	30.7
	H	30.7	49.1
	I	49.1	78.5
	J	78.5	125.7
	K	125.7	201.1
	L	201.1	289.0
	M	289.0	417.0
	O	417.0	680.0

Tolerance for each bin limit is  $\pm 15\%$ .

### Color Bin Limits Table

Color	Cat.	Lambda (nm)	
		Min.	Max.
Orange	2	599.5	602.0
	3	602.0	604.5
	4	604.5	607.5
	5	607.5	610.5
	6	610.5	613.5
Green	6	561.5	564.5
	5	564.5	567.5
	4	567.5	570.5
	3	570.5	573.5
	2	573.5	576.5

Tolerance for each bin limit is  $\pm 1.0$  nm.

Figure 2: Relative Intensity vs. Wavelength

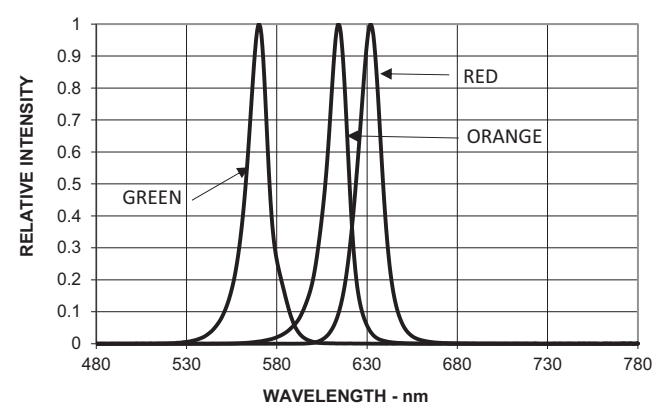


Figure 3: Forward Current vs. Forward Voltage

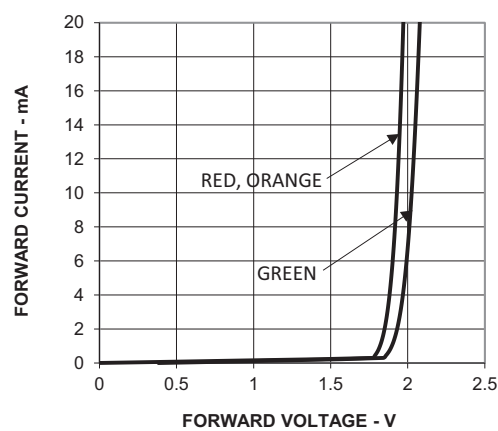


Figure 4: Relative Intensity vs. Forward Current

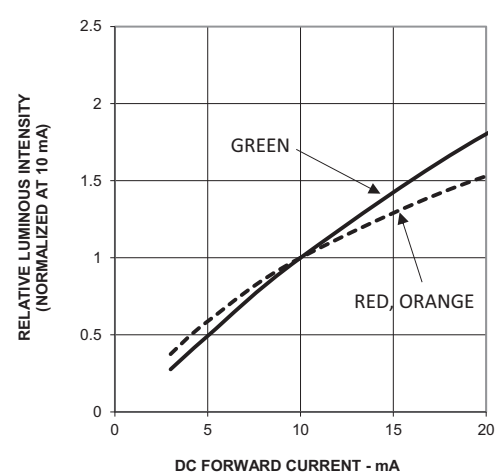


Figure 5: Ambient Temperature vs. Maximum DC Forward Current

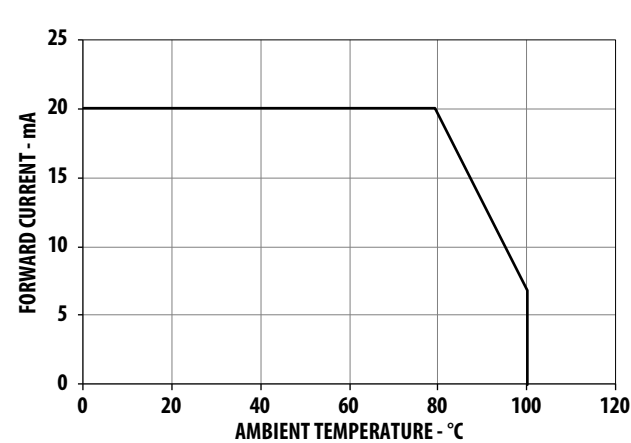


Figure 6: Representative Radiation Pattern for HLMP-Y502


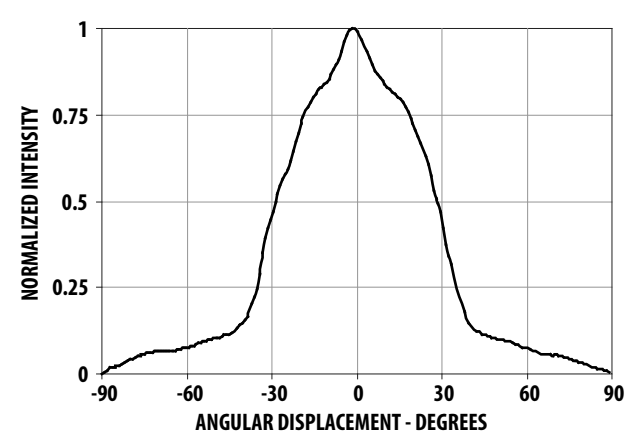


Figure 7: Representative Radiation Pattern for HLMP-Y301 and HLMP-Y402

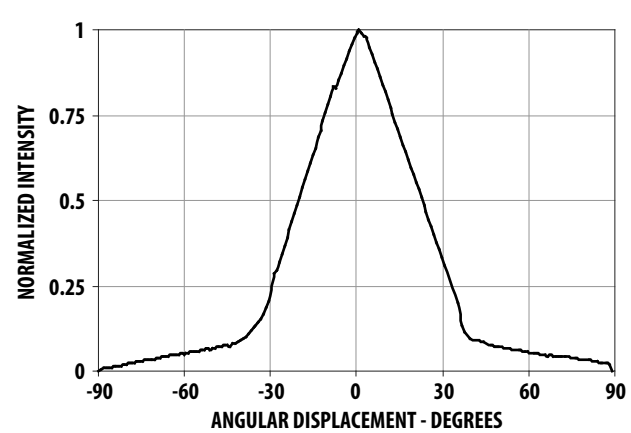

## Precautions

### Assembly Method

This product is not meant for auto-insertion.

### Lead Forming

- The leads of an LED lamp may be preformed or cut to length prior to insertion and soldering into PC board.
- If lead forming is required before soldering, take care to avoid any excessive mechanical stress induced to LED package. Otherwise, cut the leads of LED to length after soldering process at room temperature. The solder joint formed will absorb the mechanical stress of the lead cutting from traveling to the LED chip die attach and wirebond.
- During lead forming, the leads should be bent at a point at least 3 mm from the base of the lens. Do not use the base of the lead frame as a fulcrum during forming. Do lead forming before soldering at normal temperature.
- Make tooling to precisely form and cut the leads to length rather than rely upon hand operation.

### Soldering Conditions


- Take care during the PCB assembly and soldering process to prevent damage to the LED component.
- The closest LED is allowed to solder on board is 1.59 mm below the body (encapsulant epoxy) for those parts without standoff.
- The recommended soldering conditions follow.

	Wave Soldering	Manual Solder Dipping
Pre-heat Temperature	105°C max.	—
Preheat Time	60s max	—
Peak Temperature	250°C max.	260°C max.
Dwell Time	3s max.	5s max

- Set and maintain the wave soldering parameter according to the recommended temperature and dwell time in the solder wave. Periodically check on the soldering profile to ensure the soldering profile used always conforms to the recommended soldering condition.
- If necessary, use a fixture to hold the LED component in the proper orientation with respect to the PCB during the soldering process.
- Proper handling is imperative to avoid excessive thermal stresses to LED components when heated. Therefore, the soldered PCB must be allowed to cool to room temperature, 25°C, before handling.
- Pay special attention to board fabrication, solder masking, surface plating and lead holes size, and component orientation to assure solderability.
- Recommended PC board plated through-hole sizes for LED component leads follow.

Led Component Lead Size	Diagonal	Plated Through Hole Diameter
0.457 mm × 0.457 mm (0.018 in. × 0.018 in.)	0.646 mm (0.025 in.)	0.976 mm to 1.078 mm (0.038 in. to 0.042 in.)
0.508 mm × 0.508 mm (0.020 in. × 0.020 in.)	0.718 mm (0.028 in.)	1.049 mm to 1.150 mm (0.041 in. to 0.045 in.)

**NOTE:** Refer to application note AN1027 for more information on soldering LED component.

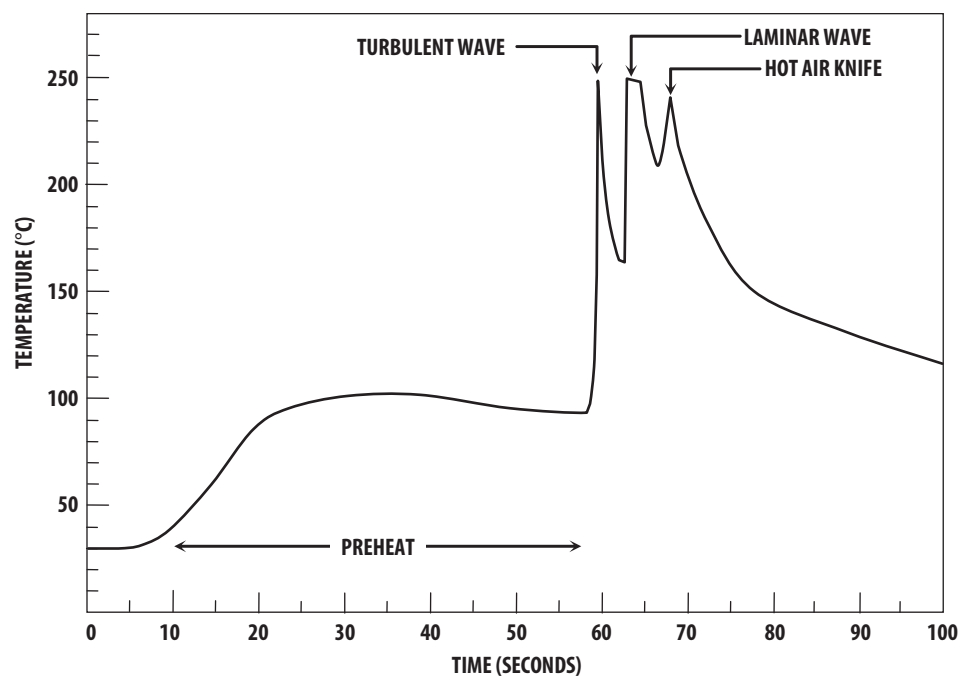**Figure 8: Recommended Wave Soldering Profile**

Recommended solder:  
Sn63 (Leaded solder alloy)  
SAC305 (Lead-free solder alloy)

Flux: Rosin flux

Solder bath temperature:  
245°C ± 5°C (maximum peak  
temperature = 250°C)

Dwell time: 1.5s - 3.0s  
(maximum = 3s)

Note: Allow for board to be  
sufficiently cooled to room  
temperature before you exert  
mechanical force.

## Disclaimer

Broadcom's products and software are not specifically designed, manufactured, or authorized for sale as parts, components, or assemblies for the planning, construction, maintenance, or direct operation of a nuclear facility or for use in medical devices or applications. The customer is solely responsible, and waives all rights to make claims against Broadcom or its suppliers, for all loss, damage, expense, or liability in connection with such use.

Broadcom, the pulse logo, Connecting everything, Avago Technologies, Avago, and the A logo are among the trademarks of Broadcom and/or its affiliates in the United States, certain other countries, and/or the EU.

Copyright © 2011–2021 Broadcom. All Rights Reserved.

The term "Broadcom" refers to Broadcom Inc. and/or its subsidiaries. For more information, please visit [www.broadcom.com](http://www.broadcom.com).

Broadcom reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. Information furnished by Broadcom is believed to be accurate and reliable. However, Broadcom does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.



Lead (Pb) Free  
RoHS Compliant



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Broadcom Limited:

[HLMP-Y402-G0000](#) [HLMP-Y301-F0000](#) [HLMP-Y502-F0000](#)