



### Features & Benefits

- Isolated output
- Up to 50W/in<sup>3</sup>
- cURus, cTUVus
- Up to 90% efficiency
- Size: 4.6" x 2.4" x 0.5" (116,8 x 61,0 x 12,7mm)
- Remote sense and current limit
- OVP, thermal shutdown
- Logic disable
- Wide range output adjust
- Compatible power booster modules
- ZCS power architecture
- Low noise FM control
- CE Marked
- RoHS compliant (VE-200)

### Product Highlights


The VI-200 family, with over 14 million units shipped, is Vicor's broad series of "zero-current-switching" component-level DC-DC converters.

Operating at frequencies up to 2MHz, VI-200 family converters offer exceptional power density, efficiency, noise performance, reliability and ease of use. Booster modules (VI-Bxx) provide a simple, cost-effective, off-the-shelf solution for higher power output requirements. One or more boosters may be used to create synchronous arrays capable of supplying several kilowatts of output power.

The flexibility of Vicor's power components is also available in half-size, half-power VI-J00 MiniMods.

### Part Numbering

VI - 2 6 1 - C W

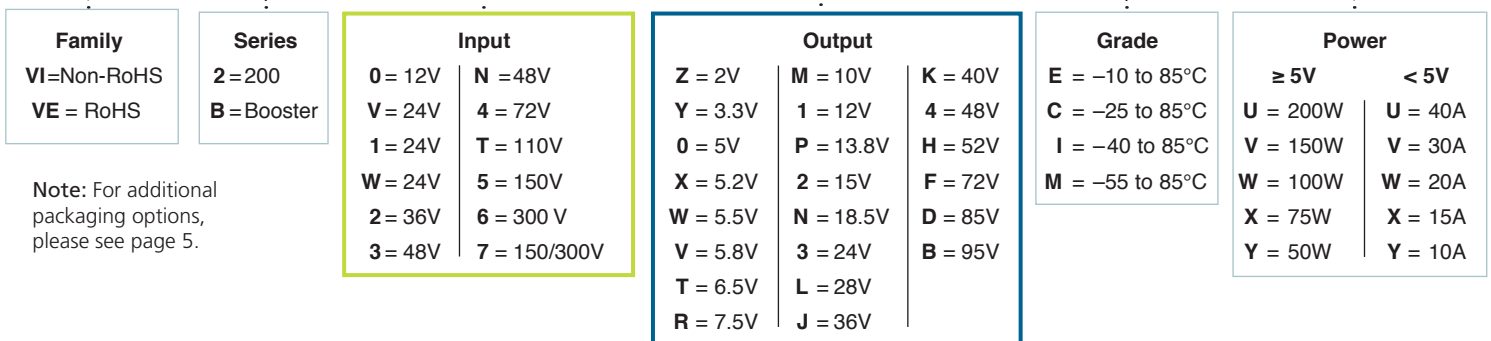

Maximum Power Available for VI-2xx-xx <sup>[a]</sup>

| Input                |                        |                          | Output                      |                              |     |   |     |     |     |     |     |    |    |      |    |      |    |    |    |    |    |    |    |    |    |
|----------------------|------------------------|--------------------------|-----------------------------|------------------------------|-----|---|-----|-----|-----|-----|-----|----|----|------|----|------|----|----|----|----|----|----|----|----|----|
| Voltage Nom. (Range) | Low Line 75% Max Power | Transient <sup>[b]</sup> | V <sub>IN</sub> Designators | V <sub>OUT</sub> Designators |     |   |     |     |     |     |     |    |    |      |    |      |    |    |    |    |    |    |    |    |    |
|                      |                        |                          |                             | 2                            | 3.3 | 5 | 5.2 | 5.5 | 5.8 | 6.5 | 7.5 | 10 | 12 | 13.8 | 15 | 18.5 | 24 | 28 | 36 | 40 | 48 | 52 | 72 | 85 | 95 |
|                      |                        |                          |                             | Z                            | Y   | O | X   | W   | V   | T   | R   | M  | 1  | P    | 2  | N    | 3  | L  | J  | K  | 4  | H  | F  | D  | B  |
| 12 (10 – 20)         | n/a                    | 22                       | 0                           | X                            | X   | X | X   | X   | X   | X   | X   | X  | X  | X    | X  | X    | X  | X  | X  | X  | X  | X  | X  |    |    |
| 24 (10 – 36)         | n/a                    | n/a                      | V                           | --                           | X   | Y | Y   | Y   | Y   | Y   | X   | X  | X  | X    | X  | X    | X  | X  | X  | -- | -- | -- | -- |    |    |
| 24 (21 – 32)         | 18                     | 36                       | 1                           | U                            | U   | U | U   | U   | U   | V   | V   | U  | U  | U    | U  | U    | U  | U  | U  | U  | U  | U  |    |    |    |
| 24 (18 – 36)         | n/a                    | n/a                      | W                           | V                            | V   | V | V   | V   | V   | W   | W   | V  | V  | V    | V  | V    | V  | V  | V  | V  | V  | V  |    |    |    |
| 36 (21 – 56)         | 18                     | 60                       | 2                           | W                            | V   | W | W   | W   | W   | W   | W   | W  | W  | W    | W  | W    | W  | W  | W  | -- | -- | -- |    |    |    |
| 48 (42 – 60)         | 36                     | 72                       | 3                           | U                            | U   | U | U   | U   | U   | U   | U   | U  | U  | U    | U  | U    | U  | U  | U  | U  | U  | U  |    |    |    |
| 48 (36 – 76)         | n/a                    | n/a                      | N                           | U                            | U   | U | U   | U   | U   | U   | U   | U  | U  | U    | U  | U    | U  | U  | U  | U  | U  | U  |    |    |    |
| 72 (55 – 100)        | 45                     | 110                      | 4                           | v                            | U   | U | U   | U   | U   | V   | V   | U  | U  | U    | U  | U    | U  | U  | U  | U  | U  | U  |    |    |    |
| 110 (66 – 160)       | n/a                    | n/a                      | T                           | V                            | V   | V | V   | V   | V   | W   | W   | V  | V  | V    | V  | V    | V  | V  | V  | V  | V  | -- |    |    |    |
| 150 (100 – 200)      | 85 <sup>[c]</sup>      | 215                      | 5                           | U                            | U   | V | V   | V   | V   | V   | V   | U  | U  | U    | U  | U    | U  | U  | U  | U  | U  | U  |    |    |    |
| 150 (100 – 375)      | n/a                    | n/a                      | 7                           | W                            | W   | Y | Y   | Y   | Y   | W   | W   | W  | W  | W    | W  | W    | W  | W  | W  | -- | -- | -- |    |    |    |
| 300 (200 – 400)      | 170 <sup>[d]</sup>     | 425                      | 6                           | U                            | U   | U | U   | U   | U   | V   | V   | U  | U  | U    | U  | U    | U  | U  | U  | U  | U  | U  |    |    |    |

<sup>[a]</sup> For additional output power, "booster" modules are available. (VI-Bxx-xx).

<sup>[b]</sup> Transient voltage for 1 second.

<sup>[c]</sup> 12V<sub>OUT</sub>, 13.8V<sub>OUT</sub>, 15V<sub>OUT</sub>, 200W models are limited to 90V<sub>DC</sub>.

<sup>[d]</sup> 15V<sub>OUT</sub>, 200W models are limited to 185V<sub>DC</sub>.

Converter Specifications

(Typical at T<sub>BP</sub> = 25°C, nominal line and 75% load, unless otherwise specified.)

Input Specifications

| Parameter                           | VI-200 E-Grade |  |     | VI-200 C-, I-, M-Grade |  |                        | Units           | Test Conditions         |
|-------------------------------------|----------------|--|-----|------------------------|--|------------------------|-----------------|-------------------------|
|                                     | Min            | Typ                                    | Max | Min                    | Typ                                    | Max                    |                 |                         |
| Inrush charge                       |                | 120 x 10 <sup>-6</sup>                 |     |                        | 120 x 10 <sup>-6</sup>                 | 200 x 10 <sup>-6</sup> | Coulombs        | Nominal line            |
| Input reflected ripple current – pp |                | 10%                                    |     |                        | 10%                                    |                        | I <sub>IN</sub> | Nominal line, full load |
| Input ripple rejection              |                | 25+20 Log ( $\frac{V_{IN}}{V_{OUT}}$ ) |     |                        | 30+20 Log ( $\frac{V_{IN}}{V_{OUT}}$ ) |                        | dB              | 120Hz, nominal line     |
|                                     |                |  |     |                        | 20+20 Log ( $\frac{V_{IN}}{V_{OUT}}$ ) |                        | dB              | 2400Hz, nominal line    |
| No load power dissipation           |                | 1.35                                   | 2   |                        | 1.35                                   | 2                      | Watts           |                         |

## Converter Specifications (Cont.)

(Typical at  $T_{BP} = 25^{\circ}\text{C}$ , nominal line and 75% load, unless otherwise specified.)

### Output Characteristics

| Parameter                            | VI-200 E-Grade |                     |      | VI-200 C-, I-, M-Grade |                     |      | Units                  | Test Conditions            |
|--------------------------------------|----------------|---------------------|------|------------------------|---------------------|------|------------------------|----------------------------|
|                                      | Min            | Typ                 | Max  | Min                    | Typ                 | Max  |                        |                            |
| Setpoint accuracy                    |                | 1%                  | 2%   |                        | 0.5%                | 1%   | $V_{NOM}$              |                            |
| Load/line regulation                 |                |                     | 0.5% |                        | 0.05%               | 0.2% | $V_{NOM}$              | LL to HL, 10% to Full Load |
| Load/line regulation                 |                |                     | 1%   |                        | 0.2%                | 0.5% | $V_{NOM}$              | LL to HL, No Load to 10%   |
| Output temperature drift             |                | 0.02                |      |                        | 0.01                | 0.02 | % / $^{\circ}\text{C}$ | Over rated temp.           |
| Long term drift                      |                | 0.02                |      |                        | 0.02                |      | %/1K hours             |                            |
| Output ripple – pp:                  |                |                     |      |                        |                     |      |                        |                            |
| 2V, 3.3V                             |                |                     | 150  |                        | 60                  | 100  | mV                     | 20MHz bandwidth            |
| 5V                                   |                |                     | 5%   |                        | 2%                  | 3%   | $V_{NOM}$              | 20MHz bandwidth            |
| 10 – 95V                             |                |                     | 3%   |                        | 0.75%               | 1.5% | $V_{NOM}$              | 20MHz bandwidth            |
| Trim range <sup>[a]</sup>            | 50%            |                     | 110% | 50%                    |                     | 110% | $V_{NOM}$              |                            |
| Total remote sense compensation      | 0.5            |                     |      | 0.5                    |                     |      | Volts                  | 0.25V max. neg. leg        |
| OVP set point                        |                | 125% <sup>[b]</sup> |      | 115%                   | 125% <sup>[b]</sup> | 135% | $V_{NOM}$              | Recycle power              |
| Current limit                        | 105%           |                     | 135% | 105%                   |                     | 125% | $I_{FULL\ LOAD}$       | Automatic restart          |
| Short circuit current <sup>[c]</sup> | 20%            |                     | 140% | 20%                    |                     | 130% | $I_{FULL\ LOAD}$       | Automatic restart          |

<sup>[a]</sup> 10V to 15V outputs, or “V” input range have standard trim range  $\pm 10\%$ . Consult factory for wider trim range.  
3.3V output trim range 2.20 to 3.63V, 95V output  $-50 + 0\%$  trim range.

<sup>[b]</sup> 131% nominal for booster modules.

<sup>[c]</sup> Output voltages of 3.3V or 5V incorporate foldback current limiting; For output voltages from 5.2V to 7.5V consult factory;  
All other outputs provide constant current limiting.

**Note:** The permissible load current must never be exceeded during normal, abnormal or test conditions. For additional output related application information, please refer to output connections on page 5.

### Control Pin Specifications

| Parameter                    | VI-200 E-Grade |      |      | VI-200 C-, I-, M-Grade |      |      | Units | Test Conditions    |
|------------------------------|----------------|------|------|------------------------|------|------|-------|--------------------|
|                              | Min            | Typ  | Max  | Min                    | Typ  | Max  |       |                    |
| Gate out impedance           |                | 50   |      |                        | 50   |      | Ohms  |                    |
| Gate in impedance            |                | 1000 |      |                        | 1000 |      | Ohms  |                    |
| Gate in open circuit voltage |                | 6    |      |                        | 6    |      | Volts | Use open collector |
| Gate in low threshold        | 0.65           |      |      | 0.65                   |      |      | Volts |                    |
| Gate in low current          |                |      | 6    |                        |      | 6    | mA    |                    |
| Power sharing accuracy       | 0.95           |      | 1.05 | 0.95                   |      | 1.05 |       |                    |

## Converter Specifications (Cont.)

(Typical at  $T_{BP} = 25^{\circ}\text{C}$ , nominal line and 75% load, unless otherwise specified.)

### Dielectric Withstand Characteristics

| Parameter           | VI-200 E-Grade |     |     | VI-200 C-, I-, M-Grade |     |     | Units     | Test Conditions   |
|---------------------|----------------|-----|-----|------------------------|-----|-----|-----------|-------------------|
|                     | Min            | Typ | Max | Min                    | Typ | Max |           |                   |
| Input to output     | 3,000          |     |     | 3,000                  |     |     | $V_{RMS}$ | Baseplate earthed |
| Output to baseplate | 500            |     |     | 500                    |     |     | $V_{RMS}$ |                   |
| Input to baseplate  | 1,500          |     |     | 1,500                  |     |     | $V_{RMS}$ |                   |

### Thermal Characteristics

| Parameter   | VI-200 E-Grade |          |     | VI-200 C-, I-, M-Grade |          |     | Units                          | Test Conditions                   |
|---|----------------|----------|-----|------------------------|----------|-----|--------------------------------|-----------------------------------|
|   | Min            | Typ      | Max | Min                    | Typ      | Max |                                |                                   |
| Efficiency  |                | 78 – 88% |     |                        | 80 – 90% |     |                                |                                   |
| Baseplate to sink thermal impedance               |                | 0.07     |     |                        | 0.07     |     | $^{\circ}\text{C}/\text{Watt}$ | With Vicor P/N 20266              |
| Thermal shutdown <sup>[d]</sup><br>(Drivers only) | 90             | 95       | 105 | 90                     | 95       | 105 | $^{\circ}\text{C}$             | Cool and recycle power to restart |

<sup>[d]</sup> No overtemp protection in booster modules.

### Mechanical Specifications

| Parameter | VI-200 E-Grade |              |                | VI-200 C-, I-, M-Grade |              |                | Units             | Test Conditions |
|-----------|----------------|--------------|----------------|------------------------|--------------|----------------|-------------------|-----------------|
|           | Min            | Typ          | Max            | Min                    | Typ          | Max            |                   |                 |
| Weight    | 5.7<br>(160.2) | 6.3<br>(178) | 6.9<br>(195.8) | 6.6<br>(187.2)         | 7.3<br>(208) | 8.1<br>(228.8) | Ounces<br>(Grams) |                 |

### Product Grade Temperatures

| Parameter | Storage     | Operating  | Units              | Notes  |
|-----------|-------------|------------|--------------------|--|
| E         | -20 to +100 | -10 to +85 | $^{\circ}\text{C}$ | Overtemperature shutdown<br>95 $^{\circ}\text{C}$ typical (recycle power to restart) |
| C         | -40 to +100 | -25 to +85 | $^{\circ}\text{C}$ |  |
| I         | -55 to +100 | -40 to +85 | $^{\circ}\text{C}$ |  |
| M         | -65 to +100 | -55 to +85 | $^{\circ}\text{C}$ |  |


### Maximum Capacitance, Rated Output Voltage <5V

| Rated $V_{OUT}$ (V) | $I_{OUT}$ Rating (A) | $C_{MAX}$ ( $\mu\text{F}$ ) | $I_{OUT}$ Rating (A) | $C_{MAX}$ ( $\mu\text{F}$ ) |
|---------------------|----------------------|-----------------------------|----------------------|-----------------------------|
| 2 to <3             | $\leq 10$            | 1500                        | >10 to 40            | 5000                        |
| 3 to <5             | $\leq 10$            | 1000                        | >10 to 40            | 5000                        |

### Maximum Capacitance, Rated Output Voltage $\geq 5\text{V}$

| Rated $V_{OUT}$ (V) | $P_{OUT}$ Rating (W) | $C_{MAX}$ ( $\mu\text{F}$ ) | $P_{OUT}$ Rating (W) | $C_{MAX}$ ( $\mu\text{F}$ ) |
|---------------------|----------------------|-----------------------------|----------------------|-----------------------------|
| 5 to <7.5           | $\leq 50$            | 1000                        | >50 to 200           | 1500                        |
| 7.5 to <10          | $\leq 50$            | 400                         | >50 to 200           | 700                         |
| 10 to <28           | $\leq 50$            | 400                         | >50 to 200           | 500                         |
| >28                 | $\leq 50$            | 150                         | >50 to 200           | 250                         |

## Basic Module Operation

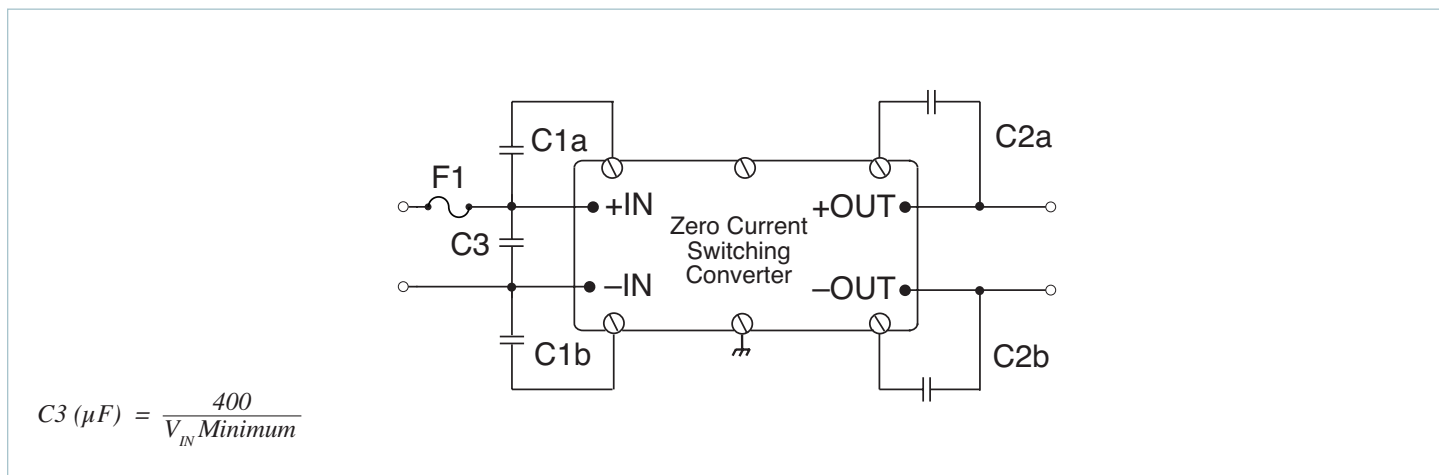

**Figure 1** — Basic module operation requires fusing, grounding, bypassing capacitors.\* See [Design Guide & Applications Manual](#).

### Output Connections and Considerations

The permissible load current<sup>[e]</sup> must never be exceeded during normal, abnormal or test conditions. Converters subject to dynamic loading exceeding 25% of rated current must be reviewed by Vicor Applications Engineering to ensure that the converter will operate properly.


Under dynamic load, light load, or no load conditions, the converter may emit audible noise. Converters that utilize remote sense may require compensation circuitry to offset the phase lag caused by the external output leads and load impedance. Remote Sense leads must be protected for conditions such as lead reversal, noise pickup, open circuit, or excessive output lead resistance between the sense point and the converters output terminals. For applications that may draw more than the rated current, a fast acting electronic circuit breaker must be utilized to protect the converter. Under no circumstance should the rated current be exceeded. Utilizing or testing of current limit or short circuit current will damage the converter. Ensure that the total output capacitance connected to the converter does not exceed the limits on Page 4.

<sup>[e]</sup> Permissible load current:  $\frac{\text{Nominal Power Rating}}{\text{Nominal } V_{OUT}}$

### Storage

Vicor products, when not installed in customer units, should be stored in ESD safe packaging in accordance with ANSI/ESD S20.20, "Protection of Electrical and Electronic Parts, Assemblies and Equipment" and should be maintained in a temperature controlled factory/warehouse environment not exposed to outside elements controlled between the temperature ranges of 15°C and 38°C. Humidity shall not be condensing, no minimum humidity when stored in an ESD compliant package.

Mechanical Drawing

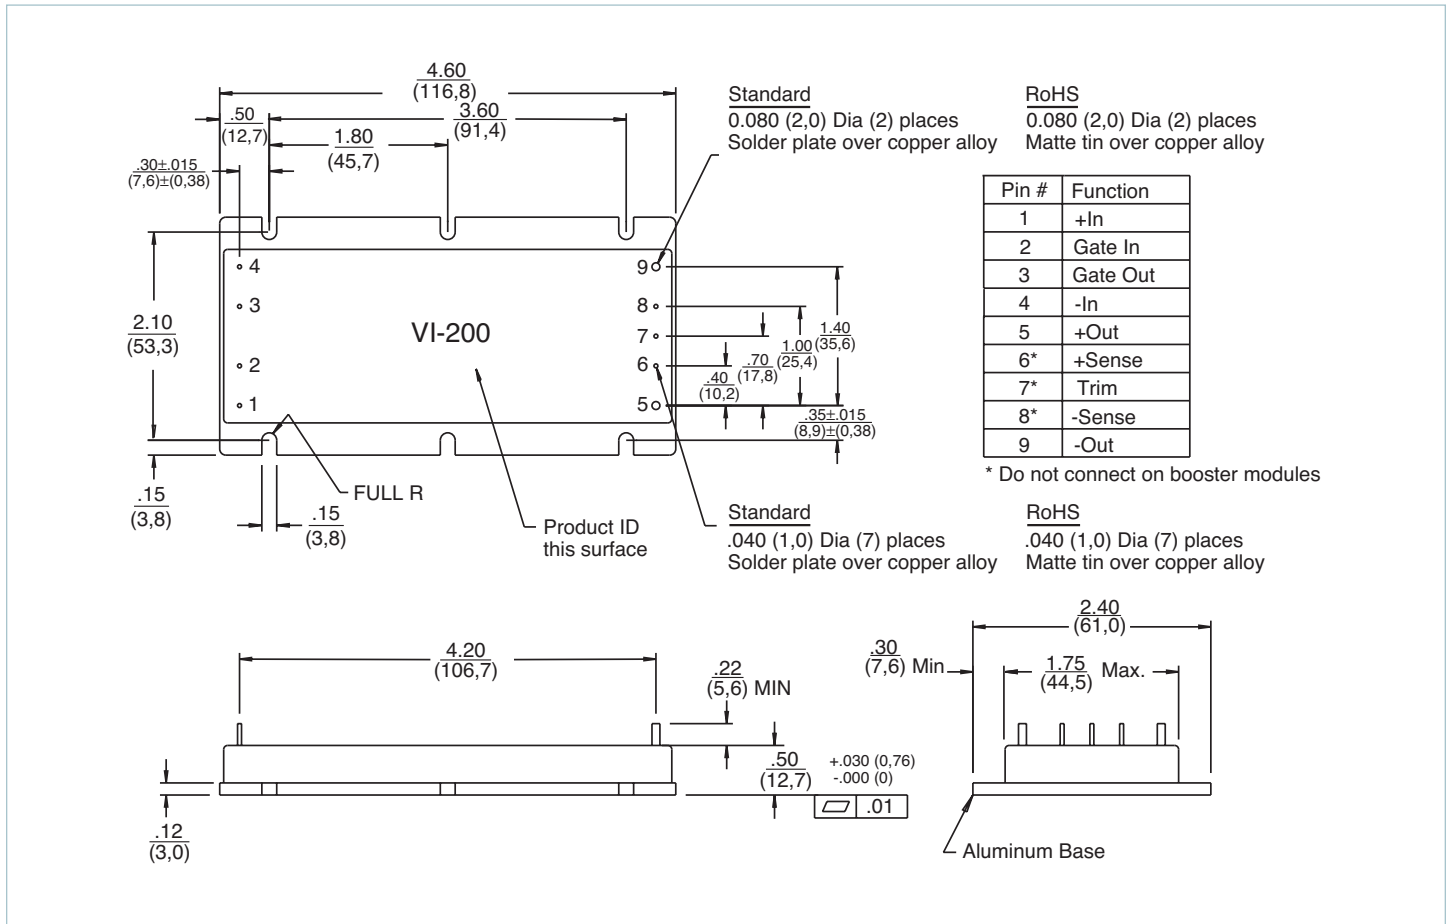

Packaging Options

**SlimMod**

Flangeless package




4.60"L x 1.80"W x 0.50"H  
(116,8 x 45,7 x 12,7mm)

To order the SlimMod configuration add the suffix "-S" to the standard module part number.

Qty (2) grounding clips are included with each SlimMod P/N 32187

**FinMod**

Flangeless package with integral heat sink



Longitudinal, 0.25"(6.35mm) fins — add suffix "-F1"  
Longitudinal, 0.50"(12.7mm) fins — add suffix "-F2"



Transverse, 0.25"(6.35mm) fins — add suffix "-F3"  
Transverse, 0.50"(12.7mm) fins — add suffix "-F4"

Available with longitudinal or transverse fins of 0.25"(6.35 mm) or 0.50"(12.7mm) height. Add the appropriate suffix to the module part number.

Qty (4) grounding clips are included with each FinMod F1, F2 P/N 32185  
F3, F4 P/N 32186

**MegaMod**

Chassis mount alternatives, one, two, or three outputs: up to 600W



1 up - 4.9" x 2.5" x 0.62" (124,4 x 63,5 x 15,7mm)  
2 up - 4.9" x 4.9" x 0.62" (124,4 x 124,4 x 15,7mm)  
3 up - 4.9" x 7.3" x 0.62" (124,4 x 185,4 x 15,7mm)

**BusMod**



4.60"L x 2.40"W x 1.08"H  
(116,8 x 61,0 x 27,4mm)

To order the BusMod fully assembled, add suffix "-B1" to the standard module part number.

To order the BusMod separately:  
Full-sized BusMod — P/N 06322

See BusMod Mechanical Drawings for more details.

**Vicor's comprehensive line of power solutions includes high density AC-DC and DC-DC modules and accessory components, fully configurable AC-DC and DC-DC power supplies, and complete custom power systems.**

Information furnished by Vicor is believed to be accurate and reliable. However, no responsibility is assumed by Vicor for its use. Vicor makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication. Vicor reserves the right to make changes to any products, specifications, and product descriptions at any time without notice. Information published by Vicor has been checked and is believed to be accurate at the time it was printed; however, Vicor assumes no responsibility for inaccuracies. Testing and other quality controls are used to the extent Vicor deems necessary to support Vicor's product warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

**Specifications are subject to change without notice.**

Visit [http://www.vicorpower.com/vi-200\\_vi-j00](http://www.vicorpower.com/vi-200_vi-j00) for the latest product information.

**Vicor's Standard Terms and Conditions and Product Warranty**

All sales are subject to Vicor's Standard Terms and Conditions of Sale, and Product Warranty which are available on Vicor's webpage (<http://www.vicorpower.com/termsconditionswarranty>) or upon request.

**Life Support Policy**

VICOR'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF VICOR CORPORATION. As used herein, life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness. Per Vicor Terms and Conditions of Sale, the user of Vicor products and components in life support applications assumes all risks of such use and indemnifies Vicor against all liability and damages.

**Intellectual Property Notice**

Vicor and its subsidiaries own Intellectual Property (including issued U.S. and Foreign Patents and pending patent applications) relating to the products described in this data sheet. No license, whether express, implied, or arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Interested parties should contact Vicor's Intellectual Property Department.

Contact Us: <http://www.vicorpower.com/contact-us>

**Vicor Corporation**  
25 Frontage Road  
Andover, MA, USA 01810  
Tel: 800-735-6200  
Fax: 978-475-6715  
[www.vicorpower.com](http://www.vicorpower.com)

**email**

Customer Service: [custserv@vicorpower.com](mailto:custserv@vicorpower.com)  
Technical Support: [apps@vicorpower.com](mailto:apps@vicorpower.com)

©2017 Vicor Corporation. All rights reserved. The Vicor name is a registered trademark of Vicor Corporation.  
All other trademarks, product names, logos and brands are property of their respective owners.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Vicor:

[VE-263-EU-F3](#) [VI-210-EV](#) [VI-26L-CU](#) [VI-263-CV](#) [VI-250-CV](#) [VI-25R-EV](#) [VI-250-IW](#) [VI-202-CX](#) [VI-2T0-EV](#) [VI-2W0-IV](#) [VI-220-MW](#) [VI-24J-IU](#) [VI-2WB-CV](#) [VI-210-CV](#) [VI-220-CW](#) [VI-261-CV](#) [VI-262-CU](#) [VI-213-CV](#) [VI-243-IW](#) [VI-264-IU](#) [VI-2W2-CY](#) [VI-B60-CU](#) [VI-203-IX](#) [VE-263-EU](#) [VI-260-CU](#) [VI-2W3-CV](#) [VI-253-CU](#) [VI-211-CW](#) [VI-263-EU-S](#) [VI-233-EU](#) [VI-241-EU](#) [VI-211-IU](#) [VI-213-IU](#) [VE-26M-CU](#) [VI-25L-EU](#) [VI-262-CX](#) [VI-260-IU](#) [VI-260-CY](#) [VI-210-EX](#) [VI-26B-CU](#) [VI-BAMD-EM](#) [VI-2W0-EX](#) [VI-26H-EU](#) [VI-2W1-EW](#) [VI-2WN-EV](#) [VI-2WR-EW](#) [VI-2T3-CV](#) [VI-2W0-EW](#) [VI-26L-04](#) [VI-2WL-EV](#) [VE-2T3-CV](#) [VI-B61-CU](#) [VI-261-CU](#) [VI-B03-CX](#) [VI-203-CX](#) [VI-260-CX-F2](#) [VI-250-CX](#) [VE-261-IV](#) [VE-26L-CU](#) [VE-B6L-CU](#) [VI-272-CW](#) [VI-26M-IU](#) [VI-261-EU-F2](#) [VI-253-CW](#) [VI-260-CV](#) [VI-201-19](#) [VI-261-EU](#) [VI-251-EU](#) [VI-26L-EU](#) [VI-B6L-EU](#) [VI-263-CU](#) [VE-26T-CY](#) [VI-2WT-IW](#) [VI-2W0-CV](#) [VI-223-IY](#) [VI-2W1-IV](#) [VI-2W3-CY](#) [VI-262-IV](#) [VI-26L-IU](#) [VI-B6L-CU](#) [VI-261-CW](#) [VI-2W0-CW](#) [VE-B33-CV](#) [VI-264-EU](#) [VI-220-IW](#) [VI-2W2-IW](#) [VI-262-EV](#) [VI-264-MU](#) [VI-262-EY](#) [VI-2W3-EW](#) [VI-264-CU](#) [VI-251-EY](#) [VE-253-EU-F2](#) [VI-260-CW](#) [VE-243-CX](#) [VI-2WL-IV](#) [VI-260-IV](#) [VI-2W2-EV](#) [VI-210-EU-F4](#) [VI-2W0-IW](#)