

LaceLok[®]

Instruction Manual



DMC **DANIELS**[®]
MANUFACTURING
CORPORATION

www.dmctools.com

INSTALLATION TOOL


DLT-1100
(M32555/01-01)



LACELOK



| LACELOK SPECIFICATIONS | |
|------------------------|--|
| Operating Temperature | -65°C to 260°C |
| Chemical Resistance | Hydraulic fluid, JP-8 jet fuel, lubricating oil, isopropyl alcohol |
| Fastener Head | Ultra high temperature thermoplastic (PEEK) |
| Lacing Tape | A-A-52084 Size 2, Finish C |
| Length (A) | 0.28" (7.1 mm) |
| Width (B) | 0.23" (5.8 mm) |
| Height (C) | 0.18" (4.6 mm) |
| Overall Length | 6" - 24" (152-610 mm) |

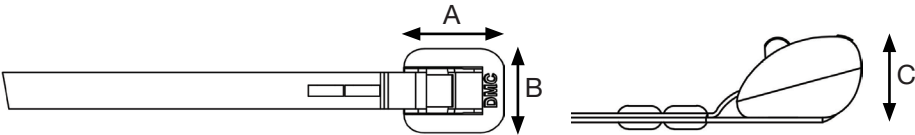

STANDARDS AND CLASSIFICATIONS

SAE INTERNATIONAL

LaceLok (CLF) is approved for use as a secondary wiring support device for aerospace vehicles under **AS50881H**.

U.S. MILITARY

MIL-DTL-32554 Straps, Tie-Down, Adjustable, Non-Metallic, Cable Bundling

MIL-DTL-32555 Tool, Installation, for Adjustable Tie-Down Straps

NAVAIR 01-1A-505-1 Tech Manual - Installation Practices for Aircraft Electronic Wiring

MIL-HDBK-522 Guidelines for Inspection of Aircraft EWIS

INSTRUCTIONS

1. Wrap LaceLok around the wire bundle one to three times (Fig. 1).
2. Feed the end of lace through the fastener and under the locking pin. Cinch tightly (Fig. 2).
3. Loop the end of lace over the locking pin and back through the fastener. Cinch tightly (Fig. 3).



Fig. 1



Fig. 2



Fig. 3

4. Side-load the lace into the capstan (Fig. 4).
5. While maintaining tension on the lace, position the fastener in the nose of the tool (Fig. 5).
6. Ensuring the fastener is properly nested, squeeze tool trigger two to three times to tighten, lock, and cut the excess lace.
7. The operator will hear and see the activated fastener (Fig. 6).



Fig. 4



Fig. 5



Fig. 6



Scan the QR code or visit https://qrco.de/LaceLok_Training_Video to view the official DMC LaceLok Training Video


INSTALLATION PRACTICES

LaceLok is exceptionally strong with a single wrap. Additional strength can be achieved by simply applying a second or third wrap around the wire harness prior to activation. Multiple wrap installations should be used where increased tensile strength or additional resistance to radial motion is needed. Double and triple wrap configurations are ideal for pressure sensitive components such as coaxial and fiber optic cables.

| Number of Wraps | Application | Minimum Tensile Strength |
|-----------------|--|--------------------------|
| Single | 1/4" to 1" (.6 cm to 2.5 cm) diameter cable bundles | 55 lbs. (240 N) |
| Double | <1/4" and 1" to 3" (< .6 cm and 2.5 cm to 7.5 cm) diameter cable bundles | 110 lbs. (490 N) |
| Triple | >3" (> 7.5 cm) diameter cable bundles or Exposure to JP-8 jet fuel | 165 lbs. (730 N) |

BREAKOUT EXAMPLES

LaceLok can be used to create breakouts in a similar application method as plastic cable ties or hand-tied lace by replacing the traditional hand-tied lace knot with the LaceLok fastener. Examples of breakouts include, but are not limited to the following examples. It is up to the responsible engineering authority to determine the applicable method and application of LaceLok.

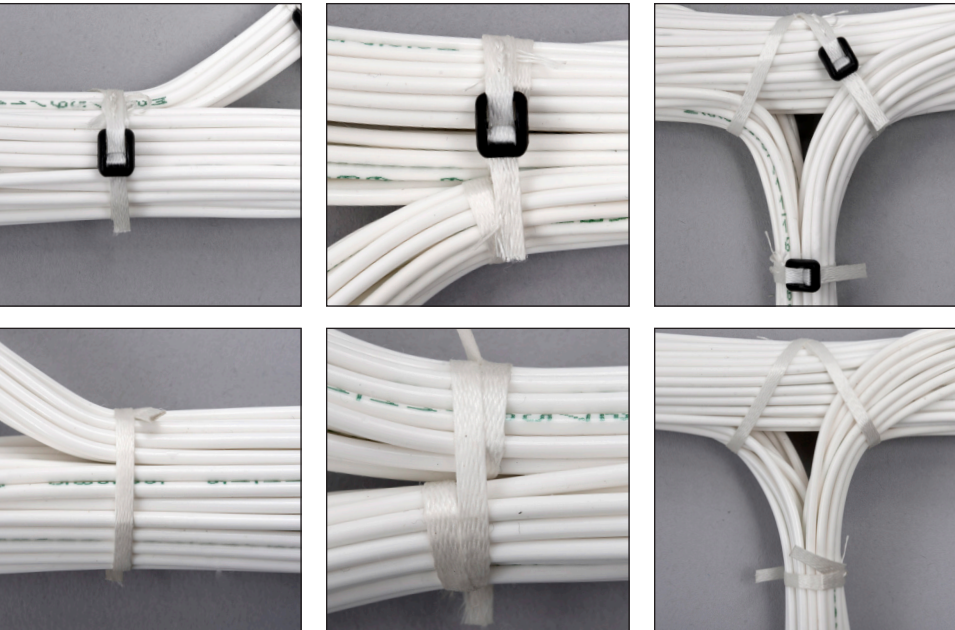

INSPECTION

A proper installation of LaceLok is shown in Fig. 7. To confirm that LaceLok has been installed correctly ensure the following:

1. The LaceLok locking pin is activated.
2. The locking pin is angled away from the cut end of the lace.
3. LaceLok is adequately tight around bundle.
4. The lacing tape is not twisted in the fastener or around the bundle.
5. The lacing tape is cut cleanly.
6. The cut end of the lacing tape measures 0.5 in. +/- 0.25.



Fig. 7

MAINTENANCE

The installation tool was designed to require no calibration and minimal maintenance. Users should keep the tool clean and free of debris. Users can change the blade as needed. For all other repair work, users must return to the tool to DMC or to a DMC authorized repair center.

Warnings

- Do not disassemble housing halves or injury may occur due to spring-loaded components.
- The warranty will be voided if the housing is disassembled.
- The cutting blade is sharp and could cause injury.

Cutting Blade and Nose Replacement

1. Unscrew the cutting blade cover screw (1-1025).
2. Remove the cutting blade cover (DLT-1100-33).
3. Carefully remove the used yellow cutting blade (DLT-1100-SA5).
4. Replace the cutting blade with the new cutting blade.
5. Reinstall cutting blade cover, or replace as necessary.



BEST PRACTICES

LaceLok is used to support wire bundles, not gather the bundle. Before installing LaceLok, it may be helpful to bundle the wire with a clamp or other bundling device. If a clamp is not available, operators may hold the bundle together with their non-dominant hand (Fig 8).



Fig. 8

To ensure the bundle is secured properly, it is important that the lacing tape is not twisted during installation (Fig. 9).

Remember the lace is not fed through the nose of the tool, but rather side-loaded through the capstan.

To achieve the best termination, remember to align the tool to the fastener so that it is nested in the nose of the tool. Do not position the tool in front, to the side, or perpendicular to the fastener. Failure to correctly align the tool can result in a faulty installation.



Fig. 9

When performing a multiple wrap installation, be sure to wrap the lace around the bundle multiple times, but only through the fastener once on the final pass around the bundle. Do not thread the lace through the fastener multiple times (Fig. 10).



Fig. 10

A lockstitch method can be used for larger bundles, bundles of multi-conductor cables, or bundles where additional resistance to lateral movement is needed. A lockstitch is completed by looping the lace around one component and then completing the wraps and termination as normal (Fig. 11).



Fig. 11

LACELOK ORDERING INFORMATION

DMC PART NUMBERING SYSTEM

LF2-XX CCC

| LENGTH | COLOR |
|------------------|-----------------------------|
| 06 = 6" (15 cm) | NA1 = Natural (White) |
| 10 = 10" (25 cm) | NA2 = Natural w/Dark Tracer |
| 18 = 18" (45 cm) | BLK = Black |
| 24 = 24" (61 cm) | BLU = Blue |
| | BRN = Brown |
| | GRY = Gray |
| | GRE = Green |
| | ORN = Orange |
| | PNK = Pink |
| | RED = Red |
| | VIO = Violet |

MILITARY PART NUMBERING SYSTEM

M32554-XX-1-XXX

| LENGTH | COLOR |
|------------------|-----------------------------|
| 06 = 6" (15 cm) | NA1 = Natural (White) |
| 10 = 10" (25 cm) | NA2 = Natural w/Dark Tracer |
| 18 = 18" (45 cm) | BLK = Black |
| 24 = 24" (61 cm) | BLU = Blue |
| | BRN = Brown |
| | GRY = Gray |
| | GRE = Green |
| | ORN = Orange |
| | PNK = Pink |
| | RED = Red |
| | VIO = Violet |

| Color | Length | DMC Part # | Military Part # | NSN |
|----------------------------------|--------|------------|-----------------|-------------|
| NA1 (White) | 6" | LF2-06NA1 | M32554-06-1-NA1 | NSN Pending |
| | 10" | LF2-10NA1 | M32554-10-1-NA1 | NSN Pending |
| | 18" | LF2-18NA1 | M32554-18-1-NA1 | NSN Pending |
| | 24" | LF2-24NA1 | M32554-24-1-NA1 | NSN Pending |
| NA2 (White w/ Dark Tracer) | 6" | LF2-06NA2 | M32554-06-1-NA2 | NSN Pending |
| | 10" | LF2-10NA2 | M32554-10-1-NA2 | NSN Pending |
| | 18" | LF2-18NA2 | M32554-18-1-NA2 | NSN Pending |
| | 24" | LF2-24NA2 | M32554-24-1-NA2 | NSN Pending |
| Black | 6" | LF2-06BLK | M32554-06-1-BLK | NSN Pending |
| | 10" | LF2-10BLK | M32554-10-1-BLK | NSN Pending |
| | 18" | LF2-18BLK | M32554-18-1-BLK | NSN Pending |
| | 24" | LF2-24BLK | M32554-24-1-BLK | NSN Pending |

LaceLok is sold in packages of 100 and is available in various colors including blue, brown, gray, green, orange, pink, red, and violet. Contact DMC for additional part numbers.

| Tool and Tool Kits | Length | DMC Part # | Military Part # | NSN |
|---|--------|---------------|-----------------|-------------|
| LaceLok Installation Tool | N/A | DLT-1100 | M32555/01-01 | NSN Pending |
| Starter Kit: LaceLok Instal- lation Tool, Cutting Blade, Guarded Cutter, 100 Quantity of White LaceLok | 10" | DMC2300-10NA1 | N/A | NSN Pending |
| | 18" | DMC2300-18NA1 | | |

Additional kits are available with various lengths and colors of LaceLok including blue, brown, gray, green, orange, pink, red, and violet. Contact DMC for additional part numbers.



Daniels Manufacturing Corporation
526 Thorpe Road, Orlando, Florida 32824 USA
407-855-6161 dmc@dmctools.com
www.dmctools.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Daniels Manufacturing:](#)

[DLT-1100](#)