
### **Technical Data Sheet**

# Rosenberger

## Cable assembly

RPC-1.00 Plug - UT-047-LL - RPC-1.00 Plug

L70-281-XXX

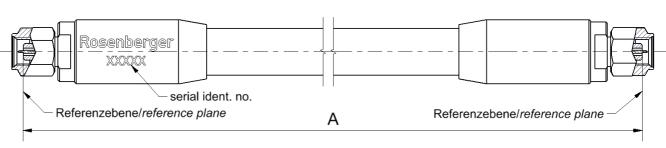

All dimensions are in mm; tolerances: ± 3mm for A ≤ 300 mm; ± 1% for A > 300 mm

#### Available variants

Type	max. Insertion loss	Weight (g) / pce
L70-281-XXX	$\leq 0.0017 * \sqrt{f[GHz]} \frac{dB}{mm}$	$0.0710 \frac{g}{mm} * A[mm] + 8.9g$

XXX - length in mm = A

Maximum possible length = 6000mm

Note:

Weight:

First constant = Cable- and Armour- weight per mm; Second Constant = Connector left and Connector right weight per pce

#### Assembly parts

Connector left RPC-1.00 plug
Connector right RPC-1.00 plug
Cable UT-047-LL

Armour silicone rubber jacket over glass fiber braid / stainless steel spiral

#### **Electrical data**

Impedance 50  $\Omega$ 

Frequency DC to 110 GHz

Return loss<sup>1</sup>  $\geq$  17 dB, DC to 50 GHz  $\geq$  14 dB, 50 to 110 GHz

Insertion loss<sup>1</sup> see table available variants

Individual testing and documentation:

Measurement plot with all 4 S – Parameters (S11; S22; S21; S12) is included with the cable assembly and on the backside the care and handling instruction is printed.

#### Mechanical data

Minimum bend radius:

Single 20.0 mm

#### **Environmental data**

Temperature range - 40 °C to +125 °C RoHS compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date		Rev.	Engineering change number	Name	Date
Martin Moder	10.06.15	Markus Müller	10.04.19		c00	19-0462	Marion Striegler	08.04.19
Rosenberger Hochfrequenztechnik GmbH & Co. KG					Tal	40 0004 10 0		Page

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel. : +49 8684 18-0 Email : info@rosenberger.de

1/1

<sup>&</sup>lt;sup>1</sup> Return Loss and Insertion Loss includes the measurement adaptor

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Rosenberger: