






Technical Data Sheet

Rosenberger

WSMP

Male Smooth Bore
Right Angle Launch

W1S143-40ML5

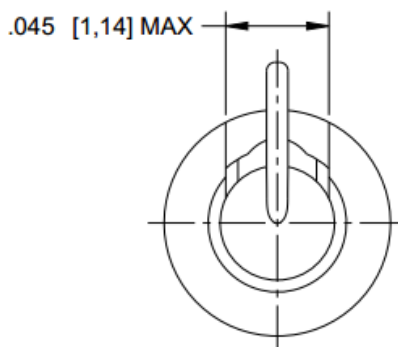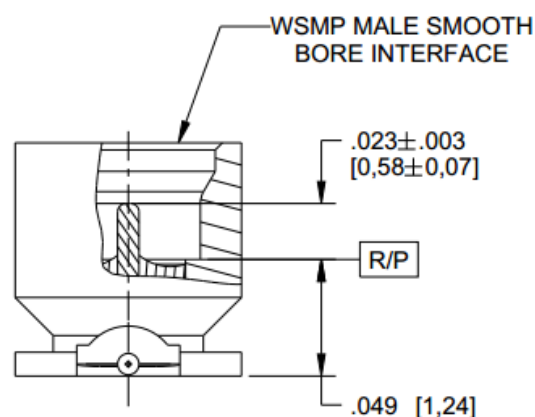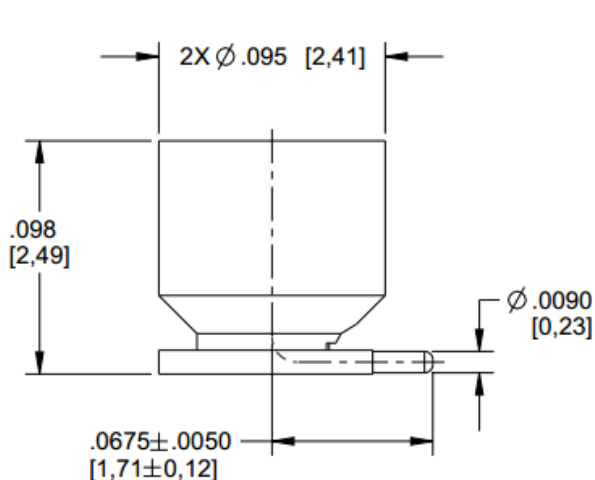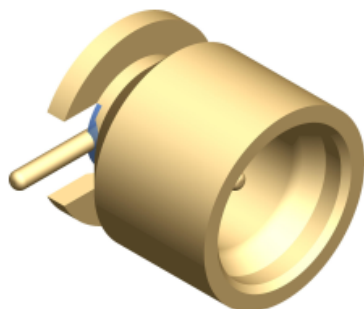

All dimensions are in inches [mm]

Interface

According to

Rosenberger WSMP™ Interface standards

Material and plating

Connector parts

Body and Contact

Material

Kovar® per ASTM F15

Plating

Hard gold 6µIN [0,15µm] min, over
Nickel, 80µIN [2,0µm] min

Dielectric

7070 Glass

Technical Data Sheet

Rosenberger

WSMP

Male Smooth Bore
Right Angle Launch

W1S143-40ML5

Electrical data (@ STP unless otherwise specified)

Impedance	50 Ω
Frequency	DC to 65 GHz
Return loss	≥ 26 dB, DC to 26 GHz ≥ 19 dB, 26 to 40 GHz ≥ 14 dB, 40 to 50 GHz
Insertion loss	$\leq 0.12 \times \sqrt{f(\text{GHz})}$ dB
Insulation resistance	$\geq 3.5 \times 10^3$ M Ω
Center contact resistance	≤ 2.0 m Ω
Outer contact resistance	≤ 6.0 m Ω
Test voltage	250 V rms
RF High Potential	150 V rms @ 5 MHz
RF-leakage	≥ -80 dB (typical mated pair)

*Connector only, return loss in application depends decisively on PCB layout

Mechanical data

Mating cycles	≥ 500
Engagement force	
Smooth Bore	1.2 lbf [5.3 N]
Disengagement force	
Smooth Bore	1.0 lbf [4.45 N]

Environmental data

Temperature range	-55°C to +165°C
Thermal shock	MIL-STD-202 – 107, Condition B
Corrosion	MIL-STD-202 – 101
Vibration	MIL-STD-202 – 204, Condition D
Shock	MIL-STD-202 – 213, Condition I
Moisture resistance	MIL-STD-202 – 106, except Step 7B
Max soldering temperature	IEC 61760-1, +500°F [+260°C] for 10 seconds
2002/95/EC (RoHS)	compliant

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
R. Fisher	7/1/16	R. Hosler	7/1/16	a02	Revised per ECN 23-1039	J. Havener	7/6/2023
Rosenberger North America Akron, LLC P.O. Box 309 Akron, PA USA 17501 www.rosenbergerna.com				Tel. : +1.717.859.8900 Fax : +1.717.859.7044 Email : info@rosenbergerna.com			Page 2 / 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Rosenberger:](#)

[W1S143-40ML5](#)