



10 to 60 W Constant Current LED Drivers with Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V)

| Input Voltage | Max. Output Power | Output Voltage | Output Current | Efficiency | Max. Case Temperature | THD | Power Factor | Dimming Method | Dimming Range | Startup Time |
|----------------|-------------------|----------------|----------------|-------------------|---------------------------------|-------|--------------|--------------------------------------|---------------|--------------|
| 120 to 277 Vac | 60 W | 8 to 56 Vdc | 280 to 1400 mA | up to 87% typical | 90°C (measured at the hot spot) | < 20% | > 0.9 | Forward-Phase, Reverse-Phase & 0-10V | 1 - 100% | 400 ms |

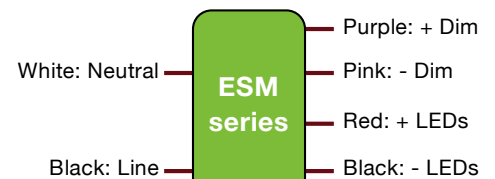

Metal Case:
L 110 x W 60 x H 26 mm
(L 4.33 x W 2.36 x H 1.02 in)

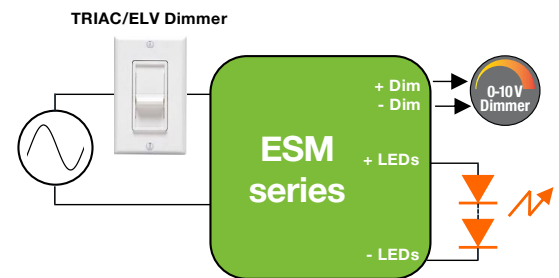

Wiring Diagram

FEATURES

- Compatible with TRIAC (forward-phase or leading-edge), ELV (reverse-phase or trailing-edge) and 0-10 V dimmers
- TRIAC and ELV dimming at 120 Vac only
- 90° C maximum case hot spot temperature
- Class 2 power supply
- Lifetime: 50,000 hours at 70° C case hot spot temperature (some models have higher lifetime. Check lifetime curves in page 6)
- IP20-rated case with silicone-based potting
- Protections: output open load, over-current and short-circuit (hiccup), and over-temperature with auto recovery
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class B (120 Vac) and Class A (277 Vac)
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements
- Worldwide safety approvals


APPLICATIONS

- Indoor & outdoor
- Recessed lighting (downlights)
- Commercial & residential lighting
- Architectural lighting
- Office Lighting



10 to 60 W Constant Current LED Drivers with Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V)


1 - ORDERING INFORMATION - MODEL DESCRIPTION

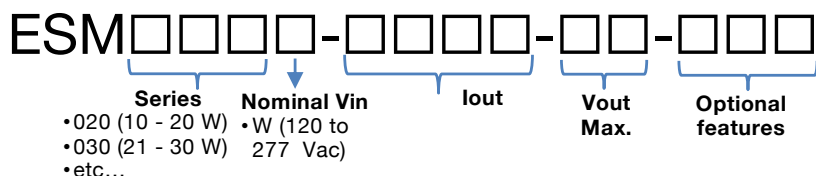

| ERP Part Number | Nominal Input Voltage (Vac) | Iout (mA) | Max Output Power (W) | Vout Min (Vdc) | Vout Nom (Vdc) | Vout Max (Vdc) | Open Loop (no load) Voltage (Vdc) |
|------------------------|-----------------------------|-----------|----------------------|----------------|----------------|----------------|-----------------------------------|
| ESM020W: 11-20W | | | | | | | |
| ESM020W-0350-42 | 120 to 277 | 350 | 14.7 | 24 | 37.8 | 42 | 50 |
| ESM020W-0440-34 | 120 to 277 | 440 | 15.0 | 19 | 30.6 | 34 | 44.2 |
| ESM030W: 21-30W | | | | | | | |
| ESM030W-0500-42 | 120 to 277 | 500 | 21.0 | 24 | 37.8 | 42 | 50 |
| ESM030W-0550-42 | 120 to 277 | 550 | 23.1 | 24 | 37.8 | 42 | 50 |
| ESM030W-0700-42 | 120 to 277 | 700 | 29.4 | 24 | 37.8 | 42 | 50 |
| ESM040W: 31-40W | | | | | | | |
| ESM040W-0800-42 | 120 to 277 | 800 | 33.6 | 24 | 37.8 | 42 | 50 |
| ESM040W-0900-42 | 120 to 277 | 900 | 37.8 | 24 | 37.8 | 42 | 50 |
| ESM040W-0940-43 | 120 to 277 | 940 | 40.4 | 32 | 38.7 | 43 | 50 |
| ESM050W: 41-50W | | | | | | | |
| ESM050W-1050-42 | 120 to 277 | 1050 | 44.1 | 24 | 37.8 | 42 | 50 |
| ESM050W-1200-42 | 120 to 277 | 1200 | 50.4 | 24 | 37.8 | 42 | 50 |
| ESM050W-1400-34 | 120 to 277 | 1400 | 47.6 | 23 | 30.6 | 34 | 44.2 |
| ESM060W: 51-60W | | | | | | | |
| ESM060W-1400-42 | 120 to 277 | 1400 | 58.8 | 24 | 37.8 | 42 | 50 |

10 to 60 W Constant Current LED Drivers with Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V)

2 - INPUT SPECIFICATION (@25°C ambient temperature)

| | Units | Minimum | Typical | Maximum | Notes |
|---|---|-----------------------------|-----------|--|--|
| Input Voltage Range (Vin) | Vac | 90 | 120, 277 | 305 | •The rated output current for each model is achieved at Vin≥108 Vac & at Vin≥198 Vac. •At nominal load |
| Input Frequency Range | Hz | 47 | 60 | 63 | |
| Input Current (Iin) | A | | | 0.7 A @ 120 Vac 0.4 A @ 230 Vac 0.35 A @ 277 Vac | |
| Power Factor (PF) | | 0.9 | > 0.9 | | At nominal input voltage and with nominal LED voltage and no dimmer |
| Inrush Current | A | Meets NEMA-410 requirements | | | •At any point on the sine wave and 25°C |
| Leakage Current | µA | | | 250 µA @ 120 Vac 500 µA @ 230 Vac 600 µA @ 277 Vac | Measured per IEC60950-1 |
| Input Harmonics | Complies with IEC61000-3-2 for Class C equipment | | | | |
| Total Harmonics Distortion (THD) | | | | 20% | •At nominal input voltage and nominal LED voltage •Complies with DLC (Design Light Consortium) technical requirements |
| Efficiency | % | - | up to 87% | - | •Measured with nominal input voltage, a full sinusoidal wave form and without dimmer connected. |
| Isolation | The AC input to the main DC output is isolated and meets Class II reinforced/double insulation power supply  | | | | |

3 - OUTPUT SPECIFICATION (@25°C ambient temperature)

| | Units | Minimum | Typical | Maximum | Notes |
|----------------------------------|--|---------|---------|---------|---|
| Output Voltage (Vout) | Vdc | 8 | | 56 | See ordering information for details |
| Output Current (Iout) | mA | 280 | | 1400 | •See ordering information for details •The rated output current for each model is achieved at Vin≥108 Vac & at Vin≥198 Vac. |
| Output Current Regulation | % | -5 | | 5 | •At nominal AC line voltage •Includes load and current set point variations |
| Output Current Overshoot | % | - | - | 10 | The driver does not operate outside of the regulation requirements for more than 500 ms during power on with nominal LED load and without dimmer. |
| Ripple Current | ≤ 33% of rated output current for each model | | | | •Measured at nominal LED voltage and nominal input voltage without dimming •Calculated in accordance with the IES Lighting Handbook, 9th edition |
| Dimming Range | % | 1 | | 100 | •The dimming range is dependent on each specific dimmer. It may not be able to achieve 1% dimming with some dimmers. •When testing, if light is measured, dimming range is based on light output. If no light is measured, dimming range is based on percentage of output current. •Dimming performance is optimal when the driver is operated at its nominal output voltage matching the LED nominal Vf (forward voltage). Dimming performance may vary when the driver is operated near its minimum output voltage. |
| Start-up Time | ms | | | 400 | •Measured from application of AC line voltage to the time where light is visible (about 10% of rated output current) |
| | | | | 500 | •Measured from application of AC line voltage to 100% light output •Complies with California Title 24 and ENERGY STAR® luminaire specification |

10 to 60 W Constant Current LED Drivers with Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V)

4 - 0-10 V DIMMING CONTROL (@25°C ambient temperature)

| | Units | Minimum | Typical | Maximum | Notes |
|--|---|---------|---------|---------|--|
| +Dim Signal, -Dim Signal | The ESM series operate only with 0-10V dimmers that sink current. The method to dim the output current of the driver is done via the +Dim/-Dim Signal pins. The +Dim/-Dim signal pins can be used to adjust the output setting via a standard commercial wall dimmer, an external control voltage source (0 to 10 Vdc), or a variable resistor when using the recommended number of LEDs. The dimming input permits 1% to 100% dimming. | | | | |
| Dimming Range (% of Iout) | % | 1 | | 100 | <ul style="list-style-type: none"> The dimming range is dependent on each specific dimmer. It may not be able to achieve 1% dimming with some dimmers. Dimming performance is optimal when the driver is operated at its nominal output voltage matching the LED nominal Vf (forward voltage). Dimming performance may vary when the driver is operated near its minimum output voltage. |
| Current Supplied by the +Dim Signal Pin | mA | | | 1 | |
| Output Current Tolerance While Being Dimmed | % | | | ±8 | The tolerance of the output current while being dimmed is ≤ ±8% until down to 1V. |
| Isolation | The 0-10 V circuit is isolated from the AC input and meets Class II reinforced/double insulation power supply. <input type="checkbox"/> | | | | |

5 - ENVIRONMENTAL CONDITIONS

| | Units | Minimum | Typical | Maximum | Notes |
|--|--|---------|---------|---------|---|
| Operating Case Temperature (Tc) | °C | -30 | | +70 | Case temperature measured at the hot spot •tc (see label on page 12) |
| Maximum Case Temperature (Tc) | °C | | | +90 | Case temperature measured at the hot spot •tc (see label on page 12) |
| Storage Temperature | °C | -40 | | +85 | |
| Humidity | % | 5 | - | 95 | Non-condensing |
| Cooling | Convection cooled | | | | |
| Acoustic Noise | dBA | | | 22 | Measured at a distance of 1 foot (30 cm), without and with approved dimmers |
| Mechanical Shock Protection | per EN60068-2-27 | | | | |
| Vibration Protection | per EN60068-2-6 & EN60068-2-64 | | | | |
| MTBF | > 300,000 hours when operated at nominal input and output conditions, and at Tc ≤ 70°C | | | | |
| Lifetime | hours | 50,000 | | | <ul style="list-style-type: none"> At Tc ≤ 70°C maximum case hot spot temperature (see hot spot •tc on label on page 12) Other models in the ESM series have a longer lifetime. For example, the ESM060W-1400-42 (58.8 W) has a 98,500-hour lifetime @ Tc = 70°C. See details in section 8. |
| Warranty | 5 years at Tc ≤ 70°C | | | | |

10 to 60 W Constant Current LED Drivers with Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V)

6 - EMC COMPLIANCE AND SAFETY APPROVALS

| EMC Compliance | | | |
|---|--|--|--|
| Conducted and Radiated EMI | | FCC CFR Title 47 Part 15 Class B at 120 Vac and Class A at 277 Vac | |
| Harmonic Current Emissions | | IEC61000-3-2 | For Class C equipment |
| Voltage Fluctuations & Flicker | | IEC61000-3-3 | |
| Immunity Compliance | ESD (Electrostatic Discharge) | IEC61000-4-2 | 6 kV contact discharge, 8 kV air discharge, level 3 |
| | RF Electromagnetic Field Susceptibility | IEC61000-4-3 | 3 V/m, 80 - 1000 MHz, 80% modulated at a distance of 3 meters |
| | Electrical Fast Transient | IEC61000-4-4 | ± 2 kV on AC power port for 1 minute, ± 1 kV on signal/control lines |
| | Surge | IEC61000-4-5 | ± 1 kV line to line (differential mode) / ± 2 kV line to common mode ground (tested to secondary ground) on AC power port, ± 0.5 kV for outdoor cables |
| | | ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A, 2.5 kV ring wave | |
| | Conducted RF Disturbances | IEC61000-4-6 | 3V, 0.15-80 MHz, 80% modulated |
| Voltage Dips | | IEC61000-4-11 | >95% dip, 0.5 period; 30% dip, 25 periods; 95% reduction, 250 periods |

| Safety Agency Approvals | |
|-------------------------|---|
| UL | UL8750 recognized Class 2 |
| cUL | CAN/CSA C22.2 No. 250.13-14 LED equipment for lighting applications |

| Safety | | | | | |
|--|-------|---------|---------|---------|---|
| | Units | Minimum | Typical | Maximum | Notes |
| Hi Pot (High Potential) or Dielectric voltage-withstand | Vdc | 4242 | | | <ul style="list-style-type: none"> Insulation between the input (AC line and Neutral) and the output Tested at the RMS voltage equivalent of 3000 Vac |

7 - PROTECTION FEATURES

Under-Voltage (Brownout)

The ESM series provides protection circuitry such that an application of an input voltage below the minimum stated in paragraph 1 (Input Specification) shall not cause damage to the driver.

Short Circuit

The ESM series is protected against short-circuit such that a short from any output to return shall not result in a fire hazard or shock hazard. The driver shall hiccup as a result of a short circuit or over current fault. Removal of the fault will return the driver to within normal operation. The driver shall recover, with no damage, from a short across the output for an indefinite period of time.

Internal Over temperature Protection

The ESM series incorporates circuitry that prevents internal damage due to an over temperature condition. An over temperature condition may be a result of an excessive ambient temperature or as a result of an internal failure. When the over temperature condition is removed, the driver shall automatically recover.

Output Open Load

When the LED load is removed, the output voltage of the ESM series is limited to 1.3 times the maximum output voltage of each model.

10 to 60 W Constant Current LED Drivers with Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V)

8 - PREDICTED LIFETIME VERSUS CASE AND AMBIENT TEMPERATURE

Lifetime is defined by the measurement of the temperatures of all the electrolytic capacitors whose failure would affect light output under the nominal LED load and worst case AC line voltage. The graphs in figure 1/1-bis are determined by the electrolytic capacitor with the shortest lifetime, among all electrolytic capacitors. They represent a worst case scenario in which the LED driver is powered 24 hours/day, 7 days/week. The lifetime of an electrolytic capacitor is measured when any of the following changes in performance are observed:

- 1) Capacitance changes more than 20% of initial value
- 2) Dissipation Factor ($\tan \delta$): 150% or less of initial specified value
- 3) Equivalent Series Resistance (ESR): 150% or less of initial specified value
- 4) Leakage current: less of initial specified value

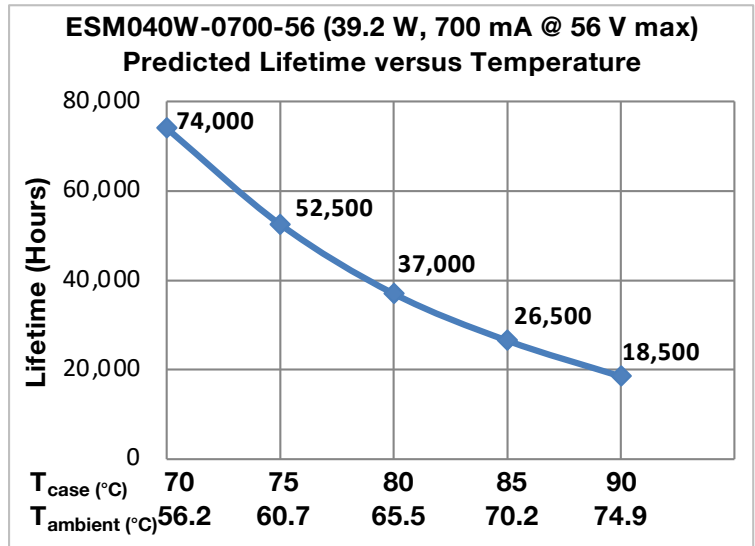
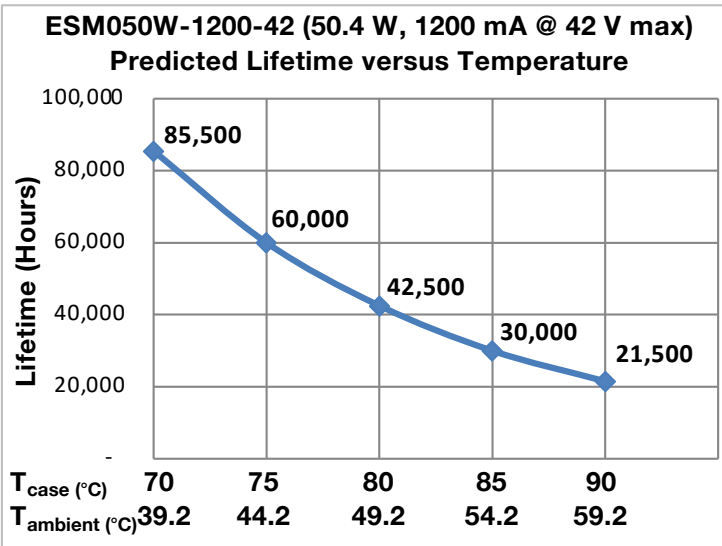


Figure 1

Notes:

- The ambient temperature $T_{ambient}$ and the differential between $T_{ambient}$ and T_{case} mentioned in the above graphs are relevant only as long as both the driver and the light fixture are exposed to the same ambient room temperature. If the LED driver is used in an enclosure or covered by insulation material, then the ambient room temperature is no longer valid. In this situation, please refer only to the case temperature T_{case} .
- It should be noted the graph "Lifetime vs. Ambient Temperature" may have an error induced in the final application if the mounting has restricted convection flow around the case. For applications where this is evident, the actual case temperature measured at the Tc point in the application should be used for reliability calculations.

10 to 60 W Constant Current LED Drivers with Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V)

8 - PREDICTED LIFETIME VERSUS CASE AND AMBIENT TEMPERATURE (CONTINUED)

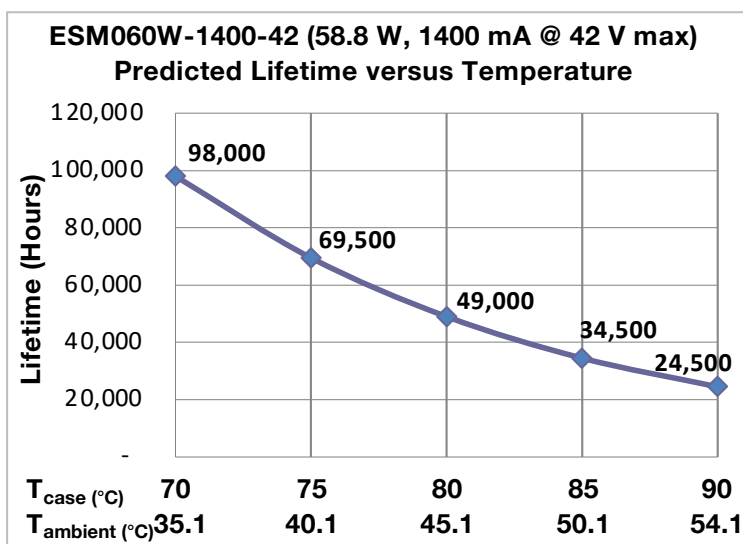


Figure 1-bis

Notes:



- The ambient temperature $T_{ambient}$ and the differential between $T_{ambient}$ and T_{case} mentioned in the above graphs are relevant only as long as both the driver and the light fixture are exposed to the same ambient room temperature. If the LED driver is used in an enclosure or covered by insulation material, then the ambient room temperature is no longer valid. In this situation, please refer only to the case temperature T_{case} .
- It should be noted the graph "Lifetime vs. Ambient Temperature" may have an error induced in the final application if the mounting has restricted convection flow around the case. For applications where this is evident, the actual case temperature measured at the T_c point in the application should be used for reliability calculations.

10 to 60 W Constant Current LED Drivers with Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V)

9 - PHASE-CUT DIMMING

Dimming of the driver is possible with standard TRIAC-based incandescent dimmers that chop the AC voltage as shown in Figure 2, or with ELV dimmers. During the rapid rise time of the AC voltage when the dimmer turns on, the driver does not generate any voltage or current oscillations, and inrush current is controlled. During the on-time of the AC input, the driver regulates the output current based upon the conduction angle. The RMS value of the driver output current is proportional to the on-time of the AC input voltage. When operating with an incandescent dimmer, the RMS output current varies depending upon the conduction angle and RMS value of the applied AC input voltage. Figure 3 shows the typical output current versus conduction angle at nominal input voltage. The ESM series offers tri-mode dimming compatibility with both phase-cut (reverse-phase and forward-phase) and 0-10V dimmers. Phase-cut dimming always has priority over 0-10 V dimming.

Please note that the ESM series is compatible with TRIAC and ELV dimming only at 120 Vac.

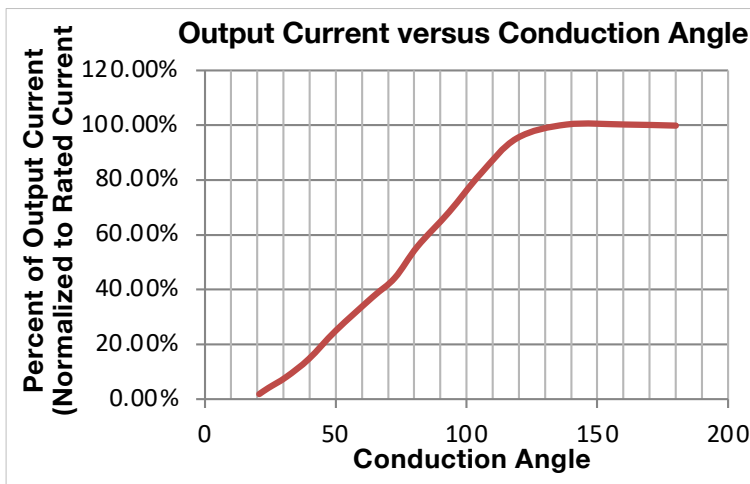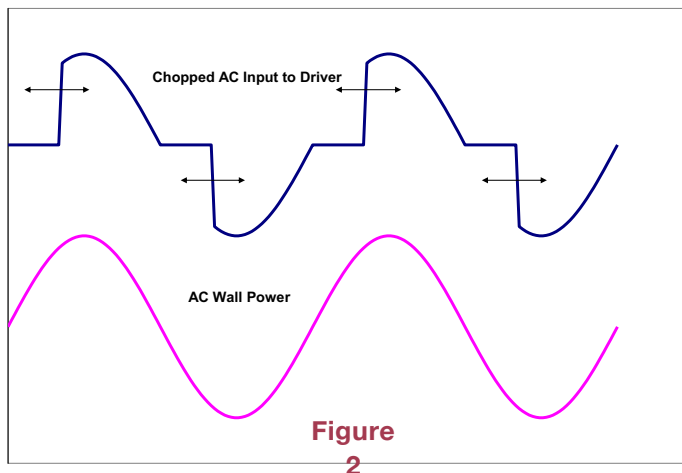

10 - COMPATIBLE PHASE-CUT DIMMERS & DIMMING RANGE

| 120Vac Dimmers | | | | | |
|----------------|-----------|---------|------------|------------|-----------|
| Mfg. | Model | Mfg. | Model | Mfg. | Model |
| Lutron | S-603PG | Lutron | DVELV-303P | Lutron | CT-103P |
| Leviton | IPI06-1LZ | Lutron | SELV-300P | Cooper | SLC03P |
| Leviton | 6631-2 | Leviton | 6683-IW | Leviton | IPE04 |
| Lutron | DVCL-153P | Leviton | 6161 | Lutron | MAELV-600 |
| Lutron | DV-600P | Leviton | 6633-P | Lutron | FAELV-500 |
| Lutron | TGCL-153P | Lutron | TG-600P | Lightolier | ZP260QEW |
| Lutron | S-600P | Cooper | DLC03P | Cooper | DAL06P |
| Leviton | VPE06 | Lutron | LG-600P | | |

Dimming compatibility charts are available for each model on the ESM series page at: erp-power.com

10 to 60 W Constant Current LED Drivers with Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V)

11 - 0-10 V DIMMING

The ESM drivers operate only with 0-10V dimmers that sink current. They are not designed to operate with 0-10V control systems that source current, as used in theatrical/entertainment systems. Developed in the 1980's, the 0-10V sinking current control method is adopted by the International Electrotechnical Commission (IEC) as apart of their IEC Standard 60929 Annex E.

The method to dim the output current of the driver is done via the +Dim/-Dim Signal pins. The +Dim/-Dim Signal pins respond to a 0 to 10 V signal, delivering 1% to 100% of the output current based on rated current for each model. A pull-up resistor is included internal to the driver. When the +Dim wire (purple) is short circuited to the -Dim wire (pink) or to the -LED wire (black), a small amount of current may be present on the output and, in that condition, shimmering may be observed. If the +Dim input is ≤ 1 V and ≥ 0.6 V, the output current is still present, as shown in figure 4. **Please note that short circuiting the +Dim wire (purple) to the -Dim wire (grey) does not guarantee that the output current is turned off. In some models, the current may turn off when short circuiting the +Dim wire to the -Dim wire. In other models, there may be a small amount of current still present.**

If the +Dim input is > 10 V or open circuited, the output current is programmed to 100% of the rated current.

When not used, the -Dim wire (pink) and the +Dim wire (purple) can be individually capped or cut off. In this configuration, no dimming is possible and the driver delivers 100% of its rated output current.

The maximum source current (flowing from the driver to the 0-10V dimmer) supplied by the +Dim Signal pin is ≤ 1 mA. The tolerance of the output current while being dimmed shall be $\pm 8\%$ typical until down to 1 V.

There 0-10V dimming transfer function is a linear curve where 10V = 100% of the output current and 1V = 10% of the output current (seen in figure 4).

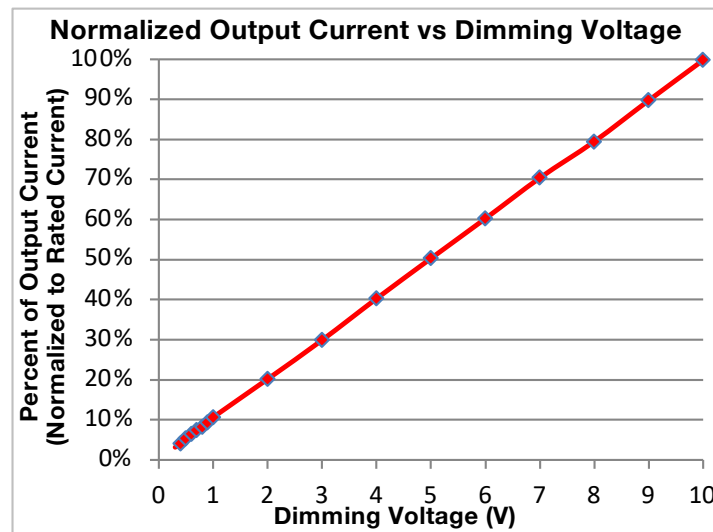


Figure 4

10 to 60 W Constant Current LED Drivers with Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V)

12 - 0-10 V DIMMING (CONTINUED)

A fixed or variable resistor can be also used from the +Dim signal pin to the -Dim pin to adjust the output current. Figure 6 show the relationship of the output current to a resistor connected across the 0-10V dimming input. This is a typical graph for the entire ESM series but is not specific to a particular model. This graph may vary from one model to the next.

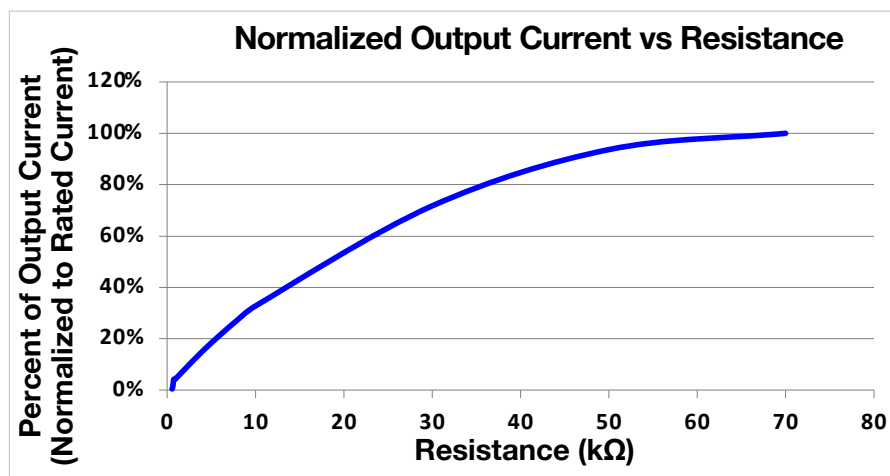


Figure 5

13 - COMPATIBLE 0-10 V DIMMERS

- Lutron, Nova series (part number NFTV)
- Lutron, Diva series (part number DVTV)
- Leviton, IllumaTech series (part number IP710-DL)

10 to 60 W Constant Current LED Drivers with Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V)

14 - MECHANICAL DETAILS

- Packaging Options:** Metal case
- I/O Connections:** Flying leads, 18 AWG on power leads, 22 AWG on 0-10V dimming wires, 203 mm (8 in) long, 105°C rated, stranded, stripped by approximately 9.5mm, and tinned. All the wires, on both input and output, have a 300 V insulation rating.
- Ingress Protection:** IP20 rated
- Mounting Instructions:** The ESM driver case must be secured on a flat surface through the two mounting tabs, shown here below in the case outline drawings.

15 - OUTLINE DRAWINGS

Dimensions: L 110 x W 60 x H 26 mm (L 4.33 x W 2.36 x H 1.02 in)

Volume: 171.6 cm³ (10.47 in³)

Weight: 252 g (8.9 oz)

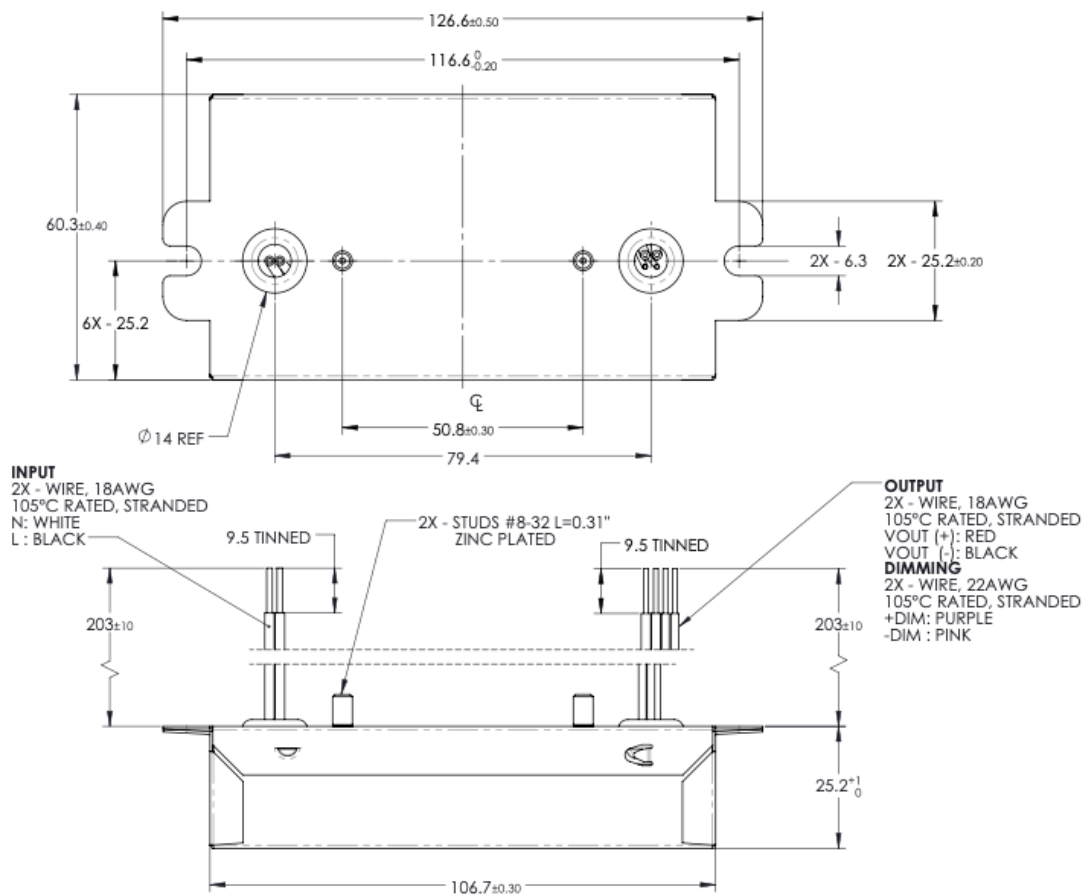


Figure 6

All dimensions are in mm

10 to 60 W Constant Current LED Drivers with Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V)

16 – LABELING AND T_c POINT LOCATION

The ESM040W-0800-42 is used in figures 7 & 8 as an example to illustrate a typical label.

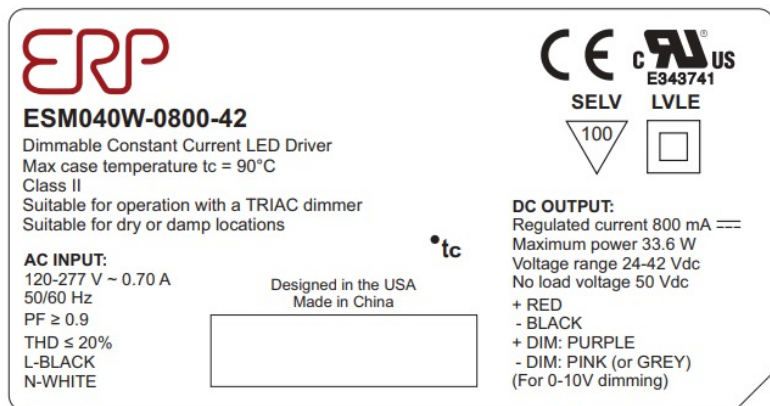
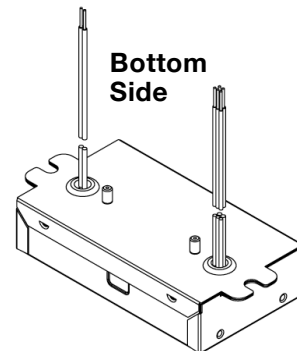



Figure 7

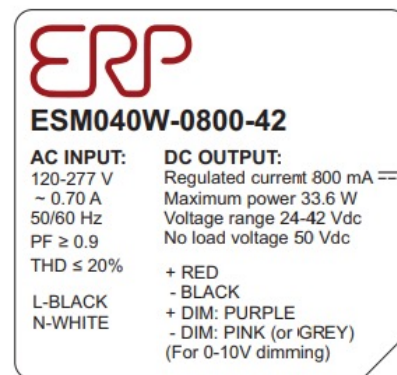


Figure 8

USA Headquarters

Tel: +1-805-517-1300
Fax: +1-805-517-1411
2625 Townsgate Road, Suite 106
Westlake Village, CA 91361, USA

CHINA Operations

Tel: +86-756-6266298
Fax: +86-756-6266299
No. 8 Pingdong Road 2
Zhuhai, Guangdong, China 519060

ERP Power, LLC (ERP) reserves the right to make changes without further notice to any products herein. ERP makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ERP assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in ERP data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ERP does not convey any license under its patent rights nor the rights of others. ERP products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the ERP product could create a situation where personal injury or death may occur. Should Buyer purchase or use ERP products for any such unintended or unauthorized application, Buyer shall indemnify and hold ERP and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ERP was negligent regarding the design or manufacture of the part. ERP is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERP Power:](#)

[ESM030W-1750-14](#) [ESM020W-1000-14](#) [ESM020W-1000-24](#)