


[illegible]

Diagram illustrating the interaction with the robot using speech and touch. The robot is shown with three screens: a left screen, a central screen, and a right screen. The central screen displays "17:05" and "Thu, Apr 2". The right screen displays "17:05" and "Thu, Apr 22". A yellow arrow points from the right screen to the central screen. A yellow speech bubble points to the central screen with the text "Screen On, Screen Off". A red speech bubble points to the right screen with the text "Rotate Camera". A blue speech bubble points to the central screen with the text "Rotate Body". A teal speech bubble points to the right screen with the text "Play, Pause Desktop Screen". A blue speech bubble points to the left screen with the text "Turn Left, Turn Right, Turn up, Turn down". A yellow speech bubble points to the central screen with the text "Screen On, Screen Off". A yellow arrow points from the right screen to the central screen.



## The Value of Software & Hardware Integration with AfoBot

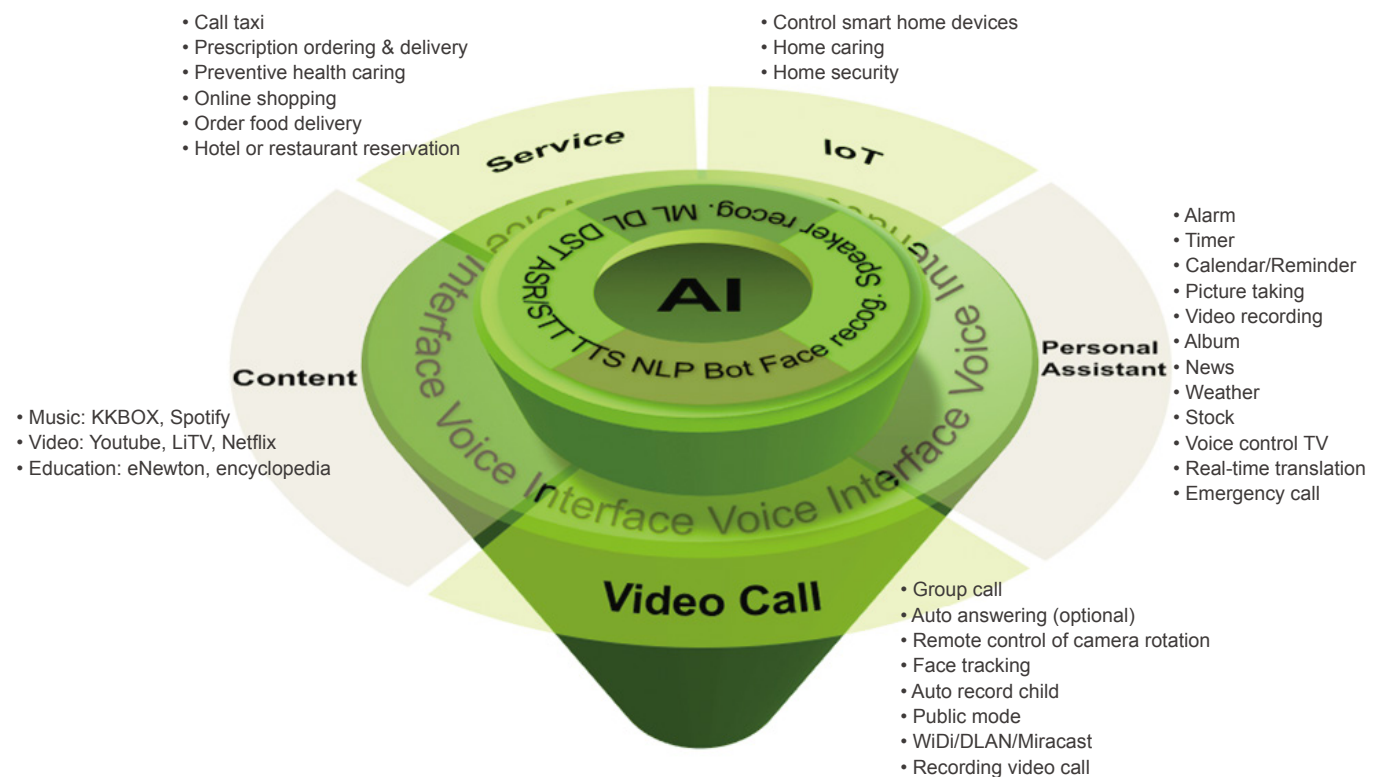

# AfoBot

8" TFT LCD with 1280 x 800 Full HD



## Features

- 8" 16:10 IPS TFT LCD (1280x800)
- 8-core Cortex-A53 1.5GHz
- 32GB eMMC flash on-board
- 5-megapixel camera, 2592×1944@15fps, F2.2, FF, FOV 103.5° 1/4" OV5640 image sensor
- IEEE 802.11 a/b/g/n; 2x2 802.11n, Bluetooth 4.0
- 5200 mAh Li-ion battery (2 x 18650 3600mAh)
- Android 6.0



## Specifications

Model	AfoBot
Display	8" TFT LCD with 1280 x 800 Full HD
Processor	8-core Cortex-A53 SoC
Touch Screen	Projected capacitive touch screen with 10-point multi-touch
Memory	On-board 2 GB LPDDR3
Video Codec	4K*2K H.264/H.265, 4K*2K@60Hz
Storage	On-board 32GB eMMC 1 x microSD card slot
Wireless Connectivity	Wi-Fi 802.11 a/b/g/n dual band Wi-Fi Direct for Miracast Bluetooth 4.0, BLE support Wi-Fi access point
Power Adapter	AC Input: 100-240V AC, 50/60Hz DC Output: 12V 2.5A
Motion	Body: 360° horizontal pan (motorized) Camera: 100° tilt (motorized) Panel: 33° tilt (manual)
I/O Interface	1 x USB2.0 Type C 1 x USB2.0 Type A 1 x GbE LAN
Camera	5-megapixel camera, F2.2, FOV103°
Audio	2 x Digital microphone 5W 4Ω stereo reflective speaker Echo cancelling, noise reduction and auto gain control
Operating System	Host: Android 6.0 Client APP: Android / iOS
Color	Pantone White and pantone 312C
Size	271 mm x 213 mm x 136 mm
Weight	1730g
Certificate	CE, FCC Class B and BSMI
Battery	Lithium Ion; 5200mAh; 3.7V; battery run time: 5 hrs

## Ordering Information

Part No.	Description
AfoBot-F08A-AD6-TW-R21	8" Assistant Robot with 8-core Cortex-A53 SoC, Wi-Fi 802.11 a/b/g/n ,BT 4.0, 5MP webcam, PCAP touch, on-board 32GB eMMC,Android 6.0, Conexant CX20921, Wifi code: TW, R21
AfoBot-F08A-AD6-BAT-TW-R21	8" Assistant Robot with 8-core Cortex-A53 SoC, Wi-Fi 802.11 a/b/g/n ,BT 4.0, 5MP webcam, PCAP touch, on-board 32GB eMMC,Android 6.0, 5200AH 1S2P Li-ion battery, Conexant CX20921, Wifi code: TW, R21
AfoBot-F08A-AD6-EU-R21	8" Assistant Robot with 8-core Cortex-A53 SoC, Wi-Fi 802.11 a/b/g/n ,BT 4.0, 5MP webcam, PCAP touch, on-board 32GB eMMC,Android 6.0, Conexant CX20921, Wifi code: EU, R21
AfoBot-F08A-AD6-BAT-EU-R21	8" Assistant Robot with 8-core Cortex-A53 SoC, Wi-Fi 802.11 a/b/g/n ,BT 4.0, 5MP webcam, PCAP touch, on-board 32GB eMMC,Android 6.0, 5200AH 1S2P Li-ion battery, Conexant CX20921, Wifi code: EU, R21


## Options

Item	Description
33502-000394-RS	EU power plug
33502-000393-RS	US power plug
33502-000392-RS	UK power plug

## Packing List

Item	Q'ty
QIG	1
Power adapter	1

### AfoBot Dimensions (Unit: mm)

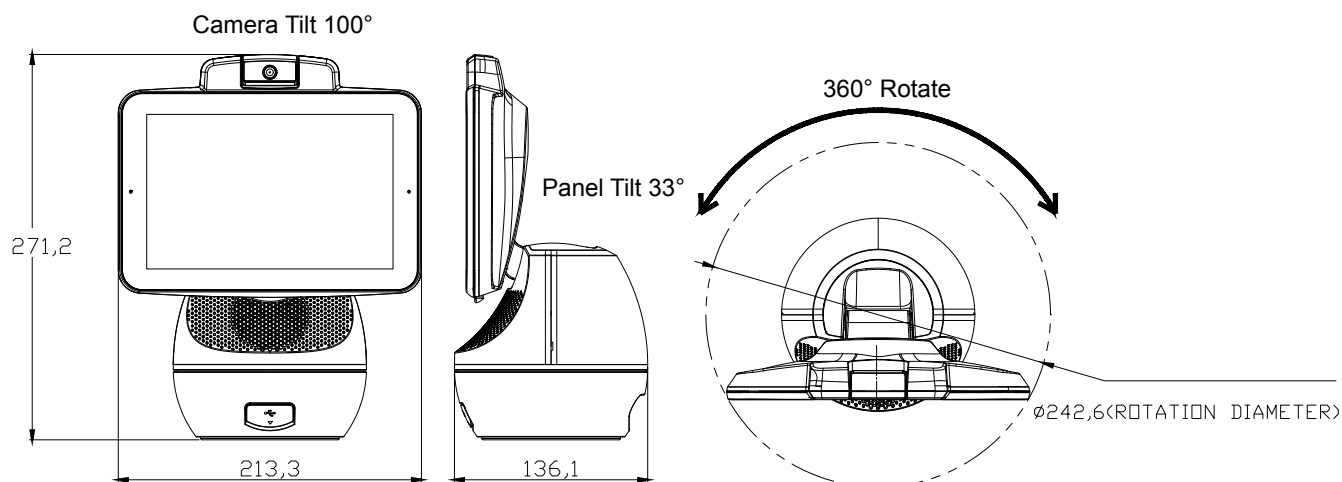

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IEI:](#)

[AfoBot-F08A-AD6-BAT-R10](#) [AfoBot-F08A-AD6-R10](#) [AfoBot-F08A-AD6-BAT-TW-R21](#) [AfoBot-F08A-AD6-EU-R21](#)  
[AfoBot-F08A-AD6-TW-R21](#) [AfoBot-F08A-AD6-BAT-EU-R21](#)