

**165-Bump BGA**  
**Commercial Temp**  
**Industrial Temp**

**18Mb SigmaDDR-II+™**  
**Burst of 2 SRAM**

**435 MHz–300 MHz**  
**1.8 V V<sub>DD</sub>**  
**1.8 V and 1.5 V I/O**

## Features

- 2.0 Clock Latency
- Simultaneous Read and Write SigmaDDR-II™ Interface
- Common I/O bus
- JEDEC-standard pinout and package
- Double Data Rate interface
- Byte Write (x36 and x18) function
- Burst of 2 Read and Write
- 1.8 V +100/–100 mV core power supply
- 1.5 V or 1.8 V HSTL Interface
- Pipelined read operation with self-timed Late Write
- Fully coherent read and write pipelines
- ZQ pin for programmable output drive strength
- IEEE 1149.1 JTAG-compliant Boundary Scan
- 165-bump, 13 mm x 15 mm, 1 mm bump pitch BGA package
- RoHS-compliant 165-bump BGA package available

## SigmaDDR-II™ Family Overview

The GS8182T19/37BD are built in compliance with the SigmaDDR-II+ SRAM pinout standard for Common I/O synchronous SRAMs. They are 18,874,368-bit (18Mb) SRAMs. The GS8182T19/37BD SigmaDDR-II SRAMs are

just one element in a family of low power, low voltage HSTL I/O SRAMs designed to operate at the speeds needed to implement economical high performance networking systems.

## Clocking and Addressing Schemes

The GS8182T19/37BD SigmaDDR-II+ SRAMs are synchronous devices. They employ two input register clock inputs, K and  $\bar{K}$ . K and  $\bar{K}$  are independent single-ended clock inputs, not differential inputs to a single differential clock input buffer.

Each internal read and write operation in a SigmaDDR-II+ B2 RAM is two times wider than the device I/O bus. An input data bus de-multiplexer is used to accumulate incoming data before it is simultaneously written to the memory array. An output data multiplexer is used to capture the data produced from a single memory array read and then route it to the appropriate output drivers as needed. Therefore the address field of a SigmaDDR-II+ B2 RAM is always one address pin less than the advertised index depth (e.g., the 2M x 8 has a 1M addressable index).

## Parameter Synopsis

|       | -435    | -400    | -375    | -333    | -300    |
|-------|---------|---------|---------|---------|---------|
| tKHKH | 2.3 ns  | 2.5 ns  | 2.67 ns | 3.0 ns  | 3.3 ns  |
| tKHQV | 0.45 ns | 0.45 ns | 0.45 ns | 0.45 ns | 0.45 ns |

## 512K x 36 SigmaDDR-II+ SRAM—Top View

|   | 1                        | 2                       | 3                       | 4                              | 5                       | 6                      | 7                       | 8                       | 9                       | 10                      | 11   |
|---|--------------------------|-------------------------|-------------------------|--------------------------------|-------------------------|------------------------|-------------------------|-------------------------|-------------------------|-------------------------|------|
| A | $\overline{\text{CQ}}$   | NC/SA<br>(144Mb)        | NC/SA<br>(36Mb)         | $\text{R}/\overline{\text{W}}$ | $\overline{\text{BW2}}$ | $\overline{\text{K}}$  | $\overline{\text{BW1}}$ | $\overline{\text{LD}}$  | SA                      | NC/SA<br>(72Mb)         | CQ   |
| B | NC                       | DQ27                    | DQ18                    | SA                             | $\overline{\text{BW3}}$ | K                      | $\overline{\text{BW0}}$ | SA                      | NC/SA<br>(288Mb)        | NC                      | DQ8  |
| C | NC                       | NC                      | DQ28                    | $\text{V}_{\text{SS}}$         | SA                      | NC                     | SA                      | $\text{V}_{\text{SS}}$  | NC                      | DQ17                    | DQ7  |
| D | NC                       | DQ29                    | DQ19                    | $\text{V}_{\text{SS}}$         | $\text{V}_{\text{SS}}$  | $\text{V}_{\text{SS}}$ | $\text{V}_{\text{SS}}$  | $\text{V}_{\text{SS}}$  | NC                      | NC                      | DQ16 |
| E | NC                       | NC                      | DQ20                    | $\text{V}_{\text{DDQ}}$        | $\text{V}_{\text{SS}}$  | $\text{V}_{\text{SS}}$ | $\text{V}_{\text{SS}}$  | $\text{V}_{\text{DDQ}}$ | NC                      | DQ15                    | DQ6  |
| F | NC                       | DQ30                    | DQ21                    | $\text{V}_{\text{DDQ}}$        | $\text{V}_{\text{DD}}$  | $\text{V}_{\text{SS}}$ | $\text{V}_{\text{DD}}$  | $\text{V}_{\text{DDQ}}$ | NC                      | NC                      | DQ5  |
| G | NC                       | DQ31                    | DQ22                    | $\text{V}_{\text{DDQ}}$        | $\text{V}_{\text{DD}}$  | $\text{V}_{\text{SS}}$ | $\text{V}_{\text{DD}}$  | $\text{V}_{\text{DDQ}}$ | NC                      | NC                      | DQ14 |
| H | $\overline{\text{Doff}}$ | $\text{V}_{\text{REF}}$ | $\text{V}_{\text{DDQ}}$ | $\text{V}_{\text{DDQ}}$        | $\text{V}_{\text{DD}}$  | $\text{V}_{\text{SS}}$ | $\text{V}_{\text{DD}}$  | $\text{V}_{\text{DDQ}}$ | $\text{V}_{\text{DDQ}}$ | $\text{V}_{\text{REF}}$ | ZQ   |
| J | NC                       | NC                      | DQ32                    | $\text{V}_{\text{DDQ}}$        | $\text{V}_{\text{DD}}$  | $\text{V}_{\text{SS}}$ | $\text{V}_{\text{DD}}$  | $\text{V}_{\text{DDQ}}$ | NC                      | DQ13                    | DQ4  |
| K | NC                       | NC                      | DQ23                    | $\text{V}_{\text{DDQ}}$        | $\text{V}_{\text{DD}}$  | $\text{V}_{\text{SS}}$ | $\text{V}_{\text{DD}}$  | $\text{V}_{\text{DDQ}}$ | NC                      | DQ12                    | DQ3  |
| L | NC                       | DQ33                    | DQ24                    | $\text{V}_{\text{DDQ}}$        | $\text{V}_{\text{SS}}$  | $\text{V}_{\text{SS}}$ | $\text{V}_{\text{SS}}$  | $\text{V}_{\text{DDQ}}$ | NC                      | NC                      | DQ2  |
| M | NC                       | NC                      | DQ34                    | $\text{V}_{\text{SS}}$         | $\text{V}_{\text{SS}}$  | $\text{V}_{\text{SS}}$ | $\text{V}_{\text{SS}}$  | $\text{V}_{\text{SS}}$  | NC                      | DQ11                    | DQ1  |
| N | NC                       | DQ35                    | DQ25                    | $\text{V}_{\text{SS}}$         | SA                      | SA                     | SA                      | $\text{V}_{\text{SS}}$  | NC                      | NC                      | DQ10 |
| P | NC                       | NC                      | DQ26                    | SA                             | SA                      | QVLD                   | SA                      | SA                      | NC                      | DQ9                     | DQ0  |
| R | TDO                      | TCK                     | SA                      | SA                             | SA                      | NC                     | SA                      | SA                      | SA                      | TMS                     | TDI  |

11 x 15 Bump BGA—13 x 15 mm<sup>2</sup> Body—1 mm Bump Pitch

## Notes:

1.  $\overline{\text{BW0}}$  controls writes to DQ0:DQ8;  $\overline{\text{BW1}}$  controls writes to DQ9:DQ17;  $\overline{\text{BW2}}$  controls writes to DQ18:DQ26;  $\overline{\text{BW3}}$  controls writes to DQ27:DQ35
2. NC = Not connected

**1M x 18 SigmaDDR-II+ SRAM—Top View**

|   | 1                        | 2                       | 3                       | 4                              | 5                       | 6                      | 7                       | 8                       | 9                       | 10                      | 11  |
|---|--------------------------|-------------------------|-------------------------|--------------------------------|-------------------------|------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-----|
| A | $\overline{\text{CQ}}$   | NC/SA<br>(72Mb)         | SA                      | $\text{R}/\overline{\text{W}}$ | $\overline{\text{BW1}}$ | $\overline{\text{K}}$  | NC/SA<br>(144Mb)        | $\overline{\text{LD}}$  | SA                      | NC/SA<br>(36 Mb)        | CQ  |
| B | NC                       | DQ9                     | NC                      | SA                             | NC/SA<br>(288Mb)        | K                      | $\overline{\text{BW0}}$ | SA                      | NC                      | NC                      | DQ8 |
| C | NC                       | NC                      | NC                      | $\text{V}_{\text{SS}}$         | SA                      | NC                     | SA                      | $\text{V}_{\text{SS}}$  | NC                      | DQ7                     | NC  |
| D | NC                       | NC                      | DQ10                    | $\text{V}_{\text{SS}}$         | $\text{V}_{\text{SS}}$  | $\text{V}_{\text{SS}}$ | $\text{V}_{\text{SS}}$  | $\text{V}_{\text{SS}}$  | NC                      | NC                      | NC  |
| E | NC                       | NC                      | DQ11                    | $\text{V}_{\text{DDQ}}$        | $\text{V}_{\text{SS}}$  | $\text{V}_{\text{SS}}$ | $\text{V}_{\text{SS}}$  | $\text{V}_{\text{DDQ}}$ | NC                      | NC                      | DQ6 |
| F | NC                       | DQ12                    | NC                      | $\text{V}_{\text{DDQ}}$        | $\text{V}_{\text{DD}}$  | $\text{V}_{\text{SS}}$ | $\text{V}_{\text{DD}}$  | $\text{V}_{\text{DDQ}}$ | NC                      | NC                      | DQ5 |
| G | NC                       | NC                      | DQ13                    | $\text{V}_{\text{DDQ}}$        | $\text{V}_{\text{DD}}$  | $\text{V}_{\text{SS}}$ | $\text{V}_{\text{DD}}$  | $\text{V}_{\text{DDQ}}$ | NC                      | NC                      | NC  |
| H | $\overline{\text{Doff}}$ | $\text{V}_{\text{REF}}$ | $\text{V}_{\text{DDQ}}$ | $\text{V}_{\text{DDQ}}$        | $\text{V}_{\text{DD}}$  | $\text{V}_{\text{SS}}$ | $\text{V}_{\text{DD}}$  | $\text{V}_{\text{DDQ}}$ | $\text{V}_{\text{DDQ}}$ | $\text{V}_{\text{REF}}$ | ZQ  |
| J | NC                       | NC                      | NC                      | $\text{V}_{\text{DDQ}}$        | $\text{V}_{\text{DD}}$  | $\text{V}_{\text{SS}}$ | $\text{V}_{\text{DD}}$  | $\text{V}_{\text{DDQ}}$ | NC                      | DQ4                     | NC  |
| K | NC                       | NC                      | DQ14                    | $\text{V}_{\text{DDQ}}$        | $\text{V}_{\text{DD}}$  | $\text{V}_{\text{SS}}$ | $\text{V}_{\text{DD}}$  | $\text{V}_{\text{DDQ}}$ | NC                      | NC                      | DQ3 |
| L | NC                       | DQ15                    | NC                      | $\text{V}_{\text{DDQ}}$        | $\text{V}_{\text{SS}}$  | $\text{V}_{\text{SS}}$ | $\text{V}_{\text{SS}}$  | $\text{V}_{\text{DDQ}}$ | NC                      | NC                      | DQ2 |
| M | NC                       | NC                      | NC                      | $\text{V}_{\text{SS}}$         | $\text{V}_{\text{SS}}$  | $\text{V}_{\text{SS}}$ | $\text{V}_{\text{SS}}$  | $\text{V}_{\text{SS}}$  | NC                      | DQ1                     | NC  |
| N | NC                       | NC                      | DQ16                    | $\text{V}_{\text{SS}}$         | SA                      | SA                     | SA                      | $\text{V}_{\text{SS}}$  | NC                      | NC                      | NC  |
| P | NC                       | NC                      | DQ17                    | SA                             | SA                      | QVLD                   | SA                      | SA                      | NC                      | NC                      | DQ0 |
| R | TDO                      | TCK                     | SA                      | SA                             | SA                      | NC                     | SA                      | SA                      | SA                      | TMS                     | TDI |

**11 x 15 Bump BGA—13 x 15 mm<sup>2</sup> Body—1 mm Bump Pitch**
**Notes:**

1.  $\overline{\text{BW0}}$  controls writes to DQ0:DQ8;  $\overline{\text{BW1}}$  controls writes to DQ9:DQ17
2. NC = Not connected

Pin Description Table

| Symbol               | Description                     | Type         | Comments               |
|----------------------|---------------------------------|--------------|------------------------|
| SA                   | Synchronous Address Inputs      | Input        | —                      |
| $\overline{R/W}$     | Synchronous Read/ Write         | Input        | Read Active when High  |
| $\overline{BW0-BW3}$ | Synchronous Byte Writes         | Input        | Active Low             |
| $\overline{LD}$      | Synchronous Load Pin            | Input        | Active Low             |
| K                    | Input Clock                     | Input        | Active High            |
| $\overline{K}$       | Input Clock                     | Input        | Active Low             |
| TMS                  | Test Mode Select                | Input        | —                      |
| TDI                  | Test Data Input                 | Input        | —                      |
| TCK                  | Test Clock Input                | Input        | —                      |
| TDO                  | Test Data Output                | Output       | —                      |
| $V_{REF}$            | HSTL Input Reference Voltage    | Input        | —                      |
| ZQ                   | Output Impedance Matching Input | Input        | —                      |
| MCL                  | Must Connect Low                | —            | —                      |
| DQ                   | Data I/O                        | Input/Output | Three State            |
| $\overline{Doff}$    | Disable DLL when low            | Input        | Active Low             |
| CQ                   | Output Echo Clock               | Output       | —                      |
| $\overline{CQ}$      | Output Echo Clock               | Output       | —                      |
| $V_{DD}$             | Power Supply                    | Supply       | 1.8 V Nominal          |
| $V_{DDQ}$            | Isolated Output Buffer Supply   | Supply       | 1.5 V or 1.8 V Nominal |
| $V_{SS}$             | Power Supply: Ground            | Supply       | —                      |
| QVLD                 | Q Valid Output                  | Output       | —                      |
| NC                   | No Connect                      | —            | —                      |

## Notes:

1. NC = Not Connected to die or any other pin
2. When ZQ pin is directly connected to  $V_{DDQ}$ , output impedance is set to minimum value and it cannot be connected to ground or left unconnected.
3. K,  $\overline{K}$  cannot be set to  $V_{REF}$  voltage

## Background

Common I/O SRAMs, from a system architecture point of view, are attractive in read dominated or block transfer applications. Therefore, the SigmaDDR-II+ SRAM interface and truth table are optimized for burst reads and writes. Common I/O SRAMs are unpopular in applications where alternating reads and writes are needed because bus turnaround delays can cut high speed Common I/O SRAM data bandwidth in half.

## Burst Operations

Read and write operations are "burst" operations. In every case where a read or write command is accepted by the SRAM, it will respond by issuing or accepting two beats of data, executing a data transfer on subsequent rising edges of  $K$  and  $\bar{K}$ , as illustrated in the timing diagrams. This means that it is possible to load new addresses every  $K$  clock cycle. Addresses can be loaded less often, if intervening deselect cycles are inserted.

## Deselect Cycles

Chip Deselect commands are pipelined to the same degree as read commands. This means that if a deselect command is applied to the SRAM on the next cycle after a read command captured by the SRAM, the device will complete the two beat read data transfer and then execute the deselect command, returning the output drivers to high-Z. A high on the  $\bar{LD}$  pin prevents the RAM from loading read or write command inputs and puts the RAM into deselect mode as soon as it completes all outstanding burst transfer operations.

## SigmaDDR-II+ B2 SRAM Read Cycles

The SRAM executes pipelined reads. The status of the Address,  $\bar{LD}$  and  $R/\bar{W}$  pins are evaluated on the rising edge of  $K$ . The read command ( $\bar{LD}$  low and  $R/\bar{W}$  high) is clocked into the SRAM by a rising edge of  $K$ .

## SigmaDDR-II+ B2 SRAM Write Cycles

The status of the Address,  $\bar{LD}$  and  $R/\bar{W}$  pins are evaluated on the rising edge of  $K$ . The SRAM executes "late write" data transfers. Data in is due at the device inputs on the rising edge of  $K$  following the rising edge of  $K$  clock used to clock in the write command ( $\bar{LD}$  and  $R/\bar{W}$  low) and the write address. To complete the remaining beat of the burst of two write transfer, the SRAM captures data in on the next rising edge of  $\bar{K}$ , for a total of two transfers per address load.

## Power-Up Sequence for SigmaQuad-II+ SRAMs

For compatibility across all vendors it is recommended that SigmaQuad-II+ SRAMs be powered-up in a specific sequence in order to avoid undefined operations

### Power-Up Sequence

1. Power-up and maintain  $\overline{\text{Doff}}$  at low state.
  - 1a. Apply  $V_{DD}$ .
  - 1b. Apply  $V_{DDQ}$ .
  - 1c. Apply  $V_{REF}$  (may also be applied at the same time as  $V_{DDQ}$ ).
2. After voltages are within specification range, and clocks (K,  $\overline{K}$ ) are stabilized, change  $\overline{\text{Doff}}$  to high.
3. An additional 2048 clock cycles are required to lock the DLL after it has been enabled.

Note:

The DLL may be reset by driving the  $\overline{\text{Doff}}$  pin low or by stopping the K clocks for at least 30ns. 2048 cycles of clean K clocks are always required to re-lock the DLL after reset.

### DLL Constraints

**The DLL synchronizes to either K clock. These clocks should have low phase jitter ( $t_{KCKVar}$ ).**

- The DLL cannot operate at a frequency lower than that specified by the  $t_{KHKH}$  maximum specification for the desired operating clock frequency.
- If the incoming clock is not stabilized when DLL is enabled, the DLL may lock on the wrong frequency and cause undefined errors or failures during the initial stage.

## Special Functions

### Byte Write Control

Byte Write Enable pins are sampled at the same time that Data In is sampled. A high on the Byte Write Enable pin associated with a particular byte (e.g.,  $\overline{\text{BW0}}$  controls D0–D8 inputs) will inhibit the storage of that particular byte, leaving whatever data may be stored at the current address at that byte location undisturbed. Any or all of the Byte Write Enable pins may be driven high or low during the data in sample times in a write sequence.

Each write enable command and write address loaded into the RAM provides the base address for a 2 beat data transfer. The x18 version of the RAM, for example, may write 36 bits in association with each address loaded. Any 9-bit byte may be masked in any write sequence.

### Example x18 RAM Write Sequence using Byte Write Enables

| Data In Sample Time | $\overline{\text{BW0}}$ | $\overline{\text{BW1}}$ | D0–D8      | D9–D17     |
|---------------------|-------------------------|-------------------------|------------|------------|
| Beat 1              | 0                       | 1                       | Data In    | Don't Care |
| Beat 2              | 1                       | 0                       | Don't Care | Data In    |

### Resulting Write Operation

| Byte 1<br>D0–D8 | Byte 2<br>D9–D17 | Byte 3<br>D0–D8 | Byte 4<br>D9–D17 |
|-----------------|------------------|-----------------|------------------|
| Written         | Unchanged        | Unchanged       | Written          |
| Beat 1          |                  | Beat 2          |                  |

## FLXDrive-II Output Driver Impedance Control

HSTL I/O SigmaDDR-II SRAMs are supplied with programmable impedance output drivers. The ZQ pin must be connected to  $V_{SS}$  via an external resistor,  $R_Q$ , to allow the SRAM to monitor and adjust its output driver impedance. The value of  $R_Q$  must be 5X the value of the desired RAM output impedance at mid-rail. The allowable range of  $R_Q$  to guarantee impedance matching continuously is between  $175\Omega$  and  $350\Omega$ . Periodic readjustment of the output driver impedance is necessary as the impedance is affected by drifts in supply voltage and temperature. The SRAM's output impedance circuitry compensates for drifts in supply voltage and temperature. A clock cycle counter periodically triggers an impedance evaluation, resets and counts again. Each impedance evaluation may move the output driver impedance level one step at a time towards the optimum level. The output driver is implemented with discrete binary weighted impedance steps.

## Common I/O SigmaDDR-II+ B2 SRAM Truth Table

| $K_n$      | $\overline{LD}$ | $R/\overline{W}$ | DQ                 |                    | Operation |
|------------|-----------------|------------------|--------------------|--------------------|-----------|
|            |                 |                  | A + 0              | A + 1              |           |
| $\uparrow$ | 1               | X                | Hi-Z               | Hi-Z               | Deselect  |
| $\uparrow$ | 0               | 0                | $D@K_{n+1}$        | $D@K_{n+1}$        | Write     |
| $\uparrow$ | 0               | 1                | $Q@K(n+2)$ for A+0 | $Q@K(n+2)$ for A+1 | Read      |

**Note:**

Q is controlled by K clocks if C clocks are not used.

**x36 Byte Write Enable (BWn) Truth Table**

| $\overline{BW0}$ | $\overline{BW1}$ | $\overline{BW2}$ | $\overline{BW3}$ | D0–D8      | D9–D17     | D18–D26    | D27–D35    |
|------------------|------------------|------------------|------------------|------------|------------|------------|------------|
| 1                | 1                | 1                | 1                | Don't Care | Don't Care | Don't Care | Don't Care |
| 0                | 1                | 1                | 1                | Data In    | Don't Care | Don't Care | Don't Care |
| 1                | 0                | 1                | 1                | Don't Care | Data In    | Don't Care | Don't Care |
| 0                | 0                | 1                | 1                | Data In    | Data In    | Don't Care | Don't Care |
| 1                | 1                | 0                | 1                | Don't Care | Don't Care | Data In    | Don't Care |
| 0                | 1                | 0                | 1                | Data In    | Don't Care | Data In    | Don't Care |
| 1                | 0                | 0                | 1                | Don't Care | Data In    | Data In    | Don't Care |
| 0                | 0                | 0                | 1                | Data In    | Data In    | Data In    | Don't Care |
| 1                | 1                | 1                | 0                | Don't Care | Don't Care | Don't Care | Data In    |
| 0                | 1                | 1                | 0                | Data In    | Don't Care | Don't Care | Data In    |
| 1                | 0                | 1                | 0                | Don't Care | Data In    | Don't Care | Data In    |
| 0                | 0                | 1                | 0                | Data In    | Data In    | Don't Care | Data In    |
| 1                | 1                | 0                | 0                | Don't Care | Don't Care | Data In    | Data In    |
| 0                | 1                | 0                | 0                | Data In    | Don't Care | Data In    | Data In    |
| 1                | 0                | 0                | 0                | Don't Care | Data In    | Data In    | Data In    |
| 0                | 0                | 0                | 0                | Data In    | Data In    | Data In    | Data In    |

**x18 Byte Write Enable (BWn) Truth Table**

| $\overline{BW0}$ | $\overline{BW1}$ | D0–D8      | D9–D17     |
|------------------|------------------|------------|------------|
| 1                | 1                | Don't Care | Don't Care |
| 0                | 1                | Data In    | Don't Care |
| 1                | 0                | Don't Care | Data In    |
| 0                | 0                | Data In    | Data In    |

## Absolute Maximum Ratings

(All voltages reference to  $V_{SS}$ )

| Symbol    | Description                   | Value                                        | Unit               |
|-----------|-------------------------------|----------------------------------------------|--------------------|
| $V_{DD}$  | Voltage on $V_{DD}$ Pins      | -0.5 to 2.9                                  | V                  |
| $V_{DDQ}$ | Voltage in $V_{DDQ}$ Pins     | -0.5 to $V_{DD}$                             | V                  |
| $V_{REF}$ | Voltage in $V_{REF}$ Pins     | -0.5 to $V_{DDQ}$                            | V                  |
| $V_{I/O}$ | Voltage on I/O Pins           | -0.5 to $V_{DDQ} + 0.5$ ( $\leq 2.9$ V max.) | V                  |
| $V_{IN}$  | Voltage on Other Input Pins   | -0.5 to $V_{DDQ} + 0.5$ ( $\leq 2.9$ V max.) | V                  |
| $I_{IN}$  | Input Current on Any Pin      | +/-100                                       | mA dc              |
| $I_{OUT}$ | Output Current on Any I/O Pin | +/-100                                       | mA dc              |
| $T_J$     | Maximum Junction Temperature  | 125                                          | $^{\circ}\text{C}$ |
| $T_{STG}$ | Storage Temperature           | -55 to 125                                   | $^{\circ}\text{C}$ |

### Note:

Permanent damage to the device may occur if the Absolute Maximum Ratings are exceeded. Operation should be restricted to Recommended Operating Conditions. Exposure to conditions exceeding the Recommended Operating Conditions, for an extended period of time, may affect reliability of this component.

## Recommended Operating Conditions

### Power Supplies

| Parameter          | Symbol    | Min. | Typ. | Max. | Unit |
|--------------------|-----------|------|------|------|------|
| Supply Voltage     | $V_{DD}$  | 1.7  | 1.8  | 1.9  | V    |
| I/O Supply Voltage | $V_{DDQ}$ | 1.4  | —    | 1.9  | V    |
| Reference Voltage  | $V_{REF}$ | 0.68 |      | 0.95 | V    |

### Notes:

- Unless otherwise noted, all performance specifications quoted are evaluated for worst case at both  $1.4\text{ V} \leq V_{DDQ} \leq 1.6\text{ V}$  (i.e., 1.5 V I/O) and  $1.7\text{ V} \leq V_{DDQ} \leq 1.9\text{ V}$  (i.e., 1.8 V I/O) and quoted at whichever condition is worst case.
- The power supplies need to be powered up simultaneously or in the following sequence:  $V_{DD}$ ,  $V_{DDQ}$ ,  $V_{REF}$ , followed by signal inputs. The power down sequence must be the reverse.  $V_{DDQ}$  must not exceed  $V_{DD}$ .

### Operating Temperature

| Parameter                                          | Symbol | Min. | Typ. | Max. | Unit               |
|----------------------------------------------------|--------|------|------|------|--------------------|
| Ambient Temperature<br>(Commercial Range Versions) | $T_A$  | 0    | 25   | 70   | $^{\circ}\text{C}$ |
| Ambient Temperature<br>(Industrial Range Versions) | $T_A$  | -40  | 25   | 85   | $^{\circ}\text{C}$ |

## Thermal Impedance

| Package | Test PCB Substrate | $\theta_{JA}$ (C°/W)<br>Airflow = 0 m/s | $\theta_{JA}$ (C°/W)<br>Airflow = 1 m/s | $\theta_{JA}$ (C°/W)<br>Airflow = 2 m/s | $\theta_{JB}$ (C°/W) | $\theta_{JC}$ (C°/W) |
|---------|--------------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|----------------------|----------------------|
| 165 BGA | 4-layer            | 19.1                                    | 15.9                                    | 14.9                                    | 7.2                  | 2.3                  |

### Notes:

- Thermal Impedance data is based on a number of samples from multiple lots and should be viewed as a typical number.
- Please refer to JEDEC standard JESD51-6.
- The characteristics of the test fixture PCB influence reported thermal characteristics of the device. Be advised that a good thermal path to the PCB can result in cooling or heating of the RAM depending on PCB temperature.

## HSTL I/O DC Input Characteristics

| Parameter           | Symbol        | Min              | Max              | Units | Notes |
|---------------------|---------------|------------------|------------------|-------|-------|
| DC Input Logic High | $V_{IH}$ (dc) | $V_{REF} + 0.10$ | $V_{DD} + 0.3$ V | V     | 1, 4  |
| DC Input Logic Low  | $V_{IL}$ (dc) | -0.3 V           | $V_{REF} - 0.10$ | V     | 1, 3  |

### Notes:

- Compatible with both 1.8 V and 1.5 V I/O drivers.
- These are DC test criteria. DC design criteria is  $V_{REF} \pm 50$  mV. The AC  $V_{IH}/V_{IL}$  levels are defined separately for measuring timing parameters.
- $V_{IL}$  (Min) DC = -0.3 V,  $V_{IL}$  (Min) AC = -1.5 V (pulse width  $\leq 3$  ns).
- $V_{IH}$  (Max) DC =  $V_{DDQ} + 0.3$  V,  $V_{IH}$  (Max) AC =  $V_{DDQ} + 0.85$  V (pulse width  $\leq 3$  ns).


## HSTL I/O AC Input Characteristics

| Parameter                         | Symbol         | Min              | Max               | Units | Notes |
|-----------------------------------|----------------|------------------|-------------------|-------|-------|
| AC Input Logic High               | $V_{IH}$ (ac)  | $V_{REF} + 0.20$ | —                 | V     | 2, 3  |
| AC Input Logic Low                | $V_{IL}$ (ac)  | —                | $V_{REF} - 0.20$  | V     | 2, 3  |
| $V_{REF}$ Peak to Peak AC Voltage | $V_{REF}$ (ac) | —                | 5% $V_{REF}$ (DC) | V     | 1     |


### Notes:

- The peak to peak AC component superimposed on  $V_{REF}$  may not exceed 5% of the DC component of  $V_{REF}$ .
- To guarantee AC characteristics,  $V_{IH}$ ,  $V_{IL}$ , Trise, and Tfall of inputs and clocks must be within 10% of each other.
- For devices supplied with HSTL I/O input buffers. Compatible with both 1.8 V and 1.5 V I/O drivers.

## Undershoot Measurement and Timing

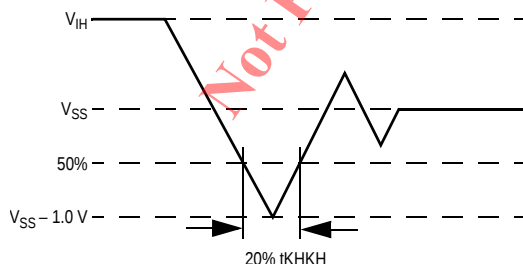

## Overshoot Measurement and Timing

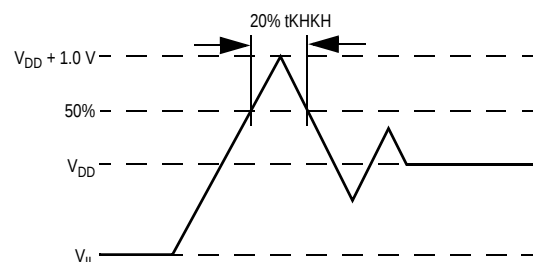

## Capacitance

( $T_A = 25^\circ\text{C}$ ,  $f = 1\text{ MHz}$ ,  $V_{DD} = 3.3\text{ V}$ )

| Parameter          | Symbol    | Test conditions        | Typ. | Max. | Unit |
|--------------------|-----------|------------------------|------|------|------|
| Input Capacitance  | $C_{IN}$  | $V_{IN} = 0\text{ V}$  | 4    | 5    | pF   |
| Output Capacitance | $C_{OUT}$ | $V_{OUT} = 0\text{ V}$ | 6    | 7    | pF   |
| Clock Capacitance  | $C_{CLK}$ | —                      | 5    | 6    | pF   |

### Note:

This parameter is sample tested.


## AC Test Conditions

| Parameter              | Conditions  |
|------------------------|-------------|
| Input high level       | $V_{DDQ}$   |
| Input low level        | 0 V         |
| Max. input slew rate   | 2 V/ns      |
| Input reference level  | $V_{DDQ}/2$ |
| Output reference level | $V_{DDQ}/2$ |

### Note:

Test conditions as specified with output loading as shown unless otherwise noted.

## AC Test Load Diagram

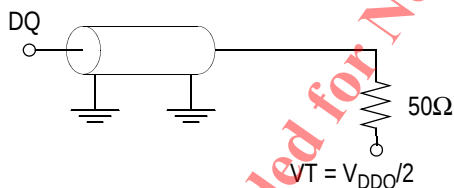

$R_Q = 250\ \Omega$  (HSTL I/O)  
 $V_{REF} = 0.75\text{ V}$

## Input and Output Leakage Characteristics

| Parameter                                   | Symbol       | Test Conditions                                                          | Min.                                   | Max                                |
|---------------------------------------------|--------------|--------------------------------------------------------------------------|----------------------------------------|------------------------------------|
| Input Leakage Current<br>(except mode pins) | $I_{IL}$     | $V_{IN} = 0\text{ to }V_{DD}$                                            | -2 $\mu\text{A}$                       | 2 $\mu\text{A}$                    |
| $\overline{\text{Doff}}$                    | $I_{INDOFF}$ | $V_{DD} \geq V_{IN} \geq V_{IL}$<br>$0\text{ V} \leq V_{IN} \leq V_{IL}$ | -100 $\mu\text{A}$<br>-2 $\mu\text{A}$ | 2 $\mu\text{A}$<br>2 $\mu\text{A}$ |
| Output Leakage Current                      | $I_{OL}$     | Output Disable,<br>$V_{OUT} = 0\text{ to }V_{DDQ}$                       | -2 $\mu\text{A}$                       | 2 $\mu\text{A}$                    |

### Programmable Impedance HSTL Output Driver DC Electrical Characteristics

| Parameter           | Symbol    | Min.            | Max.        | Units | Notes |
|---------------------|-----------|-----------------|-------------|-------|-------|
| Output High Voltage | $V_{OH1}$ | $V_{DDQ}/2$     | $V_{DDQ}$   | V     | 1, 3  |
| Output Low Voltage  | $V_{OL1}$ | $V_{SS}$        | $V_{DDQ}/2$ | V     | 2, 3  |
| Output High Voltage | $V_{OH2}$ | $V_{DDQ} - 0.2$ | $V_{DDQ}$   | V     | 4, 5  |
| Output Low Voltage  | $V_{OL2}$ | $V_{SS}$        | 0.2         | V     | 4, 6  |

#### Notes:

- $I_{OH} = (V_{DDQ}/2) / (RQ/5) \pm 15\%$  @  $V_{OH} = V_{DDQ}/2$  (for:  $175\Omega \leq RQ \leq 350\Omega$ ).
- $I_{OL} = (V_{DDQ}/2) / (RQ/5) \pm 15\%$  @  $V_{OL} = V_{DDQ}/2$  (for:  $175\Omega \leq RQ \leq 350\Omega$ ).
- Parameter tested with  $RQ = 250\Omega$  and  $V_{DDQ} = 1.5\text{ V}$  or  $1.8\text{ V}$
- $0\Omega \leq RQ \leq \infty\Omega$
- $I_{OH} = -1.0\text{ mA}$
- $I_{OL} = 1.0\text{ mA}$

Not Recommended for New Design—Discontinued Product

\*Assuming stable conditions, the RAM can achieve optimum impedance within 1024 cycles.

## Operating Currents

| Parameter                    | Symbol    | Test Conditions                                                                                                                        | -435       |              | -400       |              | -375       |              | -333       |              | -300       |              | Notes |
|------------------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------|------------|--------------|------------|--------------|------------|--------------|------------|--------------|------------|--------------|-------|
|                              |           |                                                                                                                                        | 0° to 70°C | -40° to 85°C | 0° to 70°C | -40° to 85°C | 0° to 70°C | -40° to 85°C | 0° to 70°C | -40° to 85°C | 0° to 70°C | -40° to 85°C |       |
| Operating Current (x36): DDR | $I_{DD}$  | $V_{DD} = \text{Max}, I_{OUT} = 0 \text{ mA}$<br>Cycle Time $\geq t_{CKH} \text{ Min}$                                                 | 750 mA     | 760 mA       | 565 mA     | 575 mA       | 540 mA     | 550 mA       | 490 mA     | 500 mA       | 455 mA     | 465 mA       | 2, 3  |
| Operating Current (x18): DDR | $I_{DD}$  | $V_{DD} = \text{Max}, I_{OUT} = 0 \text{ mA}$<br>Cycle Time $\geq t_{CKH} \text{ Min}$                                                 | 645 mA     | 655 mA       | 510 mA     | 520 mA       | 480 mA     | 490 mA       | 440 mA     | 450 mA       | 415 mA     | 425 mA       | 2, 3  |
| Standby Current (NOP): DDR   | $I_{SB1}$ | Device deselected,<br>$I_{OUT} = 0 \text{ mA}, f = \text{Max},$<br>All Inputs $\leq 0.2 \text{ V}$<br>or $\geq V_{DD} - 0.2 \text{ V}$ | 190 mA     | 200 mA       | 175 mA     | 185 mA       | 170 mA     | 180 mA       | 160 mA     | 170 mA       | 155 mA     | 165 mA       | 2, 4  |

### Notes:

1. Power measured with output pins floating.
2. Minimum cycle,  $I_{OUT} = 0 \text{ mA}$
3. Operating current is calculated with 50% read cycles and 50% write cycles.
4. Standby Current is only after all pending read and write burst operations are completed.

## AC Electrical Characteristics

| Parameter                                                          | Symbol                  | -435  |      | -400  |      | -375  |      | -333  |      | -300  |      | Units | Notes |
|--------------------------------------------------------------------|-------------------------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|-------|
|                                                                    |                         | Min   | Max  | Min   | Max  | Min   | Max  | Min   | Max  | Min   | Max  |       |       |
| Clock                                                              |                         |       |      |       |      |       |      |       |      |       |      |       |       |
| K, $\overline{K}$ Clock Cycle Time                                 | $t_{KHKH}$              | 2.3   | 8.4  | 2.5   | 8.4  | 2.67  | 8.4  | 3.0   | 8.4  | 3.3   | 8.4  | ns    |       |
| tKC Variable                                                       | $t_{KVar}$              | —     | 0.2  | —     | 0.2  | —     | 0.2  | —     | 0.2  | —     | 0.2  | ns    | 4     |
| K, $\overline{K}$ Clock High Pulse Width                           | $t_{KHKL}$              | 0.4   | —    | 0.4   | —    | 0.4   | —    | 0.4   | —    | 0.4   | —    | ns    |       |
| K, $\overline{K}$ Clock Low Pulse Width                            | $t_{KLKH}$              | 0.4   | —    | 0.4   | —    | 0.4   | —    | 0.4   | —    | 0.4   | —    | ns    |       |
| K to $\overline{K}$ High                                           | $t_{KH\overline{K}H}$   | 1.00  | —    | 1.06  | —    | 1.13  | —    | 1.28  | —    | 1.4   | —    | ns    |       |
| $\overline{K}$ to K High                                           | $t_{\overline{K}HKH}$   | 1.00  | —    | 1.06  | —    | 1.13  | —    | 1.28  | —    | 1.4   | —    | ns    |       |
| DLL Lock Time                                                      | $t_{KLock}$             | 2048  | —    | 2048  | —    | 2048  | —    | 2048  | —    | 2048  | —    | cycle | 6     |
| K Static to DLL reset                                              | $t_{KReset}$            | 30    | —    | 30    | —    | 30    | —    | 30    | —    | 30    | —    | ns    |       |
| Output Times                                                       |                         |       |      |       |      |       |      |       |      |       |      |       |       |
| K, $\overline{K}$ Clock High to Data Output Valid                  | $t_{KHQV}$              | —     | 0.45 | —     | 0.45 | —     | 0.45 | —     | 0.45 | —     | 0.45 | ns    |       |
| K, $\overline{K}$ Clock High to Data Output Hold                   | $t_{KHQX}$              | −0.45 | —    | −0.45 | —    | −0.45 | —    | −0.45 | —    | −0.45 | —    | ns    |       |
| K, $\overline{K}$ Clock High to Echo Clock Valid                   | $t_{KHCQV}$             | —     | 0.45 | —     | 0.45 | —     | 0.45 | —     | 0.45 | —     | 0.45 | ns    |       |
| K, $\overline{K}$ Clock High to Echo Clock Hold                    | $t_{KHCQX}$             | −0.45 | —    | −0.45 | —    | −0.45 | —    | −0.45 | —    | −0.45 | —    | ns    |       |
| CQ, $\overline{CQ}$ High Output Valid                              | $t_{CQHQV}$             | —     | 0.2  | —     | 0.2  | —     | 0.2  | —     | 0.2  | —     | 0.2  | ns    | 7     |
| CQ, $\overline{CQ}$ High Output Hold                               | $t_{CQHQX}$             | −0.2  | —    | −0.2  | —    | −0.2  | —    | −0.2  | —    | −0.2  | —    | ns    | 7     |
| CQ, CQ High to QLVD                                                | $t_{QVLD}$              | −0.2  | —    | −0.2  | —    | −0.2  | —    | −0.2  | —    | −0.2  | —    |       |       |
| CQ Phase Distortion                                                | $t_{CQH\overline{CQ}H}$ | 0.8   | —    | 0.86  | —    | 0.88  | —    | 1.03  | —    | 1.15  | —    | ns    |       |
| K Clock High to Data Output High-Z                                 | $t_{KHQZ}$              | —     | 0.45 | —     | 0.45 | —     | 0.45 | —     | 0.45 | —     | 0.45 | ns    | 5     |
| K Clock High to Data Output Low-Z                                  | $t_{KHQX1}$             | −0.45 | —    | −0.45 | —    | −0.45 | —    | −0.45 | —    | −0.45 | —    | ns    | 5     |
| Setup Times                                                        |                         |       |      |       |      |       |      |       |      |       |      |       |       |
| Address Input Setup Time                                           | $t_{AVKH}$              | 0.4   | —    | 0.4   | —    | 0.4   | —    | 0.4   | —    | 0.4   | —    | ns    | 1     |
| Control Input Setup Time (R, W)                                    | $t_{IVKH}$              | 0.4   | —    | 0.4   | —    | 0.4   | —    | 0.4   | —    | 0.4   | —    | ns    | 2     |
| Control Input Setup Time (BW $\overline{X}$ ) (NW $\overline{X}$ ) | $t_{IVKH}$              | 0.28  | —    | 0.28  | —    | 0.28  | —    | 0.28  | —    | 0.28  | —    | ns    | 3     |
| Data Input Setup Time                                              | $t_{DVKH}$              | 0.28  | —    | 0.28  | —    | 0.28  | —    | 0.28  | —    | 0.28  | —    | ns    |       |

## AC Electrical Characteristics (Continued)


| Parameter                                                     | Symbol            | -435 |     | -400 |     | -375 |     | -333 |     | -300 |     | Units | Notes |
|---------------------------------------------------------------|-------------------|------|-----|------|-----|------|-----|------|-----|------|-----|-------|-------|
|                                                               |                   | Min  | Max | Min  | Max | Min  | Max | Min  | Max | Min  | Max |       |       |
| Hold Times                                                    |                   |      |     |      |     |      |     |      |     |      |     |       |       |
| Address Input Hold Time                                       | t <sub>KHAX</sub> | 0.4  | —   | 0.4  | —   | 0.4  | —   | 0.4  | —   | 0.4  | —   | ns    | 1     |
| Control Input Hold Time (R, W)                                | t <sub>KHIX</sub> | 0.4  | —   | 0.4  | —   | 0.4  | —   | 0.4  | —   | 0.4  | —   | ns    | 2     |
| Control Input Hold Time (BW <sub>X</sub> ) (NW <sub>X</sub> ) | t <sub>KHIX</sub> | 0.28 | —   | 0.28 | —   | 0.28 | —   | 0.28 | —   | 0.28 | —   | ns    | 3     |
| Data Input Hold Time                                          | t <sub>KHDX</sub> | 0.28 | —   | 0.28 | —   | 0.28 | —   | 0.28 | —   | 0.28 | —   | ns    |       |

### Notes:

1. All Address inputs must meet the specified setup and hold times for all latching clock edges.
2. Control singles are  $\overline{R}$ ,  $\overline{W}$ .
3. Control singles are  $\overline{BW0}$ ,  $\overline{BW1}$  and ( $\overline{BW2}$ ,  $\overline{BW3}$  for x36).
4. Clock phase jitter is the variance from clock rising edge to the next expected clock rising edge.
5. To avoid bus contention, at a given voltage and temperature  $t_{KHQX1}$  is bigger than  $t_{KHQZ}$ . The specs as shown do not imply bus contention because  $t_{KHQX1}$  is a MIN parameter that is worst case at totally different test conditions (0°C, 1.9 V) than  $t_{KHQZ}$ , which is a MAX parameter (worst case at 70°C, 1.7 V). It is not possible for two SRAMs on the same board to be at such different voltages and temperatures.
6.  $V_{DD}$  slew rate must be less than 0.1 V DC per 50 ns for DLL lock retention. DLL lock time begins once  $V_{DD}$  and input clock are stable.
7. Echo clock is very tightly controlled to data valid/data hold. By design, there is a  $\pm 0.1$  ns variation from echo clock to data. The datasheet parameters reflect tester guard bands and test setup variations.

[illegible]

## Read Write CQ-Based Timing Diagram

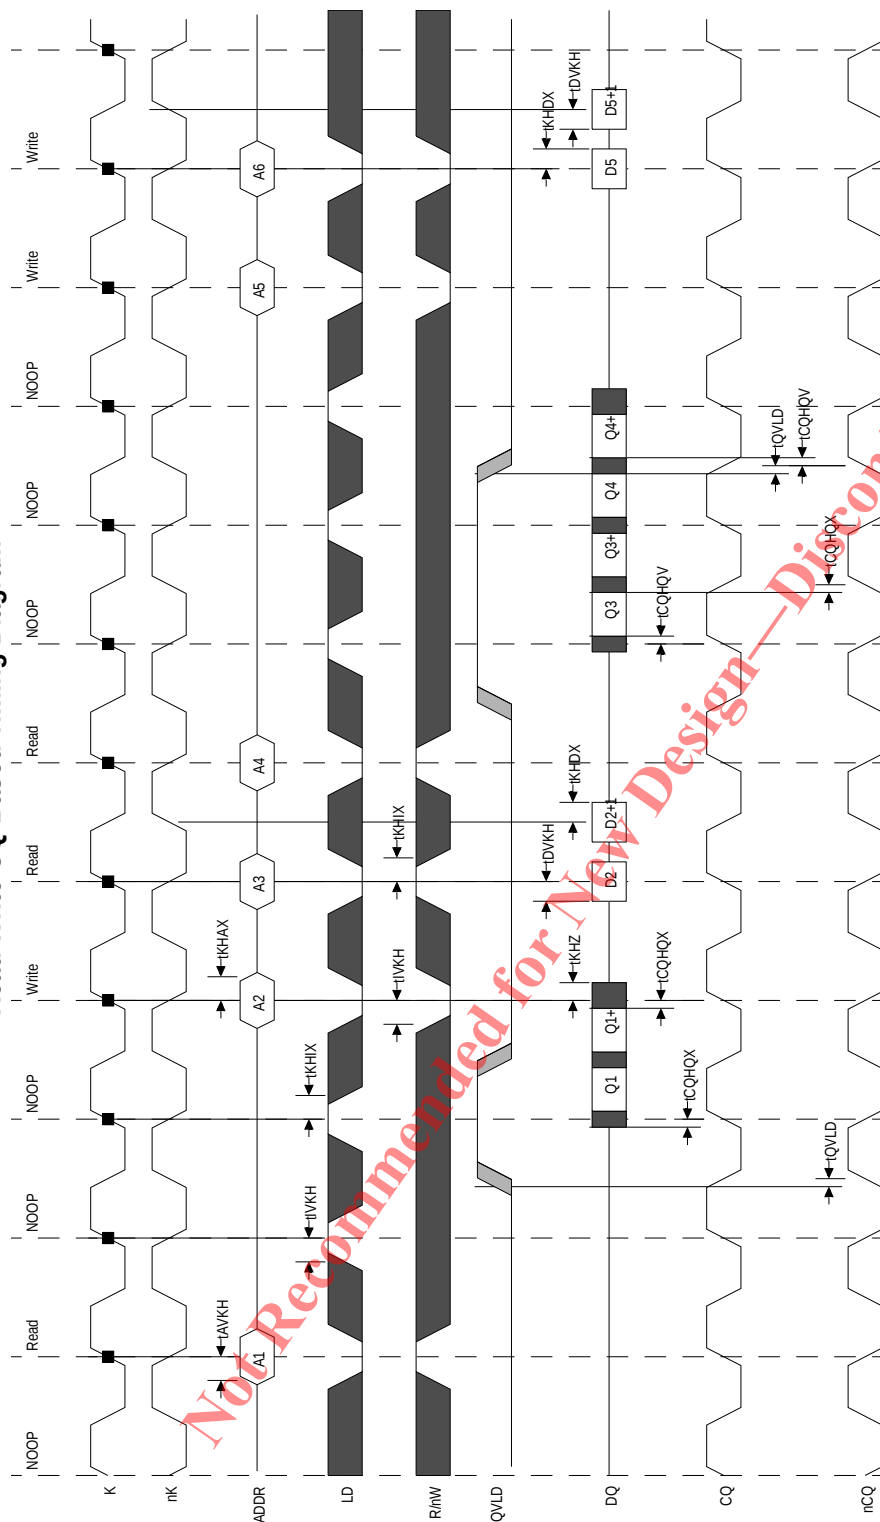

## JTAG Port Operation

### Overview

The JTAG Port on this RAM operates in a manner that is compliant with IEEE Standard 1149.1-1990, a serial boundary scan interface standard (commonly referred to as JTAG). The JTAG Port input interface levels scale with  $V_{DD}$ . The JTAG output drivers are powered by  $V_{DD}$ .

### Disabling the JTAG Port

It is possible to use this device without utilizing the JTAG port. The port is reset at power-up and will remain inactive unless clocked. TCK, TDI, and TMS are designed with internal pull-up circuits. To assure normal operation of the RAM with the JTAG Port unused, TCK, TDI, and TMS may be left floating or tied to either  $V_{DD}$  or  $V_{SS}$ . TDO should be left unconnected.

## JTAG Pin Descriptions

| Pin | Pin Name         | I/O | Description                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----|------------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TCK | Test Clock       | In  | Clocks all TAP events. All inputs are captured on the rising edge of TCK and all outputs propagate from the falling edge of TCK.                                                                                                                                                                                                                                                                                                             |
| TMS | Test Mode Select | In  | The TMS input is sampled on the rising edge of TCK. This is the command input for the TAP controller state machine. An undriven TMS input will produce the same result as a logic one input level.                                                                                                                                                                                                                                           |
| TDI | Test Data In     | In  | The TDI input is sampled on the rising edge of TCK. This is the input side of the serial registers placed between TDI and TDO. The register placed between TDI and TDO is determined by the state of the TAP Controller state machine and the instruction that is currently loaded in the TAP Instruction Register (refer to the TAP Controller State Diagram). An undriven TDI pin will produce the same result as a logic one input level. |
| TDO | Test Data Out    | Out | Output that is active depending on the state of the TAP state machine. Output changes in response to the falling edge of TCK. This is the output side of the serial registers placed between TDI and TDO.                                                                                                                                                                                                                                    |

### Note:

This device does not have a TRST (TAP Reset) pin. TRST is optional in IEEE 1149.1. The Test-Logic-Reset state is entered while TMS is held high for five rising edges of TCK. The TAP Controller is also reset automatically at power-up.

## JTAG Port Registers

### Overview

The various JTAG registers, referred to as Test Access Port or TAP Registers, are selected (one at a time) via the sequences of 1s and 0s applied to TMS as TCK is strobed. Each of the TAP Registers is a serial shift register that captures serial input data on the rising edge of TCK and pushes serial data out on the next falling edge of TCK. When a register is selected, it is placed between the TDI and TDO pins.

### Instruction Register

The Instruction Register holds the instructions that are executed by the TAP controller when it is moved into the Run, Test/Idle, or the various data register states. Instructions are 3 bits long. The Instruction Register can be loaded when it is placed between the TDI and TDO pins. The Instruction Register is automatically preloaded with the IDCODE instruction at power-up or whenever the controller is placed in Test-Logic-Reset state.

### Bypass Register


The Bypass Register is a single bit register that can be placed between TDI and TDO. It allows serial test data to be passed through the RAM's JTAG Port to another device in the scan chain with as little delay as possible.

### Boundary Scan Register

The Boundary Scan Register is a collection of flip flops that can be preset by the logic level found on the RAM's input or I/O pins. The flip flops are then daisy chained together so the levels found can be shifted serially out of the JTAG Port's TDO pin. The Boundary Scan Register also includes a number of place holder flip flops (always set to a logic 1). The relationship between the device pins and the bits in the Boundary Scan Register is described in the Scan Order Table following. The Boundary Scan

Register, under the control of the TAP Controller, is loaded with the contents of the RAMs I/O ring when the controller is in Capture-DR state and then is placed between the TDI and TDO pins when the controller is moved to Shift-DR state. SAMPLE-Z, SAMPLE-PRELOAD and EXTEST instructions can be used to activate the Boundary Scan Register.

**JTAG TAP Block Diagram**

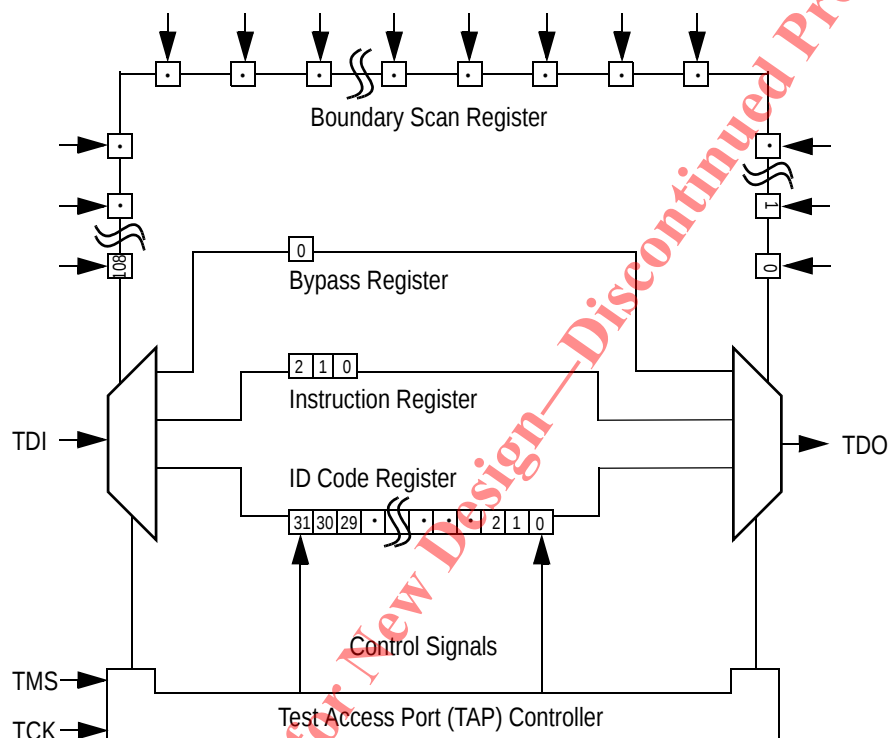

#### Identification (ID) Register

The ID Register is a 32-bit register that is loaded with a device and vendor specific 32-bit code when the controller is put in Capture-DR state with the IDCODE command loaded in the Instruction Register. The code is loaded from a 32-bit on-chip ROM. It describes various attributes of the RAM as indicated below. The register is then placed between the TDI and TDO pins when the controller is moved into Shift-DR state. Bit 0 in the register is the LSB and the first to reach TDO when shifting begins.

#### ID Register Contents

|       |                                                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |                                           |    |   |   |   |   |   |   |   |   |                   |   |
|-------|------------------------------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-------------------------------------------|----|---|---|---|---|---|---|---|---|-------------------|---|
|       | <div>Not Recommended</div> <div>See BSDL Model</div> |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | GSI Technology<br>JEDEC Vendor<br>ID Code |    |   |   |   |   |   |   |   |   | Presence Register |   |
| Bit # | 31                                                   | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11                                        | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1                 | 0 |
|       | X                                                    | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | X  | 0                                         | 0  | 0 | 1 | 1 | 0 | 1 | 1 | 0 | 0 | 1                 | 1 |



## SAMPLE/PRELOAD

SAMPLE/PRELOAD is a Standard 1149.1 mandatory public instruction. When the SAMPLE / PRELOAD instruction is loaded in the Instruction Register, moving the TAP controller into the Capture-DR state loads the data in the RAMs input and I/O buffers into the Boundary Scan Register. Boundary Scan Register locations are not associated with an input or I/O pin, and are loaded with the default state identified in the Boundary Scan Chain table at the end of this section of the datasheet. Because the RAM clock is independent from the TAP Clock (TCK) it is possible for the TAP to attempt to capture the I/O ring contents while the input buffers are in transition (i.e. in a metastable state). Although allowing the TAP to sample metastable inputs will not harm the device, repeatable results cannot be expected. RAM input signals must be stabilized for long enough to meet the TAPs input data capture set-up plus hold time ( $t_{TS}$  plus  $t_{TH}$ ). The RAMs clock inputs need not be paused for any other TAP operation except capturing the I/O ring contents into the Boundary Scan Register. Moving the controller to Shift-DR state then places the boundary scan register between the TDI and TDO pins.

## EXTEST

EXTEST is an IEEE 1149.1 mandatory public instruction. It is to be executed whenever the instruction register is loaded with all logic 0s. The EXTEST command does not block or override the RAM's input pins; therefore, the RAM's internal state is still determined by its input pins.

Typically, the Boundary Scan Register is loaded with the desired pattern of data with the SAMPLE/PRELOAD command. Then the EXTEST command is used to output the Boundary Scan Register's contents, in parallel, on the RAM's data output drivers on the falling edge of TCK when the controller is in the Update-IR state.

Alternately, the Boundary Scan Register may be loaded in parallel using the EXTEST command. When the EXTEST instruction is selected, the state of all the RAM's input and I/O pins, as well as the default values at Scan Register locations not associated with a pin, are transferred in parallel into the Boundary Scan Register on the rising edge of TCK in the Capture-DR state, the RAM's output pins drive out the value of the Boundary Scan Register location with which each output pin is associated.

## IDCODE

The IDCODE instruction causes the ID ROM to be loaded into the ID register when the controller is in Capture-DR mode and places the ID register between the TDI and TDO pins in Shift-DR mode. The IDCODE instruction is the default instruction loaded in at power up and any time the controller is placed in the Test-Logic-Reset state.

## SAMPLE-Z

If the SAMPLE-Z instruction is loaded in the instruction register, all RAM outputs are forced to an inactive drive state (high-Z) and the Boundary Scan Register is connected between TDI and TDO when the TAP controller is moved to the Shift-DR state.

## JTAG TAP Instruction Set Summary

| Instruction | Code | Description                                                                                                                    | Notes |
|-------------|------|--------------------------------------------------------------------------------------------------------------------------------|-------|
| EXTEST      | 000  | Places the Boundary Scan Register between TDI and TDO.                                                                         | 1     |
| IDCODE      | 001  | Preloads ID Register and places it between TDI and TDO.                                                                        | 1, 2  |
| SAMPLE-Z    | 010  | Captures I/O ring contents. Places the Boundary Scan Register between TDI and TDO.<br>Forces all RAM output drivers to High-Z. | 1     |
| GSI         | 011  | GSI private instruction.                                                                                                       | 1     |

## JTAG TAP Instruction Set Summary

|                |     |                                                                                    |   |
|----------------|-----|------------------------------------------------------------------------------------|---|
| SAMPLE/PRELOAD | 100 | Captures I/O ring contents. Places the Boundary Scan Register between TDI and TDO. | 1 |
| GSI            | 101 | GSI private instruction.                                                           | 1 |
| GSI            | 110 | GSI private instruction.                                                           | 1 |
| BYPASS         | 111 | Places Bypass Register between TDI and TDO.                                        | 1 |

### Notes:

1. Instruction codes expressed in binary, MSB on left, LSB on right.
2. Default instruction automatically loaded at power-up and in test-logic-reset state.

## JTAG Port Recommended Operating Conditions and DC Characteristics

| Parameter                              | Symbol     | Min.           | Max.           | Unit | Notes |
|----------------------------------------|------------|----------------|----------------|------|-------|
| Test Port Input Low Voltage            | $V_{ILJ}$  | 0.3            | $0.3 * V_{DD}$ | V    | 1     |
| Test Port Input High Voltage           | $V_{IHJ}$  | $0.7 * V_{DD}$ | $V_{DD} + 0.3$ | V    | 1     |
| TMS, TCK and TDI Input Leakage Current | $I_{INHJ}$ | -300           | 1              | uA   | 2     |
| TMS, TCK and TDI Input Leakage Current | $I_{INLJ}$ | -1             | 100            | uA   | 3     |
| TDO Output Leakage Current             | $I_{OLJ}$  | -1             | 1              | uA   | 4     |
| Test Port Output High Voltage          | $V_{OHJ}$  | $V_{DD} - 0.2$ | —              | V    | 5, 6  |
| Test Port Output Low Voltage           | $V_{OLJ}$  | —              | 0.2            | V    | 5, 7  |
| Test Port Output CMOS High             | $V_{OHJC}$ | $V_{DD} - 0.1$ | —              | V    | 5, 8  |
| Test Port Output CMOS Low              | $V_{OLJC}$ | —              | 0.1            | V    | 5, 9  |

### Notes:



1. Input Under/overshoot voltage must be  $-1\text{ V} < V_i < V_{DDn} + 1\text{ V}$  not to exceed 2.9 V maximum, with a pulse width not to exceed 20% tTKC.
2.  $V_{ILJ} \leq V_{IN} \leq V_{DDn}$
3.  $0\text{ V} \leq V_{IN} \leq V_{ILJn}$
4. Output Disable,  $V_{OUT} = 0$  to  $V_{DDn}$
5. The TDO output driver is served by the  $V_{DD}$  supply.
6.  $I_{OHJ} = -2\text{ mA}$
7.  $I_{OLJ} = +2\text{ mA}$
8.  $I_{OHJC} = -100\text{ uA}$
9.  $I_{OLJC} = +100\text{ uA}$

## JTAG Port AC Test Conditions

| Parameter              | Conditions              |
|------------------------|-------------------------|
| Input high level       | $V_{DD} - 0.2\text{ V}$ |
| Input low level        | 0.2 V                   |
| Input slew rate        | 1 V/ns                  |
| Input reference level  | $V_{DD}/2$              |
| Output reference level | $V_{DD}/2$              |

### Notes:


1. Include scope and jig capacitance.
2. Test conditions as shown unless otherwise noted.

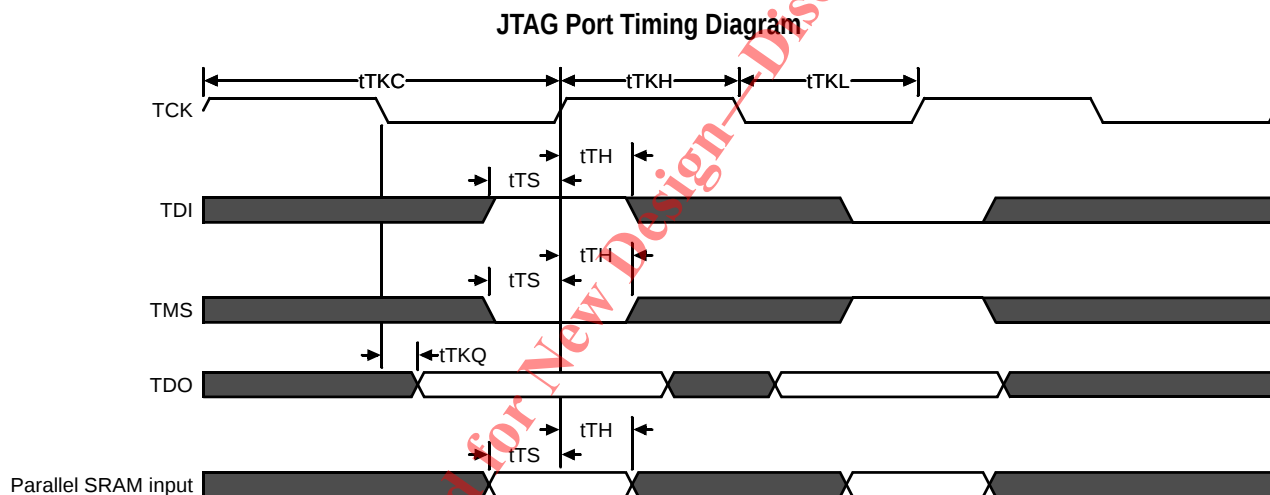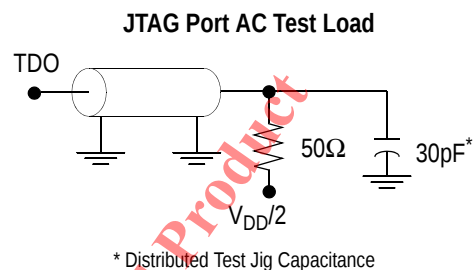

## JTAG Port AC Electrical Characteristics

| Parameter             | Symbol    | Min | Max | Unit |
|-----------------------|-----------|-----|-----|------|
| TCK Cycle Time        | $t_{TKC}$ | 50  | —   | ns   |
| TCK Low to TDO Valid  | $t_{TKQ}$ | —   | 20  | ns   |
| TCK High Pulse Width  | $t_{TKH}$ | 20  | —   | ns   |
| TCK Low Pulse Width   | $t_{TKL}$ | 20  | —   | ns   |
| TDI & TMS Set Up Time | $t_{TS}$  | 10  | —   | ns   |
| TDI & TMS Hold Time   | $t_{TH}$  | 10  | —   | ns   |

# Package Dimensions—165-Bump FPBGA (Package D)

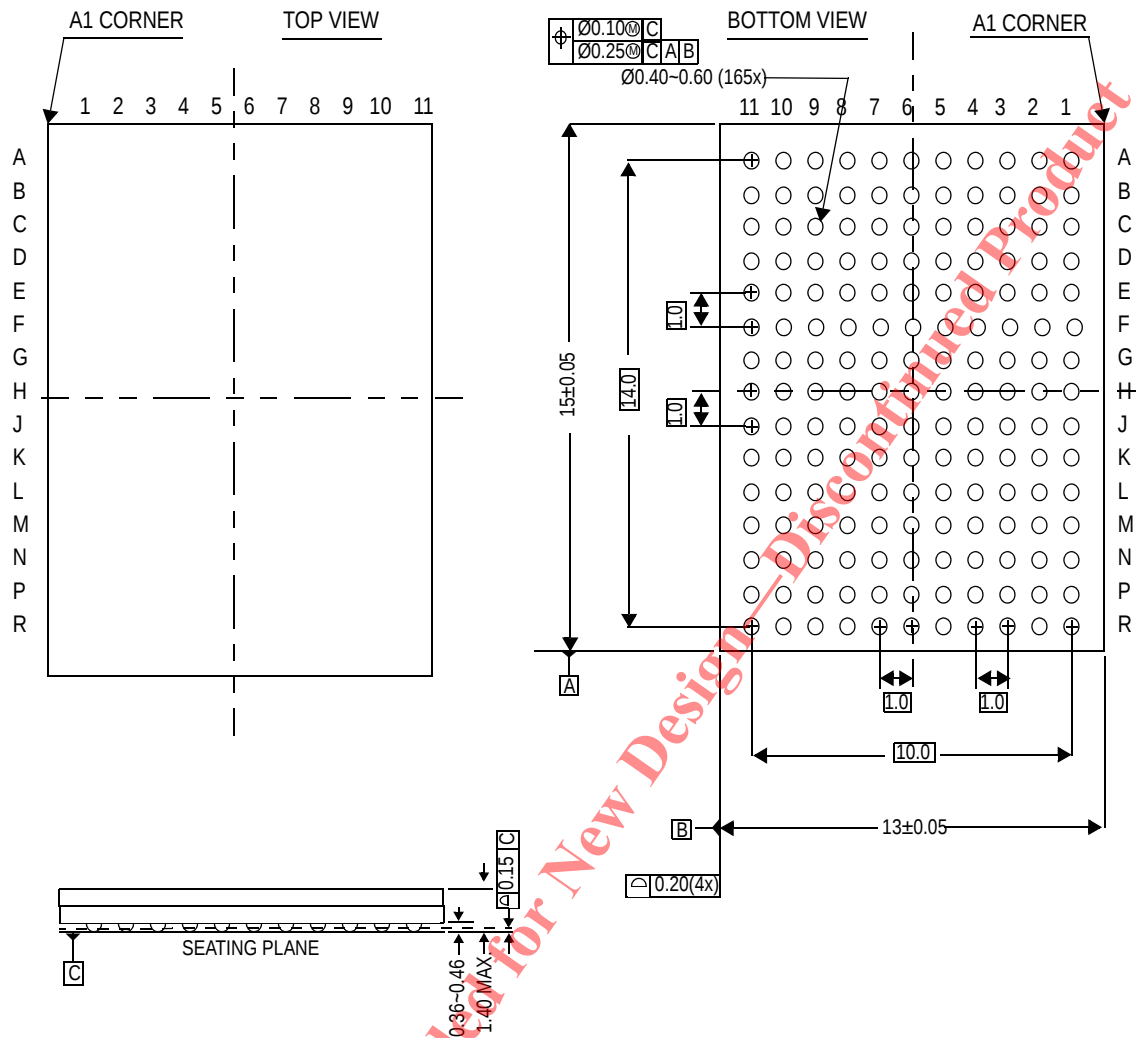

**Ordering Information–GSI SigmaQuad-II+ SRAM**

| Org       | Part Number <sup>1</sup> | II+Type              | Package                     | Speed (MHz) | T <sub>A</sub> <sup>2</sup> |
|-----------|--------------------------|----------------------|-----------------------------|-------------|-----------------------------|
| 1M x 18   | GS8182T19BD-435          | SigmaDDR-II+ B2 SRAM | 165-bump BGA                | 435         | C                           |
| 1M x 18   | GS8182T19BD-400          | SigmaDDR-II+ B2 SRAM | 165-bump BGA                | 400         | C                           |
| 1M x 18   | GS8182T19BD-375          | SigmaDDR-II+ B2 SRAM | 165-bump BGA                | 375         | C                           |
| 1M x 18   | GS8182T19BD-333          | SigmaDDR-II+ B2 SRAM | 165-bump BGA                | 333         | C                           |
| 1M x 18   | GS8182T19BD-300          | SigmaDDR-II+ B2 SRAM | 165-bump BGA                | 300         | C                           |
| 1M x 18   | GS8182T19BD-435I         | SigmaDDR-II+ B2 SRAM | 165-bump BGA                | 435         | I                           |
| 1M x 18   | GS8182T19BD-400I         | SigmaDDR-II+ B2 SRAM | 165-bump BGA                | 400         | I                           |
| 1M x 18   | GS8182T19BD-375I         | SigmaDDR-II+ B2 SRAM | 165-bump BGA                | 375         | I                           |
| 1M x 18   | GS8182T19BD-333I         | SigmaDDR-II+ B2 SRAM | 165-bump BGA                | 333         | I                           |
| 1M x 18   | GS8182T19BD-300I         | SigmaDDR-II+ B2 SRAM | 165-bump BGA                | 300         | I                           |
| 1M x 18   | GS8182T19BGD-435         | SigmaDDR-II+ B2 SRAM | RoHS-compliant 165-bump BGA | 435         | C                           |
| 1M x 18   | GS8182T19BD-400          | SigmaDDR-II+ B2 SRAM | RoHS-compliant 165-bump BGA | 400         | C                           |
| 1M x 18   | GS8182T19BGD-375         | SigmaDDR-II+ B2 SRAM | RoHS-compliant 165-bump BGA | 375         | C                           |
| 1M x 18   | GS8182T19BGD-333         | SigmaDDR-II+ B2 SRAM | RoHS-compliant 165-bump BGA | 333         | C                           |
| 1M x 18   | GS8182T19BGD-300         | SigmaDDR-II+ B2 SRAM | RoHS-compliant 165-bump BGA | 300         | C                           |
| 1M x 18   | GS8182T19BGD-435I        | SigmaDDR-II+ B2 SRAM | RoHS-compliant 165-bump BGA | 435         | I                           |
| 1M x 18   | GS8182T19BGD-400I        | SigmaDDR-II+ B2 SRAM | RoHS-compliant 165-bump BGA | 400         | I                           |
| 1M x 18   | GS8182T19BGD-375I        | SigmaDDR-II+ B2 SRAM | RoHS-compliant 165-bump BGA | 375         | I                           |
| 1M x 18   | GS8182T19BGD-333I        | SigmaDDR-II+ B2 SRAM | RoHS-compliant 165-bump BGA | 333         | I                           |
| 1M x 18   | GS8182T19BGD-300I        | SigmaDDR-II+ B2 SRAM | RoHS-compliant 165-bump BGA | 300         | I                           |
| 512K x 36 | GS8182T37BD-435          | SigmaDDR-II+ B2 SRAM | 165-bump BGA                | 435         | C                           |
| 512K x 36 | GS8182T37BD-400          | SigmaDDR-II+ B2 SRAM | 165-bump BGA                | 400         | C                           |
| 512K x 36 | GS8182T37BD-375          | SigmaDDR-II+ B2 SRAM | 165-bump BGA                | 375         | C                           |
| 512K x 36 | GS8182T37BD-333          | SigmaDDR-II+ B2 SRAM | 165-bump BGA                | 333         | C                           |
| 512K x 36 | GS8182T37BD-300          | SigmaDDR-II+ B2 SRAM | 165-bump BGA                | 300         | C                           |
| 512K x 36 | GS8182T37BD-435I         | SigmaDDR-II+ B2 SRAM | 165-bump BGA                | 435         | I                           |
| 512K x 36 | GS8182T37BD-400I         | SigmaDDR-II+ B2 SRAM | 165-bump BGA                | 400         | I                           |
| 512K x 36 | GS8182T37BD-375I         | SigmaDDR-II+ B2 SRAM | 165-bump BGA                | 375         | I                           |
| 512K x 36 | GS8182T37BD-333I         | SigmaDDR-II+ B2 SRAM | 165-bump BGA                | 333         | I                           |
| 512K x 36 | GS8182T37BD-300I         | SigmaDDR-II+ B2 SRAM | 165-bump BGA                | 300         | I                           |
| 512K x 36 | GS8182T37BGD-435         | SigmaDDR-II+ B2 SRAM | RoHS-compliant 165-bump BGA | 435         | C                           |
| 512K x 36 | GS8182T37BGD-400         | SigmaDDR-II+ B2 SRAM | RoHS-compliant 165-bump BGA | 400         | C                           |
| 512K x 36 | GS8182T37BGD-375         | SigmaDDR-II+ B2 SRAM | RoHS-compliant 165-bump BGA | 375         | C                           |

**Notes:**

- For Tape and Reel add the character "T" to the end of the part number. Example: GS818Tx36BD-300T.
- C = Commercial Temperature Range. I = Industrial Temperature Range.

| Org       | Part Number <sup>1</sup> | II+Type              | Package                     | Speed (MHz) | T <sub>A</sub> <sup>2</sup> |
|-----------|--------------------------|----------------------|-----------------------------|-------------|-----------------------------|
| 512K x 36 | GS8182T37BGD-333         | SigmaDDR-II+ B2 SRAM | RoHS-compliant 165-bump BGA | 333         | C                           |
| 512K x 36 | GS8182T37BGD-300         | SigmaDDR-II+ B2 SRAM | RoHS-compliant 165-bump BGA | 300         | C                           |
| 512K x 36 | GS8182T37BGD-435I        | SigmaDDR-II+ B2 SRAM | RoHS-compliant 165-bump BGA | 435         | I                           |
| 512K x 36 | GS8182T37BGD-400I        | SigmaDDR-II+ B2 SRAM | RoHS-compliant 165-bump BGA | 400         | I                           |
| 512K x 36 | GS8182T37BGD-375I        | SigmaDDR-II+ B2 SRAM | RoHS-compliant 165-bump BGA | 375         | I                           |
| 512K x 36 | GS8182T37BGD-333I        | SigmaDDR-II+ B2 SRAM | RoHS-compliant 165-bump BGA | 333         | I                           |
| 512K x 36 | GS8182T37BGD-300I        | SigmaDDR-II+ B2 SRAM | RoHS-compliant 165-bump BGA | 300         | I                           |

**Notes:**

- For Tape and Reel add the character "T" to the end of the part number. Example: GS818Tx36BD-300T.
- C = Commercial Temperature Range. I = Industrial Temperature Range.

*Not Recommended for New Design—Discontinued Product*

## SigmaQuad-II+ SRAM Revision History

| File Name      | Format/Content | Description of changes                                                                                                                           |
|----------------|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| 818TxxBD_r1    |                | Creation of datasheet                                                                                                                            |
| 818TxxBD_r1_01 | Content        | Added 450 and 435 MHz speed bins                                                                                                                 |
| 818TxxBD_r1_02 | Content        | Removed "Preliminary" banner to indicate MP status<br>(Rev1.02a: removed CQ reference from SAMPLE-Z section in JTAG Tap Instruction Set Summary) |
| 818TxxBD_r1_03 | Content        | Removed 450 MHz speed bin due to lack of orders<br>(Rev1.03a: Editorial updates)                                                                 |

*Not Recommended for New Design—Discontinued Product*

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## GSI Technology:

[GS8182T19BGD-375I](#) [GS8182T19BGD-435](#) [GS8182T37BGD-300I](#) [GS8182T37BD-300I](#) [GS8182T19BD-375](#)  
[GS8182T37BD-375](#) [GS8182T37BD-400I](#) [GS8182T19BD-333](#) [GS8182T37BD-375I](#) [GS8182T37BGD-400](#)  
[GS8182T37BD-333I](#) [GS8182T19BGD-333](#) [GS8182T37BD-435I](#) [GS8182T19BD-435](#) [GS8182T19BD-333I](#)  
[GS8182T19BGD-400](#) [GS8182T37BD-400](#) [GS8182T19BGD-300I](#) [GS8182T37BGD-435](#) [GS8182T37BGD-375](#)  
[GS8182T19BGD-435I](#) [GS8182T19BGD-400I](#) [GS8182T37BD-300](#) [GS8182T19BD-400I](#) [GS8182T19BGD-375](#)  
[GS8182T37BD-435](#) [GS8182T19BGD-300](#) [GS8182T19BD-300](#) [GS8182T19BGD-333I](#) [GS8182T37BGD-333](#)  
[GS8182T37BGD-400I](#) [GS8182T19BD-435I](#) [GS8182T37BGD-333I](#) [GS8182T19BD-400](#) [GS8182T19BD-300I](#)  
[GS8182T19BD-375I](#) [GS8182T37BGD-300](#) [GS8182T37BGD-375I](#) [GS8182T37BD-333](#) [GS8182T37BGD-435I](#)  
[GS8182T37BD-435M](#)