

DIO7708**300mA Low Iq , Wide Input Voltage Low Dropout Regulator****Features**

- Operating Input Voltage Range: 2.5V to 30V
- Fixed Voltage Options Available: 1.2V to 5V (upon request)
- Adjustable Voltage Option from 1.2V to 5V
- Ultra-Low Quiescent Current: typ. 4 μ A over Temperature
- PSRR: 60dB at 1kHz
- Stable with Small 1 μ F Ceramic Capacitor
- Soft-start to Reduce Inrush Current and Overshoots
- Thermal Shutdown and Current Limit Protection
- SOA Limiting for High Vin/High Iout – Static/Dynamic
- Active Discharge Option Available (upon request)
- Available in TSOT23-5, SOT23-5 and DFN 2*2-6 Packages
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

Descriptions

The DIO7708 is 300mA LDO Linear Voltage Regulator. It is a very stable and accurate device with ultra-low quiescent current consumption (typ. 4 μ A over the full temperature range) and a wide input voltage range (up to 30V). The regulator incorporates several protection features such as Thermal Shutdown and Current Limiting.

Applications

- Wireless Chargers
- Portable Equipment
- Communication Systems

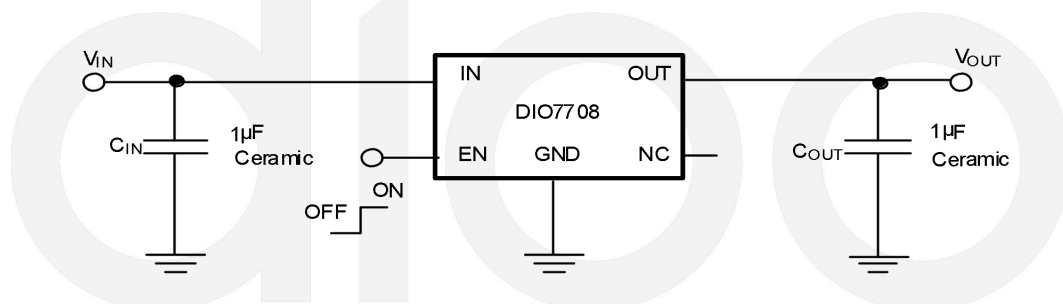
Typical Applications

Figure 1. Typical Application Schematic



DIO7708

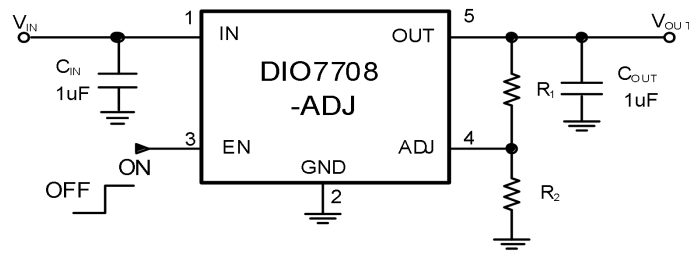


Figure 2. Typical Application Schematic

Note: Choose $R_2=1.2\text{M}\Omega$ to maintain a $1\mu\text{A}$ minimum load; If $R_2=120\text{K}\Omega$, the load is $10\mu\text{A}$. Calculate the value for R_1 using the following equation:

$$R_1 = R_2 * \left[\frac{V_{OUT}}{1.2V} - 1 \right] \quad (\text{eq.1})$$

Ordering Information

Order Part Number	Voltage Option	Top Marking	Option		T _A	Package	
DIO7708AADJTST5	Adj.	YWAA	With Active Output Discharge	Green	-40 to 85°C	TSOT23-5	Tape & Reel,3000
DIO7708A120TST5	1.2V	YWAB					
DIO7708A150TST5	1.5V	YWAC					
DIO7708A180TST5	1.8V	YWAD					
DIO7708A250TST5	2.5V	YWAE					
DIO7708A300TST5	3.0V	YWAF					
DIO7708A330TST5	3.3V	YWAG					
DIO7708BADJTST5	Adj.	YWBA	Without Active Output Discharge	Green	-40 to 85°C	SOT23-5	Tape & Reel,3000
DIO7708B180TST5	1.8V	YWBB					
DIO7708AADJST5	Adj.	YWAA	With Active Output Discharge	Green	-40 to 85°C	SOT23-5	Tape & Reel,3000
DIO7708A120ST5	1.2V	YWAB					
DIO7708A150ST5	1.5V	YWAC					
DIO7708A180ST5	1.8V	YWAD					
DIO7708A250ST5	2.5V	YWAE					
DIO7708A300ST5	3.0V	YWAF					
DIO7708A330ST5	3.3V	YWAG					
DIO7708BADJST5	Adj.	YWBA	Without Active Output Discharge	Green	-40 to 85°C	DFN2*2-6	Tape & Reel,3000
DIO7708B180ST5	1.8V	YWBB					
DIO7708AADJCD6	Adj.	78AA	With Active Output Discharge	Green	-40 to 85°C	DFN2*2-6	Tape & Reel,3000
DIO7708A330CD6	3.3V	78AG					
DIO7708BADJCD6	Adj.	78BA	Without Active Output Discharge	Green	-40 to 85°C	DFN2*2-6	Tape & Reel,3000

300mA Low Iq , Wide Input Voltage Low Dropout Regulator

Pin Assignment


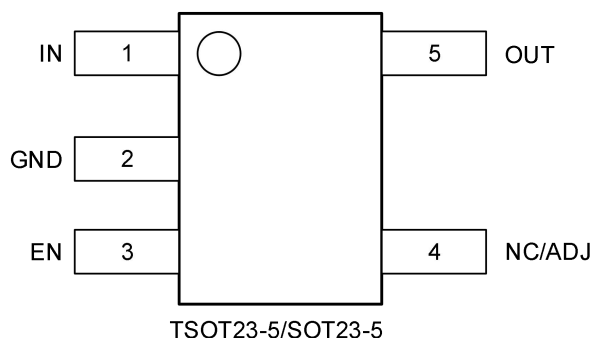


Figure 3. Top View

Pin Descriptions

Name	Description
IN	Input pin. A small capacitor is needed from this pin to ground to assure stability.
GND	Power supply ground.
EN	Enable pin. Driving this pin high turns on the regulator. Driving EN pin low puts the regulator into shutdown mode.
NC/ADJ	Fixed Version: No connection. This pin can be tied to ground to improve thermal dissipation or left disconnected. Adjustable Version: Feedback pin for set-up output voltage. Use resistor divider for voltage selection.
OUT	Regulated output voltage pin. A small 1 μ F ceramic capacitor is needed from this pin to ground to assure stability.
NC	No connection. This pin can be tied to ground to improve thermal dissipation or left disconnected.

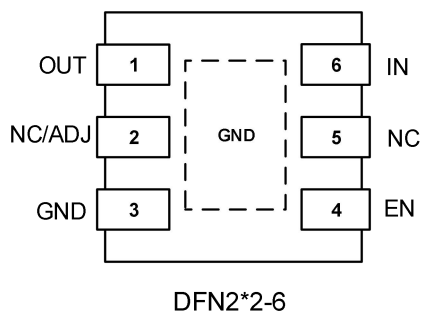

DIO7708

300mA Low Iq , Wide Input Voltage Low Dropout Regulator

Absolute Maximum Ratings

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

Symbol	Parameter	Rating	Unit
V_{IN}	Input Voltage (Note 1)	-0.3 to 30	V
V_{EN}	Enable Voltage	-0.3 to $V_{IN}+0.3$	V
V_{OUT}	Output Voltage	-0.3 to $V_{IN}+0.3$ (max. 6)	V
$T_{J(MAX)}$	Maximum Junction Temperature	150	°C
T_{STG}	Storage Temperature	-55 to 150	°C
HBM	ESD Capability, Human Body Model	2000	V

Thermal Information

Thermal Metric		DIO7708 (SOT23-5)	Unit
$R_{\theta JA}$	Junction-to-ambient thermal resistance	275	°C/W



DIO7708

300mA Low Iq, Wide Input Voltage Low Dropout Regulator

Electrical Characteristics

$-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$; $V_{IN} = 2.5\text{V}$ or $(V_{OUT} + 1.0\text{V})$, whatever is greater; $I_{OUT} = 1\text{mA}$, $C_{IN} = C_{OUT} = 1\mu\text{F}$, unless otherwise noted.

Typical values are at $T_J = 25^{\circ}\text{C}$. (Note 2)

Symbol	Parameter	Conditions		Min.	Typ.	Max.	Unit
V_{IN}	Operating Input Voltage			2.5		30	V
V_{OUT}	Output Voltage Accuracy (fixed versions)	$-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$, $V_{OUT} + 1\text{V} < V_{IN} < 30\text{V}$, $0.1\text{mA} < I_{OUT} < 300\text{mA}$ (Note 4)	$V_{OUT} < 1.8\text{V}$	-3%		3%	V
			$V_{OUT} \geq 1.8\text{V}$	-2%		2%	
V_{ADJ}	Reference Voltage	$-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$, $V_{OUT} + 1\text{V} < V_{IN} < 30\text{V}$			1.2		V
V_{OUT}	Reference Voltage Accuracy	$-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$, $V_{OUT} + 1\text{V} < V_{IN} < 30\text{V}$		-2%		2%	V
Reg_{LINE}	Line Regulation	$V_{OUT} + 1\text{V} \leq V_{IN} \leq 30\text{V}$, $I_{OUT}=1\text{mA}$			10		mV
Reg_{LOAD}	Load Regulation	$I_{OUT} = 0.1\text{mA}$ to 300mA			10		mV
V_{DO}	Dropout voltage	$V_{DO} = V_{IN} - (V_{OUT(NOM)} - 3\%)$, $I_{OUT} = 150\text{mA}$ (Note 3)	2.1V – 2.4V		480		mV
			2.5V – 2.7V		300		
			2.8V – 3.2V		280		
			3.3V – 4.9V		260		
			5V		240		
		$V_{DO} = V_{IN} - (V_{OUT(NOM)} - 2\%)$, $I_{OUT} = 1\text{mA}$			5		mV
I_{LIM}	Maximum Output Current	$V_{IN} = V_{OUT} + 1\text{V}$ (Note 4)		300		800	mA
I_{DIS}	Disable Current	$V_{EN} = 0\text{V}$			0.3	1.0	μA
I_Q	Quiescent Current	$I_{OUT} = 0\text{mA}$			4.0	8.0	μA
I_{GND}	Ground current	$I_{OUT} = 10\text{mA}$			50		μA
		$I_{OUT} = 300\text{mA}$			300		
PSRR	Power Supply Rejection Ratio	$V_{IN} = 3.5\text{V} + 100\text{mV}_{pp}$ $V_{OUT} = 2.5\text{V}$ $I_{OUT} = 1\text{mA}$, $C_{OUT} = 1\mu\text{F}$	$f = 1\text{kHz}$		60		dB
V_N	Output Noise Voltage	$V_{OUT} = 1.2\text{V}$, $I_{OUT} = 10\text{mA}$ $f = 100\text{Hz}$ to 100kHz			36		μV_{rms}
V_{EN_HI}	Enable Input Threshold Voltage	Voltage increasing		1.2			V
V_{EN_LO}		Voltage decreasing				0.4	
I_{ADJ}	ADJ Pin Current	$V_{IN} = V_{OUT} + 1\text{V}$			0.1	1.0	μA



DIO7708

300mA Low Iq , Wide Input Voltage Low Dropout Regulator

I_{EN}	EN Pin Current	$V_{EN} = 5.5V$		100		nA
R_{dis}	Active Output Discharge Resistance	$V_{IN} = 5.5V, V_{EN} = 0V$		100		Ω
T_{SD}	Thermal Shutdown Temperature (Note 5)	Temperature increasing from $T_J = 25^\circ C$		150		$^\circ C$
T_{SDH}	Thermal Shutdown Hysteresis(Note 5)	Temperature falling from T_{SD}		25		$^\circ C$

Specifications subject to change without notice.

Note:

1. Refer to ELECTRICAL CHARACTERISTICS and APPLICATION INFORMATION for Safe Operating Area.
2. Performance guaranteed over the indicated operating temperature range by design and/or characterization production tested at $T_J = T_A = 25^\circ C$. Low duty cycle pulse techniques are used during testing to maintain the junction temperature as close to ambient as possible.
3. Voltage dropout for voltage variants below 2.1V is given by minimum input voltage 2.5V.
4. Respect SOA
5. Guaranteed by design and characterization.

Typical Performance Characteristic

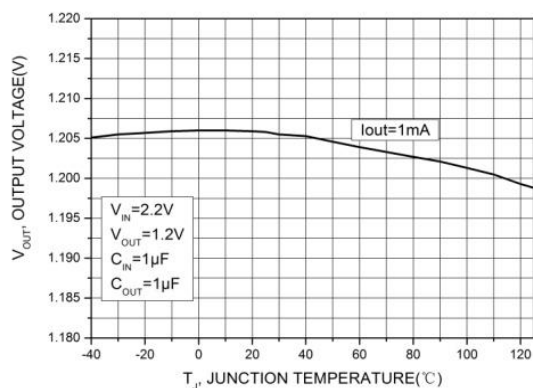


Figure 4. Output Voltage vs Temperature
V_{OUT}=1.2V

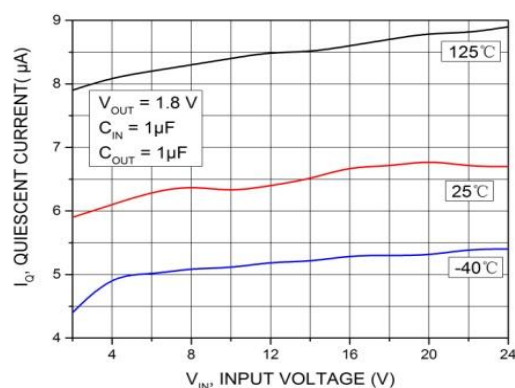


Figure 5. Quiescent Current vs Input Voltage
V_{OUT}=1.8V

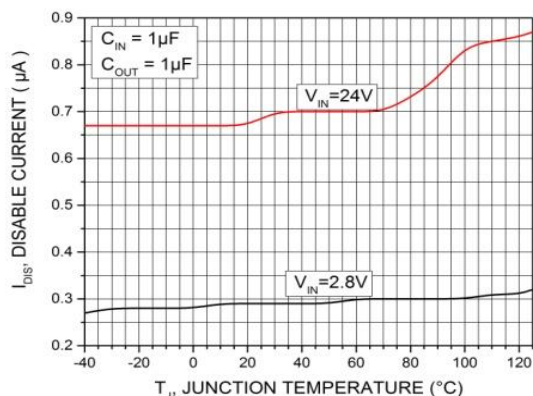


Figure 6. Disable Current vs Temperature
V_{OUT}=1.8V

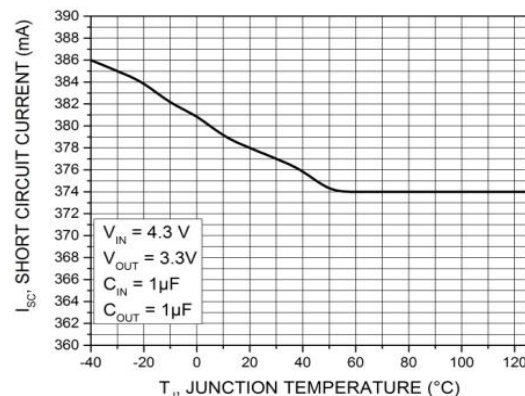


Figure 7. Short Circuit Current vs Temperature
V_{OUT}=3.3V

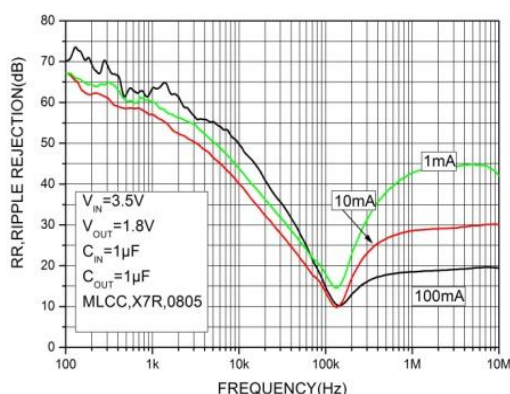


Figure 8. Power Supply Rejection Ratio vs Current
V_{IN}=3.5V, C_{OUT}=1μF

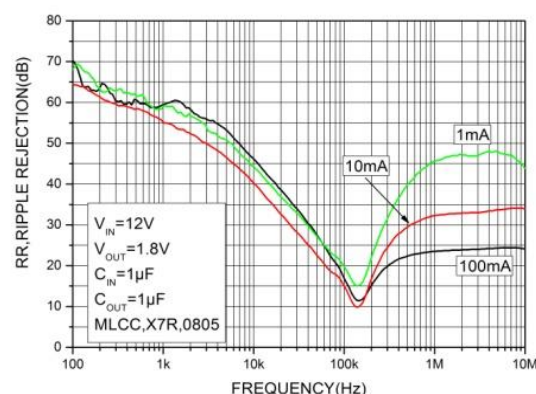


Figure 9. Power Supply Rejection Ratio vs Current
V_{IN}=12V, C_{OUT}=1μF

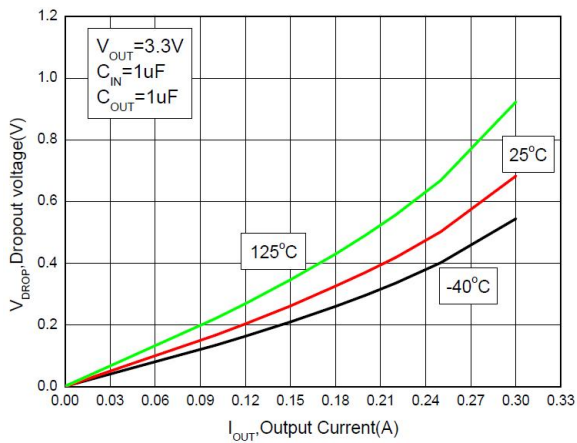


Figure 10. Dropout Voltage vs Output Current
 $V_{OUT} = 3.3V$

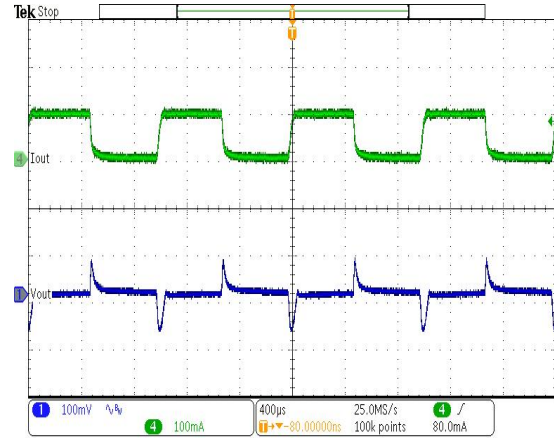


Figure 11. Load transient response
 $V_{IN} = 2.8V$, $V_{OUT} = 1.8V$, $I_{LOAD} = 5mA \sim 100mA$

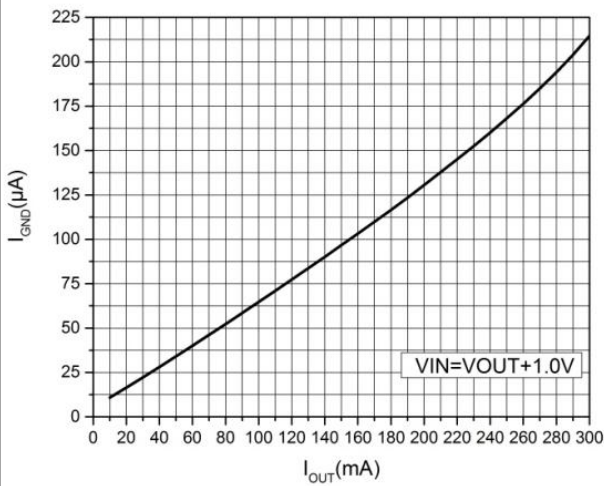


Figure 12. I_{GND} vs I_{OUT}

Functional Block Diagram

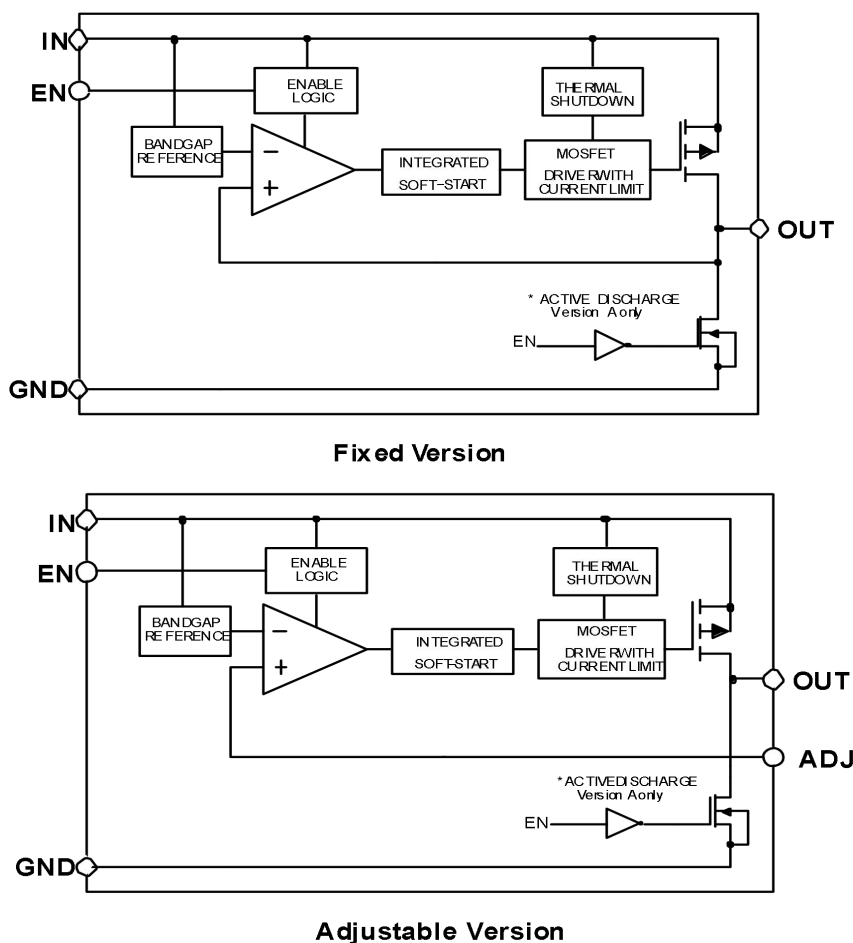


Figure 13. Functional Block Diagram

Application Information

The DIO7708 is the member of new family of Wide Input Voltage Range Low Dropout Regulators which delivers Ultra Low Ground Current consumption, Good Noise and Power Supply Rejection Ratio Performance. The DIO7708 incorporates EN pin and soft-start feature for simple controlling by microprocessor or logic.

Input Decoupling (C_{IN})

It is recommended to connect at least 1μF ceramic X5R or X7R capacitor between IN and GND pin of the device. This capacitor will provide a low impedance path for any unwanted AC signals or noise superimposed onto constant input voltage. The good input capacitor will limit the influence of input trace inductances and source resistance during sudden load current changes.

Higher capacitance and lower ESR capacitors will improve the overall line transient response.



DIO7708

Output Decoupling (C_{OUT})

The DIO7708 does not require a minimum Equivalent Series Resistance (ESR) for the output capacitor. The device is designed to be stable with standard ceramics capacitors with values of 1µF or greater. The X5R and X7R types have the lowest capacitance variations over temperature thus they are recommended.

Power Dissipation and Heat Sinking

The maximum power dissipation supported by the device is dependent upon board design and layout. Mounting pad configuration on the PCB, the board material, and the ambient temperature affect the rate of junction temperature rise for the part. For reliable operation junction temperature should be limited to 150°C.

The maximum power dissipation the DIO7708 can handle is given by:

$$P_{D(MAX)} = \frac{[T_{J(MAX)} - T_A]}{R_{\theta JA}} \quad (\text{eq.2})$$

The power dissipated by the DIO7708 for given application conditions can be calculated from the following equations:

$$P_D \approx V_{IN} (I_{GND} + I_{OUT})) + I_{OUT}(V_{IN} - V_{OUT}) \quad (\text{eq.3})$$



or

$$V_{IN(MAX)} \approx \frac{P_{D(MAX)} + (V_{OUT} \times I_{OUT})}{I_{OUT} + I_{GND}} \quad (\text{eq.4})$$

Hints

V_{IN} and GND printed circuit board traces should be as wide as possible. When the impedance of these traces is high, there is a chance to pick up noise or cause the regulator to malfunction. Place external components, especially the output capacitor, as close as possible to the DIO7708, and make traces as short as possible.




Physical Dimensions: DFN2*2-6

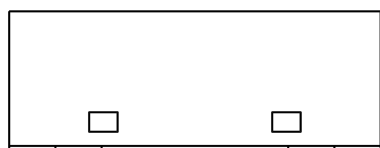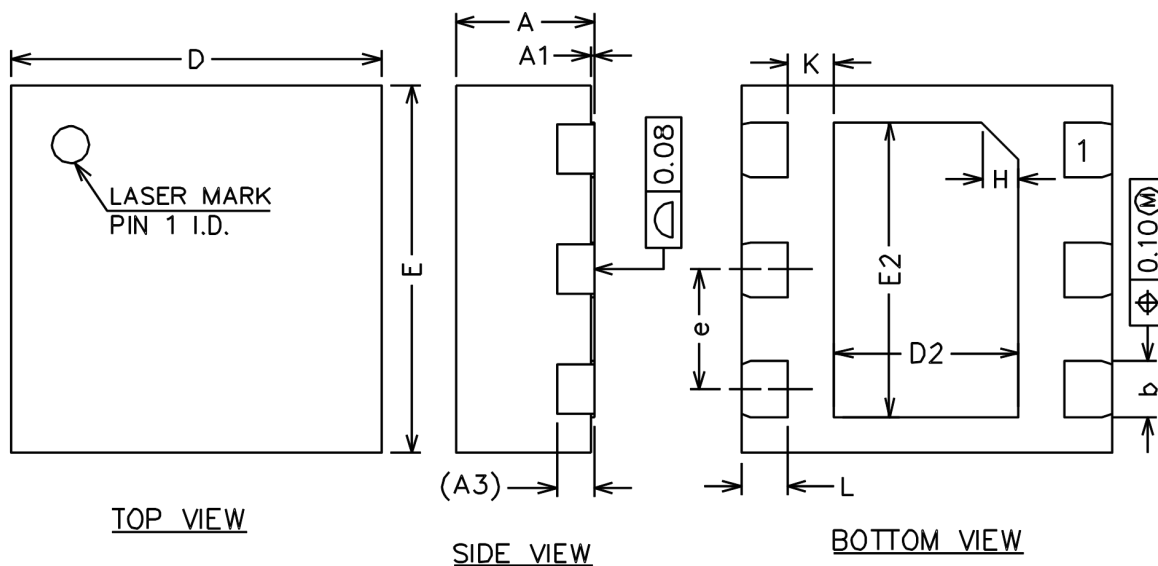

SIDE VIEW




COMMON DIMENSIONS (UNITS OF MEASURE=MILLIMETER)			
Symbol	MIN	NOM	MAX
A	0.70	0.75	0.80
A1	0.00	0.02	0.05
A3	0.20REF		
b	0.25	0.30	0.35
D	1.90	2.00	2.10
E	1.90	2.00	2.10
D2	0.90	1.00	1.10
E2	1.50	1.60	1.70
e	0.55	0.65	0.75
K	0.15	0.25	0.35
L	0.20	0.25	0.30
H	0.20REF		

Physical Dimensions: TSOT23-5

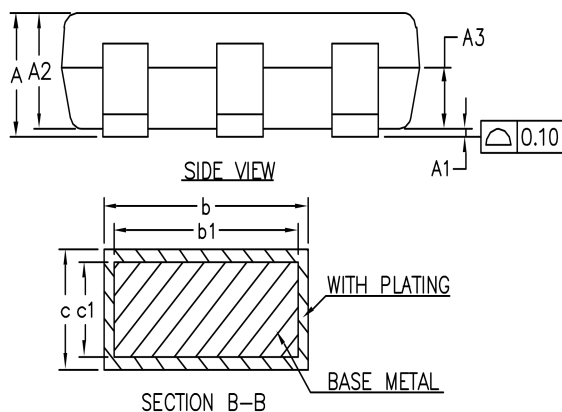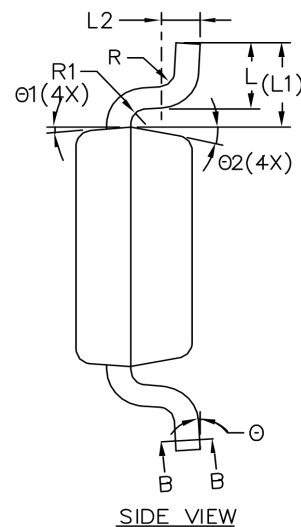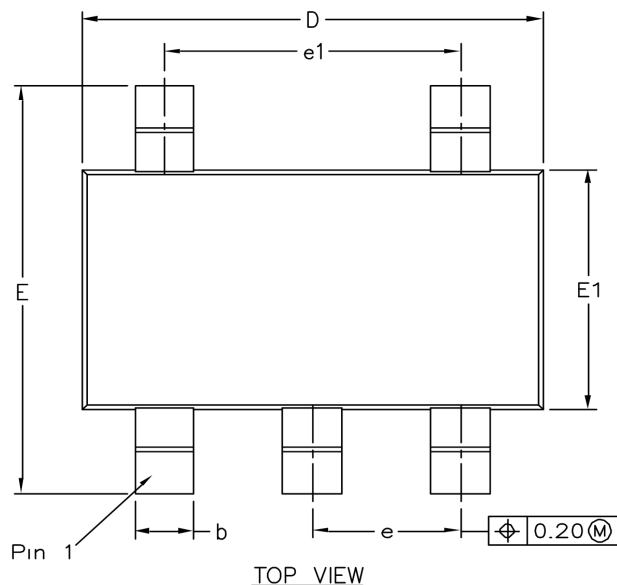

COMMON DIMENSIONS (UNITS OF MEASURE=MILLIMETER)			
Symbol	MIN	NOM	MAX
A	-	-	0.90
A1	0	-	0.15
A2	0.65	0.75	0.85
A3	0.35	0.40	0.45
b	0.36	-	0.50
b1	0.36	0.38	0.45
c	0.14	-	0.20
c1	0.14	0.15	0.16
D	2.85	2.95	3.05
E	2.65	2.80	2.95
E1	1.60	1.65	1.70
e	0.90	0.95	1.00
e1	1.80	1.90	2.00
L	0.30	0.45	0.60
L1	0.59REF		
L2	0.25BSC		
R	-	-	0.25
R1	-	-	0.25
Θ	0°	-	8°
Θ1	3°	5°	7°
Θ2	10°	12°	14°

Physical Dimensions: SOT23-5

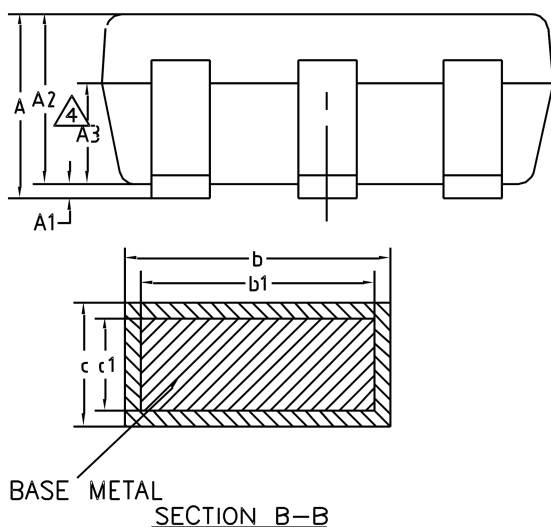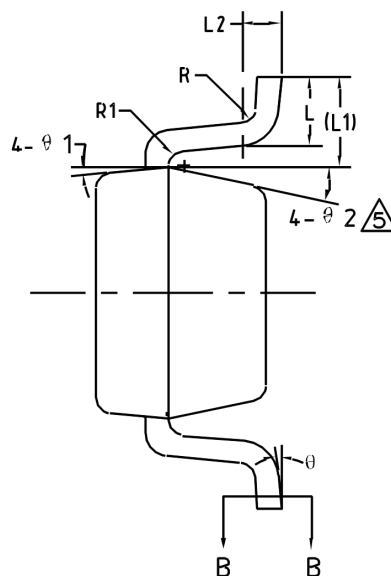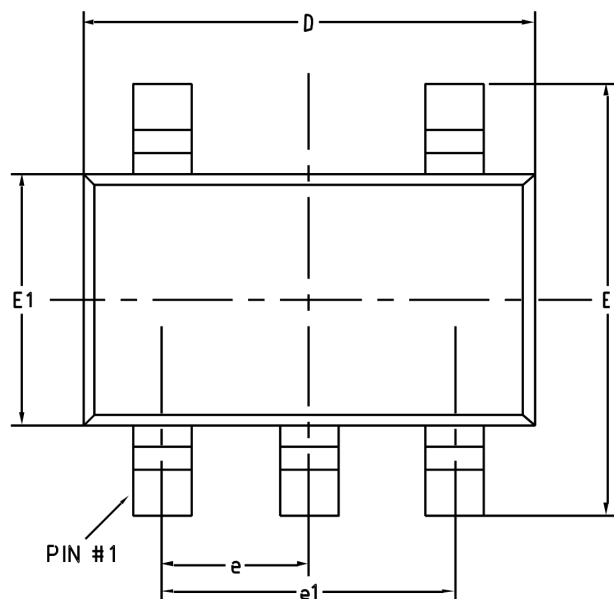

COMMON DIMENSIONS (UNITS OF MEASURE=MILLIMETER)			
Symbol	MIN	NOM	MAX
A	-	-	1.25
A1	0	-	0.15
A2	1.00	1.10	1.20
A3	0.60	0.65	0.70
b	0.36	-	0.50
b1	0.36	0.38	0.45
c	0.14	-	0.20
c1	0.14	0.15	0.16
D	2.826	2.926	3.026
E	2.60	2.80	3.00
E1	1.526	1.626	1.726
e	0.90	0.95	1.00
e1	1.80	1.90	2.00
L	0.35	0.45	0.60
L1	0.59REF		
L2	0.25BSC		
R	0.10	-	-
R1	0.10	-	0.25
θ	0°	-	8°
θ1	3°	5°	7°
θ2	6°	-	14°

300mA Low Iq , Wide Input Voltage Low Dropout Regulator



DIO7708

300mA Low Iq , Wide Input Voltage Low Dropout Regulator

CONTACT US

Dioo is a professional design and sales corporation for high-quality and performance analog semiconductors. The company focuses on industry markets, such as, cell phone, handheld products, laptop, and medical equipment and so on. Dioo's product families include analog signal processing and amplifying, LED drivers and charger IC. Go to <http://www.dioo.com> for a complete list of Dioo product families.

For additional product information, or full datasheet, please contact with our Sales Department or Representatives.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

DIOO:

DIO7708A330CD6