


ESP8266 Thing Dev Board (WRL-13711)

Arduino add-on available
80MHz

Name	Arduino
Power	ADC
GND	Serial
Control	Misc

	GND	GND
	3.3V	3V3
SDA	D2	2
SCL/SCLK	D14	14
	Reset	RST
TX	D7	TX
RX	D8	RX
	V_USB	5V
	Not Connected	NC
	GND	GND

u.fl antenna connector
Not Connected
To use swap the solder jumper

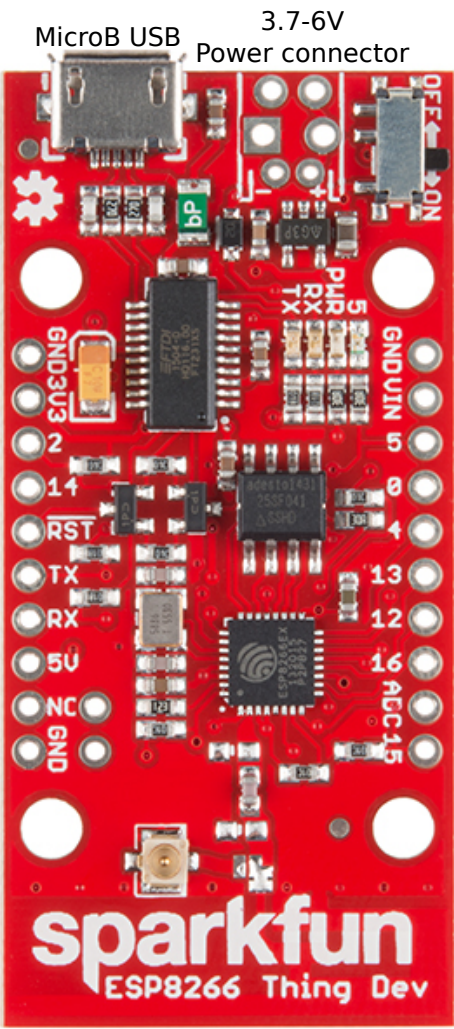

MicroB USB 3.7-6V Power connector

Power switch

PCB Antenna

GND	GND	
Vin	Vin	
5	D5	LED
0	D0	Used in reset
4	D4	
13	D13	MOSI
12	D12	MISO
16	D16	XPB
ADC	A0	10-bit 1V
15	D15	CS

Jumpers on back
PWR-LED - cut to disconnect power LED
SLEEP-EN - Connect RST to XPB to enable sleep (disables programming)

Power (ESP8266 Thing)
Vin: 3.7V-6V
VUSB: 5V
VCC:3.3V @500mA
Max 12mA per I/O pin

Typical Power (ESP8266 module)
Transmit 135-215mA
Receive 60-62mA
Standby 0.9mA
Deep sleep 10uA

LEDs
Power: Red
User (pin 5): Blue
RX: Yellow
TX: Green

Wi-Fi
802.11 b/g/n
Wi-Fi Direct (P2P) soft AP





Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[SparkFun Electronics:](#)

[WRL-13804](#) [KIT-15259](#) [KIT-13799](#)