

CABLE 161 RF: I-PEX MHF + SMA STRAIGHT BULKHEAD JACK WITH O-RING RATED TO IP67/68 + MULTIPLE CABLE SIZES

SPECIFICATIONS :


- I-PEX MHF PLUG, P/N: FOR RG178 CABLE: 20278-112R-18.
FOR $\phi 1.37\text{MM}$ CABLE: 20351-112R-37.
FOR $\phi 1.13\text{MM}$ CABLE: 20278-112R-13
FOR $\phi 1.32\text{DS}$ & 1.32MM CABLE: 20278-112R-32.
FOR $\phi 0.81\text{MM}$ CABLE: 20278-112R-08
- COAXIAL CABLE, SEE P/N OPTIONS.
- SMA STRAIGHT BULKHEAD JACK WITH O-RING RATED TO IP67/68,
P/N: RFCT-SMA002-F78.

ENVIRONMENTAL:

- BULKHEAD MOUNTED CONNECTOR (RFCT-SMA002-F78) TESTED TO THE FOLLOWING SPECIFICATION:
 - IP6X - DUST TIGHT - NO PARTICLE INGRESS.
 - IPX7 WATERPROOF FOR 30 MINUTES UP TO 1 METER UNDERWATER.
 - IPX8 WATERPROOF FOR 48 HOURS AT 1 METER UNDERWATER.
 - IPX8 WATERPROOF FOR 12 HOURS AT 5 METERS UNDERWATER.
 - PRESSURE TEST - 1 BAR FOR 10 SECONDS.


NOTES:

- THE ORIENTATION OF CONNECTORS ON DRAWING IS FOR REFERENCE ONLY, IF THE ORDER IS LEFT BLANK THE CONNECTOR WILL NOT HAVE FIXED ORIENTATION.
- FIXED ORIENTATION IS SUGGESTED FOR CABLE LENGTH 25MM TO 100MM. PLEASE SPECIFY THE FIXED ORIENTATIONS FROM THE ORDER CODE (F1, F2, ETC)
- CONTACT GCT IF THE ORIENTATION YOU REQUIRE IS NOT SHOWN.
- WORKING FREQUENCY RANGE: DC-3GHz.
- OPERATING TEMPERATURE: -40°C ~ $+85^{\circ}\text{C}$.
- IMPEDANCE: 50 Ohm.

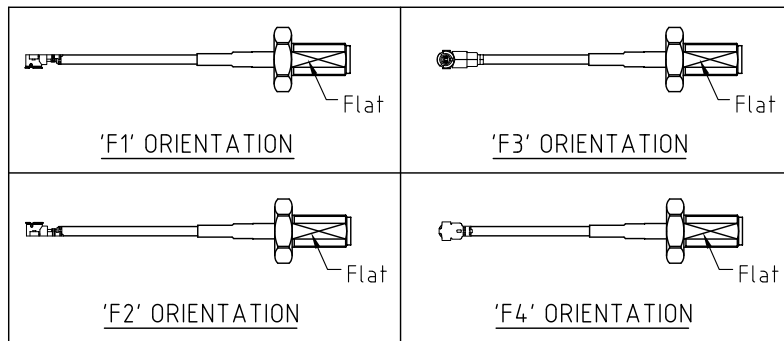

USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:

- HANDLE WITH CARE.
- DO NOT TWIST; APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES.
- CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS.

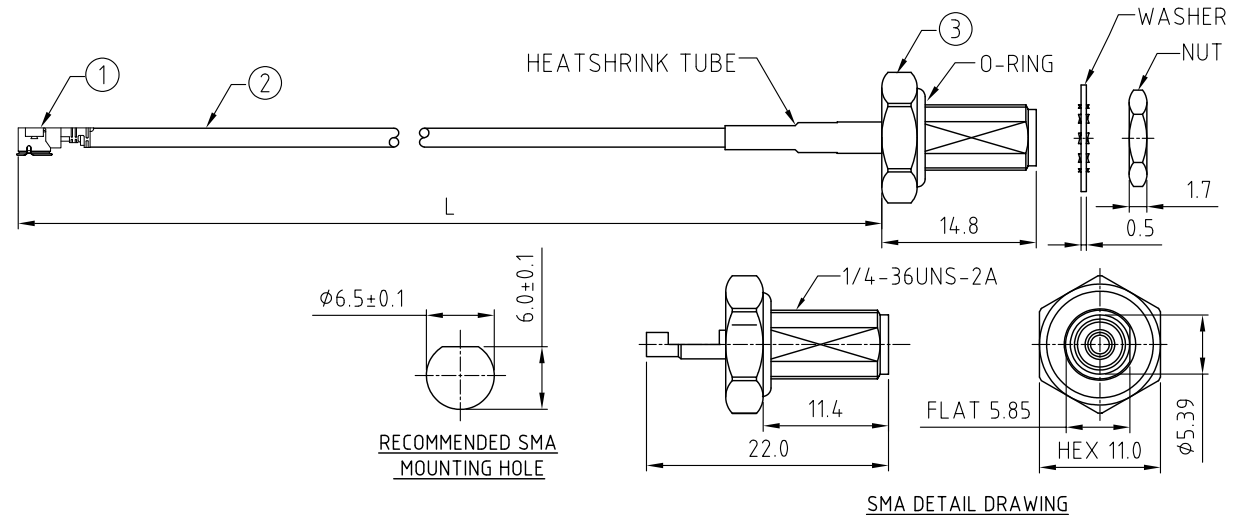

HOW TO ORDER

CABLE 161 RF - X X X - X X - X - X - X X


"L" LENGTH IN MM:
eg: 100MM = 100
(MIN. 025-MAX.400
STANDARD = 100, 150, 200)
Tolerance: 50-200mm: $\pm 5\text{mm}$.
201-400mm: $\pm 7\text{mm}$.

HEATSHRINK TUBE OPTIONS:
BLANK = WITH H/S TUBE (STANDARD)
NT = WITHOUT H/S TUBE

CABLE SIZE OPTIONS:
1 = RG178 CABLE, COLOR: BROWN
2 = $\phi 1.37\text{MM}$ CABLE, COLOR: BLACK
3 = $\phi 1.13\text{MM}$ LOW LOSS CABLE, COLOR: GREY
4 = $\phi 1.13\text{MM}$ CABLE, COLOR: GREY
5 = $\phi 1.32\text{DS}$ CABLE, COLOR: GREY
6 = $\phi 1.13\text{MM}$ CABLE, COLOR: BLACK
7 = $\phi 1.32\text{MM}$ CABLE, COLOR: GREY
8 = $\phi 0.81\text{MM}$ CABLE, COLOR: GREY

ORIENTATION OPTIONS:
BLANK = DOES NOT HAVE A FIXED ORIENTATION
F1 = MHF CONNECTION DOWN (L=25-200MM)
F2 = MHF CONNECTION UP (L=25-200MM)
F3 = MHF CONNECTION AND D FLAT SAME ORIENTATION (L=25-200MM)
F4 = MHF CONNECTION AND D FLAT OPPOSITE ORIENTATION (L=25-200MM)
(SEE NOTES 1, 2, 3 AND DIAGRAMS FOR MORE INFORMATION)

O-RING, WASHER AND NUT OPTIONS:
BLANK = O-RING ASSEMBLED, WASHER AND NUT
SEPARATELY PACKED (STANDARD)
A = ALL ASSEMBLED WITH CONNECTOR
D = ALL PACKED SEPARATELY

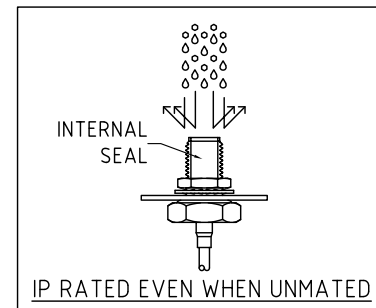

REV. DATE & DRN	10. 26/10/19 - NYW RELEASE
11. 28/10/19 - NYW	ADD 133 CABLE OPTION.
12. 29/07/19 - NYW	UPDATE SMA PART NUMBER.
13. 30/07/19 - NYW	ADD 133 CABLE OPTION 4.
14. 18/07/19 - CAO	ADD CABLE OPTION NO. 3
15. 19/08/19 - RH	ADD ASSEMBLY OPTION B.
16. 07/09/19 - NYW	ADD CABLE OPTION 4.
17. 27/08/19 - NYW	ADD CABLE OPTION 5.
18. 08/11/19 - NYW	ADD F3, F4 ORIENTATION
19. 10/11/19 - NYW	ADD 113 BLACK CABLE OPTION
20. 27/09/19 - NYW	ADD 133 CABLE OPTION.
21. 20/03/19 - NYW	REMOVE MHF CAP OPTION (B).
22. 27/05/19 - NYW	ADD OPERATING TEMP.
23. 10/07/19 - NYW	ADD 0.81 CABLE OPTION.
24. 12/07/19 - NYW	ADD NOTE 6.
25. 10/07/19 - NYW	ADD H/S TUBE OPTIONS.
26. 04/04/22 - NYW	ADD ACCESSORY OPTION D.
27. 29/04/22 - NYW	ADD NOTE 5.
28. 25/02/24 - CC	ADD IP RATING VIEW
29. 16/02/25 - KY	ADD GCT Logo.

Scale: NTS	THIRD ANGLE	Unstated .X .XX .XXX ANGLES	Tolerances: N/A N/A N/A N/A
Drawn: KY			
App'd: XXX	Title CABLE ASSEMBLY		
Date: 16 FEB. '25	Revision: 2.9	Unit: mm	

IP Rated
RF Products

© THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: Cable 161 RF

CABLE 161 RF

Drawing Number:

Sheet 1 of 1

Drawing © E and O E

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[GCT:](#)

[CABLE 161 RF-150-F1-1](#) [CABLE 161 RF-050-F1-1](#) [CABLE 161 RF-100-F1-1](#) [CABLE 161 RF-050-A-1](#) [CABLE 161 RF-150-A-1](#) [CABLE 161 RF-050-1](#) [CABLE 161 RF-150-1](#) [CABLE 161 RF-100-1](#) [CABLE 161 RF-100-A-1](#)