

HIGH POWER 8C-30C SERIES

8kV to 30kV High Voltage Cap-Charging Supplies

This High Power line of high-voltage regulated DC to DC converters is an extension of the C Series, directly addressing the high power density needs of >30 watt applications. High Power 8C - 30C units provide up to 60/125/250 watts. This high power density is especially suited to high-energy systems with large capacitances, fast repetition rates, or high continuous-DC-power requirements. See Application Note 10 for more changing information. Typical applications for the High Power 8C-30C Series include the following: laser, cap-charger, pulse generators, Q-switch, and TDR test equipment.

- 7 models from 0 to 8kV through 0 to 30kV
- 60, 125, or 250 watts of output power
- Maximum Iout capability down to 0 Volts
- Maximum Iout during charge/rise time
- Output short-circuit protection
- Very fast rise with very low overshoot



- High efficiency
- High power to voltage density
- Very low profile
- Output current & voltage monitors
- >200,000 hour MTBF @65°C
- Fixed-frequency, low-stored-energy design
- UL/cUL Recognized Component; CE Mark (LVD & RoHS)

PARAMETER	CONDITIONS	ALL TYPES																		UNITS			
INPUT																							
Voltage Range	Full Power	+ 23 to 30																		VDC			
Voltage Range	Derated Power Range	60W, 125W: + 11 to 30, 250W: 15-30																		VDC			
Current	Standby / Disable	< 40																		mA			
Current	No Load, Max Eout	8C to 15C < 500, 20C to 25C < 600																		mA			
Current	Max Load, Max Eout	60W: 3.25, 125W: 6.5, 250W: 13																		A			
AC Ripple Current	Nominal Input, Full Load	< 50																		mA p-p			
OUTPUT		8C			10C			12C			15C			20C			25C			30C			
Voltage Range	Nominal Input	0 to 8,000			0 to 10,000			0 to 12,000			0 to 15,000			0 to 20,000			0 to 25,000			0 to 30,000			VDC
Power	Nominal Input, Max Eout	60	125	250	60	125	250	60	125	250	60	125	250	60	125	250	60	125	250	60	125	250	Watts
Current	Iout, Entire Output Voltage Range	7.5	15.5	31.2	6	12.5	25	5	10.5	20.8	4	8.3	16.7	3	6.25	12.5	2.4	5	10	2	4.17	8.33	mA
Current Scale Factor	Full Load	4.7	14.2	6.25	4.1	10.9	5	4.0	7.4	4.17	4.0	7.5	3.33	.65	.653	2.5	.65	.650	2	.65	.642	1.67	mA/V
Voltage Monitor Scaling		60W & 125W Models - 1000:1 ± 2% into 10MΩ; 250W Models - 10,000:1 ± 2%																		-			
Internal Capacitance	Capacitance / 95% Decay (50Meg Load)	4400/659	2200/330	1500/225	2933/439	1467/220	1500/225	2933/439	1467/220	750/112	2200/330	1100/165	750/112	1320/200	880/132	750/112	1100/165	733/110	500/75	825/125	550/85	500/75	pF/mS
Ripple	Full Load, Max Eout	< 1%												< 1%						V p-p			
Rise Time	Max Iout, Various C Loads & Eout	Figure A																		-			
Storage Capacitance	Internal	4400	2200	1500	2933	1467	1500	2933	1467	750	2200	1100	750	1320	880	750	1100	733	500	825	550	500	pF
Overshoot	C Load, 0 Eout to Full Eout	< 1%																		V pk			
Line Regulation	Nom. Input, Max Eout, Full Power	< 0.01%																		VDC			
Static Load Regulation	No Load to Full Load, Max Eout	< 0.01%																		VDC			
Stability	30 Min. warmup, per 8 hr/ per day	< 0.01% / < 0.02%																		VDC			
PROGRAMMING & CONTROLS		ALL TYPES																					
Input Impedance	Nominal Input	+ Output Models 1.1MΩ to GND, - Output Models 1.1MΩ to +5 Vref																		MΩ			
Adjust Resistance	Typical Potentiometer Values	10K to 100K (Pot across Vref. & Signal GND, Wiper to Adjust)																		Ω			
Adjust Logic	0 to +5 for +Out, +5 to 0 for - Out	+4.64 VDC for +Output or +0.36 for -Output = Nominal Eout																		-			
Output Voltage & Impedance	T=+25°C	+ 5.00VDC ± 1%, Zout = 464Ω ± 1%																		-			
Enable/Disable		0 to +0.8V Disable, +2.0 to 32 Enable (Default = Enable)																		VDC			
ENVIRONMENTAL		ALL TYPES																					
Operating	Full Load, Max E out, Case Temperature	-40 to +65																		°C			
Coefficient	Over the Specified Temperature	±50 (±25 Optional)																		PPM/°C			
Thermal Shock	Mil-Std-810, Method 503-4, Proc. II	-40 to +65																		°C			
Storage	Non-Operating, Case Temp.	-55 to +105																		°C			
Humidity	All Conditions, Standard Package	0 to 95% non-condensing																		-			
Altitude	Standard Package, All Conditions	Sea Level through 70,000																		ft			
Shock	Mil-Std-810, Method 516.5, Proc. IV	20																		G's			
Vibration	Mil-Std-810, Method 514.5, Fig.514.5C-3	10																		G's			

C = uF
V = Volts
I = mA
T = mS

$$T = \frac{C \times V}{I}$$

C = uF
V = kV
I = mA
F = Hz

$$I = C \times V \times F$$

C = uF
V = kV
I = mA
F = Hz

$$F = \frac{I}{C \times V}$$

Specifications subject to change without notice.

C = uF
E² = kV
J = Ws

$$J = \frac{C \times E^2}{2}$$

Figure A - Rise Time Formulas

NOTES: Capacitance must include HVPS internal Capacitance.



Making High Voltage Easier!®


Higher Service, Higher Performance, Higher Reliability

©2011, UltraVolt Inc. All rights reserved.

HIGH POWER 8C-30C SERIES

8kV to 30kV High Voltage Cap-Charging Supplies

8C TO 15C - 60/125W

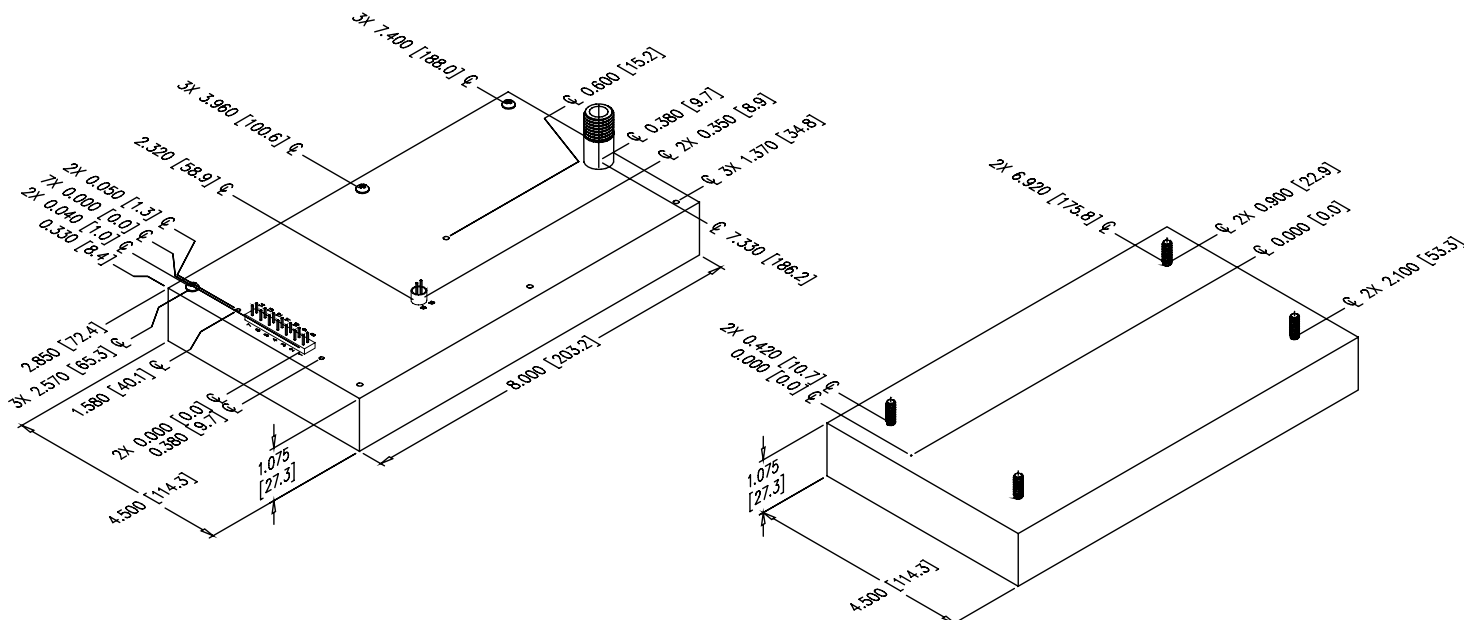

20C TO 30C - 60/125W



Downloadable drawings (complete with mounting & pin information) and 3D models are available online.




Making High Voltage Easier!®

1800 Ocean Avenue, Ronkonkoma, NY 11779
Phone: 1-631-471-4444 Fax: 1-631-471-4696 www.ultravolt.com

HIGH POWER 8C-30C SERIES

8kV to 30kV High Voltage Cap-Charging Supplies

8C TO 30C - 250W (PRELIMINARY)

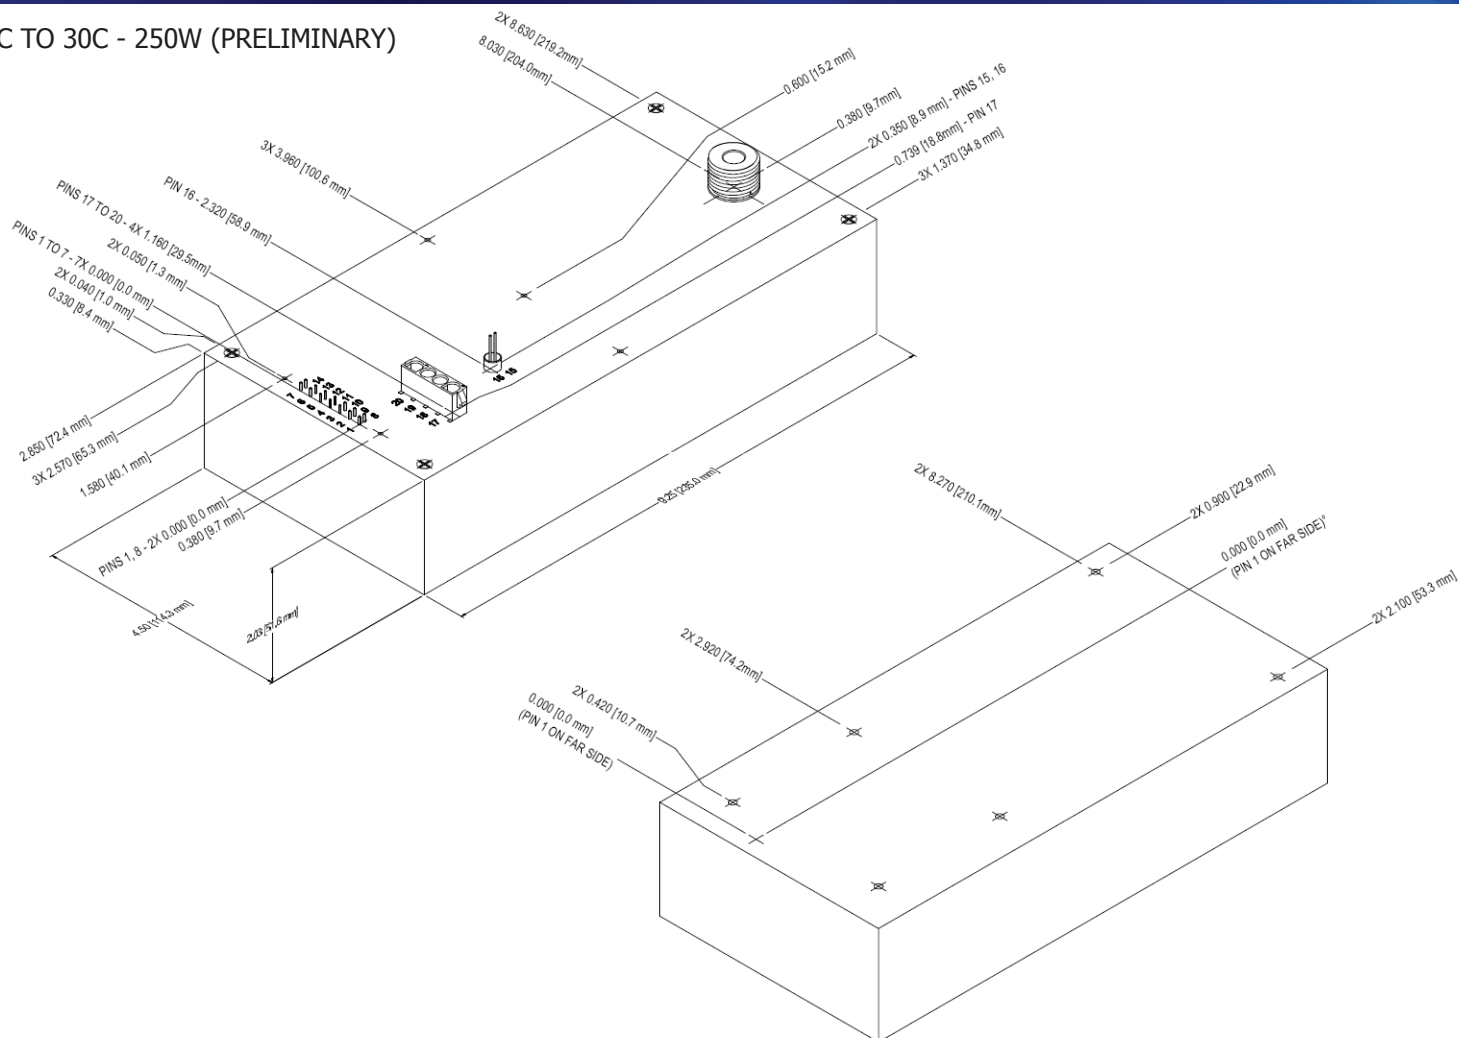

CONSTRUCTION

Epoxy-filled Aluminum Box
Chem film per MIL-A-8625 Type II (Anodizing)

SIZE - 60 & 125W MODELS

Volume 38.7 in³ (634cc)
Weight 2.6 lbs. (1.18kg)

SIZE - 250W MODELS

Volume 84.5 in³ (1386cc)
Weight 5.6 lbs. (2.54kg)

TOLERANCE

Overall $\pm 0.025"$ (0.64)
Pin to Pin $\pm 0.015"$ (0.38)
Hole to hole location $\pm 0.025"$ (0.64)

PINS

Gold-plated 0.025 (0.64) sq.

The center of the pins and mounting holes are located from the center of pin 1

Pins 1 thru 14 spacing 0.100 (2.54) x 0.200 (5.08) on center, height from cover 0.280 (7.11) min

Pins 15 and 16 spacing 0.100 (2.54) on center, height from cover 0.450 (11.43) min

HV OUTPUT CONNECTION

Unit requires an LGH flying lead connector for proper operation:

8C to 15C (60W & 125W Models) = CA-20KV-1000

20C to 30C (60W & 125W Models) = CA-40KV-1000

8C to 30C (250W Models) = CA-40KV-1000



Making High Voltage Easier!®

1800 Ocean Avenue, Ronkonkoma, NY 11779
Phone: 1-631-471-4444 Fax: 1-631-471-4696 www.ultravolt.com

HIGH POWER 8C-30C SERIES


8kV to 30kV High Voltage Cap-Charging Supplies

CONNECTIONS	
PIN	FUNCTION
1 & 8	Input-Power Ground Return
2 & 9	Positive Power Input
3	Iout Monitor
4	Enable/Disable
5	Signal Ground Return
6	Remote Adjust Input
7	+5VDC Reference Output
10	N/C (or Arc Detect option)
11, 12, & 13	N/C
14	Eout Monitor
15 & 16	HV Ground Return

All grounds joined internally. Power-supply mounting points isolated from internal grounds by >100k Ω , .01 μ F / 500V (Max).

ORDERING INFORMATION		
Type	0 to 8,000 VDC Output	8C
	0 to 10,000 VDC Output	10C
	0 to 12,000 VDC Output	12C
	0 to 15,000 VDC Output	15C
	0 to 20,000 VDC Output	20C
	0 to 25,000 VDC Output	25C
	0 to 30,000 VDC Output	30C
Input	24VDC Nominal	24
Polarity	Positive Output	-P
	Negative Output	-N
Power	60 Watts Output	60
	125 Watts Output	125
	250 Watts Output	250
Heat Sink	.400" High (sized to fit case)	-H
PCB Support	(5) 0.187" standoffs on top cover	-Z11
Enhanced Interface	5V Controls and Monitors	-I5
	10V Control and Monitors	-I10
Options	Arc Detect	-AD
	Arc Quench	-AQ
	25PPM Temperature Coefficient	-25PPM

Note: For more information on the enhanced interface options, download the [I5/I10 Option datasheet](#).

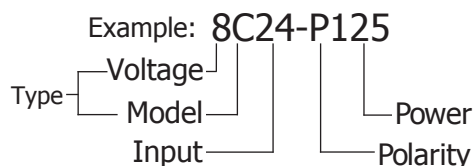

Popular accessories ordered with this product include CONN-KIT-HP, BR-7 and BR-8 mounting bracket kits and our full range of high voltage output connectors (see Accessories & Connectors datasheet).



Non-RoHS compliant units are available. Please contact the factory for more information.

Manufactured in USA



Making High Voltage Easier!®

1800 Ocean Avenue, Ronkonkoma, NY 11779
Phone: 1-631-471-4444 Fax: 1-631-471-4696 www.ultravolt.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Advanced Energy:

[8C24-P60](#) [20C24-P250-I5-H](#) [15C24-P250](#) [20C24-P250](#) [8C24-P125](#) [30C24-N60](#) [30C24-N125-I10-AD-H](#) [15C24-P60-H](#) [8C24-N125](#) [30C24-N250](#) [30C24-P250-I5-H](#) [8C24-P125-H](#) [10C24-P125-I5](#) [8C24-P250-I5](#) [10C24-P250](#) [25C24-N125](#) [20C24-N125-I10](#) [15C24-P60-I5-AQ](#) [30C24-P250-I5](#) [20C24-N125](#) [30C24-P125-H](#) [30C24-N125](#) [10C24-N250-I5](#) [25C24-N60-I10](#) [15C24-P60](#) [12C24-P125-I10](#) [20C24-N250](#) [8C24-N60](#) [30C24-N250-I5](#) [8C24-P250](#) [15C24-P125](#) [15C24-P60-I5](#) [30C24-P125](#) [12C24-P250-I10](#) [30C24-P60-I5](#) [15C24-P125-H](#) [30C24-N125-I10-H](#) [25C24-P60](#) [15C24-N250](#) [20C24-P125-I10](#) [20C24-N60](#) [12C24-N60](#) [30C24-N125-H](#) [30C24-N250-I10-AD-H](#) [25C24-N125-I10](#) [25C24-P125](#) [15C24-N125-I5-AQ](#) [20C24-N250-I5](#) [30C24-N60-I5](#) [12C24-N250](#) [30C24-P60](#) [15C24-N125-I5-AD](#) [30C24-P125-I5](#) [15C24-N60](#) [8C24-P125-I5](#) [20C24-P125](#) [20C24-P60](#) [8C24-P250-I10](#) [10C24-N60](#) [15C24-P60-I5-AD](#) [15C24-N125-H](#) [25C24-P125-I5](#) [10C24-P60-I10](#) [10C24-P125](#) [12C24-P125](#) [10C24-N125](#) [10C24-P250-I5](#) [20C24-N125-I5](#) [25C24-P125-I10](#) [30C24-P60-I10](#) [15C24-N60-I5](#) [30C24-N125-I10](#) [10C24-N125-I5](#) [30C24-N250-I5-H](#) [12C24-N250-I10](#) [15C24-N125](#) [30C24-P250](#) [10C24-P60](#) [15C24-N125-I10](#) [25C24-N250-I10-H](#) [25C24-N60](#) [12C24-P60-I5](#) [12C24-P250](#) [12C24-P60](#)