# 120Watts AEO/ALO40

Total Power: 120 Watts Input Voltages: 48V No. of Outputs: Single

**High Efficiency** 



## **Special Features**

- 2.3" x 0.9" Industry Standard 8th brick outline
- · Baseplate or Openframe construction
- · Low Ripple and Noise
- · Regulation to zero load
- High Capacitive Load start-up
- Fixed Frequency Switching for EMI predictability
- Industry Standard features: Input UVLO with hysteresis, Enable, OVP, OCP, OTP, Output VoltageTrim, Differential Remote Sense
- · Meets Basic Insulation
- EU Directive 2002/95/EC compliant for RoHS

#### **Environmental**

Operating Ambient Temperature

Openframe: -40°C to +85°C Ambient Baseplate: -40°C to +100°C Case

Storage temperature: -55°C to +125°C

MTBF: > 1 Million Hrs

#### Safety

UL, cUL 60950-1 Recognized TUV EN60950-1 Licensed

## **Electrical Specs**

Input

Input Range 36 to 75 VDC Input Surge 100V /100ms

Input UVLO 33 - 36 V (UVLO ON) 31 - 34 V (UVLO OFF)

Efficiency<sup>2</sup> 93% @ 5 V (typical)

Output

Over Voltage Protection 130% V<sub>O</sub> Typ (autorecovery)

Over Current Protection 130% I<sub>O,max</sub> Typ (autorecovery)

Over Temperature 115°C average PCB temperature

Protection (autorecovery)
Switching Frequency Fixed Frequency

Isolation Voltage 1500Vdc

Control

Output Voltage Trim  $\pm 10\% V_{O,NOM}$ Enable TTL compatible

(Positive or Negative Logic)



#### **AMERICAS**

5810 Van Allen Way Carlsbad, CA 92008 Telephone: 760-930-4600 Facsimile: 760-930-0698

**EUROPE** 

Astec House, Waterfront Business Park Merry Hill, Dudley West Midlands, DY5 1LX, UK Telephone: 44 (1384) 842-211 Facsimile: 44 (1384) 843-355

ASIA

Units 2111-2116, Level 21 Tower1, Metroplaza 223, Hing Fong Road Fwai Fong, New Territories Hong Kong Telephone: 852-2437-9662 Facsimile: 852-2402-4426



## Ordering Information

Input Voltage	Output Voltage	Output Current	Efficiency <sup>2</sup>	Model Number
36V to 75V	12.0V	10A	93.0%	A(X)O10B48(N) - (6)(S)(L)
36V to 75V	5.0V	20A	92.0%	A(X)O20A48(N) - (6)(S)(L)
36V to 75V	3.3V	30A	91.0%	A(X)O30F48(N) - (6)(S)(L)
36V to 75V	2.5V	35A	89.5%	A(X)O35G48(N) - (6)(S)(L)
36V to 75V	1.8V	40A	88.0%	A(X)O40Y48(N) - (6)(S)(L)
36V to 75V	1.5V	40A	86.0%	A(X)O40M48(N) - (6)(S)(L)
36V to 75V	1.2V	40A	85.0%	A(X)O40M48(N) - (6)(S)(L)

**OPTIONS:** 

(X): "L" = Open Frame / Low Profile

"E" = Baseplate Construction

"N" = designates Negative Logic Enable (default is Positive Enable with no suffix "N" required)

"-6" = 3.7mm nominal pin length (default is 5mm nominal pin length with no suffix "-6" required)

: "-S" = Surface Mount Termination (default is Through Hole Termination with no suffix "-S" required)<sup>7</sup>

"L" = RoHS compliant (RoHS 6) / "Blank" - RoHS compliant with Lead (PB) in solder exemption (RoHS 5)

## Pin Assignment


#### Single Output

- 1. +Vin
- 2. Enable (On/Off)
- 3. -Vin
- 4. V<sub>OUT</sub>
- 5. -Sense
- 6. Trim
- 7. +Sense
- 8. +V<sub>OUT</sub>

#### Notes:

- 1. Measured at 20 MHz bandwidth with external 10  $\mu\text{F}$ tant. capacitor in parallel with 0.1 µF ceramic capacitor connected across +Vout and -Vout; 220 μF e-cap or equivalent connected across +Vin and -Vin.
- 2. Efficiency measurements are typical values taken at full load, nominal line and  $T_A = 25$ °C.
- All specifications are typical at nominal line, full load and  $T_A = 25^{\circ}C$  unless otherwise noted.
- 4. All specifications subject to change without notice.
- 5. Mechanical drawings are for reference only. Dimensions are in inches [mm]. Pin placement tolerance ± 0.005 [0.127]. Mechanical Tolerance ± 0.02 [0.5], recommended surface mount pads (min: 0.080 x 0.112 [2.03 x 2.84] / max: 0092 x 0.124 [2.34 x 3.15]); through hole pin diameter (Pins 4 & 8)  $\emptyset = 0.062$  [1.57], others  $\emptyset = 0.04$  [1.0] (6X).
- 6. Technical Reference Notes should be consulted for detailed information when available.
- AEOxxxxxx-Sx series (surface mount termination with baseplate) are not reflow compatible.
- 8. Warranty 2 yrs.

Astec reserves the right to make changes to the information contained herein without notice and assumes no liability as a result of its use and application. (REV 02: MARCH 7, 2007)

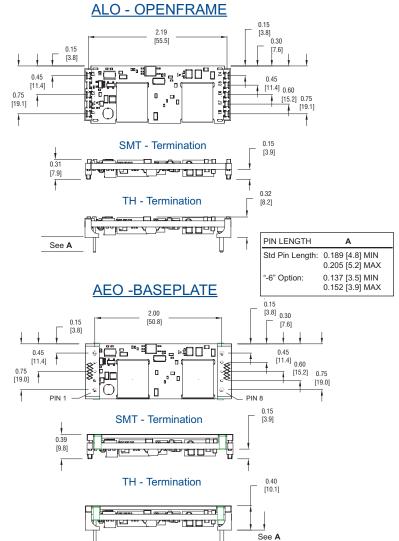

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Advanced Energy:

ALO10B48-L