

## Quarter-Brick Series

### 2nd Generation IBC

**Total Power:** 336 - 450W  
**Input Voltage:** 36 - 75 Vdc

### Special Features

- 48V input with isolated 12 V output
- Ultra-high efficiency, 95.5% 12 V @ 37.5 A
- High power density (337 W/in<sup>3</sup>) open-frame technology
- Wide operating ambient temperature range
- Industry standard quarter-brick footprint and pinout
- Low profile, 0.40 " (10.2 mm)
- Meets basic insulation requirements of EN60950-1
- Remote ON/OFF and overtemperature protection
- Available RoHS compliant
- 2 Year Warranty

### Safety

UL/cUL : CAN/CSA 22.2  
No. 60950-1  
UL60950-File No. E135734

VDE File No. 10401-3336-0206  
Licence No. 40012752



Rev.06.06.08  
qb2gibc  
1 of 4

## Electrical Specifications

### Output

Output setpoint accuracy		See table
Line regulation:	Low line to high line	See table
Load regulation	Full load to min. load	See table
Total error band	IBC38AQT4812J	9.70 - 13.40 Vdc
(including setpoint, line, load and temperature)	IBC30AQS4812J	11.52 - 12.48 Vdc
	IBC28AQW4812J	11.40 - 12.60 Vdc
Minimum load		0 A
Overshoot	At turn on and turn-off	None
Undershoot		None
Ripple and noise	(See note 2)	100 mV pk-pk typ. 40 mV rms typ.
5 - 20 MHz		

### Input

Input voltage range		See table
Input current	Remote OFF	6 mA typ.
Input current (max.)	(See note 1)	12 A max. @ Io max. and Vin = min. rated
Input reflected ripple	(See note 4)	1000 - 1560 mA (pk-pk)
Remote ON/Off	(See note 6)	
Logic compatibility		Open collector ref. to- input
On		>2.4 Vdc
OFF		<0.4 Vdc
Undervoltage lockout (non-latching):	Power-up	40 V
IBC38AQT4812J and	Power-down	38 V
IBC30AQS4812J	Power up	35.2 V
IBC28AQW4812J	Power down	34 V
Startup time (see note 3)	Power-up	15 ms
	Remote ON/OFF	5 ms



All specifications are typical at nominal input, full load at 25° C unless otherwise stated.

Rev.06.06.08  
qb2gibc  
2 of 4

## EMC Characteristics

### Immunity:

ESD air enclosure	EN61000-4-2 8 kV, 6 kV	(O/P within spec.)
Radiated field enclosure	EN61000-4-3 10 V/m	(O/P within spec.)
Conducted (DC power)	EN61000-4-6 10 V	(O/P within spec.)
Input transients	60 V to 100 V, 100 ms	

## General Specifications

Efficiency		See table
Basic insulation	Input/output	2250 Vdc
Switching frequency	Fixed	400 kHz typ.
Approvals and standards (see note 5)		EN60950-1 VDE UL/cUL60950-1
Material flammability		UL94V-0
Weight		49 g (1.73 oz)
MTBF	Telcordia Tech SR-332	5,500,000 hours
Representative model:	48 Vin, 40 °C, 50% load ground benign	

## Environmental Specifications

Thermal performance	Operating ambient, temperature	-40 °C to +85 °C
	Non-operating	-55 °C to +125 °C

### Protection

Short-circuit		Hiccup
Overvoltage	(See note 9)	Non-latching
Thermal		125 °C hot spot

## Ordering Information

Output Power (Max.)	Input Voltage	Output Voltage	Output Current (Min.)	Output Current (Max.)	Efficiency (Typ.)	Set Point Accuracy %	Regulation <sup>2</sup> Line %	Load	Model Number
450 W	42 - 53 Vdc	12 V	0 A	37.5 A <sup>(7)</sup>	95.5%	---	+10, -12.5%	±1.5%	IBC38AQT4812J
360 W	42 - 53 Vdc	12 V	0 A	30 A	94.5%	±0.25%	±0.3%	±1.5%	IBC30AQS4812J
336 W	36 - 75 Vdc	12 V	0 A	28 A	94.5%	±0.25%	±1.0%	±1.5%	IBC28AQW4812J

**CAUTION: Hazardous internal voltages and high temperatures. Ensure that unit is not user accessible.**



## Part Number System with Options

Product Family	Rated Output Current	Form Factor	Input Voltage Type	Input Voltage	Output Voltage	Remote ON/OFF Logic	Package, Body Height	Pin Length Options	RoHS Compliance <sup>(7, 8)</sup>	
IBC	30A	Q	S	48	12	-	R	A	N	J
IBC = 2nd Generation IBC	30 A = 30 Amps etc.	Q = Quarter-brick	T = Narrow Input Fixed Ratio S = Narrow Input Semi-reguated W = Wide Telecom Semi-reguated	48 = 48 V	12 = 12 V	Blank = Positive R = Negative (See Note 6)	A = Open-frame 0.40 in (10.2 mm) E = Open-rame, 0.45 in (11.4 mm)	Blank = 0.188 " (4.78 mm) N = 0.145 " (3.68 mm) K = 0.110 " (2.79 mm)	J = Pb-free (RoHS 6/6 compliant)	


### Notes

- Recommended input fusing is a 20 A HRC 200 V rated fuse.
- Maximum is model dependent, Measured with external filter. See Application Note 190 for details.
- Start-up into resistive load.
- Maximum is model dependent, measured without external Pi filter. Significant reduction is possible with external filter. See Application Note 190 for details.
- This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.
- Negative remote ON/OFF option is available. Please add the suffix '-R' to the part number, e.g. IBC30AQS4812-RAJ.
- Output is rated at 450W constant power.  
V<sub>in</sub> = 42 V: I<sub>max</sub> = 42.9 A  
V<sub>in</sub> = 48 V: I<sub>max</sub> = 37.5 A  
V<sub>in</sub> = 53 V: I<sub>max</sub> = 34.0 A
- 'E' option clearance is required to maintain 'Basic' creepage and clearance requirements when minimally insulated conductor paths are placed directly underneath the converter.
- TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.
- NOTICE: Some models do not support all options. Please contact your local Emerson Network Power representative or use the on-line model number search tool at <http://www.powerconversion.com> to find a suitable alternative.


## Mechanical Drawing

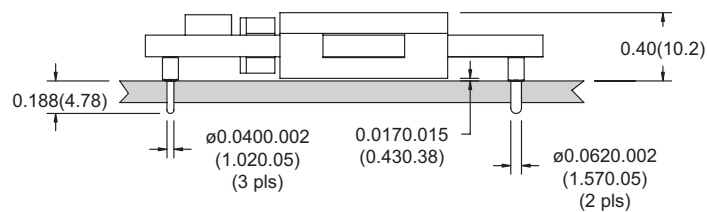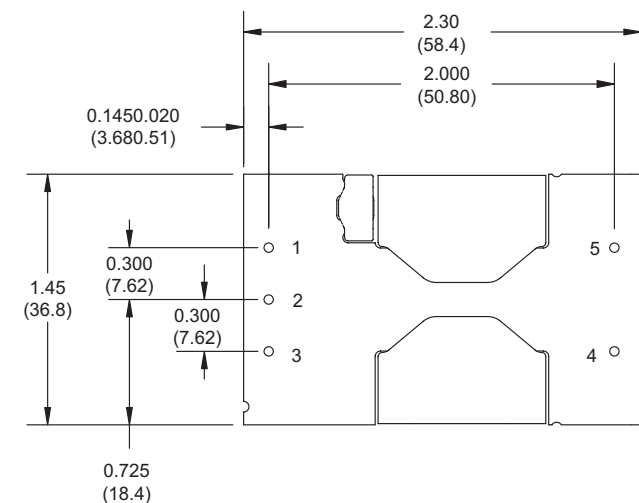

'A' Option

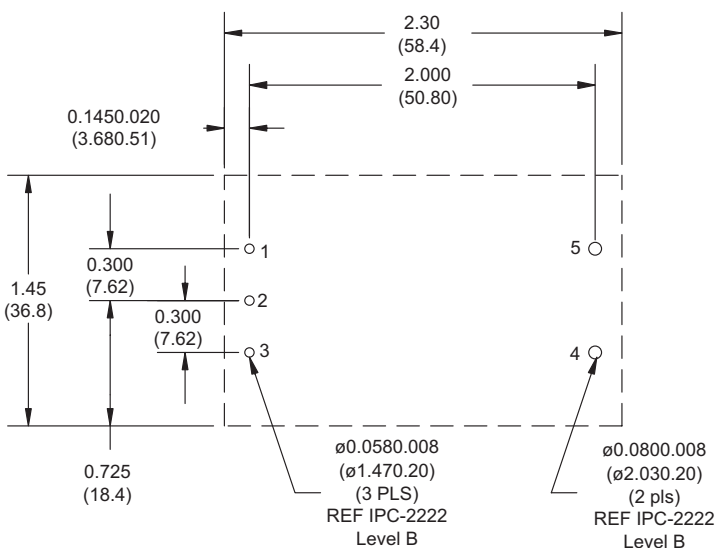

RECOMMENDED HOLE PATTERN

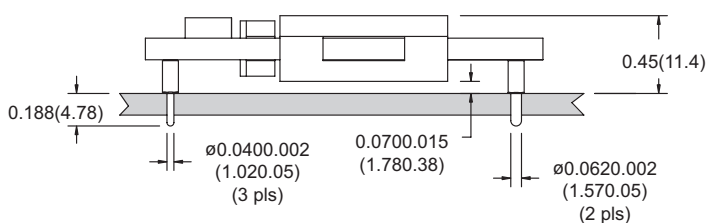

'E' Option  
(See Note 8)

Dimensions in Inches (mm)  
Tolerances (unless otherwise specified)  
x.xx 0.02 (x.x 0.5)  
x.xxx 0.010 (x.xx 0.25)

## Pin connections

Pin Number	Function
1	+Vin
2	Remote ON/OFF
3	-Vin
4	-Vout
5	+Vout

### Americas

5810 Van Allen Way  
Carlsbad, CA 92008  
USA  
Telephone: +1 (760) 930 4600  
Facsimile: +1 (760) 930 0698

### Europe (UK)

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
Telephone: +44 (0) 1384 842 211  
Facsimile: +44 (0) 1384 843 355

### Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
Telephone: +852 2176 3333  
Facsimile: +852 2176 3888

For global contact, visit:

**[www.powerconversion.com](http://www.powerconversion.com)**  
**[techsupport.embeddedpower@emerson.com](mailto:techsupport.embeddedpower@emerson.com)**

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

**Emerson Network Power.**  
The global leader in enabling  
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- **Embedded Power**
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

**EmersonNetworkPower.com**

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.  
©2008 Emerson Electric Co.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Advanced Energy:](#)

[IBC30AQS4812-EJ](#) [IBC30AQS4812-RAKJ](#) [IBC30AQS4812-RANJ](#) [IBC30AQS4812-REKJ](#) [IBC30AQS4812-RENJ](#)  
[IBC30AQS4812-RA](#)