

33500B and 33600A Series Trueform Waveform Generators

(20, 30, 80, 120 MHz)

- Built-in modulation and 17 popular waveforms
- Full bandwidth sine and square waves
- Lowest total harmonic distortion (THD) in its class
- One or two independent channels that can be coupled
- Trueform arbitrary waveform generation up to 1 GSa/s and 64 MSa



33500B and 33600A Series Trueform Function / Arbitrary Waveform Generators

- Easily generate the full range of signals you need for the most demanding measurements
- Test your devices with confidence that the waveform generator is outputting the signals you expect
- Select just the capabilities you need now, then upgrade easily when your needs change



Features

The 33500B and 33600A Series Trueform Function / Arbitrary waveform generators offer a variety of capabilities you can't find anywhere else, and they are designed to help you accelerate your testing and get your project completed faster.

Features	Descriptions
Ease of Use	A large, color graphical display offers simultaneous parameter setup, signal viewing, and editing, along with a help system. Most standard waveforms and modulation, including signal summing, are built-in.
Signal Integrity	Trueform offers precise, low-noise signals with the lowest jitter and harmonic distortion in its class. Create full bandwidth sine and square waves with Trueform generators.
Trueform Arbs	Trueform arbs ensure every waveform point is accurately represented, with up to 64 MSamples per channel. Segment waveforms connect up to 512 segments to simplify waveform creation and save memory.
Pulse Generator	Create a single pulse, a burst of pulses, or a steady pulse train with high bandwidth, up to 100 MHz. Set leading and trailing edge times independently down to 2.9 ns.
2-Channel Coupling	Quickly synchronize the independent outputs to share the same frequency, amplitude, or both. The phase between the channels is also adjustable.
Connectivity	You can automate testing or download waveforms using LAN, GPIB, USB, and USB thumb drives. The BenchVue Function Generator Control and Automation app simplifies the creation of waveforms and the control of multiple instruments.
Upgradeability	Protect your investment. Configure your instrument for now and easily upgrade later.

Ease of Use: All the Features You Expect

The 33500B and 33600A Series function/arbitrary waveform generators offer the standard signals and features you expect, such as modulation, sweep, and burst. However, it also provides features that give you the capabilities and flexibility to get your job done quickly, no matter how complex. An intuitive front-panel user interface, for example, can be quickly and easily relearned when your attention has been focused elsewhere. And that is just the beginning.



- Large, color, graphical display offers simultaneous parameter setup, signal viewing and editing for easy operation
- Two independent channels which can be coupled in amplitude and frequency
- Front-panel USB thumb drive port for file management
- Built-in help system
- LAN (LXI Core), USB, and optional GPIB connectivity for quick and easy connectivity to a PC or network
- External triggering

Modulation and built-in waveforms


17 arbitrary waveforms, including standard waveforms such as sine, square, ramp, PRBS, and Gaussian Noise, were built in. As well as specialty waveforms, such as cardiac, haversine, and Lorentz. Built-in modulations include AM, FM, PM FSK, and PWM.




Test your digital serial buses by streaming standard PRBS patterns—PN3 through PN32.

Waveforms summing and combining capability

Add noise to your signal for margin and distortion testing using only a single channel. You can create dual-tone multi-frequency signals without a dual-channel generator, preserving your budget for other test needs. On a two-channel model, you can sum and combine up to four signals.

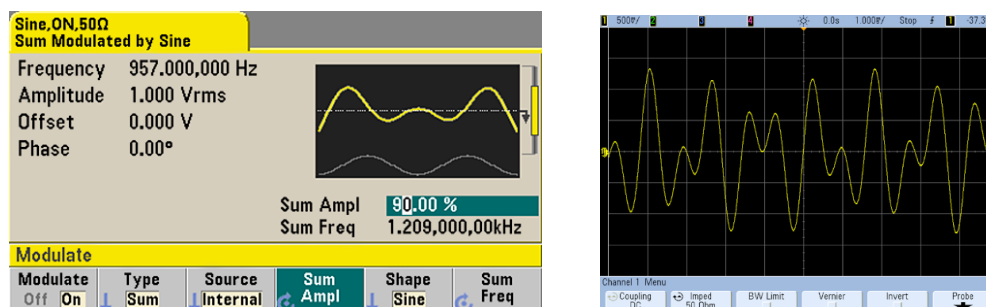

The dual-tone signal created by summing waveforms using the modulation type “Sum.”

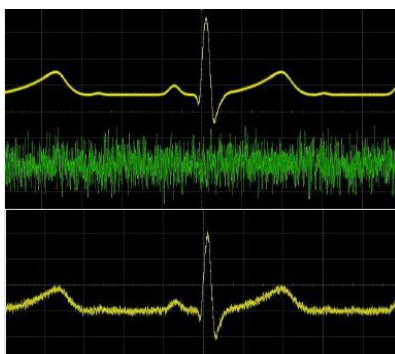

Add variable BW noise to any signal.

Smartphone and tablet access to full documentation


Need a quick answer? Get instant access to instrument documentation in seven different languages in smartphone-friendly WebHelp format. You can access all user documentation in the palm of your hand—no PC or hardcopy manuals required. Another feature you will not find in comparable function/arb generators.

Signal Integrity: Outputting the Signals You Expect

If your generator introduces spurious signals or harmonics, you'll have difficulty producing reliable designs. To succeed, you must test with clean, precise, low-noise signals. Keysight Trueform function / arbitrary waveform generators offer the highest signal fidelity, so you can generate the exact waveforms you need for your most challenging measurements. You can be confident you are seeing your design's characteristics, and not that of your waveform generator, in your measurements.

Lowest jitter


With a jitter as low as 1 ps, Trueform function / arbitrary waveform generators offer exceptional edge stability. You can even use them as a system clock to time and trigger your other instruments. With better jitter performance, you can place edges more accurately, helping you reduce timing errors in your circuit design.

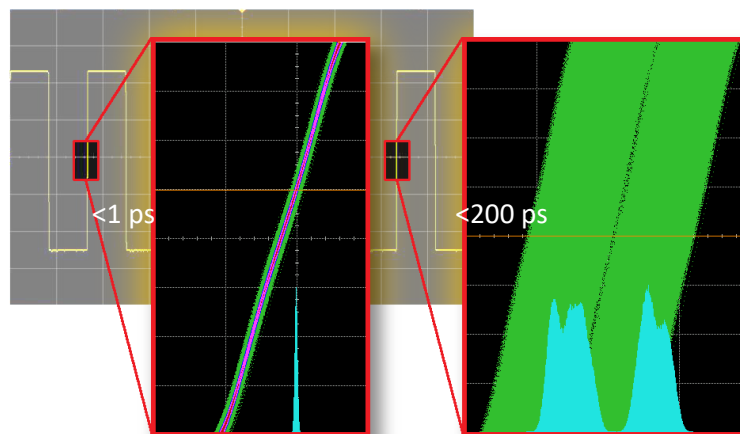


Trueform technology shown on the left significantly improves jitter performance compared to a traditional function generator shown on the right.

Lowest harmonic distortion

With a total harmonic distortion of just 0.03%, Trueform waveform generators offer up to 5x better fidelity than other generators. Clean, spurious-free signals don't introduce noise or artifacts. See your design's characteristics, not the waveform generator's, in your measurements.

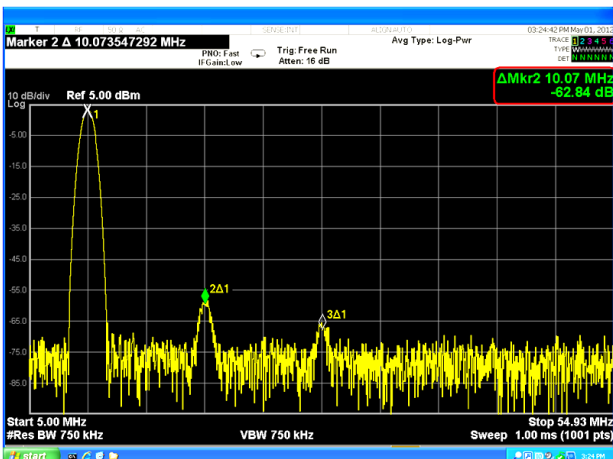

Trueform function / arbitrary waveform generators offer the lowest total harmonic distortion (THD) in its class.

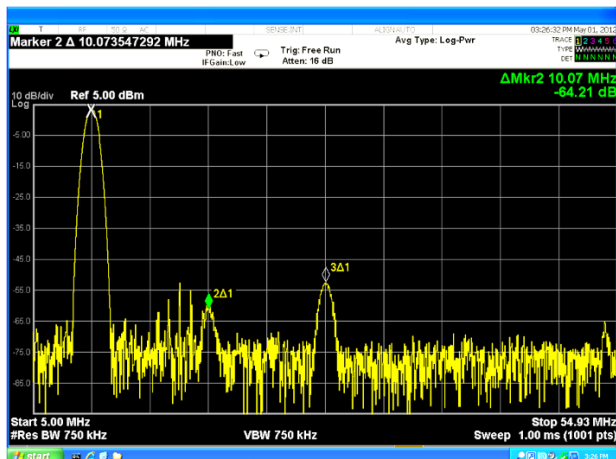

A typical direct digital synthesizer (DDS) generator has a higher noise floor and greater harmonics.

Reproduce lower-voltage output signals

Today's ultra-low-power products, such as pacemakers, hearing aids, and remote sensors, use very low voltages. With Trueform function / arbitrary waveform generators, you can create signals as low as 1 mVpp. That is a 10x lower voltage range than typical waveform generators.

Use the optional high-stability time base for even better accuracy

Improve time-based stability and frequency accuracy using the optional high-stability time base.


The optional timebase offers 0.1 ppm stability, which is 20x more stable than the standard time base over one year.

Trueform Arbs: Generating a Full Range of Signals for the Most Demanding Requirements

Trueform function / arbitrary waveform generators use a technology that plays every point in your signal exactly as you designed it. That means testing your design's robustness; you can create a specific signal with noise, overshoots, spikes, and dropouts just where you need them.

Non aliasing


Define any waveform shape and length using the Trueform arbitrary waveform capability. Play your signals as defined, at your exact sample rate, without the chance of missing short-duration anomalies that are critical for testing device reliability.

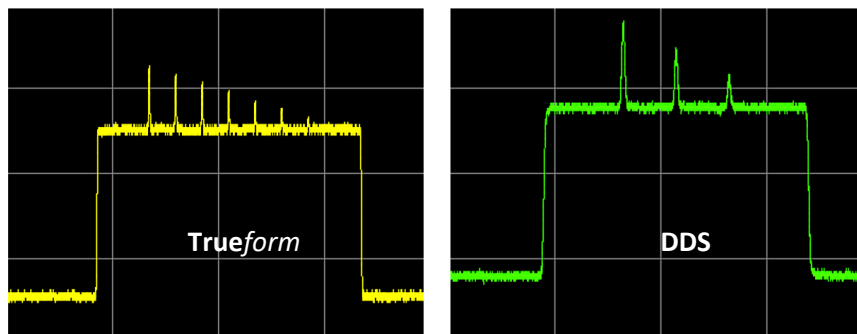


While DDS technology may skip points at higher frequencies, Trueform never skips points and is always anti-aliased.

Waveform sequencing

Waveform sequencing lets you create multiple configured waveforms with several common segments and lets you build long, complex waveforms using minimal instrument memory.

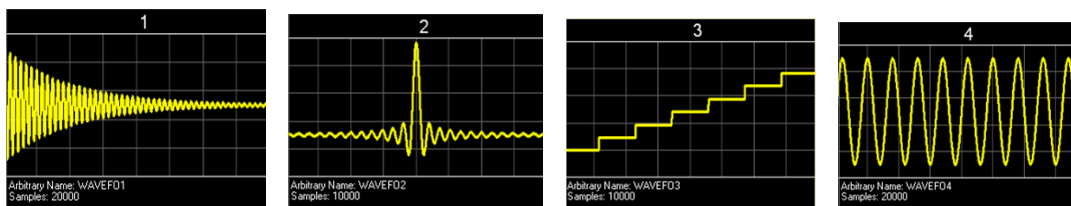

Sequence of desired signals.

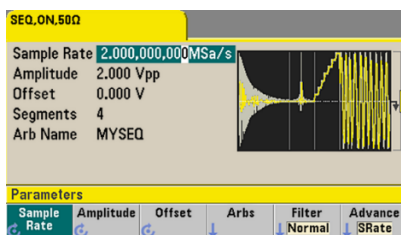

Waveform generator display of the desired sequence.

Standard deep memory

If you want to test your design with long, complex waveforms with various anomalies, you need to ensure your waveform generator has sufficient memory. The 33500B and 33600A Series come standard with 1 M Samples and 4 M Samples deep memory respectively. Typical DDS generators offer only a fraction of that capacity. In addition, higher memory options up to 64 MSamples are available to handle your most complex waveforms.

How does Keysight get such revolutionary advances over previous generation DDS signal generation?

As with any technology, DDS has its limitations. Engineers with exacting requirements have had to either work around the compromised performance or spend up to 5 times more for a high-end, point-per-clock waveform generator.

Keysight's Trueform technology offers an alternative that blends the best of DDS and point-per-clock architectures, giving you the benefits of both without the limitations of either. Trueform technology uses an exclusive digital sampling technique that delivers unmatched performance at the same low price you are accustomed to with DDS.

You can find a detailed comparison of DDS and Trueform technology in the Technical Overview- [Trueform Waveform Generation Technology](#)

Signal integrity improvements of Trueform technology over DDS

	DDS: Traditional 25 MHz waveform generator	Trueform: Keysight 20 MHz and 30 MHz waveform generators	DDS: Traditional 100 MHz waveform generator	Trueform: Keysight 80 MHz and 120 MHz waveform generators	Improvements
Edge jitter	< 500 ps	< 40 ps	< 200 ps	< 1 ps	12x to 200x better
Custom waveform replication	Skips waveform points	100%-point coverage	Skips waveform points	100%-point coverage	Exact waveform replication
Total harmonic distortion	0.2%	0.04%	0.2%	0.03%	Up to 5x better
Anti-alias filtering	Must provide externally	Always anti-aliased	Must provide externally	Always anti-aliased	No anti-aliasing artifacts
Sequenced arb	Not possible	Standard	Not possible	Standard	Easy creation of complex waveform sequences

Pulse generator with fast edge times


Create pulses up to 100 MHz with the *Trueform* function / arbitrary waveform generators. Most DDS-based generators offer reduced bandwidth when generating pulses. *Trueform* waveform generators produce higher harmonic content, allowing for rapid transitions. Like a dedicated pulse generator, edge times can be set independently down to 2.9 ns, which is twice as fast as a typical function generator.

Channel coupling with baseband generation capability

Channel coupling simplifies the operation of a two-channel function generator. Both channels can be controlled with a single parameter for phase, amplitude, or frequency, making it simple to create differential or tracking signals. In addition, IQ signal generation has now been made easier with the IQ Baseband Signal Player for *Trueform* function / arbitrary waveform generators.

The IQ Baseband Signal Player configures and controls both channels as if they were a single channel. It also keeps the phase of each channel in the nominal IQ range. Quickly, go from simulation to signal generation to test your RF component or system design.

Connectivity: Flexibility in creating and playing waveforms

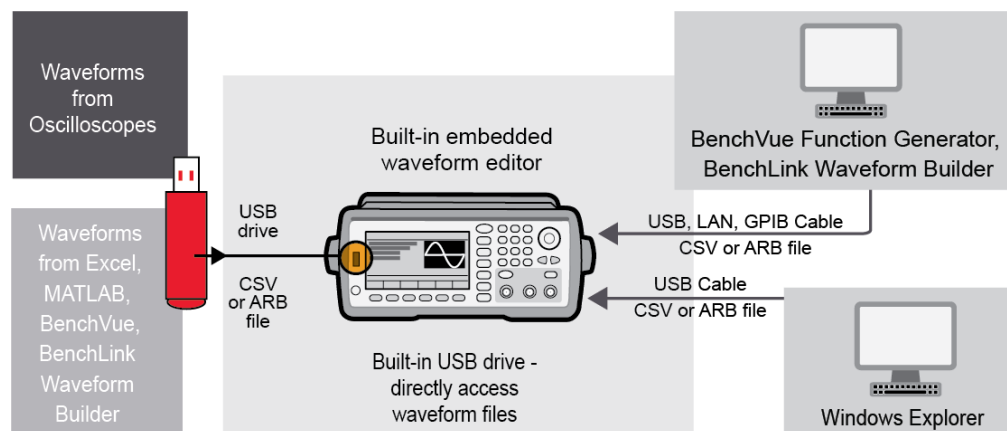

Multiple interfaces provide flexibility for creating and downloading waveforms.

Keysight BenchVue Software

Keysight BenchVue software for the PC makes it simple to connect, control instruments, and automate test sequences. With just a few clicks, you can quickly move past the test development phase and access results faster.

Note: We have fully transitioned the BenchVue Included license that comes with your instrument purchase to the BenchVue Basic App, making it easier for you to access and use BenchVue software. You can now download PathWave BenchVue Basic for free. PathWave BenchVue Basic apps provide unlimited access and features that are available in the version just before the latest version of BenchVue software. Visit www.keysight.com/find/BVBasic for more information.

BV0002B Function Generator Control and Automation App

You can purchase BV0002B separately or get the basic version for free at www.keysight.com/find/BVBasic.

- Point and click to control your function generators
- Advanced waveform creation and editing capability with 33503B Keysight BenchLink Waveform Builder Pro (purchased separately)
- Load custom arbitrary waveforms from files
- Drag-and-drop measured traces easily from the BenchVue Oscilloscope App
- Rapidly build custom test sequences with Test Flow
- Access deeper instrument controls with Command Expert integration
- Intuitively control, automate, and simplify testing with your function generators and hundreds of other Keysight instruments

33503B Keysight BenchLink Waveform Builder Pro software

Purchase 33503B separately to easily create custom waveforms with advanced waveform creation and editing software. Visit www.keysight.com/find/33503 for more information.

- Library of signals
- Freeform draw and edit
- Equation editor, waveform math
- Apply filters and windowing functions
- Create waveform sequences

Download BenchVue software at www.keysight.com/find/benchvue_apps.

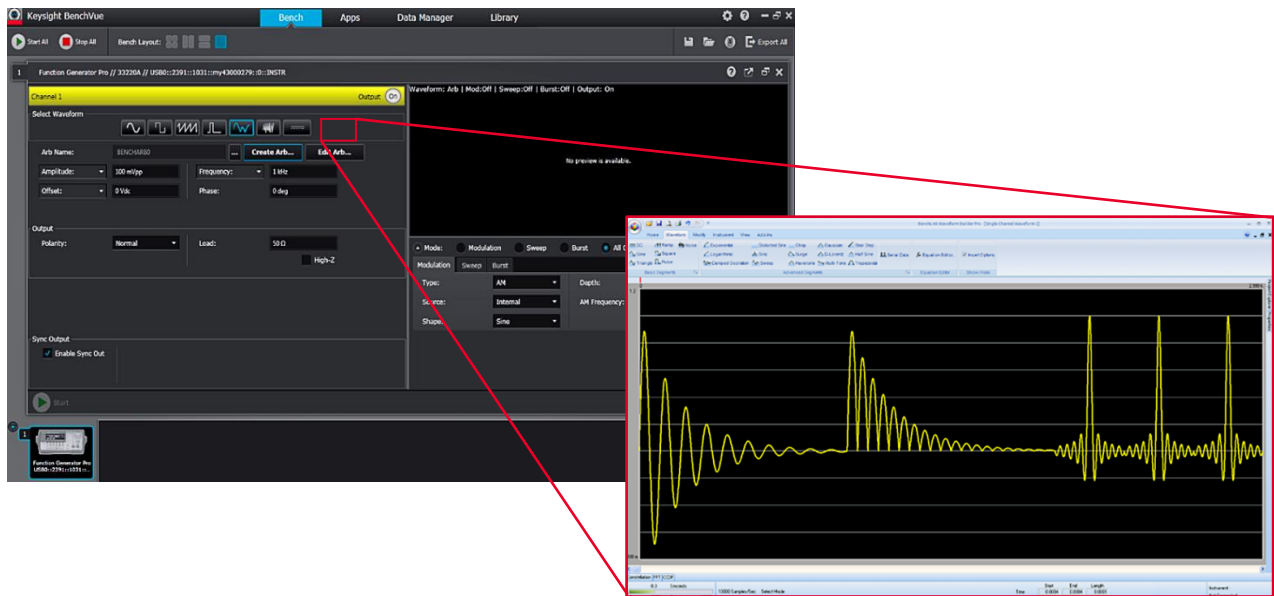


Figure 1. Design and build arbitrary waveforms with BenchLink Waveform Builder Pro

Select the Capabilities You Need Now, Then Upgrade Easily When Your Needs Change

With most waveform generators, you get what you pay for when you buy your instrument. However, with the 33500B and 33600A Series function / arbitrary waveform generators, there are four different models to choose from. You can purchase the capability you need now and upgrade later when your project needs to change. Your investment in test equipment is protected. If you need deeper memory to generate more complex signals, you can easily add the capability later with software upgrades. And there's no price penalty for adding the capability later.

Configuration Guide

Step 1. Choose your bandwidth and channel count

Bandwidth	20 MHz	20 MHz	30 MHz	30 MHz	80 MHz	80MHz	120 MHz	120 MHz
Number of channels	1	2	1	2	1	2	1	2
Waveform generator	33509B	33510B	33519B	33520B	-	-	-	-
Waveform generator with arbitrary capability	33511B	33512B	33521B	33522B	33611A	33612A	33621A	33622A

Step 2. Tailor your waveform generator for more demanding applications

Application	Order option
Additional memory for long waveforms	MEM (only available on models with arbitrary)
Security features with NISPOM	SEC
OCX0-high stability timebase	OCX

Step 3. Upgrade your waveform generator in the future

Upgrade desired	Order upgrade option (for 33500B series)	Order upgrade option (for 33600A series)
Increase bandwidth	335BW1U on 1-channel models (up to 30 MHz)	336BW1U on 1-channel models (up to 120 MHz)
	335BW2U on 2-channel models (up to 30 MHz)	336BW2U on 2-channel models (up to 120 MHz)
Add arbitrary waveform capability	335ARB1U on 1-channel models	
	335ARB2U on 2-channel models	
Increase arbitrary memory	335MEM1U on 1-channel arb models (inc to 16M)	336MEM1U on 1-channel models (inc to 64M)
	335MEM2U on 2-channel arb models (inc to 16M)	336MEM2U on 2-channel models (inc to 64M)
Add NISPOM and file security	335SECU	336SECU
Add high stability timebase	33500U-OCX (must return to Keysight) ³	33600U-OCX (must return to Keysight) ³
Add GPIB	—	3446GPBU (customer installable)

Step 4. Add on optional accessories

Optional accessories	Description
34162A	Accessory pouch
1CM124A	Rackmount kit with a filler panel
1CM107A	2U dual flange kit (mounting two instruments side-by-side)
34194A	Dual Lock link kit (to connect the two units together)

Note:

1. A 1-channel generator cannot be “upgraded” to a 2-channel generator.
2. GPIB option is included as standard for 33500B Series.
3. This option upgrade must be returned to Keysight for installation and calibration.
4. Option IQP is included as standard in 33512B/22B and 33612A/22A models.

Specifications

Unless otherwise stated, all specifications apply with a 50-Ω resistive load and automatic amplitude range selection enabled.

Instrument characteristics

Models and options

Model number	33509B	33510B	33519B	33520B	33611A	33612A	33621A	33622A				
	33511B	33512B	33521B	33522B								
Maximum frequency	20 MHz	20 MHz	30 MHz	30 MHz	80 MHz	80 MHz	120 MHz	120 MHz				
Number of channels	1	2	1	2	1	2	1	2				
Option MEM	Increase arb waveform memory to 16 MSa/Channel ¹⁵				Increase arb waveform memory from 4 MSa/Channel to 64 MSa/Channel							
Option SEC	Enables NISPOM and file security											
Option OCX	Oven-controlled frequency reference for improved stability, jitter, and phase noise											

Waveforms

Standard	Sine, Square, Ramp, Pulse, Triangle, Gaussian Noise, PRBS (Pseudorandom Binary Sequence), DC							
Built-in arbitrary ²⁰	Cardiac, Exponential Fall, Exponential Rise, Gaussian Pulse, Haversine, Lorentz, D-Lorentz, Negative Ramp, Sinc							
User-defined arbitrary ²⁰	Up to 1 MSa (16 MSa with Option MEM) with multi-segment sequencing				Up to 4 MSa (64 MSa with Option MEM) with multi-segment sequencing			

Operating modes and modulation types

Operating modes	Continuous, Modulate, Frequency Sweep, Counted Burst, Gated Burst							
Modulation types	AM, FM, PM, FSK, BPSK, PWM, Sum (carrier + modulation)							

Footnotes referenced on page 23

Waveform characteristics

Sine

Trueform Series	33500B models	33600A models	
Frequency range	$V_{OUT} \leq 10 V_{pp}$: 1 μ Hz to 20 MHz or 30 MHz, 1- μ Hz resolution	$V_{OUT} \leq 10 V_{pp}$: 1 μ Hz to 60 MHz, 1- μ Hz resolution $V_{OUT} \leq 8 V_{pp}$: 1 μ Hz to 80 MHz, 1- μ Hz resolution $V_{OUT} \leq 4 V_{pp}$: 1 μ Hz to 120 MHz, 1- μ Hz resolution ¹	
Amplitude flatness (spec) ^{2, 3, 17} (relative to 1 kHz)	$V_{OUT} \leq 10 V_{pp}$	$V_{OUT} = 1 V_{pp}$ $f_{OUT} < 10$ MHz: ± 0.10 dB f_{OUT} 10 MHz to 60 MHz: ± 0.20 dB f_{OUT} 60 MHz to 80 MHz: ± 0.30 dB f_{OUT} 80 MHz to 120 MHz ¹ : ± 0.40 dB	
	$f_{OUT} < 100$ kHz: ± 0.10 dB f_{OUT} 100 kHz to 5 MHz: ± 0.15 dB f_{OUT} 5 MHz to 20 MHz: ± 0.30 dB f_{OUT} 20 MHz to 30 MHz ¹⁶ : ± 0.40 dB	$V_{OUT} > 1 V_{pp}$ $f_{OUT} < 10$ MHz: ± 0.10 dB f_{OUT} 10 MHz to 60 MHz: ± 0.25 dB f_{OUT} 60 MHz to 80 MHz: ± 0.40 dB f_{OUT} 80 MHz to 120 MHz ¹ : ± 0.50 dB	
Harmonic distortion (typ) ^{2, 17}	$V_{OUT} \leq 10 V_{pp}$	$V_{OUT} = 1 V_{pp}$ $f_{OUT} < 1$ MHz: -70 dBc $f_{OUT} = 1$ MHz to 10 MHz: -61 dBc $f_{OUT} > 10$ MHz: -43 dBc	
	$f_{OUT} < 20$ kHz: < -70 dBc f_{OUT} 20 kHz to 100 kHz: < -65 dBc f_{OUT} 100 kHz to 1 MHz: < -50 dBc f_{OUT} 1 MHz to 20 MHz: < -40 dBc f_{OUT} 20 MHz to 30 MHz ¹⁶ : < -35 dBc	$V_{OUT} = 4 V_{pp}$ $f_{OUT} < 1$ MHz: -69 dBc $f_{OUT} = 1$ MHz to 10 MHz: -58 dBc $f_{OUT} > 10$ MHz: -36 dBc $V_{OUT} = 8 V_{pp}$ $f_{OUT} < 1$ MHz: -68 dBc $f_{OUT} = 1$ MHz to 10 MHz: -54 dBc $f_{OUT} > 10$ MHz: -40 dBc $V_{OUT} = 10 V_{pp}$ $f_{OUT} < 1$ MHz: -67 dBc $f_{OUT} = 1$ MHz to 10 MHz: -51 dBc $f_{OUT} > 10$ MHz: -39 dBc	
THD (typ) ²	$V_{OUT} \leq 10 V_{pp}$	$V_{OUT} = 1 V_{pp}$ $f_{OUT} = 20$ Hz to 20 kHz: 0.03%	
	$f_{OUT} = 20$ Hz to 20 kHz: <0.04%	$V_{OUT} > 1 V_{pp}$ $f_{OUT} = 20$ Hz to 20 kHz: 0.04%	
Non-harmonic spurious (typ) ^{2, 4, 17}	Standard < -75 dBc, increasing 20 dB/decade above 2 MHz Option OCX: < -75 dBc increasing 20 dB/decade above 10 MHz (or < -100 dBm, whichever is greater, below 500 MHz)	$f_{OUT} < 10$ MHz: -80 dBc $f_{OUT} = 10$ MHz to 60 MHz: -75 dBc $f_{OUT} > 60$ MHz: -70 dBc	
Phase noise (SSB) (typ) ⁵	Standard	Standard (80 MHz)	Standard (120 MHz) ¹
	1-kHz offset: -105 dBc/Hz 10-kHz offset: -115 dBc/Hz 100-kHz offset: -125 dBc/Hz	100-Hz offset: -105 dBc/Hz 1-kHz offset: -116 dBc/Hz 10-kHz offset: -122 dBc/Hz 100-kHz offset: -129 dBc/Hz	100-Hz offset: -101 dBc/Hz 1-kHz offset: -112 dBc/Hz 10-kHz offset: -118 dBc/Hz 100-kHz offset: -125 dBc/Hz
	Opt OCX	Opt OCX (80 MHz)	Opt OCX (120 MHz) ¹
	1-kHz offset: -110 dBc/Hz 10-kHz offset: -125 dBc/Hz 100-kHz offset: -135 dBc/Hz	100-Hz offset: -114 dBc/Hz 1-kHz offset: -122 dBc/Hz 10-kHz offset: -125 dBc/Hz 100-kHz offset: -131 dBc/Hz	100-Hz offset: -110 dBc/Hz 1-kHz offset: -118 dBc/Hz 10-kHz offset: -121 dBc/Hz 100-kHz offset: -127 dBc/Hz
Square and pulse			
Frequency ranges	$V_{OUT} \leq 10 V_{pp}$ 1 μ Hz to 20 MHz or 30 MHz, 1- μ Hz resolution	$V_{OUT} \leq 10 V_{pp}$ 1 μ Hz to 50 MHz, 1- μ Hz resolution $V_{OUT} \leq 4 V_{pp}$ 1 μ Hz to 100 MHz, 1- μ Hz resolution ¹	
Rise and fall times (nom)	$V_{OUT} \leq 10 V_{pp}$	$V_{OUT} \leq 4 V_{pp}$	
	Square: 8.4 ns, fixed	Square: 2.9 ns	

Sine

	Pulse: 8.4 ns to 1 μ s, independently variable, 100-ps resolution	Pulse: 2.9 ns to 10 μ s, independently variable, 100-ps resolution
Rise and fall times (nom)		VOUT > 4 Vpp Square: 4.0 ns Pulse: 3.3 ns to 10 μ s, independently variable, 100-ps resolution
	VOUT \leq 10 Vpp	VOUT \leq 4 Vpp
Overshoot (typ)	< 2%	Square: < 4% Pulse, min edge: < 4% Pulse, 4-ns edge: < 2% Pulse, \geq 6-ns edge: < 2% VOUT > 4 Vpp Square: < 4% Pulse, min edge: < 7% Pulse, 4-ns edge: < 4% Pulse, \geq 6-ns edge: < 2%
Duty cycle 6	0.01% to 99.99%, 0.01% resolution	
	VOUT \leq 10 Vpp	VOUT \leq 4 Vpp
Pulse width	16 ns minimum, 100-ps resolution	5 ns minimum (high or low), 1-ps resolution VOUT > 4 Vpp 8 ns minimum (high or low), 1-ps resolution
Jitter (rms) (meas) 7	1 Hz to 20 MHz or 30 MHz band Standard: < 40 ps	10 Hz to 40 MHz band Standard: < 1 ps Opt OCX: < 0.5 ps
Ramp and Triangle		
Frequency range	1 μ Hz to 200 kHz, 1- μ Hz resolution	1 μ Hz to 800 kHz, 1- μ Hz resolution
Ramp symmetry	0% to 100%, 0.1% resolution, (0% is negative ramp, 100% is positive ramp, 50% is triangle)	
Non-linearity (typ)	< 0.05% from 5% to 95% of the signal amplitude	
Gaussian Noise		
Variable bandwidth (typ)	VOUT \leq 10 Vpp 1 mHz to 20 MHz or 30 MHz	VOUT \leq 10 Vpp 1 mHz to 60 MHz VOUT \leq 8 Vpp 1 mHz to 80 MHz VOUT \leq 4 Vpp 1 mHz to 120 MHz ¹
Crest factor (nom)	4.6	4.6
Repetition period	> 50 years	> 100 years
Pseudorandom Binary Sequence (PRBS)		
Bit rate	VOUT \leq 10 Vpp 1 mbps to 50 Mbps, 1-mbps resolution	VOUT \leq 10 Vpp 1 mbps to 100 Mbps, 1-mbps resolution VOUT \leq 4 Vpp 1 mbps to 200 Mbps, 1-mbps resolution ¹
Sequence length	2 ^m - 1, m = 7, 9, 11, 15, 20, 23	2 ^m - 1, m = 3 to 32
	VOUT \leq 10 Vpp	VOUT \leq 4 Vpp
Rise and fall times (nom)	8.4 ns to 1 μ s, variable, 100-ps or 3-digit resolution	2.9 ns to 1 ms, independently variable, 100-ps resolution VOUT > 4 Vpp 3.3 ns to 1 ms, independently variable, 100-ps resolution
Arbitrary waveforms		
Waveform length	8 Sa to 1 MSa per channel (16 MSa with opt MEM), in increments of 1 Sa	32 Sa to 4 MSa per channel (64 MSa with opt MEM), in increments of 1 Sa
Sample rate	20 MHz models: 1 μ Sa/s to 160 MSa/s, 1- μ Sa/s resolution 30 MHz models: 1 μ Sa/s to 250 MSa/s, 1- μ Sa/s resolution	80 MHz models: 1 μ Sa/s to 660 MSa/s, 1- μ Sa/s resolution 8 120 MHz models: 1 μ Sa/s to 1 GSa/s, 1- μ Sa/s resolution 8
Voltage resolution	16 bits	14 bits

Footnotes referenced on page 23

Waveform filters

“Normal” (highest bandwidth, ~5% preshoot and overshoot), “Step” (lower bandwidth, ~0% preshoot and overshoot), or “Off” (transitions from point to point occur as quickly as possible)

Frequency and time characteristics	Filter= "Normal"	Filter= "Step"	Filter= "Off"	Filter= "Normal"	Filter= "Step"	Filter= "Off"
Bandwidth (-3 dB)(nom)	0.27 x (Sa rate)	0.13 x (Sa rate)	40 MHz	0.27 x (Sa rate)	0.13 x (Sa rate)	100 MHz
Rise and fall time (nom)	0.35/bandwidth (10 ns min)	0.35/bandwidth (10 ns min)	10 ns	0.35/bandwidth (3.5 ns min)	0.35/bandwidth (3.5 ns min)	3.5 ns
Jitter(rms) (meas) ⁸	< 5 ps	< 5 ps	< 40 ps	< 2 ps	< 1 ps	< 10 ps
Arb waveform sequencing ²⁰						
Operation	Individual arbitrary waveforms (segments) can be combined into user defined lists (sequences) to form longer, more complex waveforms. Each sequence step specifies whether to repeat the associated segment a certain number of times, to repeat indefinitely, to repeat until a Trigger event occurs, or to stop and wait for a Trigger event. Additionally, the behavior of the Sync output (Marker) can be specified in each step. To improve throughput, multiple sequences and segments can be pre-loaded into volatile memory.					
Segment length	8 Sa to 1 MSa per channel (16 MSa with Option MEM), in increments of 1 Sa			32 Sa to 4 MSa per channel (64 MSa with Option MEM), in increments of 1 Sa		
Sequence length	1 to 512 steps					
Segment repeat count	1 to 1x10 ¹⁰ , or infinite			1 to 1x10 ⁶ , or infinite		
General						
Connector	Front-panel BNC, shell and pin isolated from chassis (± 42 V maximum)					
Function	On, Off, or Inverted					
Output impedance (nom)	50 Ω					
Isolation	Connector shells for channel output(s), Sync, and Mod In are connected together but isolated from the instrument's chassis. Maximum allowable voltage on isolated connector shell or pin is ± 42 V relative to chassis.					
Overload protection	Output turns off automatically when an overload is applied. Instrument will tolerate a short circuit to ground indefinitely.					
Amplitude						
Range ⁹	1 mVpp to 10 Vpp into 50 Ω, 4-digit resolution 2 mVpp to 20 Vpp into open circuit, 4-digit resolution					
Units	Vpp, Vrms, or dBm					
Accuracy (at 1 kHz) (spec) ^{3,17}	± (1% of setting in Vpp) ± (1 mVpp)					
Voltage limit function	User-definable maximum and minimum voltage limits					
DC offset						
Range ¹⁸	± (5 VDC - Peak AC) into 50 Ω, 4-digit resolution ± (10 VDC - peak AC) into open circuit, 4-digit resolution					
Units	VDC					
Accuracy (spec) ^{3,17}	± (1% of Offset setting) ± (0.25% of amplitude in Vpp) ± (2 mV)					
Frequency accuracy (spec)						
Standard frequency reference	± (1 ppm of setting + 15 pHz), 1 year, 23 °C ± 5 °C ± (2 ppm of setting + 15 pHz), 1 year, 0 °C to 55 °C					
High stability frequency reference (Option OCX)	± (0.1 ppm of setting + 15 pHz), 1 year, 0 °C to 55 °C					

Footnotes referenced on page 23

Modulation, burst, and sweep capability

Carrier	AM	FM	PM	FSK	BPSK	PWM	Sum	Burst	Sweep
Sine and square	■	■	■	■	■		■	■	■
Pulse	■	■	■	■	■	■	■	■	■
Ramp and triangle	■	■	■	■	■		■	■	■
Gaussian noise	■						■	■ ¹⁰	
PRBS	■	■	■				■	■	
Single arbitrary ²⁰	■	□	■		■		■	■	□
Sequenced arbitrary ²⁰	■						■		

Modulating signals

Carrier	Sine	Square	Ramp	Triangle	Noise	PRBS	Arbitrary ²⁰	External
Sine	■	■	■	■	■	■	■	■
Square and pulse	■	■	■	■	■	■	■	■
Ramp and triangle	■	■	■	■	■	■	■	■
Gaussian noise	■	■	■	■		■	■	■
PRBS	■	■	■	■	■		■	■
Arbitrary ²⁰	■	■	■	■	■	■		■

Legend

■	All models
□	Only 33600A Series models

Modulation, burst, and sweep characteristics

Note: For all external modulation specifications, kindly refer to the Modulation input section for details.

Amplitude modulation (AM)	
Source	Internal or external (all models), or other channel (all 2-channel models)
Type	Full-Carrier or Double-Sideband Suppressed-Carrier (DSSC)
Depth ^{3, 11}	0% to 120%, 0.01% resolution
Frequency modulation (FM) ¹²	
Source	Internal or external (all models), or other channel (all 2-channel models)
	1 μ Hz to 15 MHz, 1- μ Hz resolution (all 33500 Series models)
Deviation	1 μ Hz to 40 MHz, 1- μ Hz resolution (33611A/33612A)
	1 μ Hz to 60 MHz, 1- μ Hz resolution (33621A/33622A)
Phase modulation (PM)	
Source	Internal or external (all models), or other channel (all 2-channel models)
Deviation	0° to 360°, 0.1° resolution
Frequency-shift key modulation (FSK) ¹²	
Source	Internal timer or rear-panel connector
Mark and space	Any frequency within the carrier signal's range
Rate	≤ 1 MHz
Binary phase-shift key modulation (BPSK)	
Source	Internal timer or rear-panel connector
Phase shift	0° to 360°, 0.1° resolution
Rate	≤ 1 MHz

Pulse width modulation (PWM)	
Source	Internal or external (all models), or other channel (all 2-channel models)
Deviation ⁶	0% to 100% of pulse width, 0.01% resolution
Additive modulation (Sum)	
Source	Internal or external (all models), or other channel (all 2-channel models)
Ratio ¹¹	0% to 100% of carrier amplitude, 0.01% resolution
Burst characteristics ¹⁰	
Type	Counted or gated
Counted burst operation	Each trigger event causes the instrument to produce from 1 to 10 ⁸ or an "infinite" number of waveform cycles
Gated burst operation	Instrument produces waveforms while the trigger is in the "on" state. For Gaussian Noise, waveform generation stops immediately when the trigger is in the "off" state. All other waveforms stop at the completion of a cycle; more than one cycle might elapse before generation stops.
Start/stop phase ¹⁹	–360° to +360°, 0.1° resolution
Trigger source	Internal timer or rear-panel connector
Marker	Indicated by the trailing edge of the Sync pulse; adjustable to any cycle of the burst
Sweep characteristics ¹²	
Type	Linear, Logarithmic, or List (up to 128 user-defined frequencies)
Operation	Linear and Logarithmic sweeps are characterized by a Sweep time (during which the frequency changes smoothly from Start to Stop), a Hold time (during which the frequency stays at the Stop frequency), and a Return time (during which the frequency changes smoothly from Stop to Start). Returns are always linear in the 33600A Series.
Direction	Up (start freq < stop freq) or Down (start freq > stop freq)
Sweep time	
Linear	1 millisecond to 3,600 seconds, 1-ms resolution 3,601 seconds to 250,000 seconds, 1-second resolution
Logarithmic	1 millisecond to 500 seconds, 1-ms resolution
Hold time	0 to 3,600 seconds, 1-ms resolution
Return time	0 to 3,600 seconds, 1-ms resolution
Trigger source ^{13, 14}	Immediate (continuous), external (rear-panel connector), manual (front-panel button), bus or internal timer
Marker	Indicated by the trailing edge of the Sync pulse; adjustable to any frequency between Start and Stop for Linear and Logarithmic types or any frequency in the list for List type.
Internal timer for FSK, BPSK, burst, and sweep	
Range	1 μ s to 8,000 seconds, 6-digit or 8-ns resolution (33500B Series models) 1 μ s to 4,000 seconds, 4-ns resolution (33600A Series models)

Footnotes referenced on page 23

Two-channel characteristics (all 2-channel models)

Standard

Trueform Models	33500B Series, 2-channel models	33600A Series, 2-channel models
Operating modes	Independent, Coupled parameter(s), Combined (Ch 1 + Ch 2), Equal (Ch 1 = Ch 2), or Differential (Ch 1 = –Ch 2)	
Parameter coupling	None, Frequency (ratio or difference) and/or Amplitude and DC offset	
Relative Phase	0° to 360°, 0.1° resolution	
Channel-to-channel skew (typ) (Both channels configured identically)	< 200 ps	
Crosstalk (typ)	< –85 dB	

IQ player characteristics (33512B, 33522B, 33612A, 33622A)

IQ player characteristics

Trueform Series		33512B/33522B	33612A/33622A
Balance adjusts			
Operation	This enables a two-channel model with arbitrary waveform capability to function as a baseband IQ (quadrature modulation) source. Programmable impairments include amplitude imbalance, DC offset difference, and channel-to-channel time skew.		
Channel-to-channel amplitude balance ¹¹	-30% to +30%, 0.001% resolution		
Channel-to-channel DC offset difference	± (5 VDC - peak AC), 0.1-mV resolution into 50 Ω		
	± (10 VDC - peak AC), 0.2-mV resolution into open circuit		
Channel-to-channel time skew	-4 ns to +4 ns, 10-ps resolution		-1 ns to +1 ns, 10-ps resolution
Display views	Voltage versus Time or Constellation diagram (Channel 1 versus Channel 2)		

Note: IQ player is now a standard option on 33512B/22B and 33612A/22A models.
Footnotes referenced on page 23

Sync/Marker output

Trueform Series	33500B Series	33600A Series
Sync/marker output		
Connector	Front-panel BNC, shell, and pin isolated from chassis (± 42 V maximum)	
Functions	Sync, Sweep Marker, Burst Marker, Arbitrary Waveform Marker, or Off	
Assignment	Channel 1 or Channel 2	
Polarity	Normal or Inverted	
Output level (nom)	0 to +1.5 V into 50 Ω ; 0 to +3.0 V into high impedance	
Output impedance (nom)	50 Ω	
Minimum pulse width (nom)	16 ns	5 ns

Modulation input

Trueform Series	33500B Series	33600A Series
Modulating input		
Connector	Rear-panel BNC, shell, and pin isolated from chassis (± 42 V maximum)	
Assignment	Channel 1, Channel 2, or both	
Voltage level (nom)	± 5 V full-scale	± 1 V or ± 5 V full-scale, selectable
Input Impedance (nom)	5 kΩ	
Bandwidth (-3 dB) (typ)	0 Hz to 100 kHz	

External trigger/gate input/output

Trueform Series	33500B Series		33600A Series
General characteristics			
Connector	Rear-panel BNC, chassis-referenced (functions as Input or Output)		
Assignment	Input: Channel 1, Channel 2, or both		
	Output: Channel 1 or Channel 2		
Polarity	Positive or Negative Slope		
Maximum rate	1 MHz		
Input characteristics			
Threshold voltage (nom)	(Output level setting)/2		
Impedance (nom)	10 kΩ, DC-coupled		
Minimum pulse width	16 ns	100 ns	
Variable Trigger Delay	0 to 1,000 s, 4-ns resolution		0 to 1,000 s, 1-ns resolution
Latency (typ) ¹	< 135 ns with trigger delay set to zero		< 140 ns with trigger delay set to zero
Jitter (typ)	< 2.5 ns, rms		< 320 ps, rms
Output characteristics			
Output voltage (nom)			
Low level	0 V		
High level	3 Vpp (nom) into open circuit		0.9 V to 3.8 V into open circuit
	1.5 Vpp (nom) into 50 Ω		0.1 V resolution
Impedance (nom)	50 Ω		
Duty cycle (nom)	50%		
Fan-out	Up to four Keysight Trueform waveform generators		

Note:

1. Only apply to 1kHz and above

External frequency reference input/output

Trueform Series	33500B Series	33600A Series
Input characteristics		
Connector	Rear-panel BNC, shell, and pin isolated from chassis and all other connectors (± 42 V max.)	
Frequency range	Standard: 10 MHz \pm 20 Hz	
	Option OCX: 10 MHz \pm 1 Hz	
Voltage	200 mVpp to 5 Vpp	
Impedance	1 k Ω 20 pF, AC-coupled	
Lock time (typ)	< 2 s	
Output characteristics		
Connector	Rear-panel BNC, chassis-referenced	
Frequency (nom)	10 MHz	
Level (nom)	0 dBm (632 mVpp) into 50 Ω	
Impedance (nom)	50 Ω	

Programming times

Trueform Series	33500B Series				33600A Series			
Configuration changes (meas)	LAN (socket)	LAN (VXI-11)	USB 2.0	GPIO	LAN (socket)	LAN (VXI-11)	USB 2.0	GPIO
Change function (meas)	5 ms	6 ms	5 ms	5 ms	29.2 ms	29.7 ms	29.4 ms	29.2 ms
Change frequency (meas)	2 ms	3 ms	2 ms	3 ms	2.7 ms	3.3 ms	2.8 ms	2.7 ms
Change amplitude (meas)	20 ms	20 ms	19 ms	22 ms	8.3 ms	9.0 ms	8.3 ms	8.3 ms
Select arbitrary waveform (16 k samples) (meas)	9 ms	11 ms	9 ms	9 ms	12.7 ms	13.9 ms	13.1 ms	12.6 ms
Arbitrary waveform download speed to volatile	LAN (socket)	LAN (VXI-11)	USB 2.0	GPIO	LAN (socket)	LAN (VXI-11)	USB 2.0	GPIO
4k samples (binary transfer) (meas)	6 ms	18 ms	8 ms	39 ms	6.4 ms	13.2 ms	6.6 ms	52.3 ms
1M samples (binary transfer) (meas)	1.3 s	2.6 s	13 s	9.1 s	1.26 s	2.40 s	1.25 s	12.3 s

Memory

Trueform Series	33500B Series	33600A Series
Arbitrary waveform		
Volatile	1 MSa/channel (16 MSa/channel with Option MEM). 512 sequence steps per channel	4 MSa/channel (64 MSa/channel with Option MEM).512 sequence steps per channel
Non-volatile	64 MB in file system (~32 MSa of arbitrary waveform records)	970 MB in file system (~485 MSa of arbitrary waveform records)
Instrument state		
Store/recall	User-defined instrument states (with user-defined names in the file system)	
Power-On state	Default settings or state at power-off, selectable	
USB file system		
Front-panel port	USB 2.0 high-speed mass storage class (MSC) device	
Capability	Read or write instrument configuration settings, instrument states, arbitrary waveform, and sequence files	
Speed (nom)	10 MB/s	

General characteristics

Trueform Series	33500B Series	33600A Series
Computer interfaces		
LXI-C (rev1.3)	10/100Base-T (Sockets & VXI-11 protocols)	
	USB 2.0 (USB-TMC488 protocol)	
	GPIB/IEEE-488.1, IEEE-488.2	
Web user interface	Remote operation and monitoring	
Programming language	SCPI-1999, IEEE-488.2	
Graphical display	Keysight 33210A, 33220A and 33250A Series compatible	
Real-time clock/calendar battery	4.3 inch color TFT, WQVGA (480x272) with LED backlight	
	CR-2032 coin type, replaceable, > 5-year life (typ)	
Mechanical		
Size (nom)	261.1 mm W x 103.8 mm H x 303.2 mm D (with bumpers installed)	
	212.8 mm W x 88.3 mm H x 272.3 mm D (with bumpers removed)	
	2U x 1/2 rack width	
Weight (nom)	3.3 kg (7.2 lbs.)	3.5 kg (7.7 lbs.)
Environmental		
Storage temperature	-40 °C to 70 °C	
Warm-up time	1 hour	
Operating environment	EN61010, pollution degree 2, indoor locations	
Operating temperature	0 °C to 55 °C	
Operating humidity	80% RH up to 40°C, decreases linearly to 37.5% RH at 55°C, non-condensing	
Operating altitude	Up to 3,000 meters	
Regulatory		
	Refer to Declaration of Conformity for the latest revisions of regulatory compliance at: www.keysight.com/go/conformity	
	Acoustic noise: Sound pressure level (1-m free-field) (nom) 35 dB(A) at T _{AMBIENT} ≤ 28°C	
Line power		
Line voltage	100 to 240 V ± 10%, 50/60 Hz	
	100 to 120 V ± 10%, 400 Hz	
Power consumption	< 45 W, < 130 VA	< 75 W, < 150 VA

1. Applies to 120 MHz models (33621A/22A) only.
2. DC Offset set to zero.
3. Add 1/10 of the specification per °C for operation at temperatures below 18 °C or above 28 °C.
4. At low amplitude, non-harmonic spurious level is -100 dBm (typ).
5. Measured with a Keysight E5052B signal source analyzer. Phase noise improves by 20 dB/decade as output frequency is decreased.
6. Subject to pulse width limits.
7. Measured with a Keysight E5052B signal source analyzer.
8. Maximum sample rate with Filter "Off" in 160 MSa/s for 80 MHz models and 250 MSa/s for 120 MHz models.
9. Maximum amplitude is less at high frequency for certain waveforms.
10. Counted burst is not available for Gaussian Noise.
11. Subject to amplitude limits.
12. All frequency changes are phase-continuous.
13. External trigger only for sweep time > 8,000 seconds.
14. Measured with a Square or Pulse waveform, edge time set to minimum, and trigger delay set to zero. Trigger latency is generally greater for other instrument settings. For some waveforms, trigger latency is a function of output frequency.
15. Only available on 33511B/12B/21B/22B models.
16. Only available on 33519B/20B/21B/22B models.
17. Auto range ON.
18. Output noise is typically 20 dB lower when (DC + Peak AC) < 320 mV (into 50 Ω) or 640 mV (into open circuit).
19. Limited to arbitrary waveforms that are < 1 million points, phase resolution limited by number of points in arbitrary waveforms < 3,600 points.
20. Only applies to 33511B/12B/21B/22B and 33611A/12A/21A/22A models.

Definitions

Specification (spec)

The warranted performance of a calibrated instrument that has been stored for a minimum of 2 hours within the operating temperature range of 0 to 55 °C and after a 1-hour warm-up period. All specifications account for the effects of measurement and calibration-source uncertainties and were created in compliance with ISO-17025 methods. Data published in this document are specifications (spec) only where specifically indicated.

Typical (typ)

The characteristic performance that 80% or more of manufactured instruments will meet. This data is not warranted, does not include measurement or calibration-source uncertainty, and is valid only at room temperature (approximately 23 °C).

Nominal (nom)

The mean or average characteristic performance, or the value of an attribute that is determined by design such as a connector type, physical dimension, or operating speed. This data is not warranted and is measured at room temperature (approximately 23 °C).

Measured (meas)

An attribute measured during product development for the purpose of communicating expected performance. This data is not warranted and is measured at room temperature (approximately 23°C).

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Keysight:](#)

[33509B/900/PLG](#) [33510B/900/PLG](#) [33511B/900/PLG](#) [33512B/900/PLG](#) [33521B/900/PLG](#) [33611A/C13SPWR-900/C13SPWR-PLG](#) [33612A/C13SPWR-900/C13SPWR-PLG](#) [33622A/C13SPWR-900/C13SPWR-PLG](#)