

Streamline Series Vector Network Analyzer (B-models)

P937xB 2-port Up to 44 GHz

P938xB 4-port Up to 20 GHz

P500xB 2-port Up to 53 GHz

P502xB 4-port Up to 53 GHz / 6-port Up to 20 GHz

Compact Form. Zero Compromise.



Keysight Streamline Series VNA

The freedom of portable network analysis doesn't have to mean a compromise in performance. The B-models of the Keysight Streamline Series VNAs unlock the full performance of the network analyzer hardware with fast measurements over Thunderbolt 3 connections to your host PC. Gain confidence in your measurements with best-in-class performance offering fast, reliable, and repeatable results. Explore the complete characterization of your devices with a rich portfolio of software applications that transform the compact network analyzer into a complete RF measurement solution.

The P50xxB series offers the performance required for testing passive components, amplifiers, mixers or frequency converters. The vector network analyzer (VNA) provides best-in-class key specifications such as dynamic range, measurement speed, trace noise and temperature stability. Choose from 2- or 4-port models up to 53 GHz, or 6-port models up to 20 GHz.



The P93xxB series provides excellent performance in general-purpose network analysis for passive components. With software applications like enhanced time domain analysis with TDR and automatic fixture removal, you can easily characterize passive components with the same performance of a benchtop setup. Choose from 2-port models up to 44 GHz or 4-port models up to 20 GHz.

The Streamline Series utilizes the same measurement science as other Keysight VNAs such as the PNA, ENA and PXI VNA. A common software platform makes it easy to choose the right level of performance to match budget and measurement needs. This commonality guarantees measurement consistency, repeatability, and a common remote-programming interface across multiple instruments in R&D and manufacturing.



P937xB Series

| | |
|--------|-----------------------------|
| P9370B | 9 kHz to 4.5 GHz, 2-port |
| P9371B | 9 kHz to 6.5 GHz, 2-port |
| P9372B | 9 kHz to 9 GHz, 2-port |
| P9373B | 9 kHz to 14 GHz, 2-port |
| P9374B | 9 kHz to 20 GHz, 2-port |
| P9375B | 100 kHz to 26.5 GHz, 2-port |
| P9377B | 100 kHz to 44 GHz, 2-port |



P938xB Series

| | |
|--------|-------------------------|
| P9382B | 9 kHz to 9 GHz, 4-port |
| P9384B | 9 kHz to 20 GHz, 4-port |



P500xB Series

| | |
|--------|-----------------------------|
| P5000B | 9 kHz to 4.5 GHz, 2-port |
| P5001B | 9 kHz to 6.5 GHz, 2-port |
| P5002B | 9 kHz to 9 GHz, 2-port |
| P5003B | 9 kHz to 14 GHz, 2-port |
| P5004B | 9 kHz to 20 GHz, 2-port |
| P5005B | 100 kHz to 26.5 GHz, 2-port |
| P5006B | 100 kHz to 32 GHz, 2-port |
| P5007B | 100 kHz to 44 GHz, 2-port |
| P5008B | 100 kHz to 53 GHz, 2-port |



P502xB Series

| | |
|--------|-------------------------------|
| P5020B | 9 kHz to 4.5 GHz, 4 or 6-port |
| P5021B | 9 kHz to 6.5 GHz, 4 or 6-port |
| P5022B | 9 kHz to 9 GHz, 4 or 6-port |
| P5023B | 9 kHz to 14 GHz, 4 or 6-port |
| P5024B | 9 kHz to 20 GHz, 4 or 6-port |
| P5025B | 100 kHz to 26.5 GHz, 4-port |
| P5026B | 100 kHz to 32 GHz, 4-port |
| P5027B | 100 kHz to 44 GHz, 4-port |
| P5028B | 100 kHz to 53 GHz, 4-port |

Table of Contents

| | |
|--|----|
| Keysight Streamline Series VNA..... | 2 |
| Definitions..... | 5 |
| Dynamic Range..... | 6 |
| Corrected System Performance..... | 8 |
| Uncorrected System Performance..... | 17 |
| Test Port Output..... | 21 |
| Test Port Input..... | 26 |
| Dynamic Accuracy..... | 32 |
| Spectrum Analysis (with S97090xB)..... | 34 |
| Pulsed-RF Measurements (with S97025xB)..... | 43 |
| Enhanced Time Domain Analysis with TDR (S97011B)..... | 49 |
| Multi-instrument Measurements with S97551B Software..... | 51 |
| Multi-site Operation..... | 57 |
| General Information..... | 58 |
| Measurement Throughput Summary..... | 62 |
| Test Set Block Diagrams..... | 65 |
| Literature Information..... | 67 |
| Web Resources..... | 67 |

Definitions

Specifications (spec)¹

Warranted performance. Specifications include guardbands to account for the expected statistical performance distribution, measurement uncertainties, and changes in performance due to environmental conditions. All specifications and characteristics apply over a $25\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ range (unless otherwise stated).

The following conditions must be met:

- Instrument has been turned on for 60 minutes with VNA application running.
- Instrument is within its calibration cycle.
- Instrument remains at a stable surrounding environment temperature (between $-10\text{ }^{\circ}\text{C}$ to $55\text{ }^{\circ}\text{C}$) for 60 minutes prior to turn-on.

Characteristics (char.)

A performance parameter that the product is expected to meet before it leaves the factory, but that is not verified in the field and is not covered by the product warranty. A characteristic includes the same guardbands as a specification.

Typical (typ.)

Expected performance of an average unit at a stable temperature between $25\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ for 60 minutes prior to turn-on and during operation; does not include guardbands. It is not covered by the product warranty. The instrument must be within its calibration cycle.

Nominal (nom.)

A general, descriptive term or design parameter. It is not tested, and not covered by the product warranty.

Supplemental Information

A performance parameter that is tested on sampled product during design validation. It does not include guardbands and is not covered by the product warranty.

Calibration

The process of measuring known standards to characterize an instrument's systematic (repeatable) errors.

Corrected (residual)

Indicates performance after error correction (calibration). It is determined by the quality of calibration standards and how well "known" they are, plus system repeatability, stability, and noise.

Uncorrected (raw)

Indicates instrument performance without error correction. The uncorrected performance affects the stability of a calibration.

1. For all tables in this data sheet, the specified performance at the exact frequency of a break is the better value of the two specifications at that frequency.

Dynamic Range

The specifications in this section apply to measurements made with the Keysight P937xB, P938xB, P500xB, and P502xB Streamline Series vector network analyzer under the following conditions:

- No averaging applied to data

Table 1. System dynamic range at test port (dB)¹

P9370B to P9374B, P9382B, P9384B

| Description | Specification | Typical |
|-------------------------------|---------------|---------|
| 9 kHz to 100 kHz | 84 | 94 |
| 100 kHz to 10 MHz | 108 | 117 |
| 10 MHz to 50 MHz ² | 111 | 120 |
| 50 MHz to 3 GHz | 115 | 124 |
| 3 GHz to 6.5 GHz | 115 | 122 |
| 6.5 GHz to 9 GHz | 112 | 120 |
| 9 GHz to 14 GHz | 111 | 120 |
| 14 GHz to 16 GHz | 108 | 118 |
| 16 GHz to 20 GHz | 105 | 115 |

P9375B, P9377B

| Description | Specification | Typical |
|------------------------------|---------------|---------|
| 100 kHz to 300 kHz | 93 | 106 |
| 300 kHz to 1 MHz | 102 | 115 |
| 1 MHz to 50 MHz ² | 112 | 120 |
| 50 MHz to 3 GHz | 115 | 124 |
| 3 GHz to 6.5 GHz | 115 | 122 |
| 6.5 GHz to 17 GHz | 112 | 120 |
| 17 GHz to 20 GHz | 110 | 119 |
| 20 GHz to 24 GHz | 108 | 119 |
| 24 GHz to 30 GHz | 108 | 117 |
| 30 GHz to 38 GHz | 102 | 115 |
| 38 GHz to 44 GHz | 102 | 112 |

P5000B to P5004B, P5020B to P5024B

| Description | Specification | Typical |
|-------------------------------|---------------|---------|
| 9 kHz to 100 kHz | 101 | 111 |
| 100 kHz to 300 kHz | 117 | 126 |
| 300 kHz to 1 MHz | 125 | 136 |
| 1 MHz to 10 MHz | 130 | 141 |
| 10 MHz to 50 MHz ² | 137 | 147 |
| 50 MHz to 3 GHz | 140 | 150 |
| 3 GHz to 5 GHz | 140 | 149 |
| 5 GHz to 6.5 GHz | 140 | 148 |
| 6.5 GHz to 9 GHz | 136 | 146 |
| 9 GHz to 14 GHz | 133 | 142 |
| 14 GHz to 16 GHz | 130 | 140 |
| 16 GHz to 20 GHz | 126 | 137 |

P5005B to P5008B, P5025B to P5028B

| Description | Specification | Typical |
|-------------------------------|---------------|---------|
| 100 kHz to 300 kHz | 95 | 106 |
| 300 kHz to 500 kHz | 104 | 120 |
| 500 kHz to 1 MHz | 117 | 130 |
| 1 MHz to 10 MHz | 125 | 138 |
| 10 MHz to 50 MHz ² | 137 | 147 |
| 50 MHz to 6.5 GHz | 140 | 150 |
| 6.5 GHz to 8 GHz | 138 | 150 |
| 8 GHz to 9 GHz | 138 | 147 |
| 9 GHz to 16 GHz | 137 | 147 |
| 16 GHz to 17 GHz | 137 | 143 |
| 17 GHz to 20 GHz | 132 | 143 |
| 20 GHz to 24 GHz | 130 | 143 |
| 24 GHz to 25 GHz | 130 | 141 |
| 25 GHz to 26 GHz | 127 | 141 |
| 26 GHz to 30 GHz | 127 | 137 |
| 30 GHz to 35 GHz | 122 | 137 |
| 35 GHz to 40 GHz | 122 | 134 |
| 40 GHz to 45 GHz | 122 | 132 |
| 45 GHz to 50 GHz | 100 | 115 |
| 50 GHz to 53 GHz | 72 | 101 |

1. System dynamic range = source maximum output power minus receiver noise floor at 10 Hz IF bandwidth. Does not include crosstalk effects.
2. It may typically be degraded at 25 MHz.

Corrected System Performance

This section provides specifications for the corrected performance of Streamline Series VNA using either of Mechanical Calibration Kit or Electronic Calibration (ECal) Module. To determine transmission and reflection uncertainty curves with other calibration kits, please download Uncertainty Calculator from http://www.keysight.com/find/na_calculator to generate the curves for your specific calibration kit.



Measured with 10 Hz IF bandwidth, no averaging applied to data, environmental temperature = 23 °C (± 3 °C) with < 1 °C deviation from calibration temperature.

Table 2. P9370B to P9374B, P9382B, P9384B with 85052D economy mechanical calibration kit

Corrected error terms (dB) – specifications

| Description | 9 kHz to 50 MHz | 50 MHz to 2 GHz | 2 GHz to 8 GHz | 8 GHz to 20 GHz |
|-----------------------|-----------------|-----------------|----------------|-----------------|
| Directivity | 42 | 42 | 38 | 36 |
| Source match | 37 | 37 | 31 | 28 |
| Load match | 42 | 42 | 38 | 36 |
| Reflection tracking | ± 0.003 | ± 0.003 | ± 0.004 | ± 0.008 |
| Transmission tracking | ± 0.136 | ± 0.030 | ± 0.100 | ± 0.185 |

Transmission uncertainty (magnitude and phase)

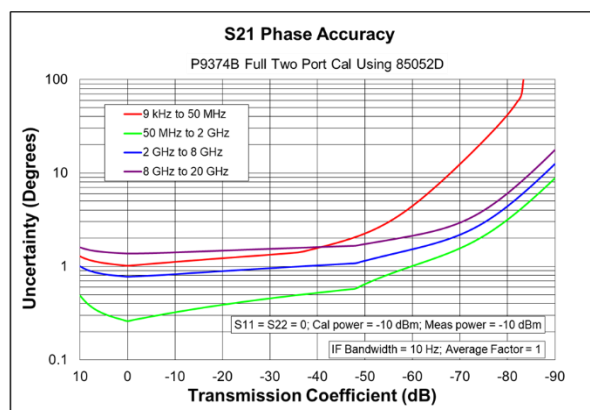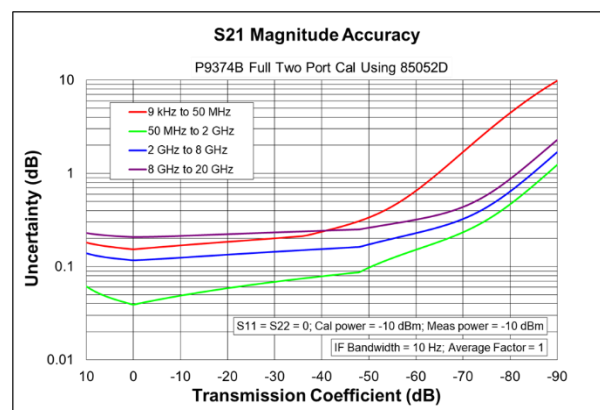

Reflection uncertainty (magnitude and phase)




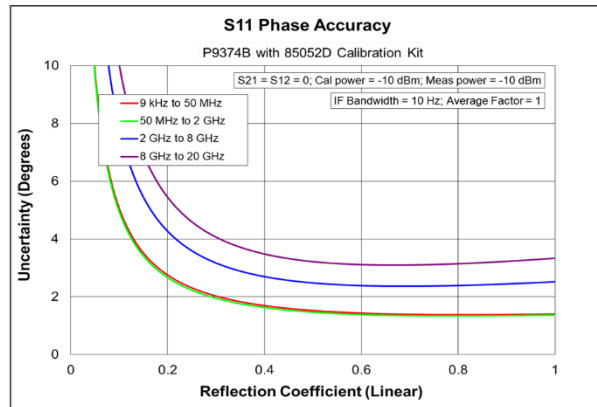


Table 3. P9370B to P9374B, P9382B, P9384B with N4691D electronic calibration (ECal) module with Option 0DC

Corrected Error Terms (dB) – specifications

| Description | 9 kHz to 10 MHz | 10 MHz to 500 MHz | 500 MHz to 2 GHz | 2 GHz to 8 GHz | 8 GHz to 20 GHz |
|-----------------------|-----------------|-------------------|------------------|----------------|-----------------|
| Directivity | 46 | 46 | 47 | 46 | 43 |
| Source match | 41 | 41 | 47 | 45 | 42 |
| Load match | 38 | 40 | 46 | 44 | 40 |
| Reflection tracking | ± 0.050 | ± 0.050 | ± 0.020 | ± 0.030 | ± 0.040 |
| Transmission tracking | ± 0.081 | ± 0.056 | ± 0.026 | ± 0.042 | ± 0.064 |

Transmission uncertainty (magnitude and phase)

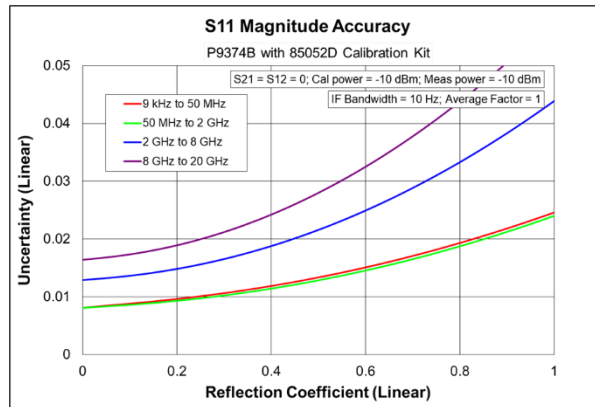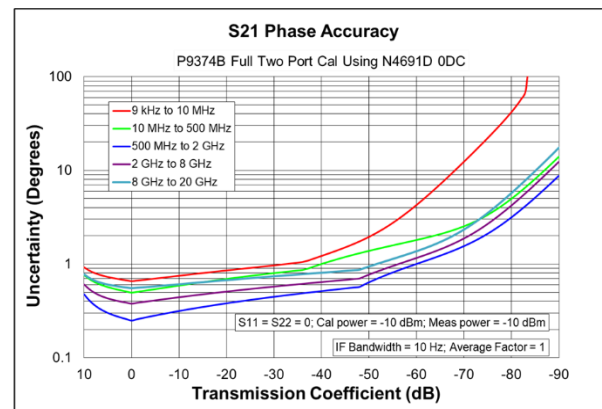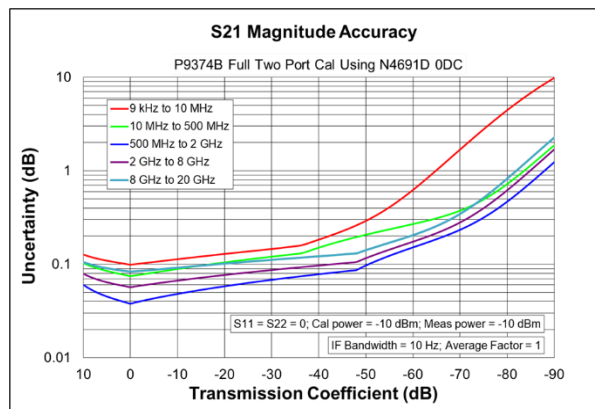

Reflection uncertainty (magnitude and phase)




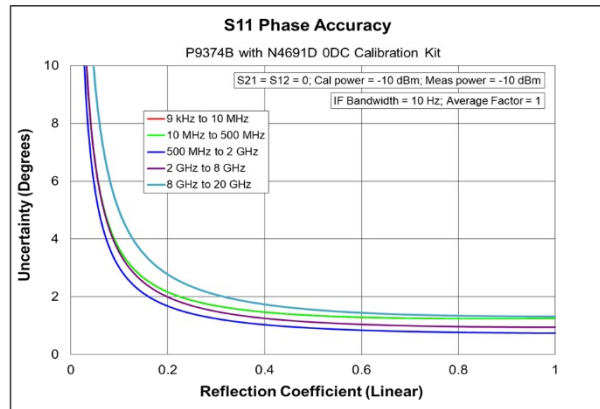


Table 4. P9377B with 85056A mechanical calibration kit

Corrected error terms (dB) – specifications

| Description | 100 kHz to 50 MHz | 50 MHz to 2 GHz | 2 GHz to 10 GHz | 10 GHz to 20 GHz | 20 GHz to 30 GHz | 30 GHz to 40 GHz | 40 GHz to 44 GHz |
|-----------------------|-------------------|-----------------|-----------------|------------------|------------------|------------------|------------------|
| Directivity | 42 | 42 | 42 | 42 | 38 | 38 | 36 |
| Source match | 41 | 41 | 38 | 38 | 33 | 33 | 31 |
| Load match | 42 | 42 | 42 | 42 | 37 | 37 | 37 |
| Reflection tracking | ± 0.001 | ± 0.001 | ± 0.008 | ± 0.008 | ± 0.020 | ± 0.020 | ± 0.027 |
| Transmission tracking | ± 0.128 | ± 0.020 | ± 0.045 | ± 0.065 | ± 0.123 | ± 0.175 | ± 0.155 |

Transmission uncertainty (magnitude and phase)

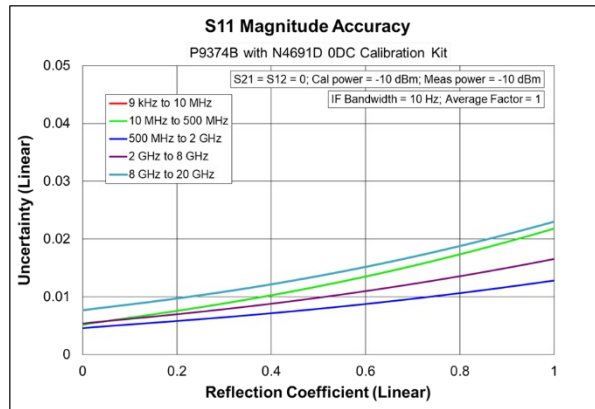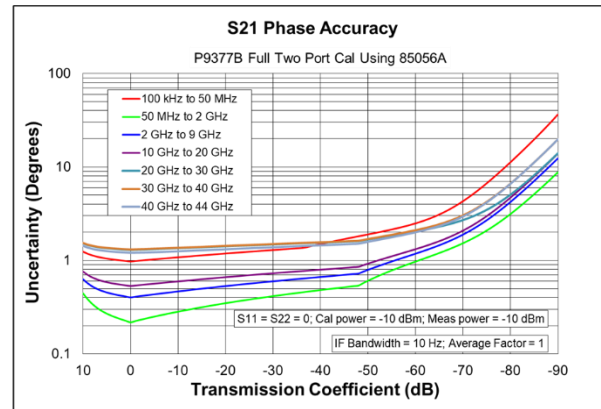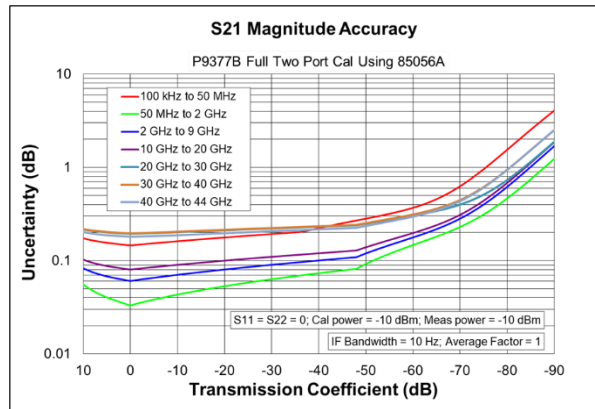

Reflection uncertainty (magnitude and phase)




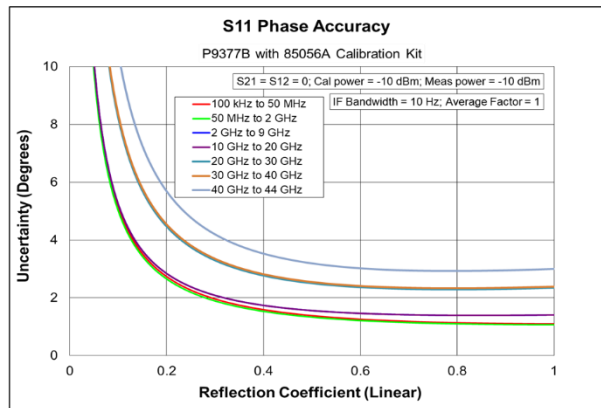


Table 5. P9377B with N4693D electronic calibration (ECal) module with Option 0DC

Corrected error terms (dB) – specifications

| Description | 100 kHz to 10 MHz | 10 MHz to 50 MHz | 50 MHz to 2 GHz | 2 GHz to 10 GHz | 10 GHz to 20 GHz | 20 GHz to 30 GHz | 30 GHz to 40 GHz | 40 GHz to 44 GHz |
|-----------------------|-------------------|------------------|-----------------|-----------------|------------------|------------------|------------------|------------------|
| Directivity | 40 | 40 | 40 | 47 | 44 | 38 | 38 | 34 |
| Source match | 38 | 38 | 44 | 42 | 37 | 35 | 35 | 32 |
| Load match | 35 | 37 | 43 | 41 | 36 | 33 | 33 | 31 |
| Reflection tracking | ± 0.050 | ± 0.050 | ± 0.050 | ± 0.040 | ± 0.050 | ± 0.060 | ± 0.060 | ± 0.080 |
| Transmission tracking | ± 0.127 | ± 0.062 | ± 0.062 | ± 0.050 | ± 0.069 | ± 0.121 | ± 0.121 | ± 0.148 |

Transmission uncertainty (magnitude and phase)

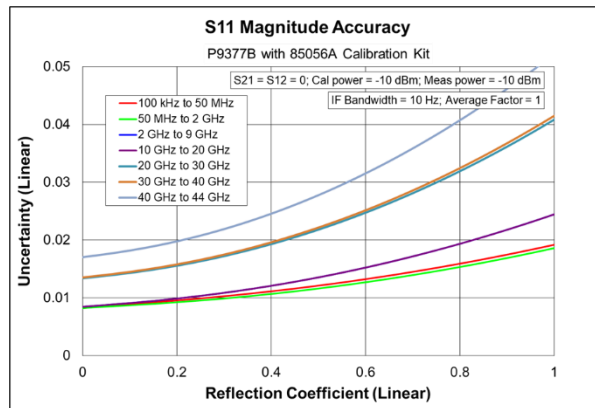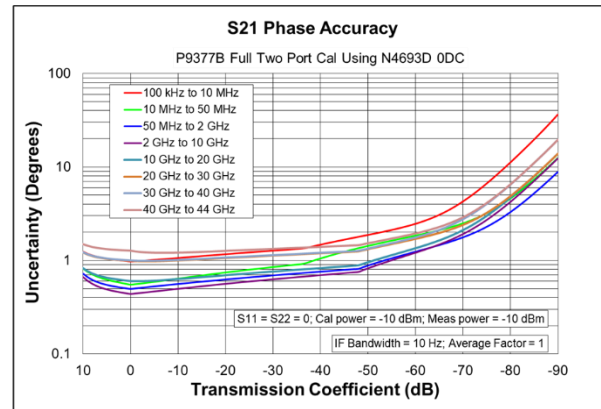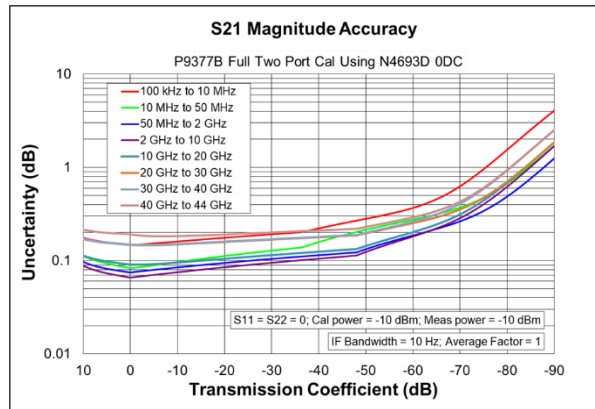

Reflection uncertainty (magnitude and phase)




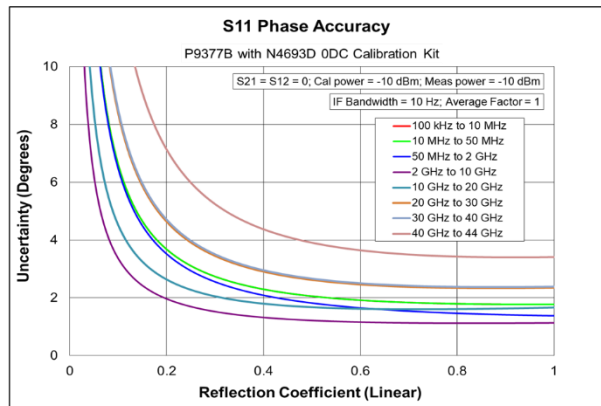


Table 6. P5000B to P5004B, P5020B to P5024B with 85032F standard mechanical calibration kit

Corrected error terms (dB) – specifications

| Description | 9 kHz to 50 MHz | 50 MHz to 3 GHz | 3 GHz to 6 GHz | 6 GHz to 9 GHz |
|-----------------------|-----------------|-----------------|----------------|----------------|
| Directivity | 49 | 46 | 40 | 38 |
| Source match | 41 | 40 | 36 | 35 |
| Load match | 47 | 46 | 40 | 38 |
| Reflection tracking | ± 0.011 | ± 0.021 | ± 0.032 | ± 0.054 |
| Transmission tracking | ± 0.082 | ± 0.021 | ± 0.063 | ± 0.074 |

Transmission uncertainty (magnitude and phase)

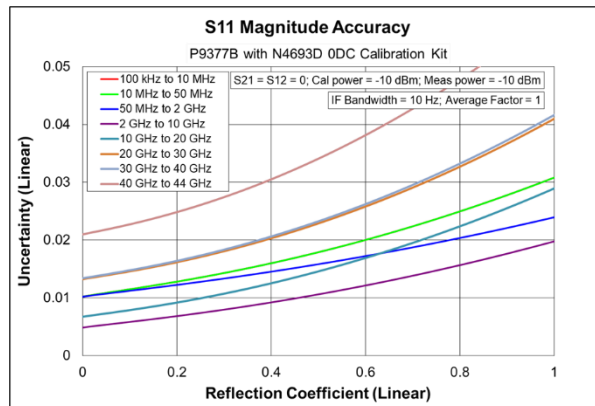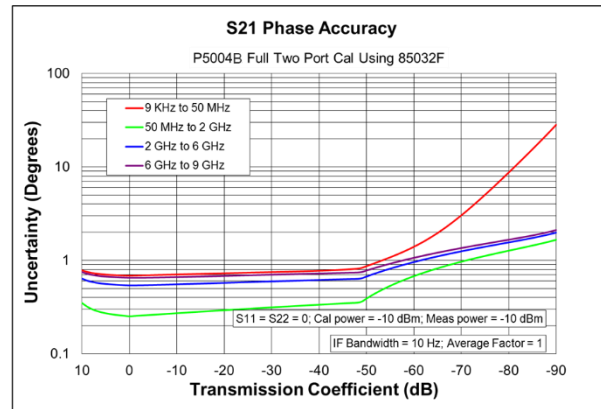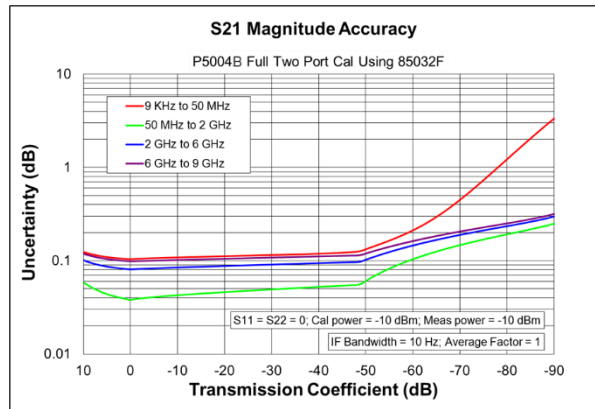

Reflection uncertainty (magnitude and phase)




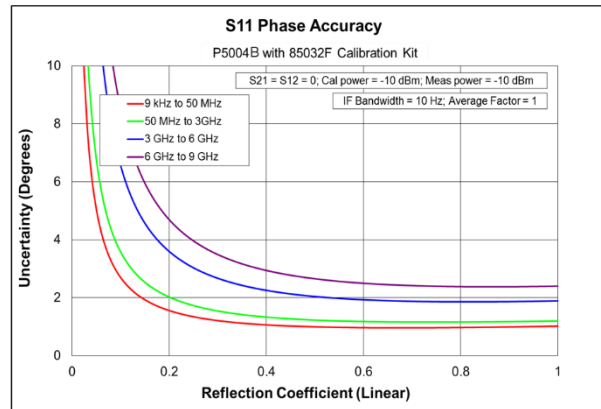


Table 7. P5000B to P5004B, P5020B to P5024B with 85052D economy mechanical calibration kit

Corrected error terms (dB) – specifications

| Description | 9 kHz to 50 MHz | 50 MHz to 2 GHz | 2 GHz to 8 GHz | 8 GHz to 20 GHz |
|-----------------------|-----------------|-----------------|----------------|-----------------|
| Directivity | 42 | 42 | 38 | 36 |
| Source match | 37 | 37 | 31 | 28 |
| Load match | 42 | 42 | 38 | 36 |
| Reflection tracking | ± 0.003 | ± 0.003 | ± 0.004 | ± 0.008 |
| Transmission tracking | ± 0.136 | ± 0.03 | ± 0.1 | ± 0.185 |

Transmission uncertainty (magnitude and phase)

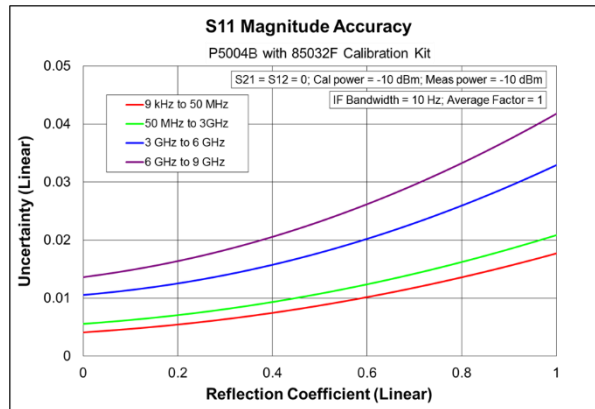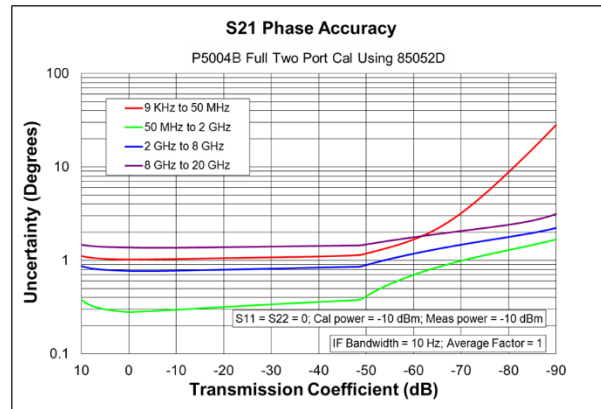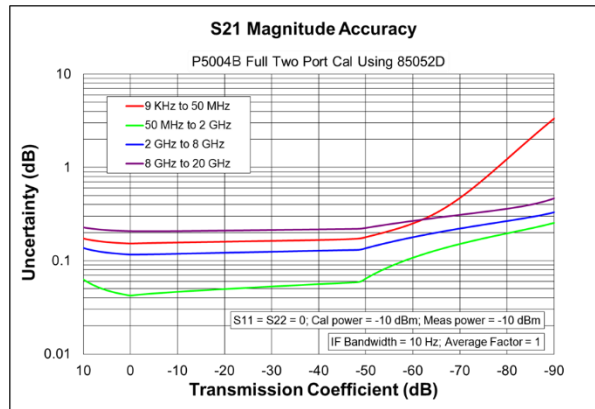

Reflection uncertainty (magnitude and phase)




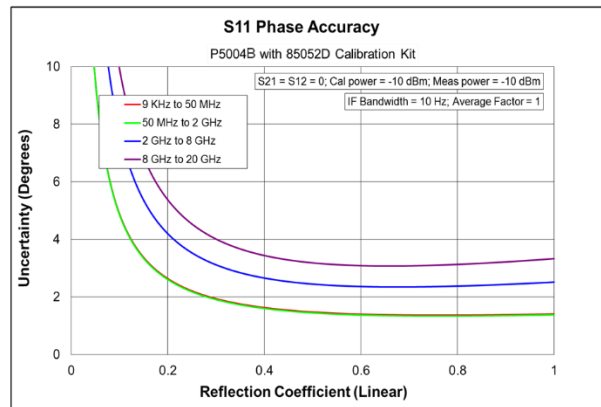


Table 8. P5000B to P5004B, P5020B to P5024B with N4691D electronic calibration (ECal) module with Option 0DC

Corrected error terms (dB) – specifications

| Description | 9 kHz to 10 MHz | 10 MHz to 500 MHz | 500 MHz to 2 GHz | 2 GHz to 8 GHz | 8 GHz to 20 GHz |
|-----------------------|-----------------|-------------------|------------------|----------------|-----------------|
| Directivity | 46 | 46 | 47 | 46 | 43 |
| Source match | 41 | 41 | 47 | 45 | 42 |
| Load match | 38 | 40 | 46 | 44 | 40 |
| Reflection tracking | ± 0.05 | ± 0.05 | ± 0.02 | ± 0.03 | ± 0.04 |
| Transmission tracking | ± 0.081 | ± 0.056 | ± 0.026 | ± 0.042 | ± 0.064 |

Transmission uncertainty (magnitude and phase)

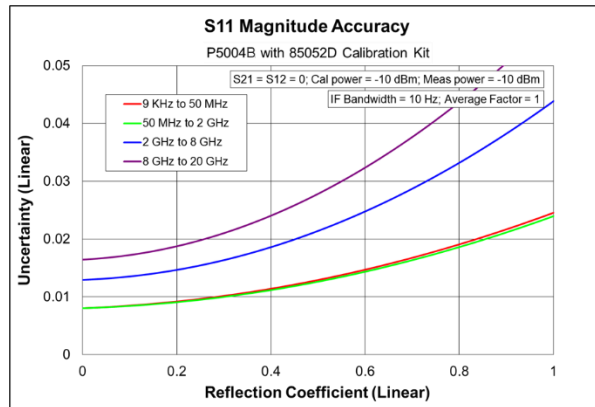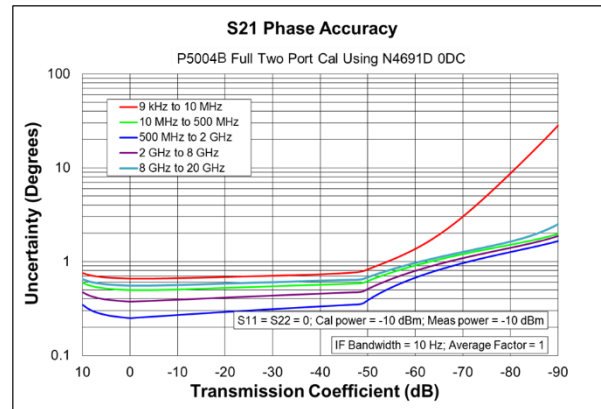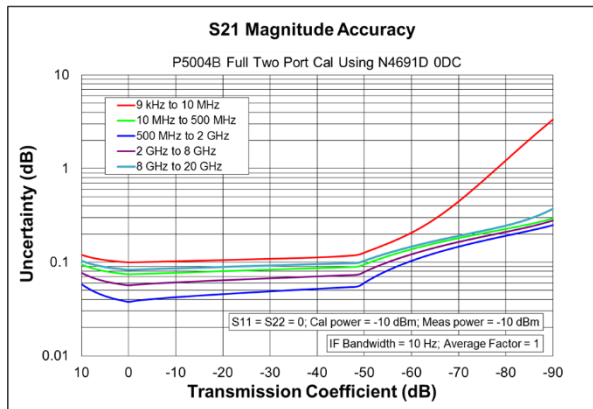

Reflection uncertainty (magnitude and phase)




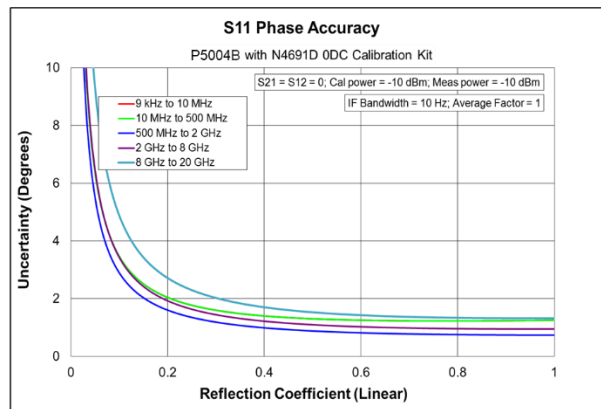


Table 9. P5005B to P5008B, P5025B to P5028B with 85058B standard mechanical calibration kit

Corrected error terms (dB) – specifications

| Description | 100 kHz to 1 MHz | 1 MHz to 50 MHz | 50 MHz to 2 GHz | 2 GHz to 10 GHz | 10 GHz to 20 GHz | 20 GHz to 35 GHz | 35 GHz to 50 GHz | 50 GHz to 53 GHz |
|-----------------------|------------------|-----------------|-----------------|-----------------|------------------|------------------|------------------|------------------|
| Directivity | 35 | 35 | 35 | 41 | 38 | 37 | 37 | 34 |
| Source match | 34 | 34 | 34 | 44 | 40 | 41 | 42 | 40 |
| Load match | 34 | 35 | 35 | 41 | 37 | 36 | 36 | 33 |
| Reflection tracking | ± 0.019 | ± 0.019 | ± 0.019 | ± 0.01 | ± 0.033 | ± 0.033 | ± 0.02 | ± 0.03 |
| Transmission tracking | ± 0.302 | ± 0.065 | ± 0.046 | ± 0.033 | ± 0.073 | ± 0.122 | ± 0.079 | ± 0.154 |

Transmission uncertainty (magnitude and phase)

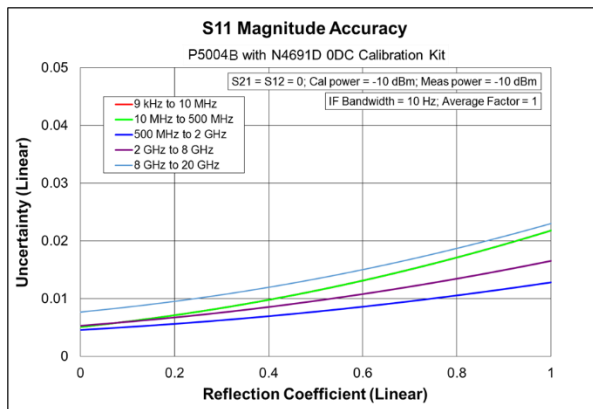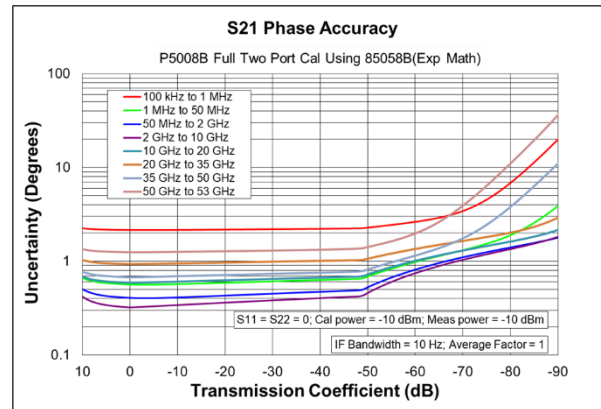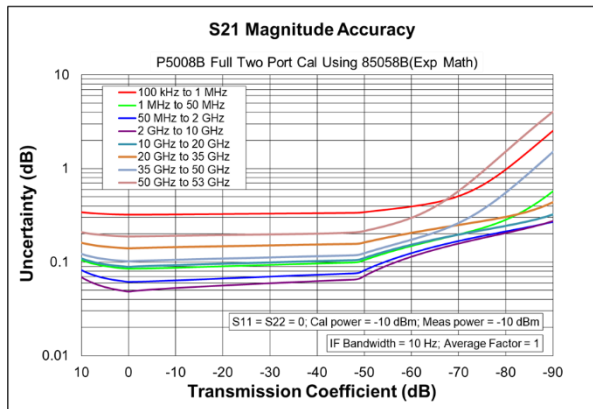

Reflection uncertainty (magnitude and phase)




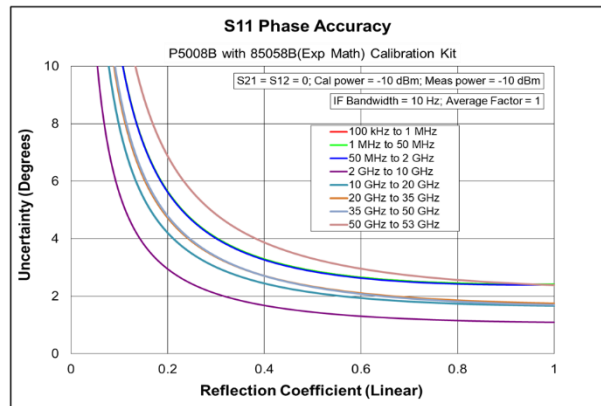


Table 10. P5005B to P5008B, P5025B to P5028B with N4694D electronic calibration (ECal) module with Option 0DC



Corrected error terms (dB) – specifications

| Description | 100 kHz to 1 MHz | 1 MHz to 50 MHz | 50 MHz to 2 GHz | 2 GHz to 20 GHz | 20 GHz to 30 GHz | 30 GHz to 40 GHz | 40 GHz to 50 GHz | 50 GHz to 53 GHz |
|-----------------------|------------------|-----------------|-----------------|-----------------|------------------|------------------|------------------|------------------|
| Directivity | 41 | 41 | 41 | 42 | 41 | 40 | 38 | 35 |
| Source match | 38 | 38 | 38 | 39 | 35 | 34 | 33 | 30 |
| Load match | 34 | 37 | 38 | 38 | 34 | 32 | 32 | 29 |
| Reflection tracking | ± 0.08 | ± 0.08 | ± 0.04 | ± 0.04 | ± 0.05 | ± 0.06 | ± 0.08 | ± 0.08 |
| Transmission tracking | ± 0.148 | ± 0.095 | ± 0.051 | ± 0.065 | ± 0.093 | ± 0.108 | ± 0.123 | ± 0.166 |

Transmission uncertainty (magnitude and phase)

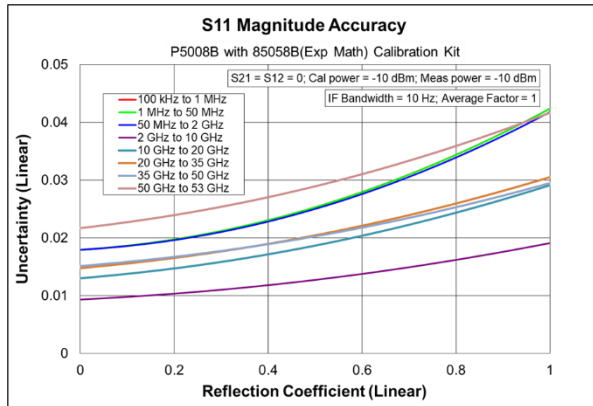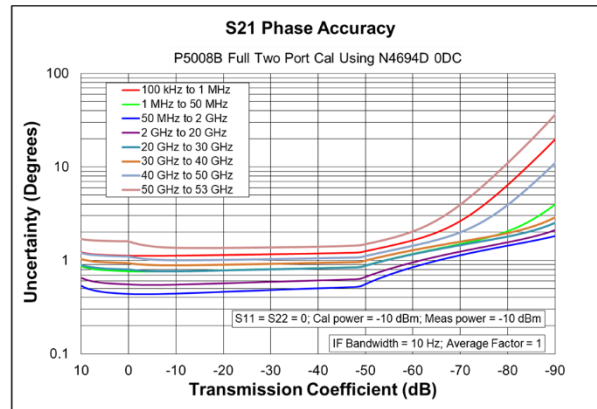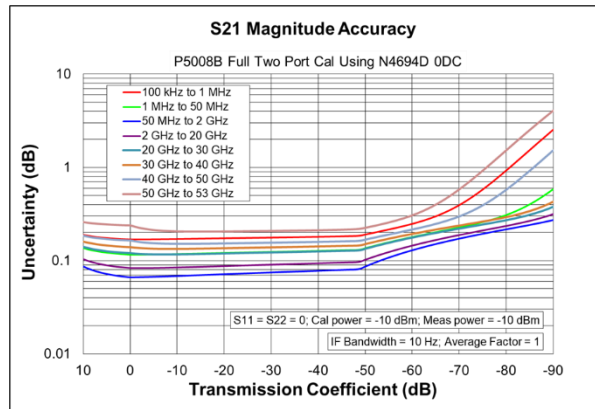

Reflection uncertainty (magnitude and phase)

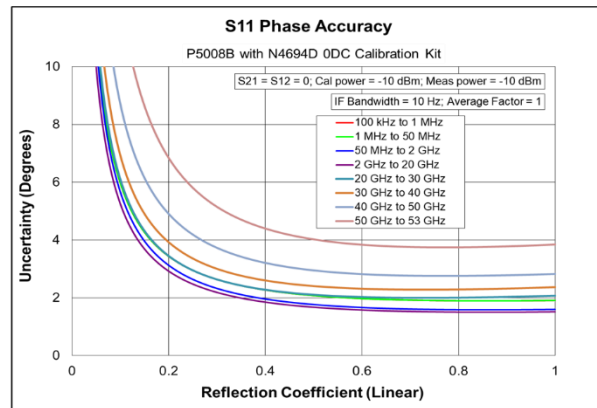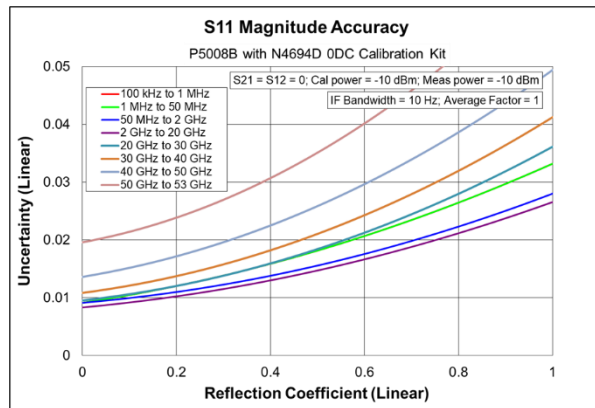

Uncorrected System Performance

Table 11. Uncorrected error terms (dB) – specification¹

P9370B to P9374B, P9382B, P9384B, P5000B to P5004B, P5020B to P5024B

| Description | Directivity | Source match | Load match | Transmission tracking | Reflection tracking | Crosstalk |
|-------------------|-------------|--------------|------------|-----------------------|---------------------|-----------|
| 300 kHz to 10 MHz | 20 | 20 | 15 | - | - | - |
| 10 MHz to 1.5 GHz | 25 | 25 | 17 | - | - | - |
| 1.5 GHz to 3 GHz | 25 | 25 | 16 | - | - | - |
| 3 GHz to 6 GHz | 25 | 25 | 11 | - | - | - |
| 6 GHz to 10 GHz | 20 | 20 | 11 | - | - | - |
| 10 GHz to 16 GHz | 15 | 15 | 11 | - | - | - |
| 16 GHz to 20 GHz | 15 | 15 | 8 | - | - | - |

P9375B, P9377B, P5005B to P5008B, P5025B to P5028B

| Description | Directivity | Source match | Load match | Transmission tracking | Reflection tracking | Crosstalk |
|------------------|-------------|--------------|------------|-----------------------|---------------------|-----------|
| 300 kHz to 1 MHz | 20 | 20 | 1 | - | - | - |
| 1 MHz to 3 MHz | 20 | 20 | 14 | - | - | - |
| 3 MHz to 10 MHz | 20 | 20 | 17 | - | - | - |
| 10 MHz to 4 GHz | 25 | 25 | 17 | - | - | - |
| 4 GHz to 6 GHz | 25 | 25 | 12 | - | - | - |
| 6 GHz to 10 GHz | 20 | 20 | 12 | - | - | - |
| 10 GHz to 20 GHz | 15 | 15 | 9 | - | - | - |
| 20 GHz to 27 GHz | 15 | 15 | 8 | - | - | - |
| 27 GHz to 40 GHz | 15 | 15 | 5 | - | - | - |
| 40 GHz to 50 GHz | 15 | 15 | 8 | - | - | - |
| 50 GHz to 53 GHz | 10 | 10 | 5 | - | - | - |

1. The specifications apply to following conditions: Factory correction is turned on. Cable loss not included in transmission tracking.

Table 12. Uncorrected error terms (dB) – typical

P9370B to P9374B, P9382B, P9384B

| Description | Directivity | Source match | Load match | Transmission tracking | Reflection tracking | Crosstalk |
|--------------------|-------------|--------------|------------|-----------------------|---------------------|-------------------|
| 9 kHz to 30 kHz | 40 | 40 | 5 | ± 0.5 | ± 0.5 | -94 |
| 30 kHz to 100 kHz | 40 | 40 | 10 | ± 0.5 | ± 0.5 | -94 |
| 100 kHz to 300 kHz | 40 | 40 | 18 | ± 0.2 | ± 0.2 | -117 |
| 300 kHz to 3 MHz | 40 | 40 | 23 | ± 0.2 | ± 0.2 | -117 |
| 3 MHz to 10 MHz | 40 | 40 | 23 | ± 0.2 | ± 0.2 | -117 |
| 10 MHz to 50 MHz | 40 | 40 | 23 | ± 0.2 | ± 0.2 | -114 ¹ |
| 50 MHz to 1.5 GHz | 40 | 40 | 23 | ± 0.2 | ± 0.2 | -124 |
| 1.5 GHz to 3 GHz | 40 | 40 | 20 | ± 0.2 | ± 0.2 | -124 |
| 3 GHz to 4.5 GHz | 40 | 40 | 15 | ± 0.2 | ± 0.2 | -123 |
| 4.5 GHz to 6 GHz | 40 | 40 | 15 | ± 0.2 | ± 0.2 | -122 |
| 6 GHz to 9 GHz | 35 | 35 | 15 | ± 0.3 | ± 0.3 | -122 |
| 9 GHz to 10 GHz | 35 | 35 | 15 | ± 0.3 | ± 0.3 | -112 |
| 10 GHz to 13 GHz | 35 | 35 | 15 | ± 0.5 | ± 0.5 | -112 |
| 13 GHz to 16 GHz | 35 | 35 | 15 | ± 0.5 | ± 0.5 | -112 |
| 16 GHz to 20 GHz | 35 | 35 | 12 | ± 0.5 | ± 0.5 | -112 |

P9375B, P9377B

| Description | Directivity | Source match | Load match | Transmission tracking | Reflection tracking | Crosstalk |
|--------------------|-------------|--------------|------------|-----------------------|---------------------|-------------------|
| 100 kHz to 300 kHz | 40 | 40 | 2 | ± 0.5 | ± 0.5 | -86 |
| 300 kHz to 500 kHz | 40 | 40 | 2 | ± 0.5 | ± 0.5 | -105 |
| 500 kHz to 1 MHz | 40 | 40 | 2 | ± 0.5 | ± 0.5 | -110 |
| 1 MHz to 3 MHz | 40 | 40 | 16 | ± 0.5 | ± 0.5 | -120 |
| 3 MHz to 10 MHz | 40 | 40 | 20 | ± 0.5 | ± 0.5 | -120 |
| 10 MHz to 50 MHz | 40 | 40 | 20 | ± 0.2 | ± 0.2 | -113 ¹ |
| 50 MHz to 3 GHz | 40 | 40 | 20 | ± 0.2 | ± 0.2 | -124 |
| 3 GHz to 4 GHz | 40 | 40 | 20 | ± 0.2 | ± 0.2 | -122 |
| 4 GHz to 6 GHz | 40 | 40 | 15 | ± 0.2 | ± 0.2 | -122 |
| 6 GHz to 8 GHz | 35 | 35 | 15 | ± 0.2 | ± 0.2 | -120 |
| 8 GHz to 10 GHz | 35 | 35 | 15 | ± 0.2 | ± 0.2 | -120 |
| 10 GHz to 16 GHz | 35 | 35 | 11 | ± 0.3 | ± 0.3 | -120 |
| 16 GHz to 20 GHz | 35 | 35 | 11 | ± 0.3 | ± 0.3 | -119 |
| 20 GHz to 24 GHz | 25 | 25 | 10 | ± 0.3 | ± 0.3 | -119 |
| 24 GHz to 26 GHz | 25 | 25 | 10 | ± 0.3 | ± 0.3 | -117 |
| 26 GHz to 27 GHz | 25 | 25 | 10 | ± 0.3 | ± 0.3 | -117 |
| 27 GHz to 35 GHz | 25 | 25 | 7 | ± 0.3 | ± 0.3 | -115 |
| 35 GHz to 40 GHz | 25 | 25 | 7 | ± 0.3 | ± 0.3 | -112 |
| 40 GHz to 44 GHz | 20 | 20 | 11 | ± 0.5 | ± 0.5 | -112 |

P5000B to P5004B, P5020B to P5024B

| Description | Directivity | Source match | Load match | Transmission tracking | Reflection tracking | Crosstalk |
|--------------------|-------------|--------------|------------|-----------------------|---------------------|-------------------|
| 9 kHz to 30 kHz | 40 | 40 | 5 | ± 0.5 | ± 0.5 | -110 |
| 30 kHz to 100 kHz | 40 | 40 | 10 | ± 0.5 | ± 0.5 | -110 |
| 100 kHz to 300 kHz | 40 | 40 | 18 | ± 0.2 | ± 0.2 | -120 |
| 300 kHz to 3 MHz | 40 | 40 | 23 | ± 0.2 | ± 0.2 | -120 |
| 3 MHz to 10 MHz | 40 | 40 | 23 | ± 0.2 | ± 0.2 | -139 |
| 10 MHz to 50 MHz | 40 | 40 | 23 | ± 0.2 | ± 0.2 | -147 ¹ |
| 50 MHz to 1.5 GHz | 40 | 40 | 23 | ± 0.2 | ± 0.2 | -150 |
| 1.5 GHz to 3 GHz | 40 | 40 | 20 | ± 0.2 | ± 0.2 | -150 |
| 3 GHz to 4.5 GHz | 40 | 40 | 15 | ± 0.2 | ± 0.2 | -149 |
| 4.5 GHz to 6 GHz | 40 | 40 | 15 | ± 0.2 | ± 0.2 | -147 |
| 6 GHz to 9 GHz | 35 | 35 | 15 | ± 0.3 | ± 0.3 | -146 |
| 9 GHz to 10 GHz | 35 | 35 | 15 | ± 0.3 | ± 0.3 | -142 |
| 10 GHz to 13 GHz | 35 | 35 | 15 | ± 0.5 | ± 0.5 | -142 |
| 13 GHz to 16 GHz | 35 | 35 | 15 | ± 0.5 | ± 0.5 | -140 |
| 16 GHz to 20 GHz | 35 | 35 | 12 | ± 0.5 | ± 0.5 | -137 |

P5005B to P5008B, P5025B to P5028B

| Description | Directivity | Source match | Load match | Transmission tracking | Reflection tracking | Crosstalk |
|--------------------|-------------|--------------|------------|-----------------------|---------------------|-------------------|
| 100 kHz to 300 kHz | 40 | 40 | 2 | ± 0.5 | ± 0.5 | -106 |
| 300 kHz to 500 kHz | 40 | 40 | 2 | ± 0.5 | ± 0.5 | -120 |
| 500 kHz to 1 MHz | 40 | 40 | 2 | ± 0.5 | ± 0.5 | -130 |
| 1 MHz to 3 MHz | 40 | 40 | 16 | ± 0.5 | ± 0.5 | -130 |
| 3 MHz to 10 MHz | 40 | 40 | 20 | ± 0.5 | ± 0.5 | -138 |
| 10 MHz to 50 MHz | 40 | 40 | 20 | ± 0.2 | ± 0.2 | -147 ¹ |
| 50 MHz to 4 GHz | 40 | 40 | 20 | ± 0.2 | ± 0.2 | -150 |
| 4 GHz to 6 GHz | 40 | 40 | 15 | ± 0.2 | ± 0.2 | -150 |
| 6 GHz to 8 GHz | 35 | 35 | 15 | ± 0.2 | ± 0.2 | -150 |
| 8 GHz to 10 GHz | 35 | 35 | 15 | ± 0.2 | ± 0.2 | -147 |
| 10 GHz to 16 GHz | 35 | 35 | 11 | ± 0.3 | ± 0.3 | -147 |
| 16 GHz to 20 GHz | 35 | 35 | 11 | ± 0.3 | ± 0.3 | -143 |
| 20 GHz to 24 GHz | 25 | 25 | 10 | ± 0.3 | ± 0.3 | -143 |
| 24 GHz to 26 GHz | 25 | 25 | 10 | ± 0.3 | ± 0.3 | -141 |
| 26 GHz to 27 GHz | 25 | 25 | 10 | ± 0.3 | ± 0.3 | -137 |
| 27 GHz to 35 GHz | 25 | 25 | 7 | ± 0.3 | ± 0.3 | -137 |
| 35 GHz to 40 GHz | 25 | 25 | 7 | ± 0.3 | ± 0.3 | -134 |
| 40 GHz to 45 GHz | 20 | 20 | 11 | ± 0.5 | ± 0.5 | -132 |
| 45 GHz to 50 GHz | 20 | 20 | 11 | ± 0.5 | ± 0.5 | -115 |
| 50 GHz to 53 GHz | 15 | 15 | 8 | ± 1 | ± 1 | -101 |

1. It may typically be degraded at 25 MHz.

Test Port Output¹

Table 13. Frequency resolution, accuracy, stability

All models

| Description | Specification | Typical |
|----------------------|------------------------------|---------------------------------------|
| Frequency resolution | 1 Hz | - |
| Frequency accuracy | ± 7 ppm (25 ± 5 °C) | - |
| Frequency stability | - | ± 7 ppm ² |
| | - | ± 3 ppm/year maximum ³ |

1. The specifications do not apply to parallel measurements of multiple devices under test (DUT).

2. 0 to 50 °C. Assumes no variation in time.

3. Assumes no variation in temperature.

Table 14. Maximum output port power (dBm)

P9370B to P9374B, P9382B, P9384B

| Description | Specification | Typical |
|--------------------|---------------|---------|
| 9 kHz to 100 kHz | 0 | +2 |
| 100 kHz to 10 MHz | +5 | +7 |
| 10 MHz to 4.5 GHz | +8 | +10 |
| 4.5 GHz to 6.5 GHz | +8 | +10 |
| 6.5 GHz to 9 GHz | +8 | +10 |
| 9 GHz to 16 GHz | +7 | +10 |
| 16 GHz to 20 GHz | +4 | +7 |

P9375B, P9377B

| Description | Specification | Typical |
|--------------------|---------------|---------|
| 100 kHz to 300 kHz | -2 | +1 |
| 300 kHz to 1 MHz | +7 | +10 |
| 1 MHz to 17 GHz | +8 | +10 |
| 17 GHz to 20 GHz | +7 | +10 |
| 20 GHz to 24 GHz | +5 | +10 |
| 24 GHz to 30 GHz | +5 | +8 |
| 30 GHz to 38 GHz | +2 | +8 |
| 38 GHz to 44 GHz | +2 | +5 |

P5000B to P5004B, P5020B to P5024B

| Description | Specification | Typical |
|--------------------|---------------|---------|
| 9 kHz to 100 kHz | 0 | +2 |
| 100 kHz to 10 MHz | +5 | +7 |
| 10 MHz to 4.5 GHz | +10 | +13 |
| 4.5 GHz to 6.5 GHz | +10 | +12 |
| 6.5 GHz to 9 GHz | +9 | +12 |
| 9 GHz to 16 GHz | +7 | +10 |
| 16 GHz to 20 GHz | +4 | +7 |

P5005B to P5008B, P5025B to P5028B

| Description | Specification | Typical |
|--------------------|---------------|---------|
| 100 kHz to 300 kHz | -2 | +1 |
| 300 kHz to 1 MHz | +7 | +10 |
| 1 MHz to 17 GHz | +10 | +13 |
| 17 GHz to 20 GHz | +7 | +11 |
| 20 GHz to 24 GHz | +5 | +11 |
| 24 GHz to 30 GHz | +5 | +8 |
| 30 GHz to 38 GHz | +2 | +8 |
| 38 GHz to 45 GHz | +2 | +5 |
| 45 GHz to 50 GHz | -5 | 0 |
| 50 GHz to 53 GHz | -23 | -12 |

Table 15. Power sweep range (dBm)¹

P9370B to P9374B, P9382B, P9384B

| Description | Specification | Typical |
|-------------------|---------------|------------|
| 9 kHz to 100 kHz | - | -60 to +2 |
| 100 kHz to 10 MHz | - | -60 to +7 |
| 10 MHz to 16 GHz | - | -60 to +10 |
| 16 GHz to 20 GHz | - | -60 to +7 |

P9375B, P9377B

| Description | Specification | Typical |
|--------------------|---------------|------------|
| 100 kHz to 300 kHz | - | -60 to +1 |
| 300 kHz to 1 MHz | - | -60 to +10 |
| 1 MHz to 20 GHz | - | -60 to +10 |
| 20 GHz to 24 GHz | - | -50 to +10 |
| 24 GHz to 38 GHz | - | -50 to +8 |
| 38 GHz to 44 GHz | - | -50 to +5 |

P5000B to P5004B, P5020B to P5024B

| Description | Specification | Typical |
|-------------------|---------------|------------|
| 9 kHz to 100 kHz | - | -60 to +2 |
| 100 kHz to 10 MHz | - | -60 to +7 |
| 10 MHz to 4.5 GHz | - | -60 to +13 |
| 4.5 GHz to 9 GHz | - | -60 to +12 |
| 9 GHz to 16 GHz | - | -60 to +10 |
| 16 GHz to 20 GHz | - | -60 to +7 |

P5005B to P5008B, P5025B to P5028B

| Description | Specification | Typical |
|--------------------|---------------|------------|
| 100 kHz to 300 kHz | - | -60 to +1 |
| 300 kHz to 1 MHz | - | -60 to +10 |
| 1 MHz to 17 GHz | - | -60 to +13 |
| 17 GHz to 20 GHz | - | -60 to +11 |
| 20 GHz to 24 GHz | - | -50 to +11 |
| 24 GHz to 38 GHz | - | -50 to +8 |
| 38 GHz to 45 GHz | - | -50 to +5 |
| 45 GHz to 50 GHz | - | -50 to 0 |
| 50 GHz to 53 GHz | - | -50 to -12 |

1. When set to source power below -50 dBm, spurious related to LO signal may be observed.

Table 16. Power level accuracy (dB)

P9370B to P9374B, P9382B, P9384B, P5000B to P5004B, P5020B to P5024B¹

| Description | Specification | Typical |
|-------------------|---------------|---------|
| 9 kHz to 100 kHz | ± 4.0 | ± 1.0 |
| 100 kHz to 15 GHz | ± 1.5 | ± 0.2 |
| 15 GHz to 20 GHz | ± 2.0 | ± 0.3 |

1. At nominal power of 0 dBm, stepped sweep mode.

P9375B, P9377B, P5005B to P5008B, P5025B to P5028B²

| Description | Specification | Typical |
|-------------------|---------------|---------|
| 100 kHz to 10 MHz | ± 3.0 | ± 0.5 |
| 10 MHz to 15 GHz | ± 1.5 | ± 0.2 |
| 15 GHz to 30 GHz | ± 2.0 | ± 0.2 |
| 30 GHz to 40 GHz | ± 2.5 | ± 0.3 |
| 40 GHz to 50 GHz | ± 2.5 | ± 0.5 |
| 50 GHz to 53 GHz | - | ± 1.0 |

2. At nominal power of -15 dBm, stepped sweep mode.

Table 17. Power level linearity (dB)

P9370B to P9374B, P9382B, P9384B, P5000B to P5004B, P5020B to P5024B¹

| Description | Specification ² | Typical ^{3,4} |
|------------------|----------------------------|------------------------|
| 9 kHz to 10 GHz | ± 0.75 | ± 1.0 |
| 10 GHz to 20 GHz | ± 1.0 | ± 1.0 |

1. Level linearity given is relative to 0 dBm.

2. Stepped sweep mode. -20 dBm ≤ P ≤ maximum specified power.

3. Stepped sweep mode. -60 dBm ≤ P < -20 dBm.

4. Swept sweep mode. -60 dBm ≤ P ≤ maximum specified power.

P9375B, P9377B, P5005B to P5008B, P5025B to P5028B¹

| Description | Specification ² | Typical |
|-------------------|----------------------------|-----------------------|
| 100 kHz to 10 GHz | ± 0.75 | ± 1.0 ^{3, 5} |
| 10 GHz to 20 GHz | ± 1.0 | ± 1.0 ^{3, 5} |
| 20 GHz to 50 GHz | ± 2.0 | ± 1.0 ^{4, 6} |

1. Level linearity given is relative to -15 dBm.
2. Stepped sweep mode. -20 dBm ≤ P ≤ maximum specified power.
3. Swept sweep mode. -60 dBm ≤ P ≤ maximum specified power.
4. Swept sweep mode. -65 dBm ≤ P ≤ maximum specified power.
5. Stepped sweep mode. -60 dBm ≤ P < -20 dBm.
6. Stepped sweep mode. -50 dBm ≤ P < -20 dBm.

Table 18. 2nd and 3rd harmonics at 0 dBm (dBc)¹

P9370B to P9374B, P9382B, P9384B, P5000B to P5004B, P5020B to P5024B

| Description | Specification | Typical |
|------------------|---------------|---------|
| 30 kHz to 10 MHz | - | -20 |
| 10 MHz to 20 GHz | - | -25 |

P9375B, P9377B, P5005B to P5008B, P5025B to P5028B

| Description | Specification | Typical |
|------------------|---------------|---------|
| 300 kHz to 1 MHz | - | -20 |
| 1 MHz to 20 GHz | - | -25 |
| 20 GHz to 25 GHz | - | -17 |
| 25 GHz to 40 GHz | - | -20 |
| 40 GHz to 47 GHz | - | -15 |
| 47 GHz to 53 GHz | - | -17 |

1. Listed frequency is harmonic frequency; tested at power of 0 dBm.

Table 19. Sub-harmonic at nominal power (dBc)

P9370B to P9374B, P9382B, P9384B, P5000B to P5004B, P5020B to P5024B¹

| Description | Specification | Typical |
|------------------|---------------|---------|
| 9 kHz to 10 MHz | - | -50 |
| 10 MHz to 20 GHz | - | -35 |

1. Listed frequency is fundamental frequency; tested at power of 0 dBm.

P9375B, P9377B, P5005B to P5008B, P5025B to P5028B²

| Description | Specification | Typical |
|-------------------|---------------|---------|
| 100 kHz to 10 GHz | - | -50 |
| 10 GHz to 20 GHz | - | -35 |
| 20 GHz to 40 GHz | - | -30 |
| 40 GHz to 47 GHz | - | -20 |
| 47 GHz to 50 GHz | - | -10 |
| 50 GHz to 53 GHz | - | -2 |

2. Listed frequency if fundamental frequency; tested at power of -15 dBm.

Table 20. Non-harmonic spurs at nominal power (dBc)

P9370B to P9374B, P9382B, P9384B, P5000B to P5004B, P5020B to P5024B¹

| Description | Specification | Typical |
|------------------|---------------|---------|
| 9 kHz to 10 MHz | - | -50 |
| 10 MHz to 20 GHz | - | -45 |

1. Listed frequency is fundamental frequency. Includes spurious related to LO signal and frac-N.

P9375B, P9377B, P5005B to P5008B, P5025B to P5028B²

| Description | Specification | Typical |
|-------------------|---------------|---------|
| 100 kHz to 10 GHz | - | -50 |
| 10 GHz to 20 GHz | - | -45 |
| 20 GHz to 53 GHz | - | -35 |

2. Listed frequency is fundamental frequency. Includes spurious related to LO signal and frac-N.

Table 21. Nominal power (preset power level)

| Description | Specification |
|--|---------------|
| P9370B to P9374B, P9382B, P9384B P5000B to P5004B, P5020B to P5024B | 0 dBm |
| P9375B, P9377B P5005B to P5008B, P5025B to P5028B | -15 dBm |

Table 22. Power resolution, maximum/minimum settable power

All models

| Description | Specification | Typical |
|------------------------|---------------|----------|
| Settable resolution | - | 0.01 dB |
| Maximum settable power | - | +20 dBm |
| Minimum settable power | - | -100 dBm |

Test Port Input

Table 23. Test port noise floor (dBm)¹

P9370B to P9374B, P9382B, P9384B

| Description | Specification | Typical |
|--------------------------------|---------------|---------|
| 9 kHz to 100 kHz | -84 | -92 |
| 100 kHz to 50 MHz ² | -103 | -110 |
| 50 MHz to 3 GHz | -107 | -114 |
| 3 GHz to 6.5 GHz | -107 | -112 |
| 6.5 GHz to 14 GHz | -104 | -110 |
| 14 GHz to 20 GHz | -101 | -108 |

P9375B, P9377B

| Description | Specification | Typical |
|------------------------------|---------------|---------|
| 100 kHz to 1 MHz | -95 | -105 |
| 1 MHz to 50 MHz ² | -104 | -110 |
| 50 MHz to 3 GHz | -107 | -114 |
| 3 GHz to 6.5 GHz | -107 | -112 |
| 6.5 GHz to 17 GHz | -104 | -110 |
| 17 GHz to 30 GHz | -103 | -109 |
| 30 GHz to 44 GHz | -100 | -107 |

P5000B to P5004B, P5020B to P5024B

| Description | Specification | Typical |
|-------------------------------|---------------|---------|
| 9 kHz to 100 kHz | -101 | -109 |
| 100 kHz to 300 kHz | -112 | -119 |
| 300 kHz to 1 MHz | -120 | -127 |
| 1 MHz to 10 MHz | -125 | -132 |
| 10 MHz to 50 MHz ² | -127 | -134 |
| 50 MHz to 3 GHz | -130 | -137 |
| 3 GHz to 4.5 GHz | -130 | -136 |
| 4.5 GHz to 6.5 GHz | -130 | -135 |
| 6.5 GHz to 9 GHz | -127 | -134 |
| 9 GHz to 14 GHz | -126 | -132 |
| 14 GHz to 16 GHz | -123 | -130 |
| 16 GHz to 20 GHz | -122 | -130 |

P5005B to P5008B, P5025B to P5028B

| Description | Specification | Typical |
|-------------------------------|---------------|---------|
| 100 kHz to 300 kHz | -97 | -105 |
| 300 kHz to 500 kHz | -97 | -110 |
| 500 kHz to 1 MHz | -110 | -120 |
| 1 MHz to 10 MHz | -115 | -124 |
| 10 MHz to 50 MHz ² | -127 | -133 |
| 50 MHz to 200 MHz | -130 | -133 |
| 200 MHz to 3 GHz | -130 | -137 |
| 3 GHz to 6.5 GHz | -130 | -135 |
| 6.5 GHz to 9 GHz | -128 | -134 |
| 9 GHz to 17 GHz | -127 | -133 |
| 17 GHz to 25 GHz | -125 | -131 |
| 25 GHz to 30 GHz | -122 | -129 |
| 30 GHz to 45 GHz | -120 | -127 |
| 45 GHz to 50 GHz | -105 | -115 |
| 50 GHz to 53 GHz | -95 | -113 |

1. Noise floor in a 10 Hz IF Bandwidth. Measured with 1 kHz IF bandwidth for 9 kHz to < 100 kHz, and 30 kHz IF bandwidth for 100 kHz to 53 GHz. Test port terminated.
2. It may typically be degraded at 25 MHz.

Table 24. Receiver compression at test port

P9370B to P9374B, P9382B, P9384B

| Description | Input power at test port (dBm) | Specification | | Typical | |
|-------------------|--------------------------------|----------------|-----------|----------------|-----------|
| | | Magnitude (dB) | Phase (°) | Magnitude (dB) | Phase (°) |
| 9 kHz to 100 kHz | 0 | 0.5 | 5 | 0.10 | 1.5 |
| 100 kHz to 10 MHz | +5 | 0.2 | 5 | 0.05 | 1.0 |
| 10 MHz to 6.5 GHz | +8 | 0.2 | 5 | 0.05 | 1.0 |
| 6.5 GHz to 9 GHz | +8 | 0.2 | 5 | 0.05 | 1.0 |
| 9 GHz to 16 GHz | +7 | 0.2 | 5 | 0.05 | 1.0 |
| 16 GHz to 20 GHz | +4 | 0.2 | 5 | 0.05 | 1.0 |

P9375B, P9377B

| Description | Input power at test port (dBm) | Specification | | Typical | |
|--------------------|--------------------------------|----------------|-----------|----------------|-----------|
| | | Magnitude (dB) | Phase (°) | Magnitude (dB) | Phase (°) |
| 100 kHz to 300 kHz | -2 | 0.2 | 5 | 0.10 | 1.0 |
| 300 kHz to 1 MHz | +7 | 0.2 | 5 | 0.10 | 1.0 |
| 1 MHz to 17 GHz | +8 | 0.2 | 5 | 0.05 | 1.0 |
| 17 GHz to 20 GHz | +7 | 0.2 | 5 | 0.05 | 1.0 |
| 20 GHz to 30 GHz | +5 | 0.2 | 5 | 0.05 | 1.0 |
| 30 GHz to 44 GHz | +2 | 0.2 | 5 | 0.05 | 1.0 |

P5000B to P5004B, P5020B to P5024B

| | | Specification | | Typical | |
|-------------------|--------------------------------|----------------|-----------|----------------|-----------|
| Description | Input power at test port (dBm) | Magnitude (dB) | Phase (°) | Magnitude (dB) | Phase (°) |
| 9 kHz to 100 kHz | 0 | 0.5 | 5 | 0.10 | 1.5 |
| 100 kHz to 10 MHz | +5 | 0.2 | 5 | 0.05 | 1.0 |
| 10 MHz to 6.5 GHz | +10 | 0.2 | 5 | 0.05 | 1.0 |
| 6.5 GHz to 9 GHz | +9 | 0.2 | 5 | 0.05 | 1.0 |
| 9 GHz to 16 GHz | +7 | 0.2 | 5 | 0.05 | 1.0 |
| 16 GHz to 20 GHz | +4 | 0.2 | 5 | 0.05 | 1.0 |

P5005B to P5008B, P5025B to P5028B

| | | Specification | | Typical | |
|--------------------|--------------------------------|----------------|-----------|----------------|-----------|
| Description | Input power at test port (dBm) | Magnitude (dB) | Phase (°) | Magnitude (dB) | Phase (°) |
| 100 kHz to 300 kHz | -2 | 0.2 | 5 | 0.10 | 1.0 |
| 300 kHz to 1 MHz | +7 | 0.2 | 5 | 0.10 | 1.0 |
| 1 MHz to 17 GHz | +10 | 0.2 | 5 | 0.05 | 1.0 |
| 17 GHz to 20 GHz | +7 | 0.2 | 5 | 0.05 | 1.0 |
| 20 GHz to 30 GHz | +5 | 0.2 | 5 | 0.05 | 1.0 |
| 30 GHz to 45 GHz | +2 | 0.2 | 5 | 0.05 | 1.0 |
| 45 GHz to 50 GHz | -5 | 0.2 | 5 | 0.05 | 1.0 |
| 50 GHz to 53 GHz | -23 | 0.2 | 5 | 0.05 | 1.0 |

Table 25. Trace noise magnitude (dB rms)¹

P9370B to P9374B, P9382B, P9384B

| Description | Specification | Typical |
|------------------------------|---------------|---------|
| 9 kHz to 30 kHz | 0.005 | 0.0025 |
| 30 kHz to 100 kHz | 0.003 | 0.001 |
| 100 kHz to 10 MHz | 0.0021 | 0.0007 |
| 10 MHz to 6 GHz ² | 0.0015 | 0.0005 |
| 6 GHz to 10 GHz | 0.002 | 0.0006 |
| 10 GHz to 20 GHz | 0.003 | 0.001 |

P9375B, P9377B

| Description | Specification | Typical |
|-------------------------------|---------------|---------|
| 100 kHz to 300 kHz | 0.005 | 0.002 |
| 300 kHz to 1 MHz | 0.003 | 0.001 |
| 1 MHz to 4.5 GHz ² | 0.0018 | 0.0006 |
| 4.5 GHz to 10 GHz | 0.0023 | 0.001 |
| 10 GHz to 17 GHz | 0.003 | 0.0015 |
| 17 GHz to 30 GHz | 0.0036 | 0.0015 |
| 30 GHz to 44 GHz | 0.0072 | 0.0027 |

P5000B to P5004B, P5020B to P5024B

| Description | Specification | Typical |
|-------------------------------|---------------|---------|
| 9 kHz to 30 kHz | 0.005 | 0.0025 |
| 30 kHz to 100 kHz | 0.003 | 0.001 |
| 100 kHz to 6 GHz ² | 0.0015 | 0.0005 |
| 6 GHz to 10 GHz | 0.002 | 0.0006 |
| 10 GHz to 20 GHz | 0.003 | 0.001 |

P5005B to P5008B, P5025B to P5028B

| Description | Specification | Typical |
|-------------------------------|---------------|---------|
| 100 kHz to 300 kHz | 0.005 | 0.002 |
| 300 kHz to 1 MHz | 0.003 | 0.001 |
| 1 MHz to 4.5 GHz ² | 0.0015 | 0.0005 |
| 4.5 GHz to 10 GHz | 0.0015 | 0.0007 |
| 10 GHz to 17 GHz | 0.002 | 0.001 |
| 17 GHz to 30 GHz | 0.003 | 0.0013 |
| 30 GHz to 45 GHz | 0.006 | 0.0022 |
| 45 GHz to 50 GHz | 0.018 | 0.006 |

1. Transmission and reflection trace noise in a 1 kHz IF bandwidth for < 10 MHz, 10 kHz IF bandwidth for ≥ 10 MHz. At maximum specified power.
2. It may typically be degraded at particular frequencies such as 25 MHz, 54 MHz, 58.5 MHz, 156 MHz, 108 MHz, 120 MHz or 132 MHz.

Table 26. Trace noise phase (degree rms)¹

P9370B to P9374B, P9382B, P9384B

| Description | Specification | Typical |
|-------------------------------|---------------|---------|
| 9 kHz to 30 kHz | 0.07 | 0.025 |
| 30 kHz to 100 kHz | 0.05 | 0.017 |
| 100 kHz to 300 kHz | 0.035 | 0.006 |
| 300 kHz to 6 GHz ² | 0.01 | 0.003 |
| 6 GHz to 10 GHz | 0.02 | 0.006 |
| 10 GHz to 13.5 GHz | 0.03 | 0.006 |
| 13.5 GHz to 20 GHz | 0.03 | 0.01 |

P9375B, P9377B

| Description | Specification | Typical |
|-----------------------------|---------------|---------|
| 100 kHz to 300 kHz | 0.07 | 0.015 |
| 300 kHz to 1 MHz | 0.03 | 0.01 |
| 1 MHz to 6 GHz ² | 0.024 | 0.0036 |
| 6 GHz to 10 GHz | 0.024 | 0.0048 |
| 10 GHz to 17 GHz | 0.024 | 0.0072 |
| 17 GHz to 30 GHz | 0.032 | 0.016 |
| 30 GHz to 44 GHz | 0.048 | 0.022 |

P5000B to P5004B, P5020B to P5024B

| Description | Specification | Typical |
|-------------------------------|---------------|---------|
| 9 kHz to 30 kHz | 0.07 | 0.025 |
| 30 kHz to 100 kHz | 0.05 | 0.017 |
| 100 kHz to 300 kHz | 0.035 | 0.006 |
| 300 kHz to 6 GHz ² | 0.01 | 0.003 |
| 6 GHz to 10 GHz | 0.02 | 0.006 |
| 10 GHz to 13.5 GHz | 0.03 | 0.006 |
| 13.5 GHz to 20 GHz | 0.03 | 0.01 |

P5005B to P5008B, P5025B to P5028B

| Description | Specification | Typical |
|-----------------------------|---------------|---------|
| 100 kHz to 300 kHz | 0.07 | 0.015 |
| 300 kHz to 1 MHz | 0.03 | 0.01 |
| 1 MHz to 6 GHz ² | 0.02 | 0.003 |
| 6 GHz to 10 GHz | 0.02 | 0.004 |
| 10 GHz to 17 GHz | 0.02 | 0.006 |
| 17 GHz to 30 GHz | 0.02 | 0.01 |
| 30 GHz to 45 GHz | 0.04 | 0.018 |
| 45 GHz to 50 GHz | 0.18 | 0.03 |

1. Transmission and reflection trace noise in a 1 kHz IF bandwidth for < 10 MHz, 10 kHz IF bandwidth for ≥ 10 MHz. At maximum specified power.
2. It may typically be degraded at particular frequencies such as 25 MHz, 54 MHz, 58.5 MHz, 156 MHz, 108 MHz, 120 MHz or 132 MHz.

Table 27. Temperature stability – typical

P9370B to P9374B, P9382B, P9384B, P5000B to P5004B, P5020B to P5024B

| Description | Magnitude (dB/°C) | Phase (degree/°C) |
|--------------------|-------------------|-------------------|
| 9 kHz to 300 kHz | 0.03 | 0.2 |
| 300 kHz to 4.5 GHz | 0.005 | 0.1 |
| 4.5 GHz to 6 GHz | 0.01 | 0.1 |
| 6 GHz to 6.5 GHz | 0.01 | 0.2 |
| 6.5 GHz to 10 GHz | 0.015 | 0.2 |
| 10 GHz to 14 GHz | 0.015 | 0.3 |
| 14 GHz to 20 GHz | 0.02 | 0.4 |

P9375B, P9377B, P5005B to P5008B

| Description | Magnitude (dB/°C) | Phase (degree/°C) |
|-------------------|-------------------|-------------------|
| 100 kHz to 1 MHz | 0.03 | 1.0 |
| 1 MHz to 10 MHz | 0.005 | 0.2 |
| 10 MHz to 4.5 GHz | 0.005 | 0.1 |
| 4.5 GHz to 10 GHz | 0.01 | 0.1 |
| 10 GHz to 20 GHz | 0.01 | 0.2 |
| 20 GHz to 30 GHz | 0.01 | 0.25 |
| 30 GHz to 40 GHz | 0.01 | 0.3 |
| 40 GHz to 50 GHz | 0.03 | 0.8 |
| 50 GHz to 53 GHz | 0.06 | 1.0 |

P5025B to P5028B

| Description | Magnitude (dB/°C) | Phase (degree/°C) |
|-------------------|-------------------|-------------------|
| 100 kHz to 1 MHz | 0.03 | 1.0 |
| 1 MHz to 10 MHz | 0.005 | 0.2 |
| 10 MHz to 4.5 GHz | 0.005 | 0.1 |
| 4.5 GHz to 10 GHz | 0.01 | 0.1 |
| 10 GHz to 20 GHz | 0.01 | 0.2 |
| 20 GHz to 30 GHz | 0.01 | 0.4 |
| 30 GHz to 40 GHz | 0.01 | 0.4 |
| 40 GHz to 50 GHz | 0.03 | 0.8 |
| 50 GHz to 53 GHz | 0.06 | 1.0 |

Table 28. Damage input level

All models



| Description | |
|--------------------|-------------------------------------|
| Damage Input Level | +27 dBm or ± 35 VDC (Warranted) |

Dynamic Accuracy



Accuracy of the test port input power relative to the reference input power level. Measured with 10 Hz IF bandwidth.

Dynamic accuracy¹ – specification



P9370B to P9374B, P9382B, P9384B

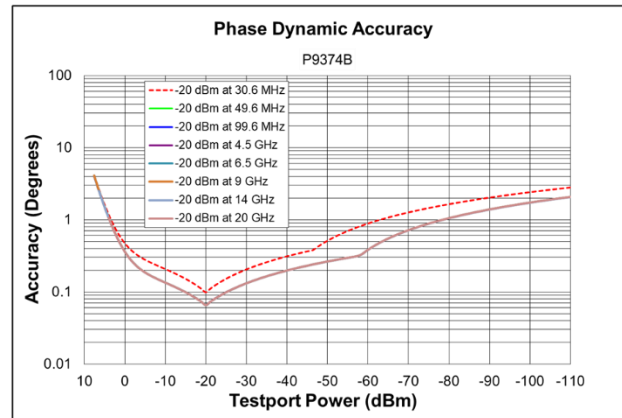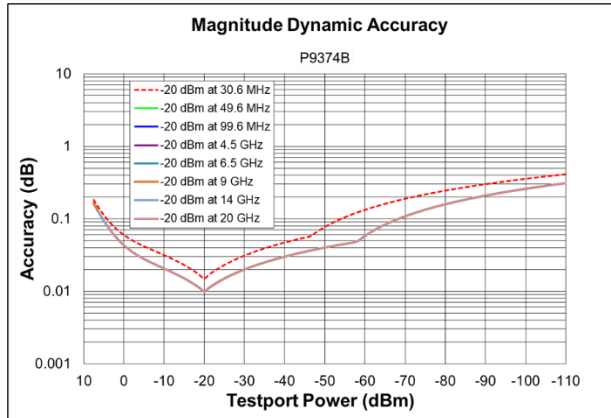



P9375B, P9377B

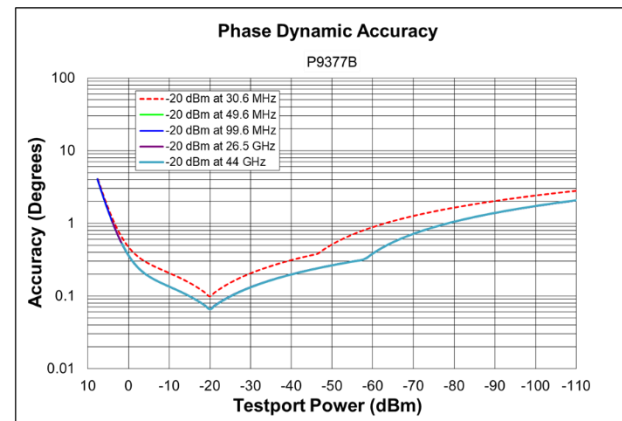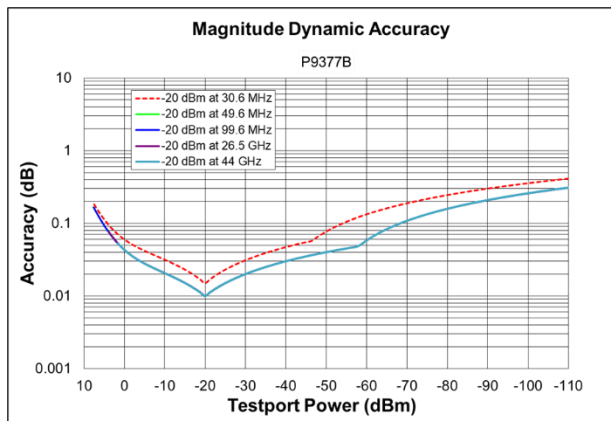

P5000B to P5004B, P5020B to P5024B

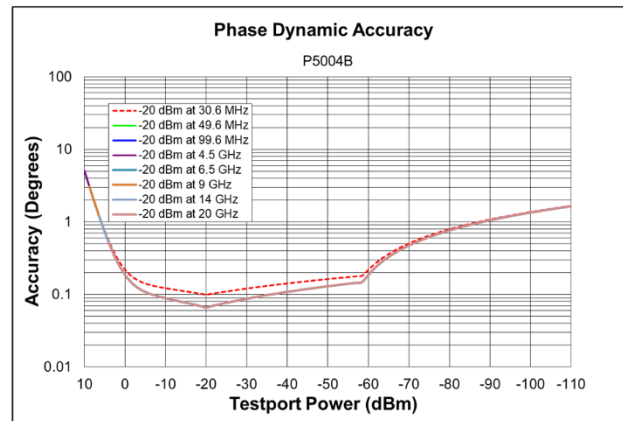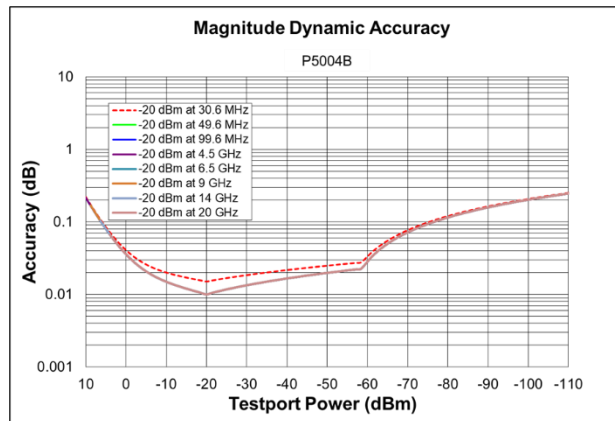

P5005B to P5008B, P5025B to P5028B

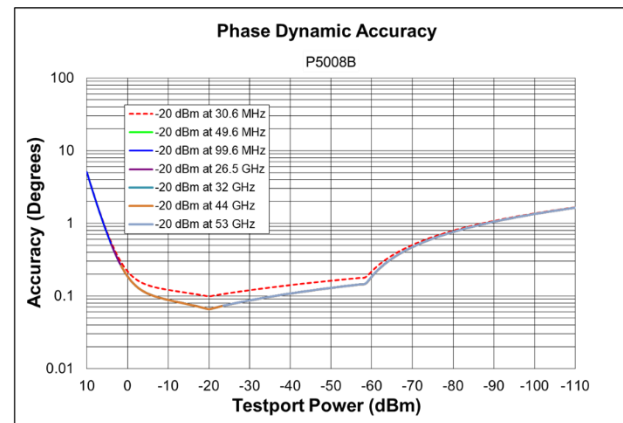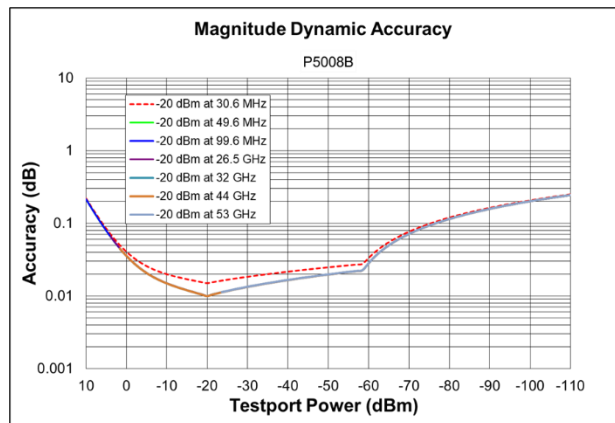

- Dynamic accuracy is verified with the following measurements:
 - Compression over frequency.
 - IF linearity at three single frequencies (30.6 MHz, 49.6 MHz and 99.6 MHz) using a reference level of -20 dBm for an input power range of 0 to -60 dBm. For values below -60 dBm, refer to [VNA Receiver Dynamic Accuracy Specifications and Uncertainties](#).
- Download Uncertainty Calculator from http://www.keysight.com/find/na_calculator to generate the curves of dynamic accuracy.

Spectrum Analysis (with S97090xB)

This section provides specifications for the P50xxB Streamline Series VNA. The S97090xB Software is required to enable spectrum analysis functions of the P50xxB.

Table 29. Frequency specifications

All models

| Description | Specification | Supplemental Information |
|--|-----------------------------|---|
| Frequency Reference¹ | | |
| Accuracy | - | ± [(time since last adjustment x aging rate) + temperature stability + calibration accuracy], typical |
| Aging Rate | - | ± 3 ppm/year maximum, typical |
| Temperature Stability | - | ± 7 ppm (0 to 50 °C) |
| Achievable Initial Calibration Accuracy | ± 7 ppm (25 ± 5 °C) | - |
| Frequency Readout Accuracy (Start, Stop, Center, Marker) | - | ± [(readout frequency x frequency reference accuracy) + (< 1% x RBW)], nominal |
| Frequency Span | | |
| Minimum/Maximum | Analyzer's full span | - |
| Resolution | 1 Hz | - |
| Sweep (Trace) Point Range | 11 to 100,001 | - |
| Resolution Bandwidth (RBW) | | |
| Range (-3 dB Bandwidth) | 10 Hz to 3 MHz in 10% steps | - |
| Bandwidth Range Accuracy | - | ± 1%, all RBW, except below 100 MHz with 3 MHz RBW |
| Selectivity (-60 dB/-3 dB) | - | Gaussian: 4.5:1, Flat top: 2.47:1, Kaiser: 3.82:1, Blackman: 3.58:1 |
| Video Bandwidth (VBW) | | |
| Range | 10 Hz to 3 MHz | - |

1. Frequency reference accuracy can be improved by using external frequency reference with better accuracy.

Table 30. Time specifications

| Description | Specification | Supplemental Information |
|---|---|--------------------------|
| Sweep Time and Triggering | | |
| Sweep Time Range | Auto | - |
| Trigger Types | Continuous, Single, Group, Manual, External | - |
| Trigger Delay Range | 0 to 3 s | - |
| Trigger Delay Resolution | 1 μ s | - |
| Measuring and Display Update Rate (milliseconds)¹ | | |
| 20 MHz Span, 3 kHz RBW, 3 kHz VBW | - | 64 |
| 100 MHz Span, Auto RBW, Auto VBW | - | 63 |
| 1 GHz Span, 3 kHz RBW, 3 kHz VBW | - | 149 |
| 1 GHz Span, 300 kHz RBW, 300 kHz VBW | - | 63 |
| 10 GHz Span, 3 kHz RBW, 3 kHz VBW | - | 1461 |
| 10 GHz Span, 300 kHz RBW, 300 kHz VBW | - | 319 |
| 10 MHz to 20 GHz, RBW/VBW = 1 MHz | - | 570 |
| 10 MHz to 50 GHz, RBW/VBW = 1 MHz | - | 1426 |

1. Measured with a 2-port model with firmware revision A.15.20.0x.

Table 31. Amplitude accuracy and range specifications

All models

| Description | Specification |
|--------------------------|---|
| Amplitude Range | |
| Measurement Range | DANL to maximum input level |
| Input Attenuator Range | High attenuation or Low attenuation |
| Maximum Safe Input Level | +27 dBm |
| Display Range | |
| Log Scale | 0.001 to 500 dB/div in 0.001 steps |
| Linear Scale | 10 divisions (default) |
| Scale Units | dBm, mW |
| Trace Detectors Types | Average, Sample, Peak, Normal, Negative Peak, Peak sample, Peak average |

Table 32. SA Detector accuracy (dB)¹ – specifications

P5000B to P5004B, P5020B to P5024B

| Description | Specification (dB) |
|------------------|--------------------|
| 9 kHz to 10 MHz | ± 0.15 |
| 10 MHz to 20 GHz | ± 0.1 |

P5005B to P5008B, P5025B to P5028B

| Description | Specification (dB) |
|-------------------|--------------------|
| 100 kHz to 10 MHz | ± 0.15 |
| 10 MHz to 20 GHz | ± 0.1 |
| 20 GHz to 53 GHz | ± 0.15 |

1. With high attenuation. SA detector accuracy is residual error of IF response calibration. IF response is characterized with P50xxB's standard measurement class after power and S-parameter calibration. Therefore, the SA total absolute amplitude accuracy includes power meter, S-parameter and SA detector accuracies. Add input attenuation switching uncertainty if receiver attenuator is changed after user calibration.

Table 33. Input attenuation switching uncertainty (dB) – supplemental information

P5000B to P5004B, P5020B to P5024B

| Description | Supplemental Information |
|------------------|--------------------------|
| 9 kHz to 50 MHz | ± 0.5 |
| 50 MHz to 20 GHz | ± 1.0 |

P5005B to P5008B, P5025B to P5028B

| Description | Supplemental Information |
|-------------------|--------------------------|
| 100 kHz to 50 MHz | ± 0.5 |
| 50 MHz to 53 GHz | ± 1.0 |

Table 34. Input VSWR – specifications

P5000B to P5004B, P5020B to P5024B

| Description | Specifications |
|-------------------|----------------|
| 300 kHz to 10 MHz | 1.433 |
| 10 MHz to 1.5 GHz | 1.329 |
| 1.5 GHz to 3 GHz | 1.377 |
| 3 GHz to 10 GHz | 1.785 |
| 10 GHz to 16 GHz | 1.785 |
| 16 GHz to 20 GHz | 2.323 |

P5005B to P5008B, P5025B to P5028B

| Description | Specifications |
|------------------|----------------|
| 1 MHz to 3 MHz | 1.499 |
| 3 MHz to 4 GHz | 1.329 |
| 4 GHz to 10 GHz | 1.671 |
| 10 GHz to 20 GHz | 2.100 |
| 20 GHz to 27 GHz | 2.323 |
| 27 GHz to 40 GHz | 3.570 |
| 40 GHz to 50 GHz | 2.323 |
| 50 GHz to 53 GHz | 3.570 |

Table 35. Other amplitude accuracy – supplemental information

All models

| Description | Supplemental Information |
|---------------------------|---|
| RBW Switching Uncertainty | 0.02 dB |
| Display Scale Fidelity | See dynamic accuracy specification. Specification applied to SA measurement class with user calibration between -10 dBm and -40 dBm input power and measurement between +10 dBm and -120 dBm input power. |

Table 36. Spurious response – supplemental information

All models

| Description | Supplemental Information |
|---------------------|---|
| Image Response | Mostly eliminated. Intermittent image response may be seen when making multi-tone or modulated signal measurements. |
| LO Related Spurious | Eliminated |

Table 37. Displayed average noise level (DANL) at test ports with low attenuation (dBm/Hz)¹ – specifications

P5000B to P5004B, P5020B to P5024B

| Description | Specifications | Typical |
|--------------------|----------------|---------|
| 9 kHz to 100 kHz | -114 | -122 |
| 100 kHz to 300 kHz | -125 | -132 |
| 300 kHz to 1 MHz | -133 | -138 |
| 1 MHz to 10 MHz | -138 | -145 |
| 10 MHz to 100 MHz | -140 | -147 |
| 100 MHz to 4.5 GHz | -144 | -150 |
| 4.5 GHz to 6.5 GHz | -144 | -149 |
| 6.5 GHz to 9 GHz | -141 | -148 |
| 9 GHz to 14 GHz | -140 | -146 |
| 14 GHz to 16 GHz | -137 | -144 |
| 16 GHz to 20 GHz | -136 | -144 |

P5005B to P5008B, P5025B to P5028B

| Description | Specifications | Typical |
|-------------------------------|----------------|---------|
| 100 kHz to 300 kHz | -110 | -118 |
| 300 kHz to 500 kHz | -110 | -120 |
| 500 kHz to 1 MHz ² | -123 | -130 |
| 1 MHz to 10 MHz | -128 | -134 |
| 10 MHz to 100 MHz | -136 | -142 |
| 100 MHz to 200 MHz | -144 | -146 |
| 200 MHz to 3 GHz | -144 | -150 |
| 3 GHz to 6.5 GHz | -144 | -148 |
| 6.5 GHz to 9 GHz | -142 | -147 |
| 9 GHz to 17 GHz | -141 | -146 |
| 17 GHz to 20 GHz | -139 | -146 |
| 20 GHz to 25 GHz | -139 | -143 |
| 25 GHz to 30 GHz | -136 | -143 |
| 30 GHz to 45 GHz | -134 | -141 |
| 45 GHz to 50 GHz | -119 | -129 |
| 50 GHz to 53 GHz | -109 | -127 |

1. Tested with 1 kHz RBW for 9 kHz to 50 MHz and 10 kHz RBW for above 50 MHz, test port terminated, average detector, averaging type = Log, IF gain = Auto, image rejection = normal, random LO OFF.
2. A residual spurious response may be observed around 600 kHz.

Table 38. Displayed average noise level (DANL) at test ports with high attenuation (dBm/Hz)¹ – typical

P5000B to P5004B, P5020B to P5024B

| Description | Specifications | Typical |
|--------------------|----------------|---------|
| 9 kHz to 100 kHz | - | -100 |
| 100 kHz to 300 kHz | - | -110 |
| 300 kHz to 10 MHz | - | -116 |
| 10 MHz to 100 MHz | - | -116 |
| 100 MHz to 4.5 GHz | - | -127 |
| 4.5 GHz to 6.5 GHz | - | -127 |
| 6.5 GHz to 9 GHz | - | -126 |
| 9 GHz to 14 GHz | - | -124 |
| 14 GHz to 16 GHz | - | -122 |
| 16 GHz to 20 GHz | - | -122 |

P5005B to P5008B, P5025B to P5028B

| Description | Specifications | Typical |
|-------------------------------|----------------|---------|
| 100 kHz to 300 kHz | - | -96 |
| 300 kHz to 500 kHz | - | -98 |
| 500 kHz to 1 MHz ² | - | -108 |
| 1 MHz to 10 MHz | - | -112 |
| 10 MHz to 100 MHz | - | -112 |
| 100 MHz to 200 MHz | - | -124 |
| 200 MHz to 3 GHz | - | -128 |
| 3 GHz to 6.5 GHz | - | -126 |
| 6.5 GHz to 9 GHz | - | -125 |
| 9 GHz to 20 GHz | - | -124 |
| 20 GHz to 30 GHz | - | -121 |
| 30 GHz to 45 GHz | - | -119 |
| 45 GHz to 50 GHz | - | -107 |
| 50 GHz to 53 GHz | - | -105 |

1. Tested with 1 kHz RBW for 9 kHz to 50 MHz and 10 kHz RBW for above 50 MHz, test port terminated, average detector, averaging type = Log, IF gain = Auto, image rejection = normal, random LO OFF.
2. A residual spurious response may be observed around 600 kHz.

Table 39. Second harmonic distortion with high attenuation¹ – supplemental information

P5000B to P5004B, P5020B to P5024B

| Description | SHI (dBm) |
|-----------------|-----------|
| 50 MHz to 1 GHz | +30 |
| 1 GHz to 4 GHz | +38 |
| 4 GHz to 10 GHz | +47 |

P5005B to P5008B, P5025B to P5028B

| Description | SHI (dBm) |
|--------------------|-----------|
| 50 MHz to 1 GHz | +30 |
| 1 GHz to 4 GHz | +38 |
| 4 GHz to 10 GHz | +47 |
| 10 GHz to 15 GHz | +44 |
| 15 GHz to 26.5 GHz | +40 |

1. Tested with 0 dBm for 50 MHz to 10 GHz, and -5 dBm for 10 GHz to 26.5 GHz input at test port, 10 MHz tone separations.

Table 40. Second harmonic distortion with low attenuation¹ – supplemental information

P5000B to P5004B, P5020B to P5024B

| Description | SHI (dBm) |
|-----------------|-----------|
| 50 MHz to 1 GHz | +10 |
| 1 GHz to 4 GHz | +20 |
| 4 GHz to 10 GHz | +30 |

P5005B to P5008B, P5025B to P5028B

| Description | SHI (dBm) |
|--------------------|-----------|
| 50 MHz to 1 GHz | +10 |
| 1 GHz to 4 GHz | +20 |
| 4 GHz to 10 GHz | +30 |
| 10 GHz to 15 GHz | +26 |
| 15 GHz to 20 GHz | +21 |
| 20 GHz to 26.5 GHz | +16 |

1. Tested with -25 dBm input at test port, 10 MHz tone separations.

Table 41. Third order intermodulation distortion with high attenuation¹ – characteristic

P5000B to P5004B, P5020B to P5024B

| Description | Distortion (dBc) | TOI (dBm) |
|-------------------|------------------|-----------|
| 50 MHz to 200 MHz | -40 | +20 |
| 200 MHz to 2 GHz | -44 | +22 |
| 2 GHz to 5 GHz | -46 | +23 |
| 5 GHz to 10 GHz | -50 | +25 |
| 10 GHz to 15 GHz | -60 | +25 |
| 15 GHz to 20 GHz | -54 | +22 |

P5005B to P5008B, P5025B to P5028B

| Description | Distortion (dBc) | TOI (dBm) |
|-------------------|------------------|-----------|
| 50 MHz to 200 MHz | -40 | +20 |
| 200 MHz to 2 GHz | -44 | +22 |
| 2 GHz to 5 GHz | -46 | +23 |
| 5 GHz to 10 GHz | -50 | +25 |
| 10 GHz to 15 GHz | -56 | +23 |
| 15 GHz to 20 GHz | -52 | +21 |
| 20 GHz to 30 GHz | -42 | +16 |
| 30 GHz to 40 GHz | -48 | +14 |
| 40 GHz to 53 GHz | -52 | +11 |

1. Tested with 0 dBm for 50 MHz to 10 GHz, -5 dBm for 10 GHz to 30 GHz, -10 dBm for 30 GHz to 40 GHz, and -15 dBm for 40 GHz to 53 GHz input at test port, 10 MHz tone separations.

Table 42. Third order intermodulation distortion with low attenuation¹ – characteristic

P5000B to P5004B, P5020B to P5024B

| Description | Distortion (dBc) | TOI (dBm) |
|------------------|------------------|-----------|
| 50 MHz to 5 GHz | -56 | +3 |
| 5 GHz to 10 GHz | -52 | +1 |
| 10 GHz to 20 GHz | -66 | +8 |


P5005B to P5008B, P5025B to P5028B

| Description | Distortion (dBc) | TOI (dBm) |
|------------------|------------------|-----------|
| 50 MHz to 5 GHz | -56 | +3 |
| 5 GHz to 10 GHz | -52 | +1 |
| 10 GHz to 20 GHz | -66 | +7 |
| 20 GHz to 30 GHz | -66 | +5 |
| 30 GHz to 53 GHz | -66 | +2 |

1. Tested with -25 dBm input at test port, 10 MHz tone separations.


DANL and distortion relative to test port level (dB) – nominal

P5000B to P5004B, P5020B to P5024B¹

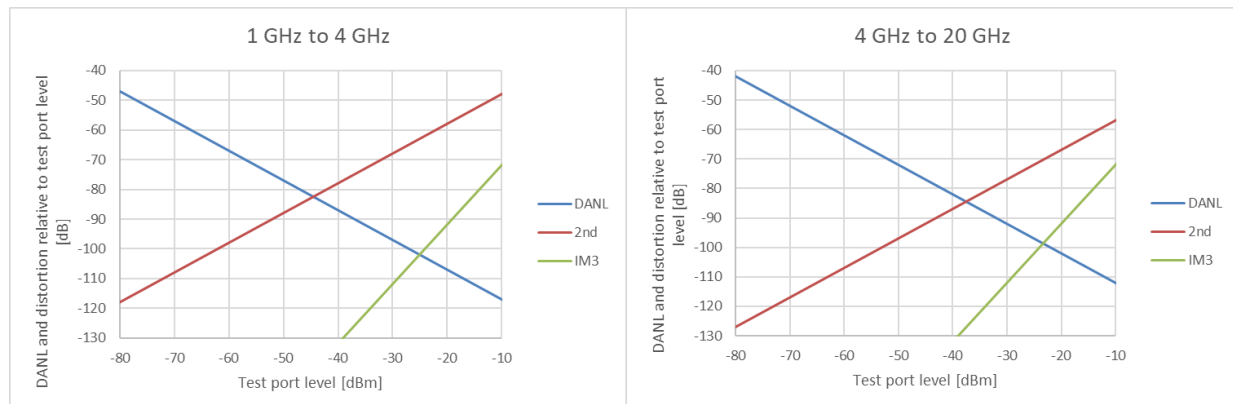

1. With High Attenuation. 2nd harmonic distortion applies up to 10 GHz.

P5005B to P5008B, P5025B to P5028B²

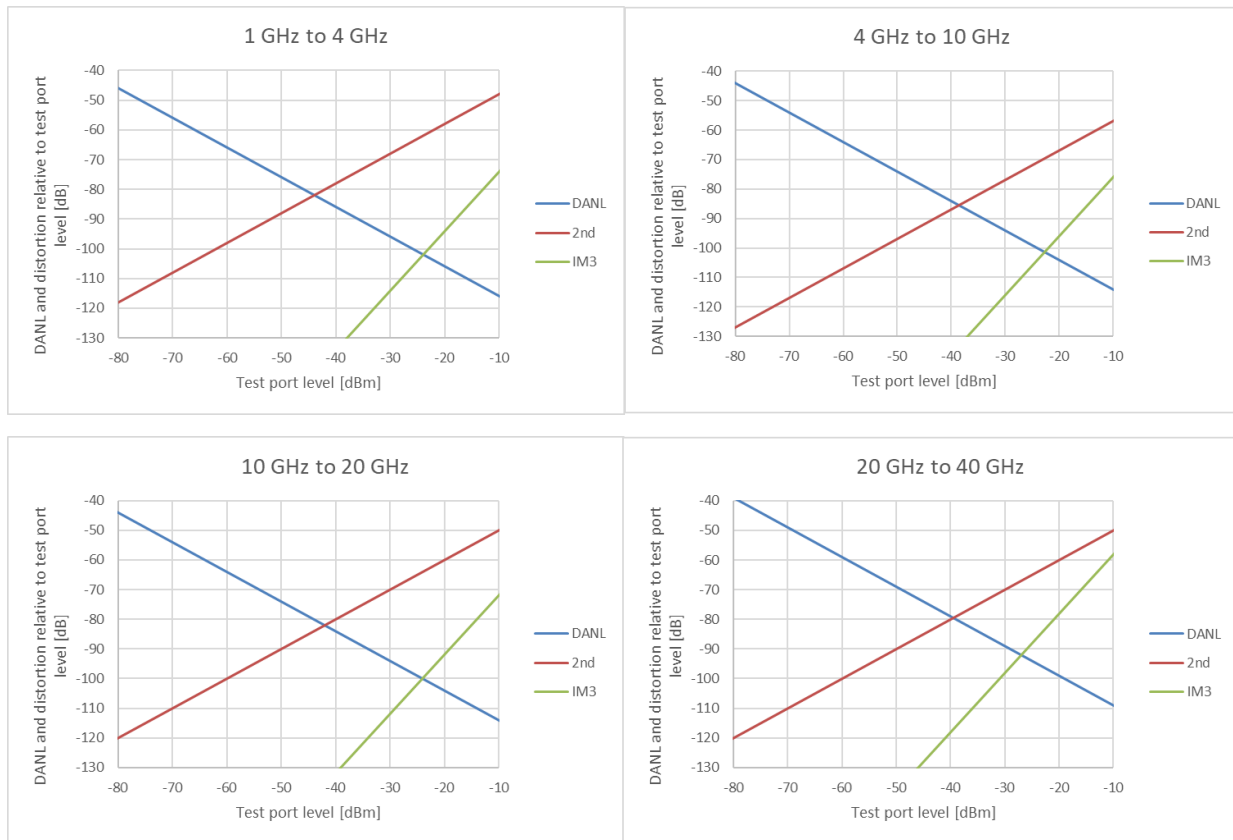

2. With High Attenuation. 2nd harmonic distortion applies up to 26.5 GHz.

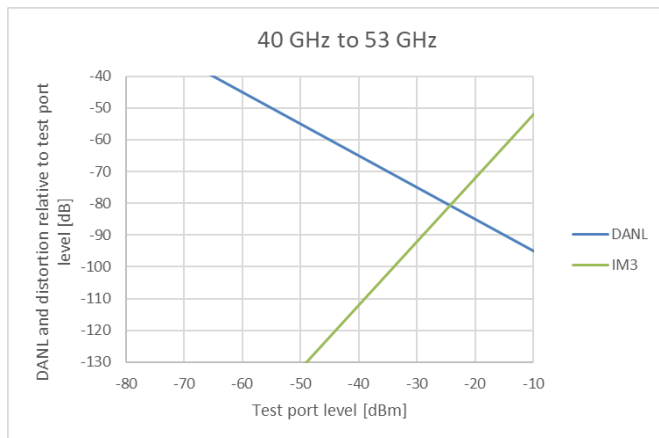


Table 43. Receiver Phase Noise (dBc/Hz)¹ – Typical

All models

| Description | 1 kHz | 10 kHz | 100 kHz | 1 MHz | 10 MHz |
|--------------------------|-------|--------|---------|-------|--------|
| CF = 1 GHz | -103 | -103 | -103 | -128 | -130 |
| CF = 3 GHz | -96 | -96 | -96 | -120 | -130 |
| CF = 10 GHz | -83 | -83 | -83 | -116 | -127 |
| CF = 20 GHz ² | -76 | -76 | -76 | -110 | -121 |

1. At maximum specified power. Spurious signals are excluded. With the SA class, phase noise of VNA's source is equivalent to the receiver phase noise.
2. Tested at 19.99 GHz.

Pulsed-RF Measurements (with S97025xB)

This section provides specifications for the P50xxB Streamline Series VNA. The S97025xB Software is required to enable pulsed-RF measurement functions of the P50xxB VNA.

Table 44. Pulse modulation On/Off ratio (dB) – typical

P5000B to P5004B, P5020B to P5024B

| Description | Normal Mode ¹ | Fast Mode |
|-------------------|--------------------------|-----------|
| 9 kHz to 4.5 GHz | 80 | 50 |
| 4.5 GHz to 15 GHz | 70 | 40 |
| 15 GHz to 20 GHz | 70 | 35 |


P5005B to P5008B, P5025B to P5028B

| Description | Normal Mode ¹ | Fast Mode |
|------------------|--------------------------|-----------|
| 100 kHz to 3 GHz | 80 | 50 |
| 3 GHz to 8 GHz | 80 | 40 |
| 8 GHz to 20 GHz | 80 | 38 |
| 20 GHz to 40 GHz | 70 | 30 |
| 40 GHz to 50 GHz | 70 | 25 |


1. At power of > -20 dBm.

Pulse modulation shape examples

P5000B to P5004B, P5020B to P5024B

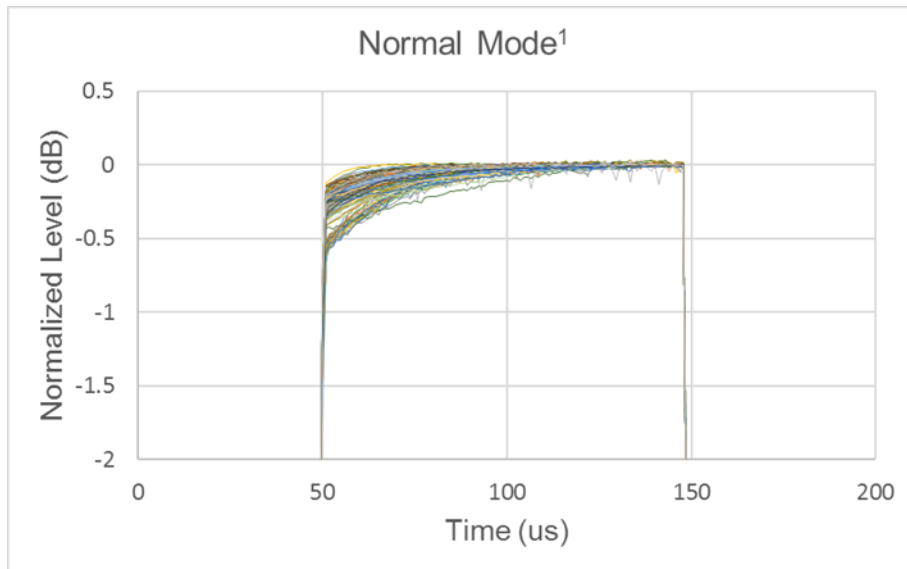


1. Measured with a 500 kHz IF bandwidth, no averaging (Average Type = Point). With 100 us pulse width setting. 50 usec/div.

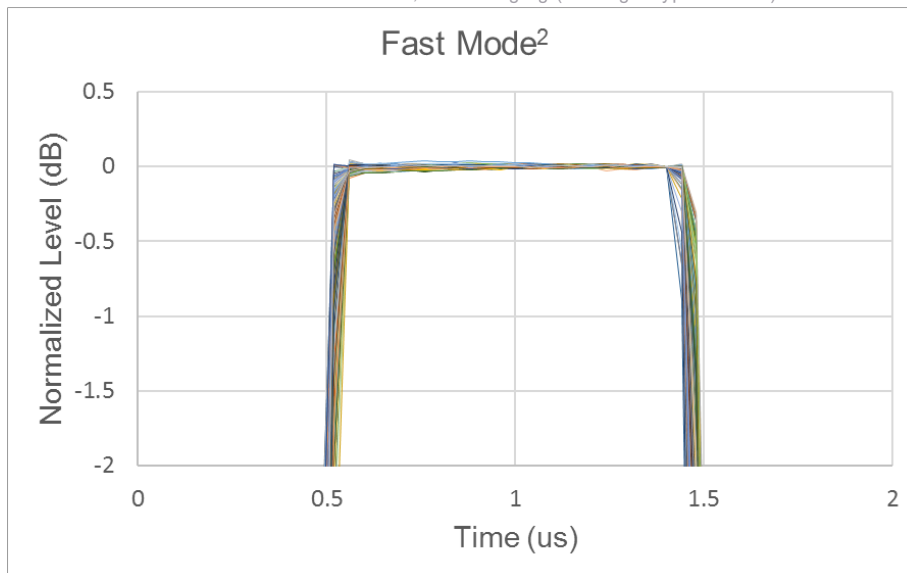


2. Measured with a 15 MHz IF bandwidth, averaging factor of 16 (Average Type = Point). With 1 us pulse width setting. 500 nsec/div.

P5005B to P5008B, P5025B to P5028B


1 GHz to 26.5 GHz

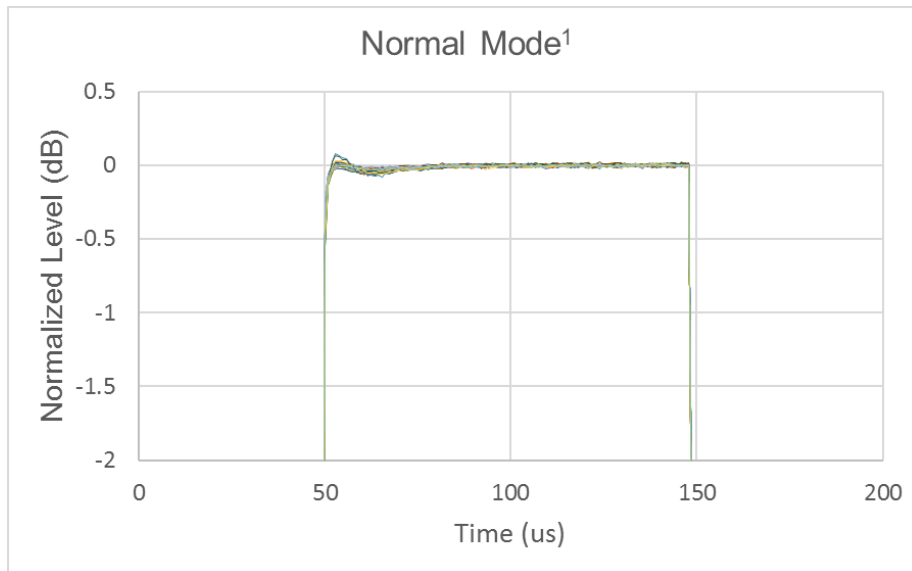


32 GHz

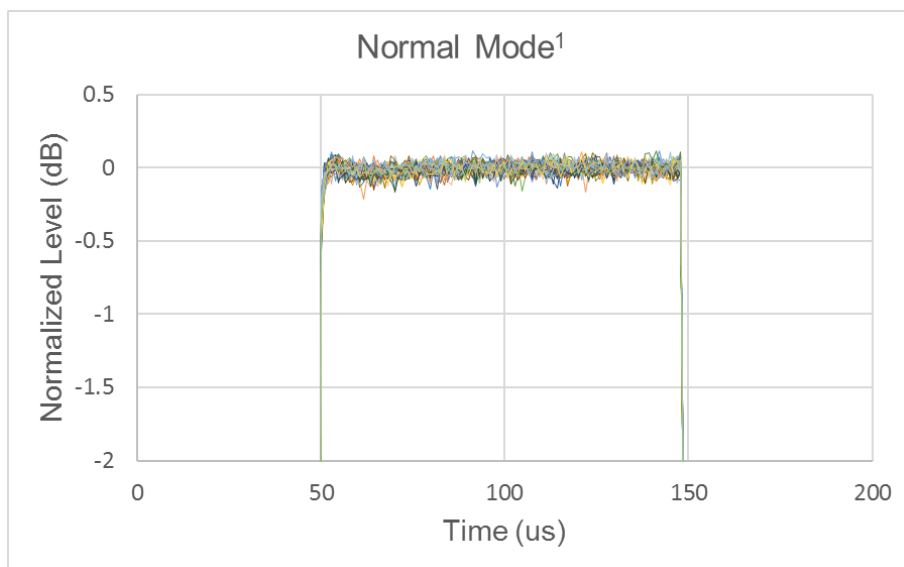

44 GHz

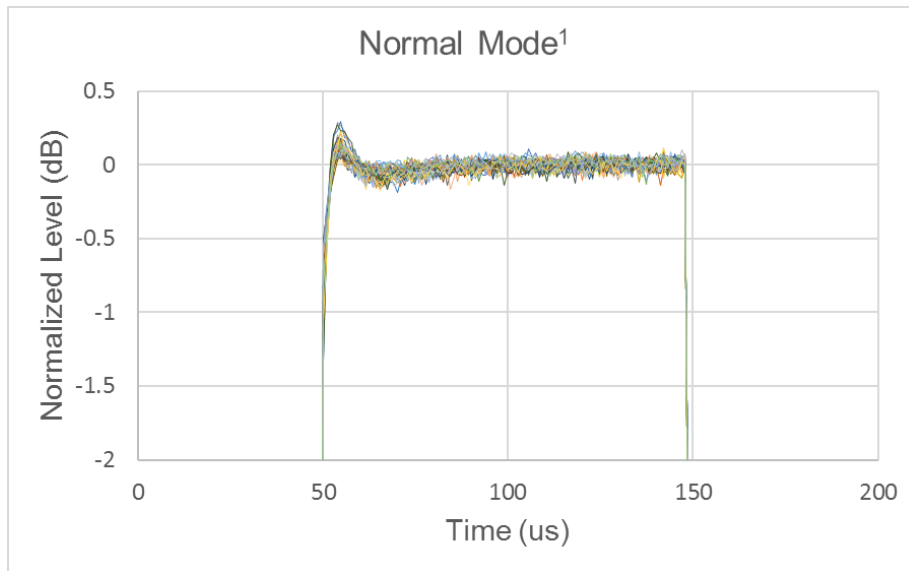


50 GHz

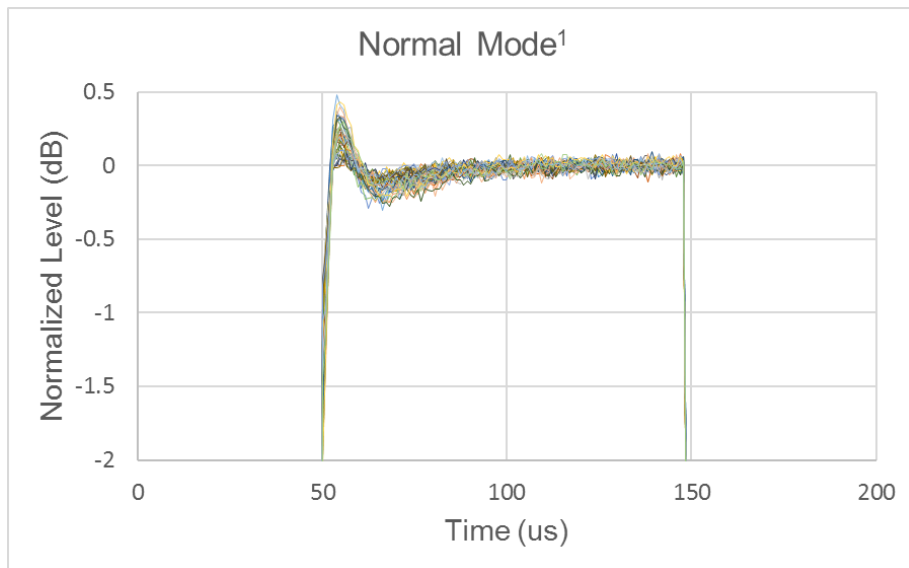


1. Measured with a 500 kHz IF bandwidth, averaging factor of 16 (Average Type = Point). With 100 us pulse width setting. 50 nsec/div.


1 GHz to 26.5 GHz

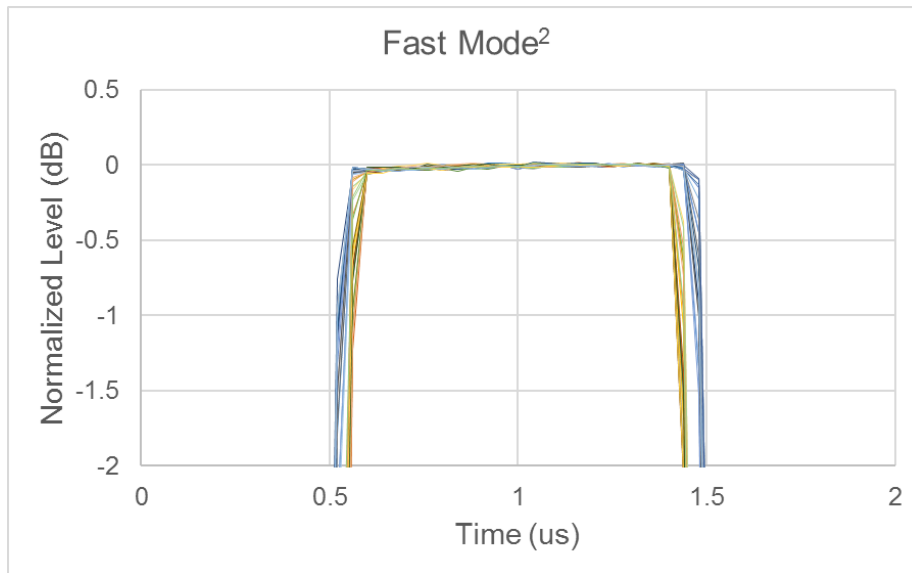


32 GHz

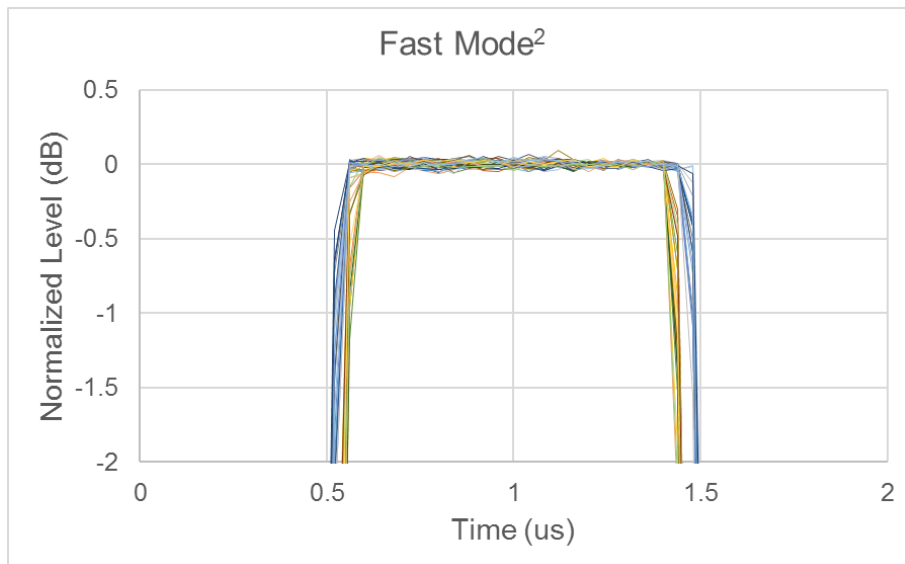

44 GHz

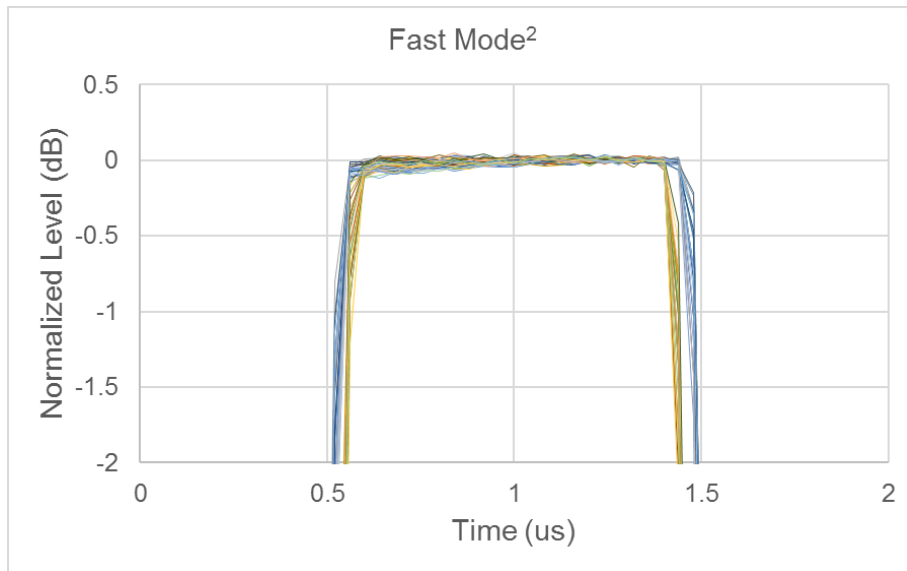

50 GHz

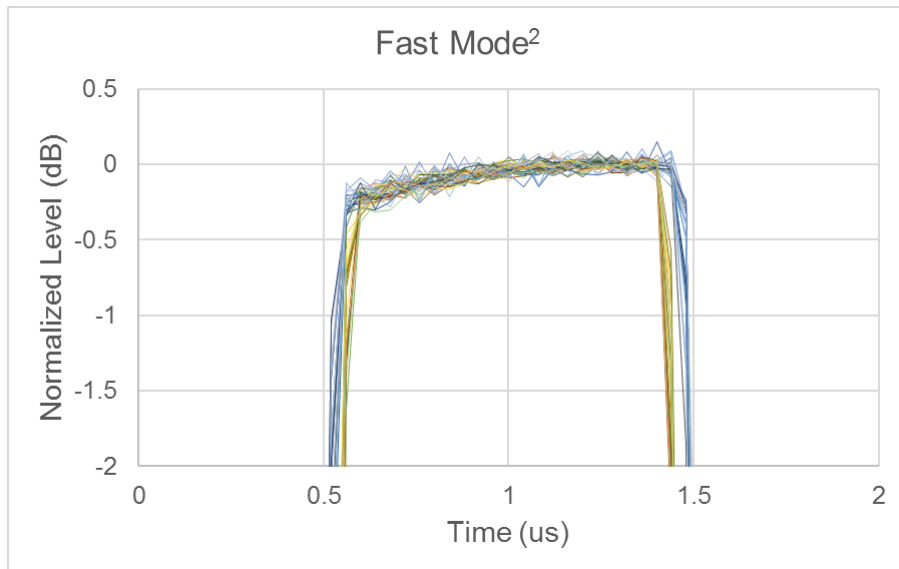

2. Measured with a 15 MHz IF bandwidth, averaging factor of 16 (Average Type = Point). With 1 us pulse width setting. 500 nsec/div.

Table 45. Pulse modulation (source modulators) - typical

All models

| Description | Typical |
|----------------------|----------|
| Minimum pulse width | 200 nsec |
| Minimum pulse period | 1 usec |
| Maximum pulse period | 10 sec |

Enhanced Time Domain Analysis with TDR (S97011B)

This section provides specifications for the enhanced time domain analysis on the P93xxB and P50xxB Streamline Series VNA. The S97011B Software is required to enable enhanced time domain analysis functions of the P93xxB and P50xxB.

Table 46. Key specifications of enhanced time domain analysis

P9370B to P9374B, P9382B, P9384B, P5000B to P5004B, P5020B to P5024B

| Description | | P9374B, P9384B, P5004B, P5024B | P9373B, P5003B, P5023B | P9372B, P9382B, P5002B, P5022B | P9371B, P5001B, P5021B | P9370B, P5000B, P5020B |
|--|-------|---|------------------------------|---|------------------------------|------------------------------|
| Bandwidth | Spec. | 20 GHz | 14 GHz | 9 GHz | 6.5 GHz | 4.5 GHz |
| Input impedance | Nom. | 50 ohm | | | | |
| DC damage level at test port | Spec. | 35 V | | | | |
| Maximum test port input voltage (Hot TDR mode) | Typ. | 1.5 Vpp | | | | |
| TDR stimulus ¹ | Nom. | Step, Impulse | | | | |
| TDR step amplitude ² | Nom. | 1 mV to 5 V | | | | |
| TDR step rise time ³ (min) (10% to 90%) | Spec. | 22.3 ps | 31.9 ps | 49.6 ps | 68.6 ps | 99.1 ps |
| TDR step response resolution in free space ⁴ ($\epsilon_r = 1$) (min) | Nom. | 3.3 mm | 4.8 mm | 7.4 mm | 10.3 mm | 14.9 mm |
| TDR impulse width (min) ³ | Spec. | 30.2 ps | 43.1 ps | 67.1 ps | 92.9 ps | 135 ps |
| TDR deskew range (max) ⁵ (test cable length) | Typ. | 50 ns | 50 ns | 50 ns | 50 ns | 50 ns |
| DUT length (max) ⁶ | Spec. | 13.8 μ s | 13.8 μ s | 13.8 μ s | 13.8 μ s | 13.8 μ s |
| TDR stimulus repetition rate (max) | Spec. | 19.9 MHz | 13.9 MHz | 8.9 MHz | 6.4 MHz | 4.4 MHz |
| RMS noise level ⁷ | Typ. | 60 μ Vrms | 60 μ Vrms | 60 μ Vrms | 60 μ Vrms | 60 μ Vrms |
| Eye diagram data rate (max) ⁸ | Spec. | 16 Gb/s | 11.2 Gb/s | 7.2 Gb/s | 5.2 Gb/s | 3.6 Gb/s |

P9375B, P9377B, P5005B to P5008B, P5025B to P5028B

| Description | | P5008B, P5028B | P9377B, P5007B, P5027B | P5006B, P5026B | P9375B, P5005B, P5025B |
|--|-------|---|---|---|---|
| Bandwidth | Spec. | 53 GHz | 44 GHz | 32 GHz | 26.5 GHz |
| Input impedance | Nom. | 50 ohm | | | |
| DC damage level at test port | Spec. | 35 V | | | |
| Maximum test port input voltage (Hot TDR mode) | Typ. | 1.5 V (100 kHz to 20 GHz) 0.9 V (20 GHz to 30 GHz) 0.7 V (30 GHz to 40 GHz) 0.5 V (40 GHz to 53 GHz) | 1.5 V (100 kHz to 20 GHz) 0.9 V (20 GHz to 30 GHz) 0.7 V (30 GHz to 40 GHz) 0.5 V (40 GHz to 44 GHz) | 1.5 V (100 kHz to 20 GHz) 0.9 V (20 GHz to 30 GHz) 0.7 V (30 GHz to 32 GHz) | 1.5 V (100 kHz to 20 GHz) 0.9 V (20 GHz to 26.5 GHz) |
| TDR stimulus ¹ | Nom. | Step, Impulse | | | |
| TDR step amplitude ² | Nom. | 1 mV to 5 V | | | |
| TDR step rise time ³ (min) (10% to 90%) | Spec. | 8.42 ps | 10.2 ps | 14 ps | 16.9 ps |
| TDR step response resolution in free space ⁴ ($\epsilon_r = 1$) (min) | Nom. | 1.3 mm | 1.5 mm | 2.1 mm | 2.5 mm |
| TDR impulse width (min) ³ | Spec. | 11.4 ps | 13.8 ps | 18.9 ps | 22.8 ps |
| TDR deskew range (max) ⁵ (test cable length) | Typ. | 50 ns | 50 ns | 50 ns | 50 ns |
| DUT length (max) ⁶ | Spec. | 1.25 μ s | 1.25 μ s | 1.25 μ s | 1.25 μ s |
| TDR stimulus repetition rate (max) | Spec. | 52.9 MHz | 43.9 MHz | 31.9 MHz | 26.4 MHz |
| RMS noise level ⁷ | Typ. | 120 μ Vrms | 80 μ Vrms | 80 μ Vrms | 80 μ Vrms |
| Eye diagram data rate (max) ⁸ | Spec | 42.4 Gb/s | 35.2 Gb/s | 25.6 Gb/s | 21.2 Gb/s |

1. The time domain function of the S97011B is similar to the time domain reflectometry (TDR) measurement on a TDR oscilloscope in that it displays the response in the time domain. In the TDR oscilloscope measurement, a pulse or step stimulus is input to the DUT and the change of the reflected wave over time is measured. In the S97011B TDR measurement, a sine wave stimulus is input to the DUT and the change of the reflected wave over frequency is measured. Then, the frequency domain response is transformed to the time domain using the Inverse Fourier Transform.
2. The TDR step amplitude setting does not vary the actual stimulus level input to the device but is used when calculating the Inverse Fourier Transform.
3. Minimum values may be limited by the DUT length setting.
4. To convert from rise time to response resolution, multiply the rise time by c , the speed of light in free space. To calculate the actual physical length, multiply this value in free space by v_f , the relative velocity of propagation in the transmission medium. (Most cables have a relative velocity of 0.66 for a polyethylene dielectric or 0.7 for a PTFE dielectric.)
5. Using high quality cables to connect the DUT is recommended in order to minimize measurement degradation. The cables should have low loss, low reflections, and minimum performance variation when flexed.
6. Maximum DUT length is the sum of the DUT and test cable lengths.
7. RMS noise level with 50 Ω DUT and default setup.
8. Maximum values may be limited by the DUT length setting.

Multi-instrument Measurements with S97551B Software

When the S97551B software is installed, Streamline Series VNA have the ability to be configured into a multiport network analyzer with two VNA instruments. Adding a second VNA would provide additional test ports to the VNA. This configuration provides a full featured multiport vector network analyzer capability with full crossbar S-parameter measurement capability.

All models of the P937xB and P938xB, or all models of the P500xB and P502xB can be connected to configure a single multiport VNA. Multiport configurations using up to two VNA instruments have been evaluated. P937xB/P938xB and P500xB/P502xB cannot be connected.

For multi-instrument operation, all single-instrument specifications apply except trace noise, test port noise floor, system dynamic range, Displayed Average Noise Level (DANL) and SA detector accuracy. The other performance of multi-instrument configurations will meet the single-instrument specifications in the data sheet.

The guidance provided here is given as general reference based on Keysight's internal evaluation of multi-instrument configurations. Not all multiport setups using multiple VNAs are tested as a multiport instrument in the factory. Interconnect cables included in the Y1701A must be used for connection between two VNAs.

Table 47. Multi-instrument performance

- A check mark, ✓, indicates the performance parameter is the same as the corresponding single-instrument performance.
- An empty diamond, ◇, indicates that the performance parameter may be degraded as the number of instruments increases.

| Description | Setups with 2 VNAs |
|---------------------------|-------------------------|
| System Dynamic Range | ◇ (see Table 48) |
| Frequency Accuracy | ✓ |
| Uncorrected Directivity | ✓ |
| Uncorrected Load Match | ✓ |
| Uncorrected Source Match | ✓ |
| Maximum Output Port Power | ✓ |
| Power Level Accuracy | ✓ |
| Power Level Linearity | ✓ |
| Noise Floor | ◇ (see Table 49) |
| Receiver Compression | ✓ |
| Trace Noise | ◇ (see Table 50 and 51) |
| Dynamic Accuracy | ✓ |
| Crosstalk | ✓ |

Table 48. System dynamic range of multi-instrument configurations (dB)¹

P9370B to P9374B, P9382B, P9384B

| | Setups with 2 VNAs | |
|-------------------------------|--------------------|---------|
| Description | Char. | Typical |
| 9 kHz to 100 kHz | 84 | 94 |
| 100 kHz to 10 MHz | 108 | 117 |
| 10 MHz to 50 MHz ² | 111 | 120 |
| 50 MHz to 3 GHz | 115 | 124 |
| 3 GHz to 6.5 GHz | 115 | 122 |
| 6.5 GHz to 9 GHz | 112 | 120 |
| 9 GHz to 14 GHz | 111 | 120 |
| 14 GHz to 16 GHz | 108 | 118 |
| 16 GHz to 20 GHz | 105 | 115 |

P9375B, P9377B

| | Setups with 2 VNAs | |
|------------------------------|--------------------|---------|
| Description | Char. | Typical |
| 100 kHz to 300 kHz | 93 | 106 |
| 300 kHz to 1 MHz | 102 | 115 |
| 1 MHz to 50 MHz ² | 112 | 120 |
| 50 MHz to 3 GHz | 115 | 124 |
| 3 GHz to 6.5 GHz | 115 | 122 |
| 6.5 GHz to 17 GHz | 112 | 120 |
| 17 GHz to 20 GHz | 110 | 119 |
| 20 GHz to 24 GHz | 108 | 119 |
| 24 GHz to 30 GHz | 108 | 117 |
| 30 GHz to 38 GHz | 102 | 115 |
| 38 GHz to 44 GHz | 102 | 112 |

P5000B to P5004B, P5020B to P5024B

| | Setups with 2 VNAs | |
|-------------------------------|--------------------|---------|
| Description | Char. | Typical |
| 9 kHz to 100 kHz | 101 | 110 |
| 100 kHz to 300 kHz | 117 | 126 |
| 300 kHz to 1 MHz | 125 | 136 |
| 1 MHz to 10 MHz | 130 | 141 |
| 10 MHz to 50 MHz ² | 137 | 147 |
| 50 MHz to 3 GHz | 140 | 150 |
| 3 GHz to 4.5 GHz | 140 | 149 |
| 4.5 GHz to 5 GHz | 140 | 149 |
| 5 GHz to 6.5 GHz | 140 | 148 |
| 6.5 GHz to 9 GHz | 136 | 146 |
| 9 GHz to 14 GHz | 133 | 142 |
| 14 GHz to 16 GHz | 127 | 140 |
| 16 GHz to 20 GHz | 124 | 137 |

P5005B to P5008B, P5025B to P5028B

| Description | Setups with 2 VNAs | |
|-------------------------------|--------------------|---------|
| | Char. | Typical |
| 100 kHz to 300 kHz | 95 | 106 |
| 300 kHz to 500 kHz | 104 | 120 |
| 500 kHz to 1 MHz | 117 | 130 |
| 1 MHz to 10 MHz | 125 | 138 |
| 10 MHz to 50 MHz ² | 137 | 147 |
| 50 MHz to 6.5 GHz | 140 | 150 |
| 6.5 GHz to 8 GHz | 138 | 150 |
| 8 GHz to 9 GHz | 138 | 147 |
| 9 GHz to 16 GHz | 137 | 147 |
| 16 GHz to 17 GHz | 137 | 143 |
| 17 GHz to 20 GHz | 132 | 143 |
| 20 GHz to 24 GHz | 130 | 143 |
| 24 GHz to 25 GHz | 130 | 141 |
| 25 GHz to 26 GHz | 127 | 141 |
| 26 GHz to 30 GHz | 127 | 137 |
| 30 GHz to 35 GHz | 122 | 137 |
| 35 GHz to 40 GHz | 122 | 134 |
| 40 GHz to 45 GHz | 122 | 132 |
| 45 GHz to 50 GHz | 100 | 115 |
| 50 GHz to 53 GHz | 72 | 101 |

1. System dynamic range = source maximum output power minus receiver noise floor at 10 Hz IF bandwidth. Does not include crosstalk effects.

2. It may typically be degraded at 25 MHz.

Table 49. Test port noise floor of multi-instrument configurations (dBm)¹

P9370B to P9374B, P9382B, P9384B

| Description | Setups with 2 VNAs | |
|--------------------------------|--------------------|---------|
| | Char. | Typical |
| 9 kHz to 100 kHz | -84 | -92 |
| 100 kHz to 50 MHz ² | -103 | -110 |
| 50 MHz to 3 GHz | -107 | -114 |
| 3 GHz to 6.5 GHz | -107 | -112 |
| 6.5 GHz to 14 GHz | -104 | -110 |
| 14 GHz to 20 GHz | -101 | -108 |

P9375B, P9377B

| | Setups with 2 VNAs | |
|------------------------------|--------------------|---------|
| Description | Char. | Typical |
| 100 kHz to 1 MHz | -95 | -105 |
| 1 MHz to 50 MHz ² | -104 | -110 |
| 50 MHz to 3 GHz | -107 | -114 |
| 3 GHz to 6.5 GHz | -107 | -112 |
| 6.5 GHz to 17 GHz | -104 | -110 |
| 17 GHz to 30 GHz | -103 | -109 |
| 30 GHz to 44 GHz | -100 | -107 |

P5000B to P5004B, P5020B to P5024B

| | Setups with 2 VNAs | |
|-------------------------------|--------------------|---------|
| Description | Char. | Typical |
| 9 kHz to 100 kHz | -101 | -109 |
| 100 kHz to 300 kHz | -112 | -119 |
| 300 kHz to 1 MHz | -120 | -127 |
| 1 MHz to 10 MHz | -125 | -132 |
| 10 MHz to 50 MHz ² | -127 | -134 |
| 50 MHz to 3 GHz | -130 | -137 |
| 3 GHz to 4.5 GHz | -130 | -136 |
| 4.5 GHz to 6.5 GHz | -130 | -135 |
| 6.5 GHz to 9 GHz | -127 | -134 |
| 9 GHz to 14 GHz | -126 | -132 |
| 14 GHz to 16 GHz | -120 | -130 |
| 16 GHz to 20 GHz | -120 | -130 |

P5005B to P5008B, P5025B to P5028B

| | Setups with 2 VNAs | |
|-------------------------------|--------------------|---------|
| Description | Char. | Typical |
| 100 kHz to 300 kHz | -97 | -105 |
| 300 kHz to 500 kHz | -97 | -110 |
| 500 kHz to 1 MHz | -110 | -120 |
| 1 MHz to 10 MHz | -115 | -124 |
| 10 MHz to 50 MHz ² | -127 | -133 |
| 50 MHz to 200 MHz | -130 | -133 |
| 200 MHz to 3 GHz | -130 | -137 |
| 3 GHz to 6.5 GHz | -130 | -135 |
| 6.5 GHz to 9 GHz | -128 | -134 |
| 9 GHz to 17 GHz | -127 | -133 |
| 17 GHz to 25 GHz | -125 | -131 |
| 25 GHz to 30 GHz | -122 | -129 |
| 30 GHz to 45 GHz | -120 | -127 |
| 45 GHz to 50 GHz | -105 | -115 |
| 50 GHz to 53 GHz | -95 | -113 |

1. Noise floor in a 10 Hz IF Bandwidth. Measured with 1 kHz IF bandwidth for 9 kHz to < 100 kHz, and 30 kHz IF bandwidth for 100 kHz to 53 GHz. Test port terminated.
2. It may typically be degraded at 25 MHz.

Table 50. Trace noise magnitude of multi-instrument configurations (dB rms)¹

P9370B to P9374B, P9382B, P9384B

| | Setups with 2 VNAs | |
|------------------------------|--------------------|---------|
| Description | Char. | Typical |
| 9 kHz to 30 kHz | 0.005 | 0.0025 |
| 30 kHz to 100 kHz | 0.003 | 0.001 |
| 100 kHz to 10 MHz | 0.0021 | 0.0007 |
| 10 MHz to 6 GHz ² | 0.0015 | 0.0005 |
| 6 GHz to 10 GHz | 0.002 | 0.0006 |
| 10 GHz to 20 GHz | 0.003 | 0.001 |

P9375B, P9377B

| | Setups with 2 VNAs | |
|-------------------------------|--------------------|---------|
| Description | Char. | Typical |
| 100 kHz to 300 kHz | 0.005 | 0.002 |
| 300 kHz to 1 MHz | 0.003 | 0.001 |
| 1 MHz to 4.5 GHz ² | 0.0018 | 0.0006 |
| 4.5 GHz to 10 GHz | 0.0023 | 0.001 |
| 10 GHz to 17 GHz | 0.003 | 0.0015 |
| 17 GHz to 30 GHz | 0.0036 | 0.0015 |
| 30 GHz to 44 GHz | 0.0072 | 0.0027 |

P5000B to P5004B, P5020B to P5024B

| Description | Setups with 2 VNAs | |
|------------------------------|--------------------|---------|
| | Char. | Typical |
| 9 kHz to 30 kHz | 0.005 | 0.0025 |
| 30 kHz to 100 kHz | 0.003 | 0.001 |
| 100 kHz to 10 MHz | 0.0025 | 0.0005 |
| 10 MHz to 6 GHz ² | 0.002 | 0.0005 |
| 6 GHz to 10 GHz | 0.002 | 0.0006 |
| 10 GHz to 13.5 GHz | 0.003 | 0.001 |
| 13.5 GHz to 20 GHz | 0.004 | 0.001 |

P5005B to P5008B, P5025B to P5028B

| Description | Setups with 2 VNAs | |
|-------------------------------|--------------------|---------|
| | Char. | Typical |
| 100 kHz to 300 kHz | 0.005 | 0.002 |
| 300 kHz to 1 MHz | 0.003 | 0.001 |
| 1 MHz to 4.5 GHz ² | 0.0015 | 0.0005 |
| 4.5 GHz to 10 GHz | 0.0015 | 0.0007 |
| 10 GHz to 17 GHz | 0.002 | 0.001 |
| 17 GHz to 30 GHz | 0.003 | 0.0013 |
| 30 GHz to 45 GHz | 0.006 | 0.0022 |
| 45 GHz to 50 GHz | 0.018 | 0.006 |

1. Reflection trace noise in a 1 kHz IF bandwidth for < 10 MHz, 10 kHz IF bandwidth ≥ 10 MHz. At maximum specified power.
2. It may typically be degraded at particular frequencies such as 25 MHz, 54 MHz, 58.5 MHz, 156 MHz, 108 MHz, 120 MHz or 132 MHz.

Table 51. Trace noise phase of multi-instrument configurations (degree rms)¹

P9370B to P9374B, P9382B, P9384B

| Description | Setups with 2 VNAs | |
|-------------------------------|--------------------|---------|
| | Char. | Typical |
| 9 kHz to 30 kHz | 0.07 | 0.025 |
| 30 kHz to 100 kHz | 0.05 | 0.017 |
| 100 kHz to 300 kHz | 0.035 | 0.006 |
| 300 kHz to 6 GHz ² | 0.01 | 0.003 |
| 6 GHz to 10 GHz | 0.02 | 0.006 |
| 10 GHz to 13.5 GHz | 0.03 | 0.006 |
| 13.5 GHz to 20 GHz | 0.03 | 0.01 |

P9375B, P9377B

| Description | Setups with 2 VNAs | |
|-----------------------------|--------------------|---------|
| | Char. | Typical |
| 100 kHz to 300 kHz | 0.07 | 0.015 |
| 300 kHz to 1 MHz | 0.03 | 0.01 |
| 1 MHz to 6 GHz ² | 0.024 | 0.0036 |
| 6 GHz to 10 GHz | 0.024 | 0.0048 |
| 10 GHz to 17 GHz | 0.024 | 0.0072 |
| 17 GHz to 30 GHz | 0.032 | 0.016 |
| 30 GHz to 44 GHz | 0.048 | 0.022 |

P5000B to P5004B, P5020B to P5024B

| Description | Setups with 2 VNAs | |
|------------------------------|--------------------|---------|
| | Char. | Typical |
| 9 kHz to 30 kHz | 0.07 | 0.025 |
| 30 kHz to 100 kHz | 0.05 | 0.017 |
| 100 kHz to 300 kHz | 0.035 | 0.006 |
| 300 kHz to 10 MHz | 0.015 | 0.003 |
| 10 MHz to 6 GHz ² | 0.015 | 0.003 |
| 6 GHz to 10 GHz | 0.025 | 0.006 |
| 10 GHz to 13.5 GHz | 0.036 | 0.006 |
| 13.5 GHz to 20 GHz | 0.045 | 0.01 |

P5005B to P5008B, P5025B to P5028B

| Description | Setups with 2 VNAs | |
|-----------------------------|--------------------|---------|
| | Char. | Typical |
| 100 kHz to 300 kHz | 0.07 | 0.015 |
| 300 kHz to 1 MHz | 0.03 | 0.01 |
| 1 MHz to 6 GHz ² | 0.02 | 0.003 |
| 6 GHz to 10 GHz | 0.02 | 0.004 |
| 10 GHz to 17 GHz | 0.02 | 0.006 |
| 17 GHz to 30 GHz | 0.02 | 0.01 |
| 30 GHz to 45 GHz | 0.04 | 0.018 |
| 45 GHz to 50 GHz | 0.18 | 0.03 |

1. Reflection trace noise in a 1 kHz IF bandwidth for < 10 MHz, 10 kHz IF bandwidth ≥ 10 MHz. At maximum specified power.
2. It may typically be degraded at particular frequencies such as 25 MHz, 54 MHz, 58.5 MHz, 156 MHz, 108 MHz, 120 MHz or 132 MHz.

Multi-site Operation

Multi-site operation is the ability to configure multiple Streamline Series VNAs to operate independently on a single host PC via Thunderbolt 3 connection. Up to two independent VNA instances per PC have been evaluated, allowing parallel testing of devices. Each instance of an independent VNA can have different measurement parameters, and can be triggered synchronously, or asynchronously.

General Information

Table 52. Miscellaneous information

| Description | Specification |
|---------------------------|---|
| System IF Bandwidth Range | 1 Hz to 700 kHz (P9370B to P9377B, P9382B, P9384B) 1 Hz to 15 MHz (P5000B to P5008B, P5020B to P5028B) |
| Number of points | 1 to 100,003 |





Table 53. External PC system requirements

| PC System Requirement | |
|-----------------------|--|
| Operating Systems | Windows 10 (64-bit only) Version 1909 or later |
| Available Memory | 16 GB recommended, 4 GB minimum |
| Available Disk space | 2 GB available disk space minimum |
| Display resolution | 1024 x 768 minimum |
| Connection with VNA | Thunderbolt 3 |
| Recommended CPU | Intel Core i7 10 th Generation or later |
| Instrument Drivers | |
| Keysight IO Libraries | IO Libraries Suite 2021 Update 1 (Release date: 2021-07-23) or later |

Table 54. Environmental and physical specifications

| Descriptions | <p>Samples of this product have been type tested in accordance with the Keysight Environmental Test Manual and verified to be robust against the environmental stresses of Storage, Transportation and End-use; those stresses include, but are not limited to, temperature, humidity, shock, vibration, altitude, and power line conditions.</p> <p>Test Methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3.</p> | |
|-----------------------|--|--|
| Temperature | Operating | 0 to 50 °C ambient 10 to 70 °C instrument temperature |
| | Non-operating | -40 to 70 °C |
| Humidity | Operating | Type tested at 20 to 80 %, wet bulb temperature < 29 °C (non-condensing) |
| | Non-operating | Type tested at 20 to 90 %, wet bulb temperature < 40 °C (non-condensing) |
| Altitude | Operating | Up to 2,000 meters (6,561 feet) |
| | Non-operating | Up to 4,572 meters (15,000 feet) |
| Vibration | Operating | 0.3 G maximum, 5 Hz to 500 Hz |
| | Non-operating | 0.75 G maximum, 5 Hz to 500 Hz |
| Instrument protection | | IP 30 IEC/EN 60529 |
| Warm-up time | | 60 minutes |

Table 55. Regulatory and safety compliance

| EMC ¹ | | | |
|--|--|-------------|---|
| Complies with the essential requirements of the European EMC Directive as well as current editions of the following standards (dates and editions are cited in the Declaration of Conformity). | | | |
|  | <p>The CE mark is a registered trademark of the European Community (if accompanied by a year, it is the year when the design was proven). This product complies with all relevant directives.</p> <ul style="list-style-type: none">• IEC 61326-1• CISPR 11 Group 1, Class A | | |
|  | UK conformity mark is a UK government owned mark. When affixed to the product is declaring all applicable Directives and Regulations have been met in full. | | |
| CAN ICES/NMB-001(A) | This ISM device complies with Canadian ICES-001. Cet appareil ISM est conforme a la norme NMB du Canada. | | |
|  | <p>The RCM mark is a registered trademark of the Australian Communications and Media Authority.</p> <ul style="list-style-type: none">• AS/NZS CISPR 11 | | |
|  | <p>South Korean Certification (KC) mark; includes the marking's identifier code: R-R-Kst-xxxxxxx</p> <p>South Korean Class A EMC declaration: Information to the user: This equipment has been conformity assessed for use in business environments. In a residential environment this equipment may cause radio interference. ※ This EMC statement applies to the equipment only for use in business environment.</p> <table><tr><td>사 용 자 안 내 문</td></tr><tr><td>이 기기는 업무용 환경에서 사용할 목적으로 적합성평가를 받은 기기로서 가정용 환경에서 사용하는 경우 전파간섭의 우려가 있습니다.</td></tr></table> <p>※ 사용자 안내문은 “업무용 방송통신기자재”에만 적용한다.</p> | 사 용 자 안 내 문 | 이 기기는 업무용 환경에서 사용할 목적으로 적합성평가를 받은 기기로서 가정용 환경에서 사용하는 경우 전파간섭의 우려가 있습니다. |
| 사 용 자 안 내 문 | | | |
| 이 기기는 업무용 환경에서 사용할 목적으로 적합성평가를 받은 기기로서 가정용 환경에서 사용하는 경우 전파간섭의 우려가 있습니다. | | | |
| Instrument calibration cycle | 1 year | | |

1. To find a current **Declaration of Conformity** for a specific Keysight product, go to: <http://www.keysight.com/go/conformity>.

Table 56. Physical size and weight

P9370B to P9374B, P9382B, P9384B, P5000B to P5004B, P5020B to P5024B

| Dimensions / Weight | 2-port | 4 or 6-port | Note |
|---------------------|--------------------|--|------|
| Width | 176 mm (6.93 in.) | 176 mm (6.93 in.) | |
| Height | 48 mm (1.89 in.) | 68 mm (2.68 in.) | |
| Depth | 333 mm (13.11 in.) | 333 mm (13.11 in.) | |
| Weight | 1.88 kg (4.14 lbs) | 2.82 kg (6.22 lbs, 4-port) 2.98 kg (6.57 lbs, 6-port) | |

P9375B, P9377B, P5005B to P5008B, P5025B to P5028B

| Dimensions / Weight | 2-port | 4-port | Note |
|---------------------|--------------------|--------------------|------|
| Width | 176 mm (6.93 in.) | 176 mm (6.93 in.) | |
| Height | 48 mm (1.89 in.) | 68 mm (2.68 in.) | |
| Depth | 333 mm (13.11 in.) | 333 mm (13.11 in.) | |
| Weight | 2.02 kg (4.45 lbs) | 3.18 kg (7.01 lbs) | |

Table 57. Electrical power

P9370B to P9374B, P9382B, P9384B, P5000B to P5004B, P5020B to P5024B

| Description | 2-port | 4 or 6-port |
|-------------------------|--|--|
| Wall Outlet | 120 V, 66 W (maximum) 240 V, 68 W (maximum) | 120 V, 94 W (maximum, 4-port) 240 V, 96 W (maximum, 4-port) 120 V, 124 W (maximum, 6-port) 240 V, 126 W (maximum, 6-port) |
| Rear Panel DC Connector | 15 V, 58 W | 19 V, 84 W (4-port) 19 V, 110 W (6-port) |

P9375B, P9377B, P5005B to P5008B, P5025B to P5028B

| Description | 2-port | 4-port |
|-------------------------|--|--|
| Wall Outlet | 120 V, 66 W (maximum) 240 V, 68 W (maximum) | 120 V, 116 W (maximum) 240 V, 118 W (maximum) |
| Rear Panel DC Connector | 15 V, 58 W | 19 V, 102 W |

Table 58. Front panel information

| Description | |
|------------------------------|---|
| Test Port | |
| Connector Type | 3.5 mm female (P9370B to P9375B, P9382B, P9384B, P5000B to P5005B, P5020B to P5025B) 2.4 mm female (P9377B, P5006B, P5007B, P5026B, P5027B) 1.85 mm female (P5008B, P5028B) |
| Impedance | 50 ohm (nominal) |
| External Reference Input | |
| Connector Type | MCX |
| Input amplitude range | -3 to +10 dBm |
| Input frequency ¹ | 10 MHz \pm 10 ppm |
| Impedance | 50 ohm (nominal) |
| External Reference Output | |
| Connector Type | MCX |
| Output amplitude range | 0 to \pm 3 dBm |
| Output frequency | 10 MHz \pm 7 ppm |
| Impedance | 50 ohm (nominal) |

1. Input frequency reference of 100 MHz is also acceptable with some limitations. See [VNA webhelp](#) for more details.

Table 59. Rear panel information

| Description | |
|---------------------|--|
| USB Ports | Type A female (USB 2.0 only, Downstream-facing), 2 ports |
| Thunderbolt 3 Ports | USB Type-C, 2 ports |
| Power Connector | Kycon KPJX-4S-S DC power connector (4 pins) |
| 10 MHz In (SMB) | 10 MHz \pm 25 ppm (not used by Streamline Series VNA) |
| 10 MHz Out (SMB) | 10 MHz \pm 25 ppm (not used by Streamline Series VNA) |
| Trig 1 | 3.3 V CMOS (TTL compatible, 5 V tolerant) |
| Trig 2 | 3.3 V CMOS (TTL compatible, 5 V tolerant) |

Measurement Throughput Summary

Table 60. Cycle time for measurement completion (milliseconds)¹ – typical

P9370B to P9374B, P9382B, P9384B

| Description | Sweep mode: Stepped | | |
|--|---------------------|------|-------|
| 10 MHz – 9 GHz frequency span, 700 kHz IF bandwidth | | | |
| Number of points | 201 | 401 | 1601 |
| Uncorrected | 10.3 | 18.6 | 63.2 |
| 2-port Calibration | 20.1 | 36.8 | 126.0 |
| 4-port Calibration | 39.7 | 72.8 | 251.3 |
| 10 MHz – 20 GHz frequency span, 700 kHz IF bandwidth | | | |
| Number of points | 201 | 401 | 1601 |
| Uncorrected | 10.8 | 18.8 | 65.4 |
| 2-port Calibration | 21.1 | 37.1 | 130.2 |
| 4-port Calibration | 41.6 | 73.5 | 259.9 |
| 800 MHz – 1 GHz frequency span, 700 kHz IF bandwidth | | | |
| Number of points | 201 | 401 | 1601 |
| Uncorrected | 7.7 | 14.5 | 54.0 |
| 2-port Calibration | 14.9 | 28.4 | 107.3 |
| 4-port Calibration | 29.4 | 56.4 | 213.8 |
| 9 GHz – 10 GHz frequency span, 700 kHz IF bandwidth | | | |
| Number of points | 201 | 401 | 1601 |
| Uncorrected | 7.9 | 14.9 | 55.7 |
| 2-port Calibration | 15.4 | 29.3 | 110.8 |
| 4-port Calibration | 30.3 | 58.1 | 220.9 |

P9375B, P9377B

| Description | Sweep mode: Stepped | | |
|--|---------------------|------|-------|
| 9 GHz – 10 GHz frequency span, 700 kHz IF bandwidth | | | |
| Number of points | 201 | 401 | 1601 |
| Uncorrected | 7.9 | 14.9 | 55.6 |
| 2-port Calibration | 15.4 | 29.3 | 110.7 |
| 10 MHz – 26.5 GHz frequency span, 700 kHz IF bandwidth | | | |
| Number of points | 201 | 401 | 1601 |
| Uncorrected | 11.1 | 19.2 | 66.4 |
| 2-port Calibration | 21.7 | 37.9 | 132.3 |
| 10 MHz – 44 GHz frequency span, 700 kHz IF bandwidth | | | |
| Number of points | 201 | 401 | 1601 |
| Uncorrected | 11.4 | 19.7 | 67.8 |
| 2-port Calibration | 22.2 | 38.9 | 135.0 |

P5000B to P5004B, P5020B to P5024B

| Description | Sweep mode: Auto | | | Sweep mode: Stepped | | |
|--|------------------|------|------|---------------------|------|------|
| 10 MHz – 9 GHz frequency span, 1 MHz IF bandwidth | | | | | | |
| Number of points | 201 | 401 | 1601 | 201 | 401 | 1601 |
| Uncorrected | 4.2 | 5.9 | 11.1 | 4.2 | 6.4 | 14.0 |
| 2-port Calibration | 7.9 | 11.3 | 21.8 | 7.9 | 12.2 | 27.6 |
| 4-port Calibration | 15.7 | 22.9 | 44.4 | 15.7 | 24.7 | 55.5 |
| 6-port Calibration | 23.1 | 33.7 | 65.1 | 23.0 | 36.3 | 82.1 |
| 10 MHz – 20 GHz frequency span, 1 MHz IF bandwidth | | | | | | |
| Number of points | 201 | 401 | 1601 | 201 | 401 | 1601 |
| Uncorrected | 4.7 | 6.5 | 10.3 | 4.6 | 6.5 | 16.1 |
| 2-port Calibration | 8.8 | 12.5 | 20.3 | 8.8 | 12.4 | 31.8 |
| 4-port Calibration | 17.6 | 25.1 | 41.1 | 17.6 | 25.0 | 63.8 |
| 6-port Calibration | 25.8 | 37.2 | 60.4 | 25.8 | 37.0 | 95.1 |
| 800 MHz – 1 GHz frequency span, 1 MHz IF bandwidth | | | | | | |
| Number of points | 201 | 401 | 1601 | 201 | 401 | 1601 |
| Uncorrected | 1.1 | 1.5 | 3.6 | 1.5 | 2.0 | 4.3 |
| 2-port Calibration | 1.8 | 2.5 | 6.7 | 2.4 | 3.5 | 8.3 |
| 4-port Calibration | 3.4 | 5.1 | 13.7 | 4.6 | 7.2 | 16.6 |
| 6-port Calibration | 4.8 | 7.3 | 20.1 | 6.9 | 10.4 | 24.6 |
| 9 GHz – 10 GHz frequency span, 1 MHz IF bandwidth | | | | | | |
| Number of points | 201 | 401 | 1601 | 201 | 401 | 1601 |
| Uncorrected | 1.1 | 1.5 | 3.6 | 1.7 | 2.4 | 6.1 |
| 2-port Calibration | 1.7 | 2.5 | 6.7 | 3.0 | 4.4 | 11.8 |
| 4-port Calibration | 3.4 | 4.9 | 13.7 | 5.5 | 8.6 | 23.9 |
| 6-port Calibration | 4.8 | 7.3 | 20.1 | 8.2 | 13.1 | 35.2 |

P5005B to P5008B, P5025B to P5028B

| Description | Sweep mode: Auto | | | Sweep mode: Stepped | | |
|--|------------------|------|------|---------------------|------|------|
| 9 GHz – 10 GHz frequency span, 1 MHz IF bandwidth | | | | | | |
| Number of points | 201 | 401 | 1601 | 201 | 401 | 1601 |
| Uncorrected | 1.3 | 1.9 | 5.4 | 1.6 | 2.4 | 6.0 |
| 2-port Calibration | 2.1 | 3.3 | 10.4 | 2.8 | 4.3 | 11.7 |
| 4-port Calibration | 4.2 | 6.8 | 21.2 | 5.3 | 8.5 | 23.7 |
| 10 MHz – 26.5 GHz frequency span, 1 MHz IF bandwidth | | | | | | |
| Number of points | 201 | 401 | 1601 | 201 | 401 | 1601 |
| Uncorrected | 5.0 | 7.4 | 11.0 | 5.0 | 6.9 | 17.2 |
| 2-port Calibration | 9.5 | 13.3 | 21.6 | 9.4 | 13.3 | 33.9 |
| 4-port Calibration | 18.9 | 26.7 | 43.7 | 18.9 | 26.7 | 68.0 |
| 10 MHz – 40 GHz frequency span, 1 MHz IF bandwidth | | | | | | |
| Number of points | 201 | 401 | 1601 | 201 | 401 | 1601 |
| Uncorrected | 5.1 | 7.5 | 12.7 | 5.2 | 7.5 | 17.9 |
| 2-port Calibration | 9.8 | 14.5 | 24.9 | 9.8 | 14.5 | 35.2 |
| 4-port Calibration | 19.7 | 29.4 | 50.4 | 19.7 | 29.3 | 70.7 |
| 10 MHz – 53 GHz frequency span, 1 MHz IF bandwidth | | | | | | |
| Number of points | 201 | 401 | 1601 | 201 | 401 | 1601 |
| Uncorrected | 5.5 | 7.7 | 15.4 | 5.6 | 7.8 | 19.0 |
| 2-port Calibration | 10.6 | 15.0 | 30.5 | 10.6 | 15.0 | 37.4 |
| 4-port Calibration | 21.3 | 30.3 | 61.3 | 21.3 | 30.3 | 75.4 |


1. Analyzer display turned off with DISPlay:VISible OFF. Measured using a host PC with Intel Core i5-10310U 1.70 GHz CPU and 16 GB RAM running Windows 10 (64 bit), with Keysight VNA firmware version A.15.20.0x. Data for one trace (S11) measurement. Uncorrected measurements are for one sweep direction.

Table 61. Software


| Description | Information |
|-------------------------------|--|
| Keysight IO library | The IO library suite offers a single entry point for connection to the most common instruments including AXIe, PXI, GPIB, USB, Ethernet/LAN, RS-232, and VXI test instrument from Keysight and other vendors. It automatically discovers interfaces, chassis, and instruments. The graphical user interface allows you to search for, verify, and update IVI instrument and soft front panel drivers for modular and traditional instruments. The IO suite safely installs in side-by-side mode with NI I/O software. Free software download at www.keysight.com/find/iosuite |
| Keysight soft front panel | Keysight Streamline Series VNA includes a soft front panel (SFP), a software based graphical user interface (GUI) which enables the instrument's capabilities from your PC. |
| Command Expert | Assists in finding the right instrument commands and setting correct parameters. A simple interface includes documentation, examples, syntax checking, command execution, and debug tools to build sequences for integration in Excel, MATLAB, LabVIEW, VEE, and System VUE. Free software download at www.keysight.com/find/commandexpert |
| Example programs | Setting up a measurement Guided calibration Data acquisition Data transfer |
| Example programming languages | C, C++, C#, VB, LabVIEW |

Test Set Block Diagrams


Legends

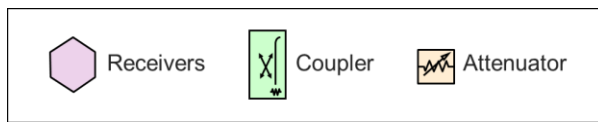


P937xB or P500xB Option 200 (2-port base model)

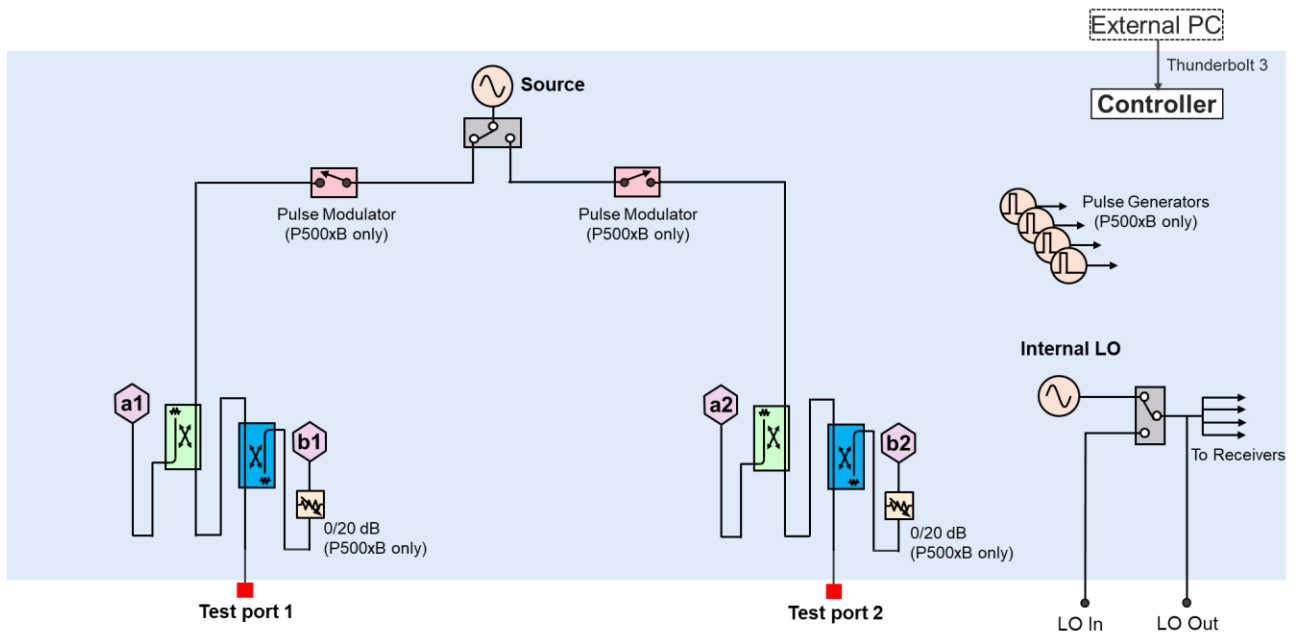


P938xB or P502xB Option 400 (4-port base model)

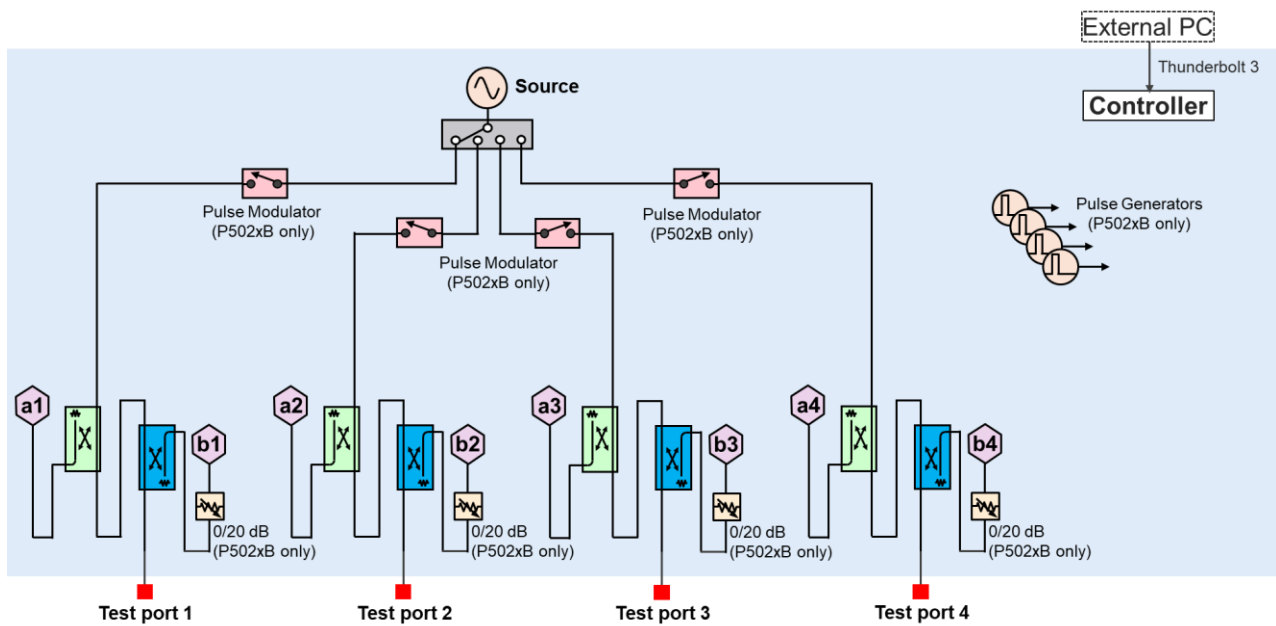

P502xB Option 402 (with internal second source)

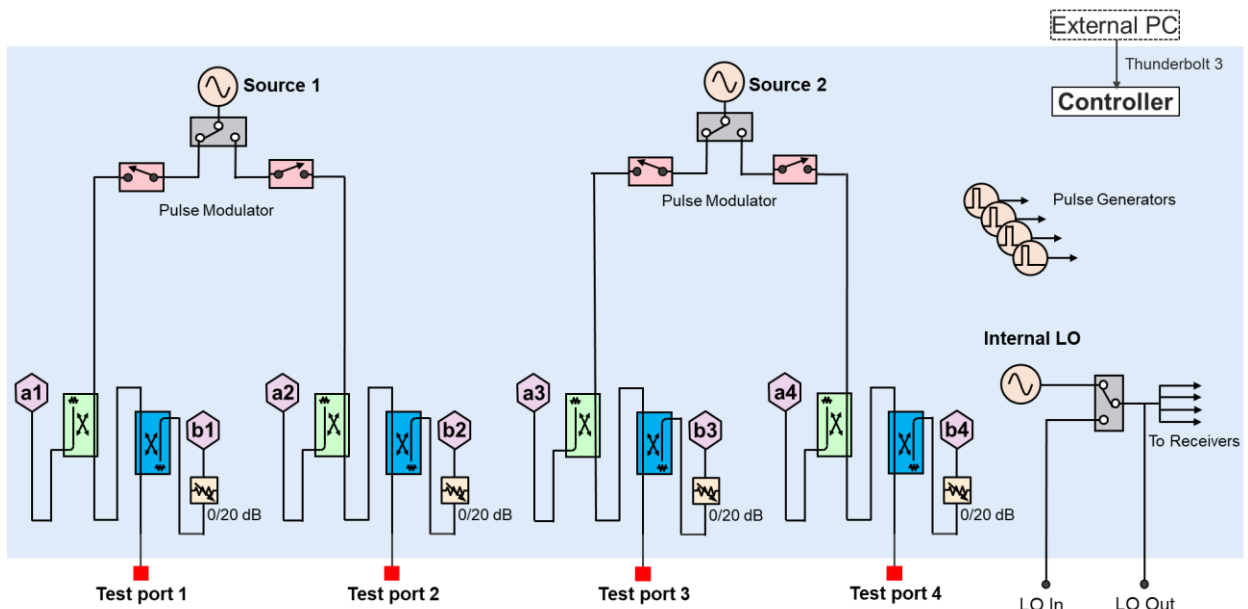

P502xB Option 600 (6-port base model)

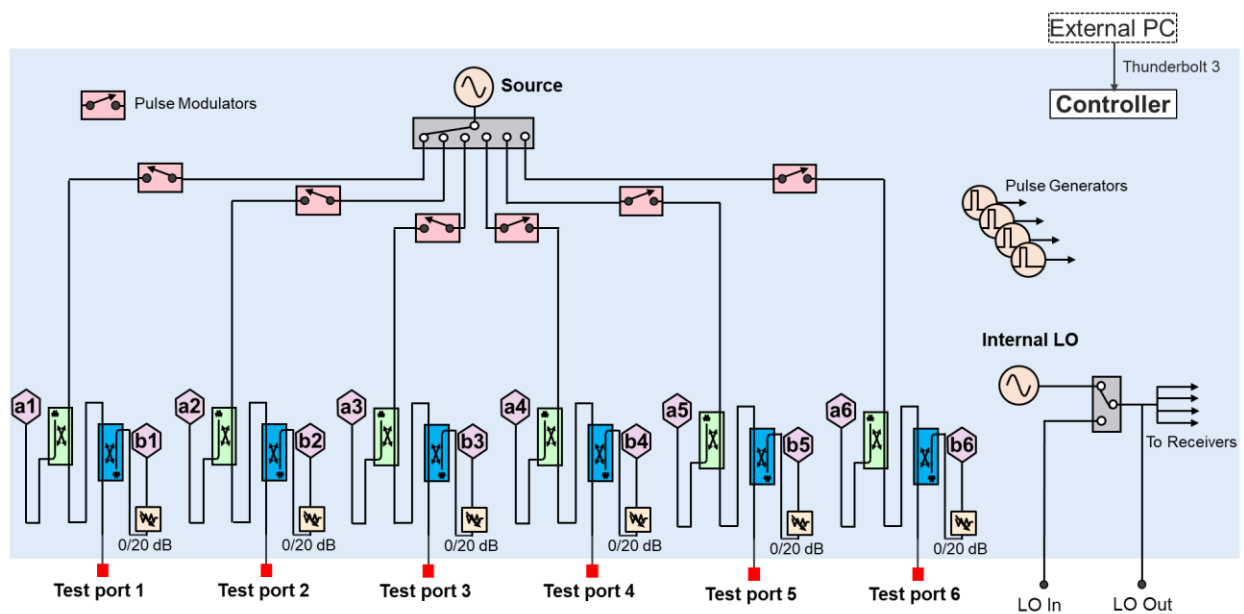

Literature Information

- Keysight Streamline Series Vector Network Analyzer – Configuration Guide, 3121-1254.EN
- Keysight Network Analyzer – Selection Guide, 5989-7603EN
- Electronic Calibration (ECal) Modules for Network Analyzer – Technical Overview, 5963-3743E

Web Resources

- www.keysight.com/find/usb-vna
- www.keysight.com/find/na
- www.keysight.com/find/vnasoftware
- www.keysight.com/find/ecal

Learn more at: www.keysight.com

For more information on Keysight Technologies' products, applications, or services, please contact your local Keysight office. The complete list is available at:
www.keysight.com/find/contactus



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Keysight:](#)

[P9374B/001](#)