



Specification

250ST160	Transmitter
250SR160	Receiver
Center Frequency	25.0±1.0KHz
Bandwidth (-6dB)	2.0KHz
Transmitting Sound Pressure Level at 25.0KHz; 0dB re 0.0002μbar per 10Vrms at 30cm	112dB min.
Receiving Sensitivity at 25.0KHz 0dB = 1 volt/μbar	-62dB min.
Capacitance at 1KHz ±20%	250ST 3000 pF 250SR 2600 pF
Max. Driving Voltage (cont.)	20Vrms
Total Beam Angle (-6dB)	85° typical
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C

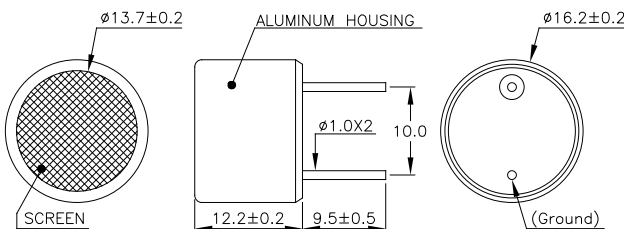
All specification taken typical at 25°C
Closer frequency tolerance can be supplied upon request.

Model available:

1	250ST/R160	Aluminum Housing
2	250ST/R16B	Black Aluminum Housing
3	250ST/R16P	Plastic Housing


Dimensions

dimensions are in mm




Impedance/Phase Angle vs. Frequency

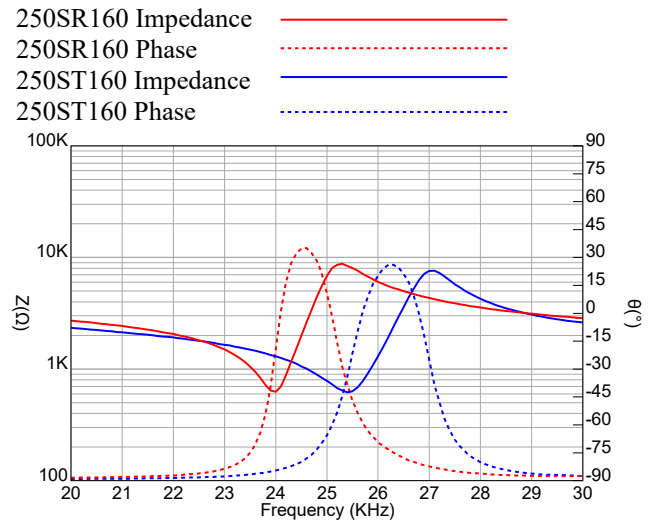Tested under 1Vrms Oscillation Level.




Sensitivity/Sound Pressure Level

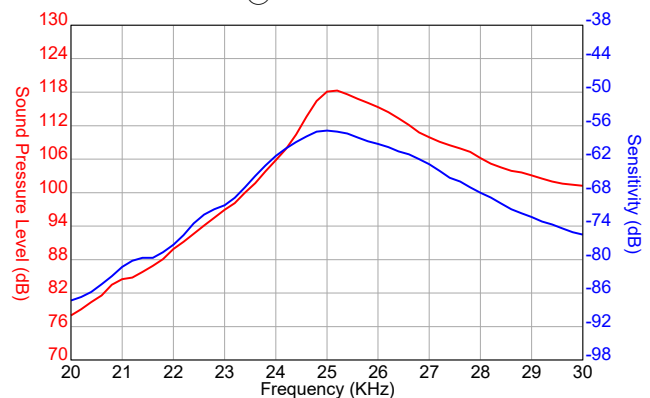Tested under 10Vrms @30cm











Beam Angle

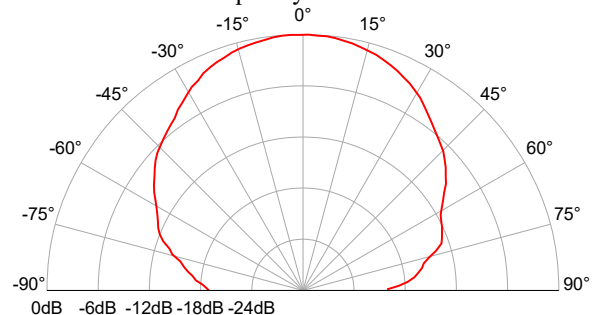Tested at 25.0KHz Frequency



S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

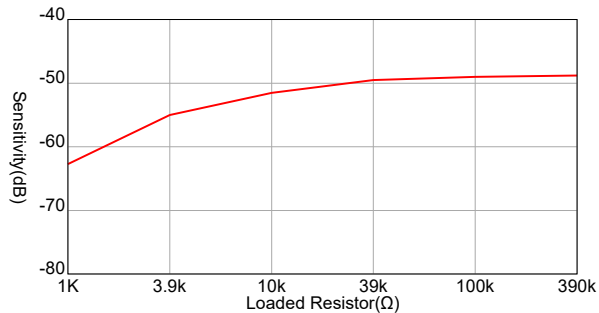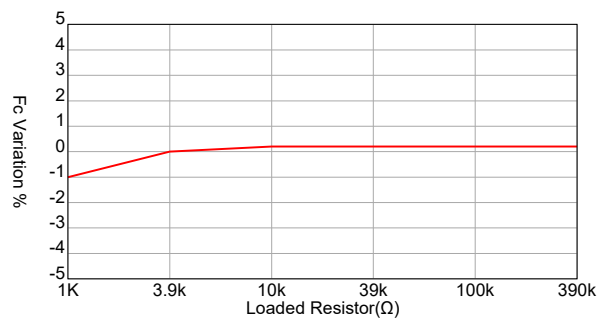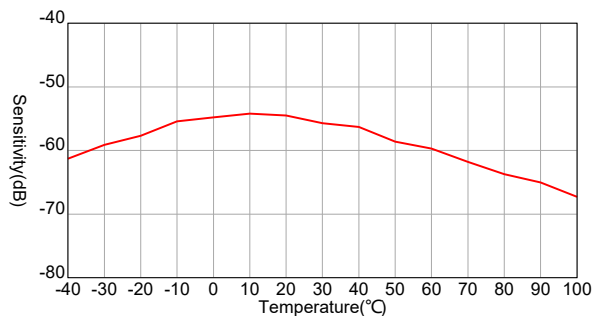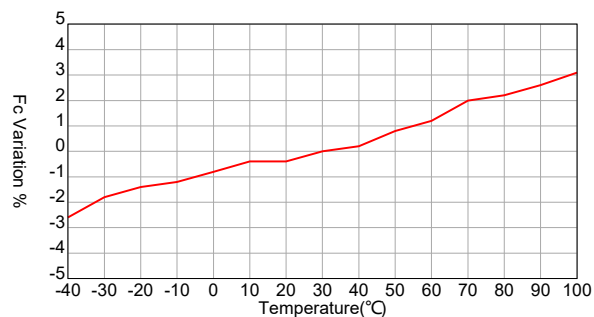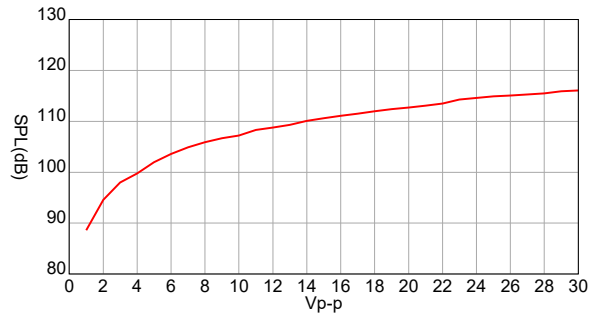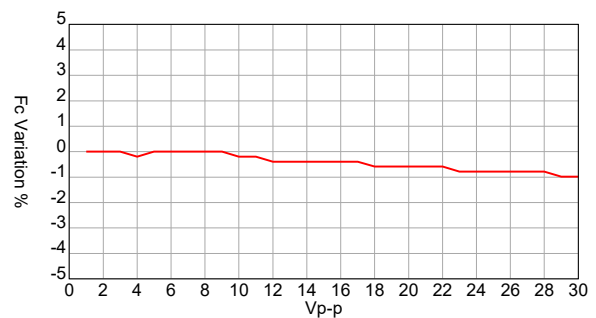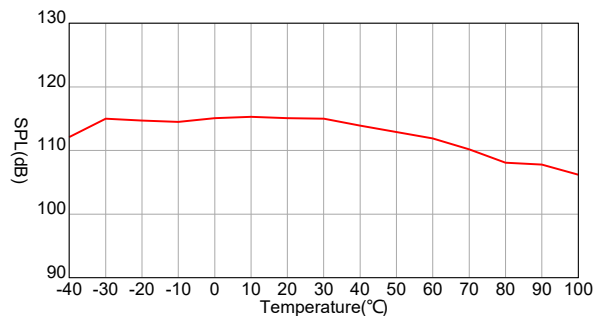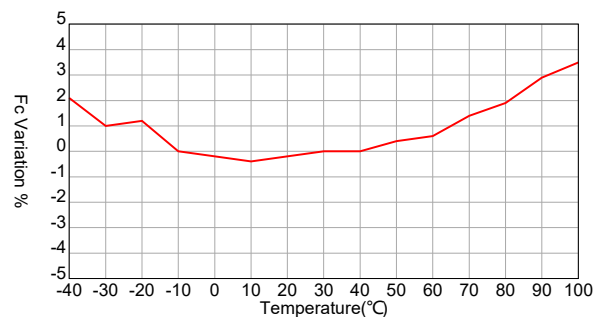[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105

250SR160 Receiver**Sensitivity Variation vs. Loaded Resistor****Center Frequency Shift vs. Loaded Resistor****Sensitivity Variation vs. Temperature****Center Frequency Shift vs. Temperature****250ST160 Transmitter****SPL Variation vs. Driving Voltage****Center Frequency Shift vs. Driving Voltage****SPL Variation vs. Temperature****Center Frequency Shift vs. Temperature**

S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Pro-Wave Electronics:](#)

[250SR16M](#) [250ST16M](#) [250SR16P](#) [250ST16P](#)