

# Datasheet Brief KTS1675A

For full datasheet, click HERE.

## Overvoltage Protector with Bidirectional Blocking and Surge Protection

#### **Features**

- Wide Input voltage range: 3.0V to +28V
- Integrated MOSFET switch 25mΩ typical
- 5A Continuous Current
- VP Select pin: over-Voltage threshold trip 13V/23.4V
- Fixed 5V Output from VSNS
- Fast Over-Voltage response time 100ns
- Low Quiescent Current: 160μA (typ.)
- Integrated Protection
  - ► Thermal Shutdown
  - ▶ Under voltage protection (UVLO)
  - ► Soft-Start
  - ► OUT to IN Reverse Blocking
- EN, VSNS, WRX and FLAG pins
- Integrated Surge Protection up to +/-100V
- Pb-free WLCSP 20-Bump, 0.4mm pitch
- -40°C to +85°C Temperature Range

### **Applications**

- Smartphones and Tablets
- Mobile Internet Devices
- Peripherals

#### **Brief Description**

The KTS1675A over-voltage protection device features high current integrated N-Channel MOSFETs with an ultralow IN to OUT on-resistance of  $25m\Omega$  (typical). Low-voltage systems on the output are protected from voltage supply faults up to +28V. An internal clamp on the input protects the device from surges up to  $\pm 100$ V.


An input voltage exceeding the over-voltage threshold causes the internal MOSFETs to turn off, preventing excessive voltage from damaging downstream devices.

The KTS1675A has a selectable internal fixed OVLO threshold preset to either 13V or 23.4V (typical) and also supports reverse bias blocking, preventing any voltage present at OUT pin feeding back into IN when the device is in the Off state.

The KTS1675A also features additional protection including enhanced ESD and thermal to protect against over-load conditions.

The device is available in a RoHS and Green compliant 20-bump, 0.4mm pitch, 2.22mm x 1.82mm WLCSP.

### **Typical Application**

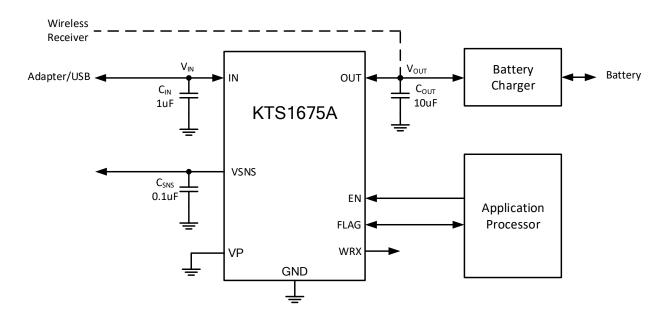



# Datasheet Brief KTS1675A

## **Ordering Information**

Part Number	Marking	Operating Temperature	Package
KTS1675AEUT-TR	NUXXYYZZZZ <sup>1</sup>	-40°C to +85°C	WLCSP-20

<sup>1.</sup> XX = Date Code, YY = Assembly Code, ZZZZ = Serial Number.

Kinetic Technologies cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Kinetic Technologies product. No intellectual property or circuit patent licenses are implied. Kinetic Technologies reserves the right to change the circuitry and specifications without notice at any time.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

KTS1675AEUT-TR