

HIGH FREQUENCY FLAT COIL PLANAR TRANSFORMER

Industrial Grade



- ⊗ Power Rating: up to 300W
- ⊗ Height: 10.4mm to 11.9mm
- ⊗ Max Footprint: 29.5mm x 26.7mm
- ⊗ Max Frequency Range: 200kHz to 700kHz
- ⊗ Isolation (Primary to Secondary): 1750V_{DC}
- ⊗ Moisture Sensitivity Level: 1


Electrical Specifications @ 25 °C – Operating Temperature – 40°C to +125 °C

Part Number	Turns Ratio		Schematic	Primary* Inductance (μH MIN)	Leakage** Inductance (μH MAX)	DCR (mΩ) MAX				Height MAX (mm)
	Primary	Secondary				Primary A	Primary B	Primary Aux.	Secondary	
R8401NL	4T & 4T	4T (1T:1T:1T:1T)	A1	211	0.3	6.8	6.8	-	4.5	10.4
R8402 NL	5T & 5T			330	0.45	8.5	8.5	-		11.9
R8403 NL	6T & 6T			423	0.6	10.2	10.2	-		
R8404 NL	7T & 7T			588	0.83	11.8	11.8	-		
R8405NL	8T & 8T			768	1.2	13.4	13.4	-		
R8406 NL	4T & 4T	1T & 1T	A2	211	0.45	6.8	6.8	-	0.56 & 0.56	10.4
R8407NL	5T & 5T			330	0.84	8.5	8.5	-		11.9
R8408NL	6T & 6T			432	1.0	10.2	10.2	-		
R8409NL	7T & 7T			588	1.2	11.8	11.8	-		
R8410NL	8T & 8T			768	1.7	13.4	13.4	-		

Notes: 1. Optional Tape & Reel packaging can be ordered by adding a "T" suffix at the end of the part number (i.e. R8408NLT)

Mechanical

R84XXNL

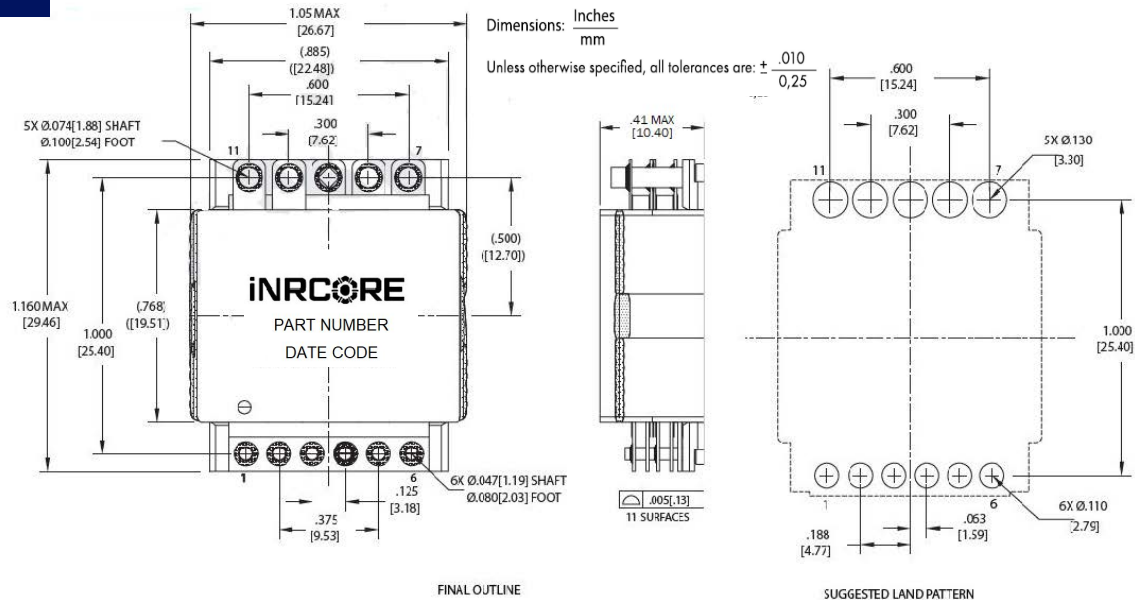

HIGH FREQUENCY FLAT COIL PLANAR TRANSFORMER


Industrial Grade



Electrical Schematic

R84XXNL


— DOUBLE INTERLEAVE SCHEMATICS —

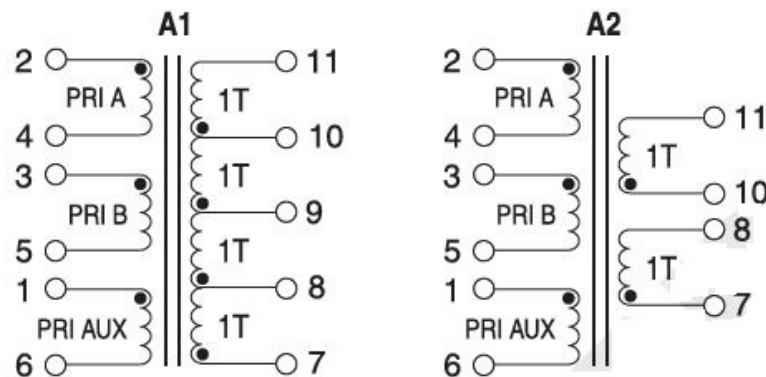

Notes from Tables


1. Inductance is measured with primary windings connected in series (2 to 5, with 3 and 4 shorted.)
2. Leakage inductance is measured on winding (2-5) with (3-4) and (7,8,9,10,11) shorted.
3. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the complete number (R8401NLT or R8401NLT).
4. To determine if the transformer is suitable for your application, it is necessary to ensure that the temperature rise of the component (ambient plus temperature rise) not exceed its operating temperature. To determine the approximate temperature rise of the transformer refer to the graphs below.

Core Loss vs. Flux Density

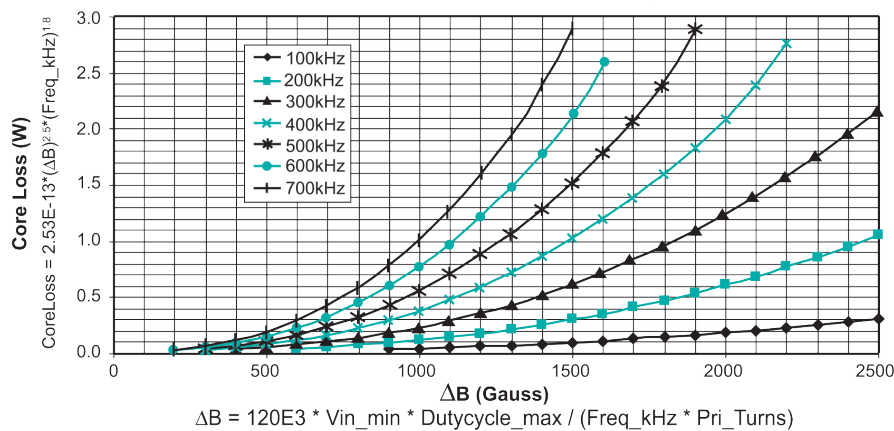

HIGH FREQUENCY FLAT COIL PLANAR TRANSFORMER

Industrial Grade

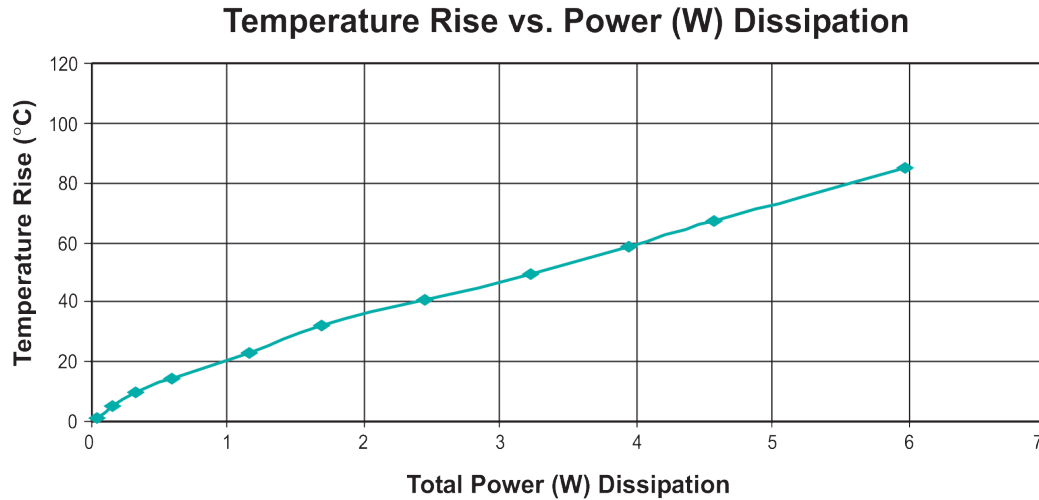

Total Power Dissipation (W) = .001 * (DCR_{primary} * I_{RMS_primary}² + DCR_{secondary} * I_{RMS_secondary}²) + Core Loss (W)

For More Information

iNRCORE, LLC

311 Sinclair Road Bristol,
PA 19007-6812 U.S.A
Tel: +1.215.781.6400
Fax: +1.215.781.6430

Dongguan iNRCORE Co. Ltd

No.7, An Li Road, Changan Town,
Dongguan City, China
Tel: +0769 8165 9962

Global Sales Representatives

and Locations: <https://www.inrcore.com>

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. iNRCORE, LLC. All rights reserved.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

iNRCORE:

[R8401NL](#) [R8401NLT](#) [R8402NL](#) [R8402NLT](#) [R8403NL](#) [R8403NLT](#) [R8410NL](#) [R8410NLT](#) [R8407NL](#) [R8407NLT](#)
[R8408NL](#) [R8408NLT](#) [R8409NL](#) [R8409NLT](#) [R8404NL](#) [R8404NLT](#) [R8405NL](#) [R8405NLT](#) [R8406NL](#) [R8406NLT](#)