

# MOSFET - Power, Single N-Channel, PQFN8

## 120 V, 4.0 mΩ, 114 A

### FDMS4D0N12C

#### Features

- Small Footprint (5x6 mm) for Compact Design
- Low  $R_{DS(on)}$  to Minimize Conduction Losses
- Low  $Q_G$  and Capacitance to Minimize Driver Losses
- These are Pb-free, Halogen Free / BFR Free and are RoHS Compliant

#### Typical Applications

- Synchronous Rectification
- AC-DC and DC-DC Power Supplies
- AC-DC Adapters (USB PD) SR
- Load Switch


#### MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ , Unless otherwise specified)

| Parameter                                                                                        |                                                            |                            | Symbol            | Value       | Unit               |
|--------------------------------------------------------------------------------------------------|------------------------------------------------------------|----------------------------|-------------------|-------------|--------------------|
| Drain-to-Source Voltage                                                                          |                                                            |                            | $V_{DSS}$         | 120         | V                  |
| Gate-to-Source Voltage                                                                           |                                                            |                            | $V_{GS}$          | $\pm 20$    | V                  |
| Continuous Drain Current $R_{\theta JC}$ (Note 7)                                                | Steady State                                               | $T_C = 25^{\circ}\text{C}$ | $I_D$             | 114         | A                  |
| Power Dissipation $R_{\theta JC}$ (Note 2)                                                       |                                                            |                            | $P_D$             | 106         | W                  |
| Continuous Drain Current $R_{\theta JA}$ (Note 6, 7)                                             | Steady State                                               | $T_A = 25^{\circ}\text{C}$ | $I_D$             | 18.5        | A                  |
| Power Dissipation $R_{\theta JA}$ (Note 6, 7)                                                    |                                                            |                            | $P_D$             | 2.7         | W                  |
| Pulsed Drain Current                                                                             | $T_A = 25^{\circ}\text{C}$ , $t_p = 10\text{ }\mu\text{s}$ |                            | $I_{DM}$          | 628         | A                  |
| Operating Junction and Storage Temperature                                                       |                                                            |                            | $T_J$ , $T_{stg}$ | -55 to +150 | $^{\circ}\text{C}$ |
| Source Current (Body Diode)                                                                      |                                                            |                            | $I_S$             | 114         | A                  |
| Single Pulse Drain-to-Source Avalanche Energy ( $I_{AV} = 66.7\text{ A}$ , $L = 0.1\text{ mH}$ ) |                                                            |                            | $E_{AS}$          | 222         | mJ                 |
| Lead Temperature Soldering Reflow for Soldering Purposes<br>(1/8" from case for 10 s)            |                                                            |                            | $T_L$             | 300         | $^{\circ}\text{C}$ |


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

| $V_{(BR)DDS}$ | $I_D \text{ MAX}$ | $R_{DS(on)} \text{ MAX}$ |
|---------------|-------------------|--------------------------|
| 120 V         | 67 A              | 4.4 mΩ @ 10 V            |
|               | 33 A              | 8.8 mΩ @ 6 V             |

#### ELECTRICAL CONNECTION




#### N-Channel MOSFET

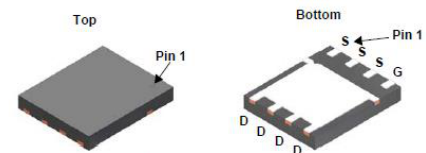

PQFN8 5x6  
(Power 56)  
CASE 483AF

#### MARKING DIAGRAM



\$Y = onsemi Logo  
 &Z = Assembly Plant Code  
 &3 = Numeric Date Code  
 &K = Lot Code  
 FDMS4D0N12C = Specific Device Code

#### ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

# FDMS4D0N12C

## ORDERING INFORMATION

| Device      | Package            | Shipping†           |
|-------------|--------------------|---------------------|
| FDMS4D0N12C | PQFN8<br>(Pb-Free) | 3,000 / Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

## THERMAL RESISTANCE RATINGS

| Parameter                                       | Symbol          | Max  | Unit |
|-------------------------------------------------|-----------------|------|------|
| Junction – to – Case – Steady State (Note 7)    | $R_{\theta JC}$ | 1.18 | °C/W |
| Junction – to – Ambient – Steady State (Note 7) | $R_{\theta JA}$ | 45   |      |

## ELECTRICAL CHARACTERISTICS ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

| Symbol | Parameter | Test Conditions | Min | Typ | Max | Unit |
|--------|-----------|-----------------|-----|-----|-----|------|
|--------|-----------|-----------------|-----|-----|-----|------|

### OFF CHARACTERISTICS

|                                                               |                   |                                                            |                           |    |           |               |
|---------------------------------------------------------------|-------------------|------------------------------------------------------------|---------------------------|----|-----------|---------------|
| Drain – to – Source Breakdown Voltage                         | $V_{(BR)DSS}$     | $V_{GS} = 0\text{ V}, I_D = 250\text{ }\mu\text{A}$        | 120                       |    |           | V             |
| Drain – to – Source Breakdown Voltage Temperature Coefficient | $V_{(BR)DSS}/T_J$ | $I_D = 250\text{ }\mu\text{A}$ , ref to $25^\circ\text{C}$ |                           | 49 |           | mV/°C         |
| Zero Gate Voltage Drain Current                               | $I_{DSS}$         | $V_{GS} = 0\text{ V}, V_{DS} = 96\text{ V}$                | $T_J = 25^\circ\text{C}$  |    | 1         | $\mu\text{A}$ |
|                                                               |                   |                                                            | $T_J = 125^\circ\text{C}$ |    | 100       | $\mu\text{A}$ |
| Gate – to – Source Leakage Current                            | $I_{GSS}$         | $V_{DS} = 0\text{ V}, V_{GS} = \pm 20\text{ V}$            |                           |    | $\pm 100$ | nA            |

### ON CHARACTERISTICS (Note 8)

|                                            |                  |                                                            |     |      |     |            |
|--------------------------------------------|------------------|------------------------------------------------------------|-----|------|-----|------------|
| Gate Threshold Voltage                     | $V_{GS(TH)}$     | $V_{GS} = V_{DS}, I_D = 370\text{ }\mu\text{A}$            | 2.0 |      | 4.0 | V          |
| Negative Threshold Temperature Coefficient | $V_{GS(TH)}/T_J$ | $I_D = 370\text{ }\mu\text{A}$ , ref to $25^\circ\text{C}$ |     | -8.5 |     | mV/°C      |
| Drain – to – Source On Resistance          | $R_{DS(on)}$     | $V_{GS} = 10\text{ V}, I_D = 67\text{ A}$                  |     | 3.3  | 4.4 | m $\Omega$ |
|                                            |                  | $V_{GS} = 6\text{ V}, I_D = 33\text{ A}$                   |     | 4.7  | 8.8 |            |
| Forward Transconductance                   | $g_{FS}$         | $V_{DS} = 5\text{ V}, I_D = 67\text{ A}$                   |     | 144  |     | S          |
| Gate-Resistance                            | $R_G$            | $T_A = 25^\circ\text{C}$                                   |     | 0.9  | 1.8 | $\Omega$   |

### CHARGES & CAPACITANCES

|                              |              |                                                                 |  |      |      |    |
|------------------------------|--------------|-----------------------------------------------------------------|--|------|------|----|
| Input Capacitance            | $C_{ISS}$    | $V_{GS} = 0\text{ V}, f = 1\text{ MHz}, V_{DS} = 60\text{ V}$   |  | 4565 | 6460 | pF |
| Output Capacitance           | $C_{OSS}$    |                                                                 |  | 2045 | 3060 |    |
| Reverse Transfer Capacitance | $C_{RSS}$    |                                                                 |  | 17   | 24   |    |
| Total Gate Charge            | $Q_{G(TOT)}$ | $V_{GS} = 6\text{ V}, V_{DS} = 60\text{ V}, I_D = 67\text{ A}$  |  | 36   | 51   | nC |
| Total Gate Charge            | $Q_{G(TOT)}$ | $V_{GS} = 10\text{ V}, V_{DS} = 60\text{ V}, I_D = 67\text{ A}$ |  | 58   | 82   |    |
| Gate-to-Source Charge        | $Q_{GS}$     |                                                                 |  | 21   |      |    |
| Gate-to-Drain Charge         | $Q_{GD}$     |                                                                 |  | 9    |      |    |
| Plateau Voltage              | $V_{GP}$     |                                                                 |  | 5    |      |    |
| Output Charge                | $Q_{OSS}$    | $V_{DD} = 60\text{ V}, V_{GS} = 0\text{ V}$                     |  | 207  |      | nC |

**FDMS4D0N12C**

### ELECTRICAL CHARACTERISTICS (T<sub>J</sub> = 25°C unless otherwise noted)

| Symbol | Parameter | Test Conditions | Min | Typ | Max | Unit |
|--------|-----------|-----------------|-----|-----|-----|------|
|--------|-----------|-----------------|-----|-----|-----|------|

### SWITCHING CHARACTERISTICS (Note 8)

|                       |              |                                                                                                    |  |    |    |    |
|-----------------------|--------------|----------------------------------------------------------------------------------------------------|--|----|----|----|
| Turn – On Delay Time  | $t_{d(ON)}$  | $V_{GS} = 10\text{ V}$ , $V_{DS} = 60\text{ V}$ ,<br>$I_D = 67\text{ A}$ , $R_G = 6\text{ }\Omega$ |  | 25 | 41 | ns |
| Rise Time             | $t_r$        |                                                                                                    |  | 8  | 16 |    |
| Turn – Off Delay Time | $t_{d(OFF)}$ |                                                                                                    |  | 45 | 72 |    |
| Fall Time             | $t_f$        |                                                                                                    |  | 12 | 22 |    |


### DRAIN-SOURCE DIODE CHARACTERISTICS

|                         |          |                                                                                           |                           |  |      |     |     |
|-------------------------|----------|-------------------------------------------------------------------------------------------|---------------------------|--|------|-----|-----|
| Forward Diode Voltage   | $V_{SD}$ | $V_{GS} = 0\text{ V}$ ,<br>$I_S = 67\text{ A}$                                            | $T_J = 25^\circ\text{C}$  |  | 0.86 | 1.3 | $V$ |
|                         |          |                                                                                           | $T_J = 125^\circ\text{C}$ |  | 0.7  | 1.2 |     |
| Reverse Recovery Time   | $t_{RR}$ | $V_{GS} = 0\text{ V}$ ,<br>$dI_S/dt = 300\text{ A}/\mu\text{s}$ ,<br>$I_S = 33\text{ A}$  |                           |  | 53   | 84  | ns  |
| Reverse Recovery Charge | $Q_{RR}$ |                                                                                           |                           |  | 175  | 280 | nC  |
| Reverse Recovery Time   | $t_{RR}$ | $V_{GS} = 0\text{ V}$ ,<br>$dI_S/dt = 1000\text{ A}/\mu\text{s}$ ,<br>$I_S = 33\text{ A}$ |                           |  | 36   | 57  | ns  |
| Reverse Recovery Charge | $Q_{RR}$ |                                                                                           |                           |  | 360  | 575 | nC  |


Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

NOTES:

1.  $R_{\theta JA}$  is determined with the device mounted on a 1 in<sup>2</sup> pad 2 oz copper pad on a 1.5 x 1.5 in. board of FR-4 material.  $R_{\theta CA}$  is determined by the user's board design.



a) 45°C/W when mounted on a 1 in<sup>2</sup> pad of 2 oz copper.



b) 115°C/W when mounted on a minimum pad of 2 oz copper.

2. Pulse Test: Pulse Width < 300  $\mu$ s, Duty cycle < 2.0%.
3.  $E_{AS}$  of 222 mJ is based on starting  $T_J = 25^\circ\text{C}$ ;  $L = 0.1$  mH,  $I_{AS} = 66.7$  A,  $V_{DD} = 100$  V,  $V_{GS} = 12$  V, 100% tested at  $L = 0.1$  mH,  $I_{AS} = 66.7$  A.
4. Pulsed  $I_D$  please refer to Fig. 11 SOA graph for more details.
5. Computed continuous current limited to max Junction Temperature only, actual continuous current will be limited by thermal & electro-mechanical application board design.
6. Surface-mounted on FR4 board using 1 in<sup>2</sup> pad size, 2 oz Cu pad.
7. The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.
8. Switching characteristics are independent of operating junction temperatures.

TYPICAL CHARACTERISTICS

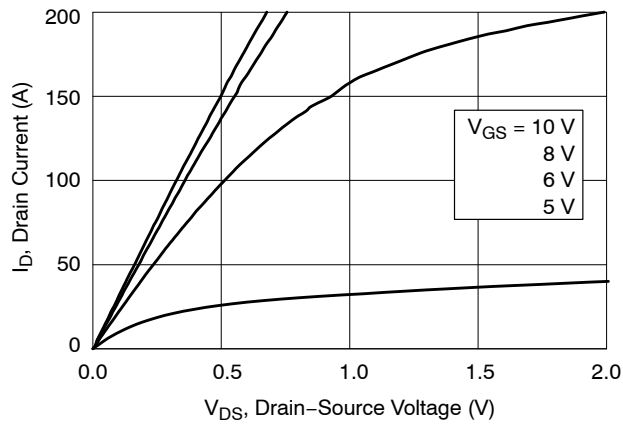


Figure 1. On-Region Characteristics

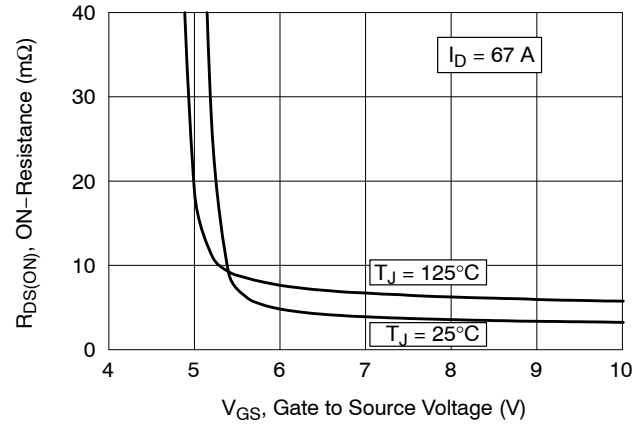


Figure 2. Transfer Characteristics

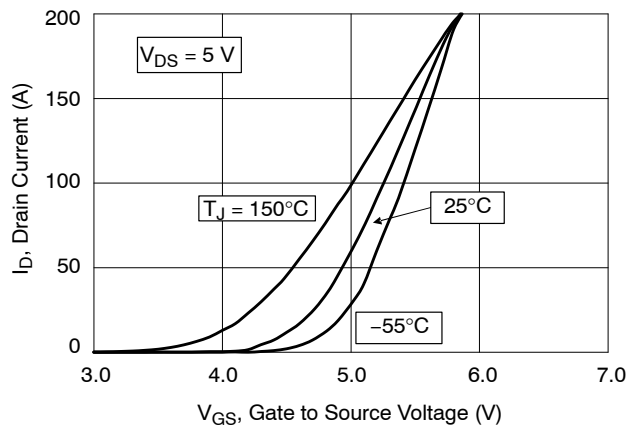


Figure 3. On-Resistance vs. Gate-to-Source Voltage

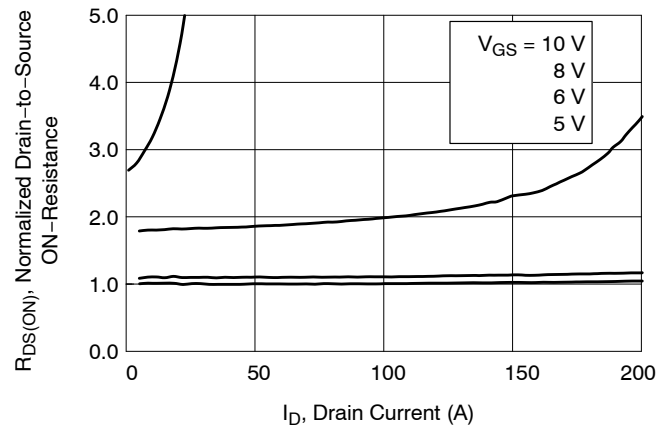


Figure 4. Normalized On-Resistance vs. Drain Current and Gate Voltage

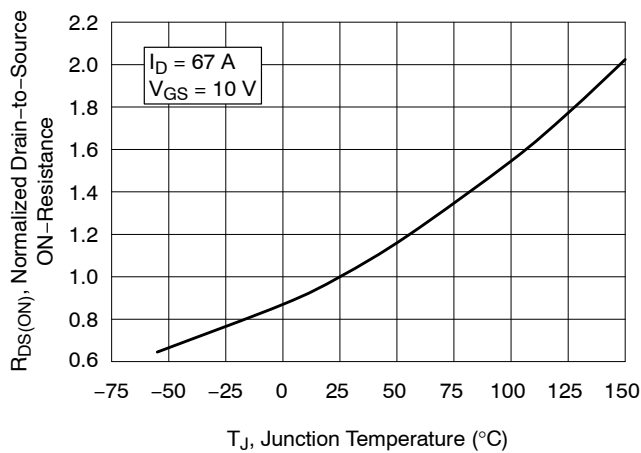


Figure 5. Normalized On-Resistance Variation with Temperature

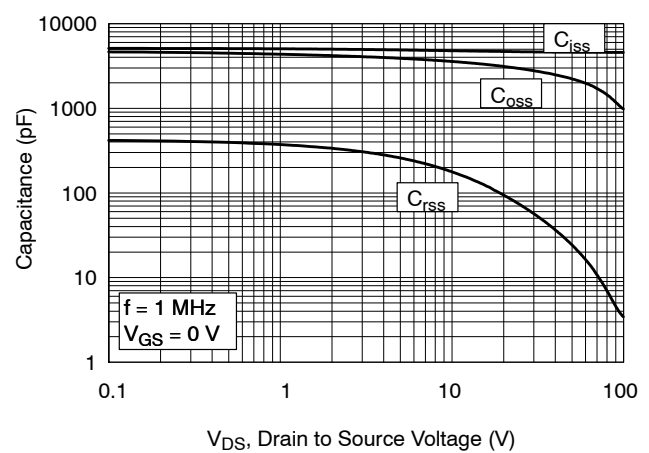


Figure 6. Capacitance Variation

TYPICAL CHARACTERISTICS (continued)

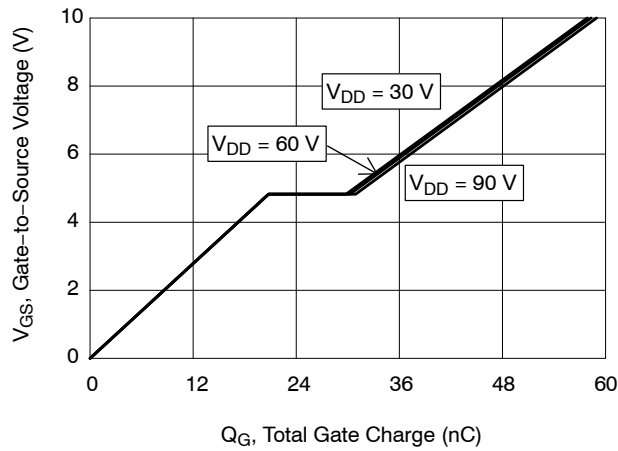


Figure 7. Gate-to-Source Voltage vs. Total Charge

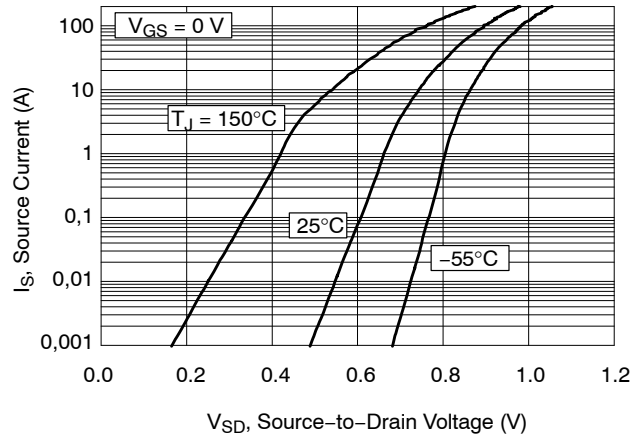


Figure 8. Diode Forward Voltage vs. Current

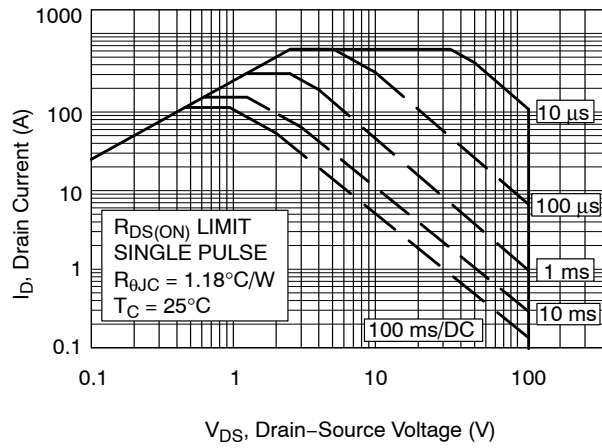


Figure 9. Safe Operating Area

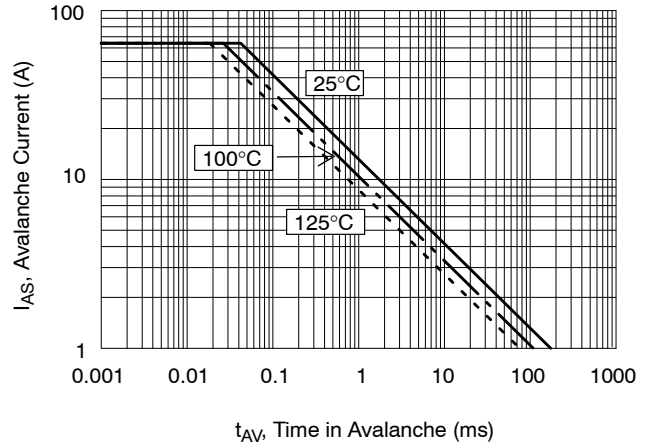


Figure 10.  $I_{PEAK}$  vs. Time in Avalanche

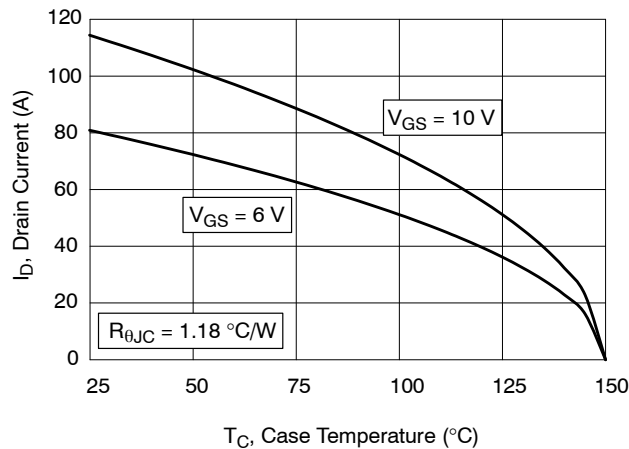


Figure 11. Maximum Drain Current vs. Case Temperature

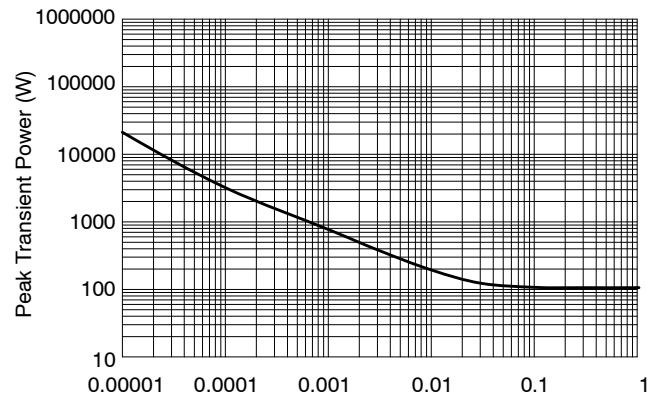


Figure 12. Single Pulse Maximum Power Dissipation

## TYPICAL CHARACTERISTICS (continued)

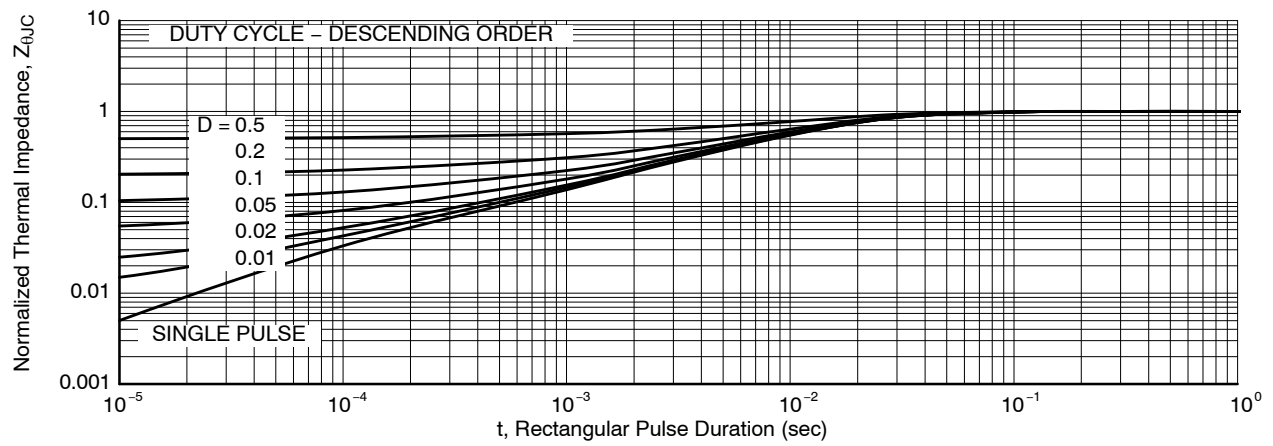

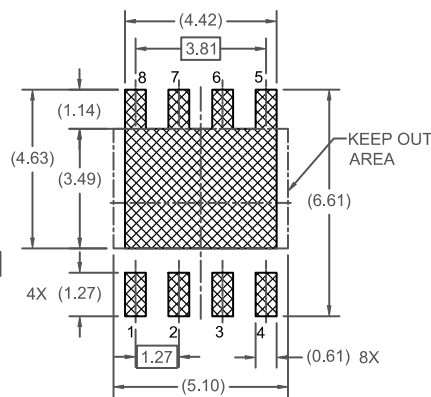
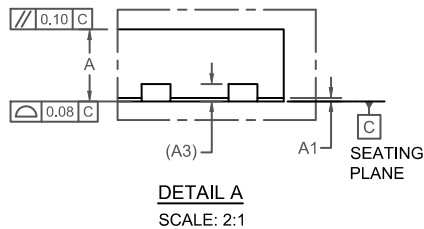
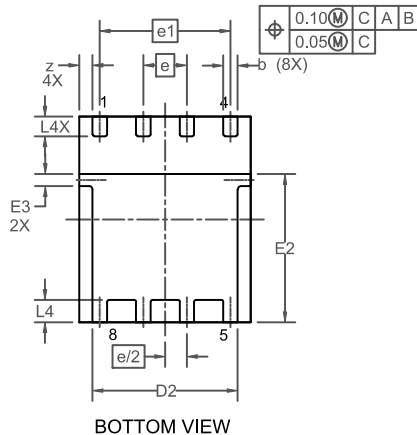

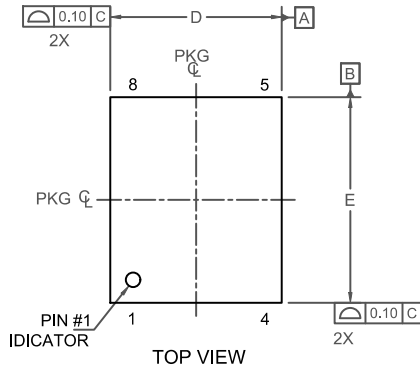


Figure 13. Transient Thermal Response Curve


**PQFN8 5X6, 1.27P**  
**CASE 483AF**  
**ISSUE A**

DATE 06 JUL 2021


**LAND PATTERN**  
**RECOMMENDATION**

\*FOR ADDITIONAL INFORMATION ON OUR PB-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERM/D.

NOTES: UNLESS OTHERWISE SPECIFIED

- A) PACKAGE STANDARD REFERENCE:  
JEDEC MO-240, ISSUE A, VAR. AA,  
B) ALL DIMENSIONS ARE IN MILLIMETERS.  
C) DIMENSIONS DO NOT INCLUDE BURRS OR MOLD FLASH. MOLD FLASH OR BURRS DOES NOT EXCEED 0.10MM.  
D) DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009.  
E) IT IS RECOMMENDED TO HAVE NO TRACES OR VIAS WITHIN THE KEEP OUT AREA.

| DIM | MILLIMETERS |      |      |
|-----|-------------|------|------|
|     | MIN.        | NOM. | MAX. |
| A   | 0.90        | 1.00 | 1.10 |
| A1  | 0.00        | -    | 0.05 |
| A3  | 0.20 REF.   |      |      |
| b   | 0.37        | 0.42 | 0.47 |
| D   | 4.90        | 5.00 | 5.10 |
| D2  | 4.13        | 4.23 | 4.33 |
| E   | 5.90        | 6.00 | 6.10 |
| E2  | 4.23        | 4.33 | 4.43 |
| E3  | 0.35 REF.   |      |      |
| e   | 1.27 BSC    |      |      |
| e/2 | 0.635 BSC   |      |      |
| e1  | 3.81 BSC    |      |      |
| L   | 0.52        | 0.57 | 0.62 |
| L4  | 0.55        | 0.65 | 0.75 |
| z   | 0.38 REF    |      |      |

**DOCUMENT NUMBER:** 98AON13656G

Electronic versions are uncontrolled except when accessed directly from the Document Repository.  
Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.

**DESCRIPTION:** PQFN8 5X6, 1.27P

**PAGE 1 OF 1**

onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)