


RPC-2.92

Adaptor
RPC-2.92 PLUG –
Mini-Coax 40 GHz JACK

02S123-K00S3

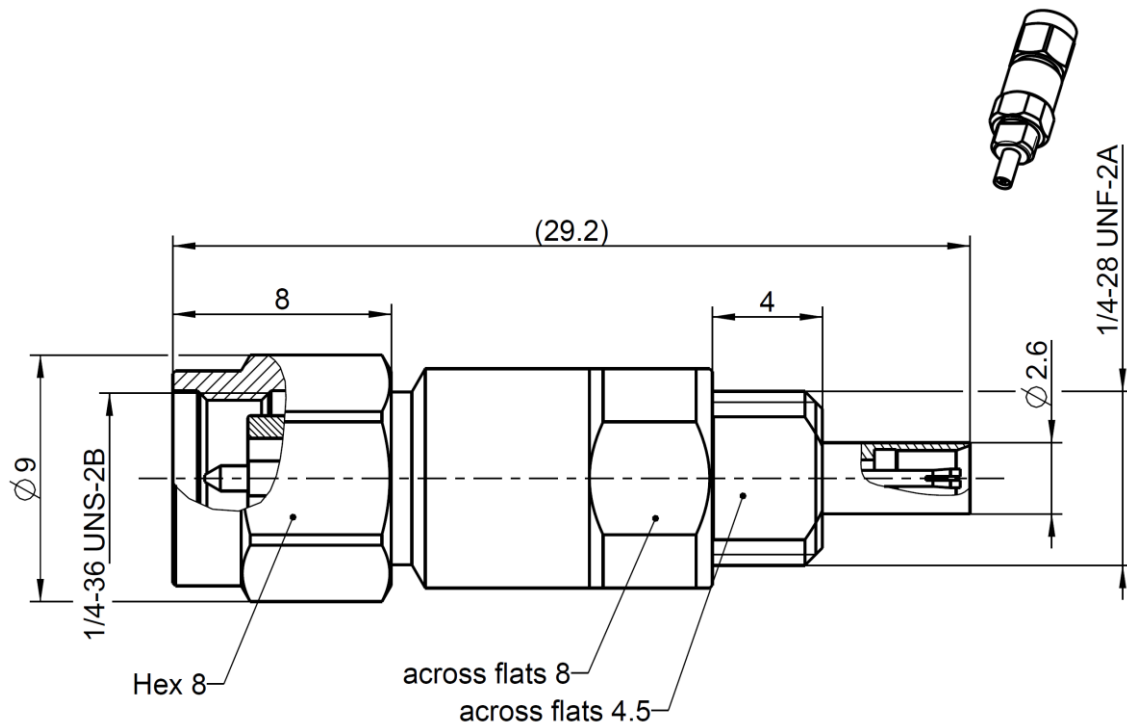

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to
Mechanically compatible with
Mini-Coax according to

IEC 61169-35
RPC-3.50 and SMA
Rosenberger Mini-Coax

Documents

N/A

Material and plating

Connector parts

Center contact
Outer contact
Coupling nut
Dielectric 1
Dielectric 2
Gasket RPC-2.92

Material

CuBe
Stainless steel
Stainless steel
TPX
PTFE
Silicone

Plating

Gold, min. 1.27 µm, over chemical nickel
Passivated
Passivated

Technical Data Sheet

Rosenberger

RPC-2.92

Adaptor
RPC-2.92 PLUG –
Mini-Coax 40 GHz JACK**02S123-K00S3****Electrical data**

Impedance	50 Ω
Frequency	DC to 40 GHz
Return loss	≥ 26 dB, DC to 18 GHz ≥ 21 dB, 18 GHz to 26.5 GHz ≥ 15 dB, 26.5 GHz to 40 GHz
Insertion loss	$\leq 0.04 \times \sqrt{f(\text{GHz})}$ dB
Insulation resistance	≥ 5 G Ω
Center contact resistance RPC-2.92	≤ 3.0 m Ω
Outer contact resistance RPC-2.92	≤ 2.0 m Ω
Center contact resistance Mini-Coax	≤ 10.0 m Ω
Outer contact resistance Mini-Coax	≤ 3.0 m Ω
Test voltage	750 V rms
Working voltage	250 V rms
RF-leakage	≥ 80 dB @ DC to 1 GHz ≥ 60 dB @ 1GHz to 4 GHz

Mechanical data

Mating cycles	≥ 500
Center contact captivation	≥ 20 N
Coupling test torque RPC-2.92	1.70 Nm
Recommended torque RPC-2.92	0.80 Nm to 1.10 Nm
Mini-Coax	
Engagement and disengagement force	1 N to 4 N

Environmental data

Temperature range	-40°C to +85°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

Tooling

N/A

Weight

Weight	7.6 g/pce
--------	-----------

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

For the installation of the electrotechnical equipment, particular electrotechnical expertise is required.



Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Martin Moder	25.05.16	Herbert Babinger	11.06.24	b00	24-0720	M. Gehl	11.06.24
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel. : +49 8684 18-0 Fax : +49 8684 18-499 Email : info@rosenberger.de			Page 2 / 2