


30 W Programmable CC Class 2 LED Driver with Enhanced Tri-Mode Dimming™ (TRIAC, ELV & 0-10V/1-10V)

Input Voltage	Max. Output Power	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 - 277 Vac, 220 - 240 Vac	30 W	up to 82% typical	90°C (measured at the hot spot)	< 20% @ max load	> 0.9	Programmable Forward-Phase, Reverse-Phase & 0 - 10 V / 1 - 10 V	1 - 100%	300 ms typical

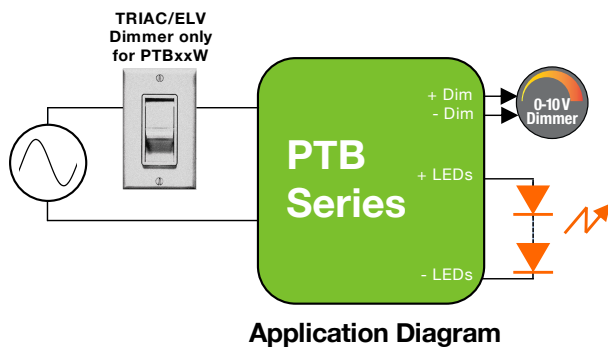

Plastic Case with Side Leads
L 70 * W 40 * H 29.5 mm
(L 2.76 * W 1.57 * H 1.16 in.)

FEATURES

- Meets IEEE 1789-2015 “no impact” recommended practices for flicker
- UL8750 Class 2 power supply
- Lifetime: 50,000 hours @ Tc ≤ 75°C
- 90°C maximum case hot spot temperature
- IP20-rated case
- Surge protection:
 - IEC61000-4-5: 2 kV line to line/2 kV line to earth
 - 2.5 kV ring wave: ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements
- Mounting clips available for multiple mounting methods

PROGRAMMING


- Audio jack programming
- Current: 100% to 60% in each voltage range
- 0-10 V dimming profiles: Linear, Non-linear, Logarithmic
- Optional dim-to-off functionality (“-ZN” models only)
- Programmable conduction angles with turn-on & turn-off for TRIAC & ELV
- Data log read: SKU, S/N, lot code, hours of operation, FW rev., power cycles

Neutral:

- White: 120-277 Vac

Line:

- Black: 120-277 Vac




Wiring Diagram for PTBxxW

Neutral:

- Blue: 220-240 Vac

Line:


- Brown: 220-240 Vac



Wiring Diagram for PTBxxE

APPLICATIONS

- Commercial & residential lighting
- Architectural lighting
- Indoor Lighting



30 W Programmable CC Class 2 LED Driver with Enhanced Tri-Mode Dimming™ (TRIAC, ELV & 0-10V/1-10V)

1 - ORDERING INFORMATION

Part Number	Input Voltage (Vac)	Max Output Power (W)	I _{out} (mA) ⁽¹⁾	Default Programmed Current (mA) ⁽³⁾	V _{out} Min. (Vdc)	V _{out} Nom. (Vdc)	V _{out} Max. (Vdc) ⁽²⁾	Open Loop (No Load) Voltage (Vdc)	Comments
120 - 277 Vac									
PTB15W-0350-42-FN	120 - 277	14.7	210 to 350	250	28	37.8	42	50	UL, FCC, Tri-Mode Dimming, No dim-to-off
PTB30W-0500-42-FN	120 - 277	21.0	300 to 500	350	28	37.8	42	50	UL, FCC, Tri-Mode Dimming, No dim-to-off
PTB30W-0700-42-FN	120 - 277	29.4	420 to 700	500	28	37.8	42	50	UL, FCC, Tri-Mode Dimming, No Dim-to-off
PTB10W-0250-42-ZN ⁽⁴⁾	120 - 277	10.5	150 to 250	250	28	37.8	42	50	UL, FCC, Tri-Mode Dimming, Dim-to-off
PTB20W-0420-42-ZN ⁽⁴⁾	120 - 277	17.6	250 to 420	350	28	37.8	42	50	UL, FCC, Tri-Mode Dimming, Dim-to-off
PTB30W-0700-42-ZN ⁽⁴⁾	120 - 277	29.4	420 to 700	500	28	37.8	42	50	UL, FCC, Tri-Mode Dimming, Dim-to-off
220 - 240 Vac									
PTB10E-0250-42	220-240	10.5	150 to 250	250	28	37.8	42	50	CE, ENEC 1-10V dimming only, No dim-to-off
PTB20E-0420-42	220-240	17.6	250 to 420	350	28	37.8	42	50	CE, ENEC 1-10V dimming only, No dim-to-off
PTB30E-0700-42	220-240	29.4	420 to 700	500	28	37.8	42	50	CE, ENEC 1-10V dimming only, No dim-to-off

Notes:

- (1) The ERP LED Driver Configuration Tool (ERP GUI) allows programming of the output current to values below the minimum limits specified in the table above. However, when the programmed output current is set below these minimum thresholds, the LED driver's Total Harmonic Distortion (THD) and Power Factor (PF) may not meet the values defined in the INPUT SPECIFICATION section of this datasheet.
- (2) The forward voltage (V_f) of the LED load should not exceed V_{out} Max. of the driver under worst case field operating conditions which are the V_f max. of the LED load under lowest temperature and highest forward current conditions. As a general design guideline, the nominal LED load V_f measured at the operating current and at room temperature should be ≤ V_{out} Nom. of the driver.
- (3) For each model, the default output current setting is the MINIMUM current.
Example: the default output current setting for the PSB50W-1200-42 is 600 mA.
- (4) Models with the "-ZN" suffix feature a programmable dim-to-off and exhibit a default non-linear 0-10V dimming profile: 10V to 8.2V=100%, 1.5V to 0.7V=1%, dim-to-off <0.7. Dim-to-off is only available on "-ZN" model numbers and is not offered in PTBxxE models


30 W Programmable CC Class 2 LED Driver with Enhanced Tri-Mode Dimming™ (TRIAC, ELV & 0-10V/1-10V)

ACCESSORIES

- By default, each PTB series driver is shipped with 2 metal mounting clips. Additional mounting clips can be ordered separately using the part number PTB-CLIPS-100 (1 bag of 100 clips) or PTB-CLIPS-1K (1 bag of 1000 clips)
- Please order the programming cable using the part number PROG-JACK-USB.

Mounting Clips

Part number: PTB-CLIPS-100 or PTB-CLIPS-1K

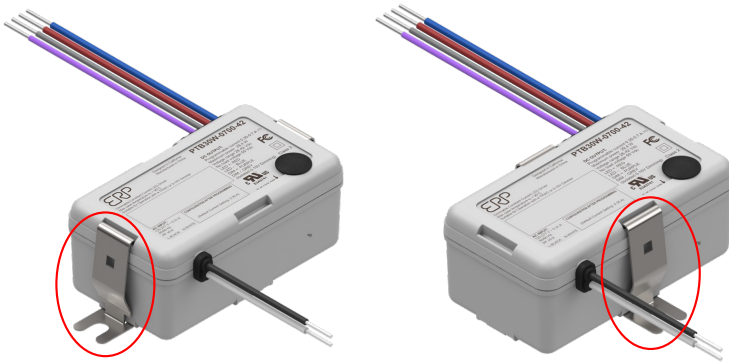

Programming Cable

Part number: PROG-JACK-USB



30 W Programmable CC Class 2 LED Driver with Enhanced Tri-Mode Dimming™ (TRIAC, ELV & 0-10V/1-10V)

2 - INPUT SPECIFICATION (@25°C ambient temperature)

	Units	Minimum	Typical	Maximum	Notes
Input Voltage Range (Vin) - PTBxxW models	Vac	105	120, 277	305	<ul style="list-style-type: none"> •The rated output current for each model is achieved at Vin≥105 Vac & at Vin≥249 Vac for PTBxxW models, and at Vin≥198 Vac for PTBxxE models. •At maximum load, as specified in section 1.
- PTBxxE models		198	230	264	
Input Frequency Range	Hz	47	50, 60	63	
Input Current (Iin)	A			0.32 A @ 120 Vac 0.18 A @ 230 vac 0.15 A @ 277 Vac	
Power Factor (PF)		0.9	> 0.9		<ul style="list-style-type: none"> •At nominal input voltage •From 100% to 60% of rated power
Inrush Current	A	Meets NEMA-410 requirements			•At any point on the sine wave and 25°C
Leakage Current	μA			0.3 mA @ 120 Vac 0.6 mA @ 230 Vac 0.7 mA @ 277 Vac	Measured per IEC60950-1
Input Harmonics	Complies with IEC61000-3-2 for Class C equipment				
Total Harmonics Distortion (THD)				20%	<ul style="list-style-type: none"> •At nominal input voltage •From 100% to 60% of rated power for all models except for PTB10E-0250-42. From 100% to 70% of rated power for PTB10E-0250-42. •Complies with DLC (Design Light Consortium) technical requirements
Efficiency	%	-	up to 82%	-	Measured with nominal input voltage
Isolation	The AC input is isolated from the main DC output.				

30 W Programmable CC Class 2 LED Driver with Enhanced Tri-Mode Dimming™ (TRIAC, ELV & 0-10V/1-10V)

3 - MAIN OUTPUT SPECIFICATION (@25°C ambient temperature)

	Units	Minimum	Typical	Maximum	Notes
Output Voltage (Vout)	Vdc				See ordering information for details
Output Current (Iout)	mA				<ul style="list-style-type: none"> •See ordering information for details •The rated output current for each model is achieved at $V_{in} \geq 108$ Vac & at $V_{in} \geq 249$ Vac.
Output Current Regulation	%	-5	± 2.5	5	<ul style="list-style-type: none"> •At nominal input voltage (120, 230 & 277 Vac) •Includes load and current set point variations
Output Current Overshoot	%	-	-	10	The driver does not operate outside of the regulation requirements for more than 500 ms during power on with nominal LED load and without dimmer.
Ripple Current	$\leq 20\%$ of rated output current for each model				<ul style="list-style-type: none"> •Measured at nominal LED voltage and nominal input voltage without dimming •Calculated in accordance with the IES Lighting Handbook, 9th edition •Meets IEEE 1789-2015 "no impact" recommended practices for flicker
Dimming Range	%	1		100	<ul style="list-style-type: none"> •The dimming range is dependent on each specific dimmer. It may not be able to achieve 1% dimming with some dimmers. •When testing, if light is measured, dimming range is based on light output. If no light is measured, dimming range is based on percentage of output current. •Dimming performance is optimal when the driver is operated at its nominal output voltage matching the LED nominal V_f (forward voltage). Dimming performance may vary when the driver is operated near its minimum output voltage.
Start-up Time	ms		300	500	<ul style="list-style-type: none"> •Without any dimmer attached, and at nominal input voltages and nominal load •Measured from application of AC line voltage to continuous light output. 100% light output achieved ≤ 750 ms. •Complies with ENERGY STAR® luminaire specification and CA Title 24
Isolation	The main DC output is certified and tested per UL8750 Class 2 or LED Class 2.				

30 W Programmable CC Class 2 LED Driver with Enhanced Tri-Mode Dimming™ (TRIAC, ELV & 0-10V/1-10V)

4 - 0-10 V DIMMING CONTROL (@25°C ambient temperature)

In the PTB series, several 0-10 V dimming profiles can be selected, such as a logarithmic profile, a non-linear profile with 1% minimum dimming, and a non-linear profile with 10% minimum dimming. Additionally, models with the “-ZN” suffix can utilize a non-linear profile with 1% minimum dimming with dim-to-off and a non-linear profile with 10% minimum dimming and dim-to-off. Furthermore, every point in the non-linear dimming profile can be programmed using the programming software.

By default, the non-linear profile with 1% minimum dimming (shown in figure 1) is pre-loaded in the PTB series. Models with the “-ZN” suffix are pre-loaded with the non-linear profile with 1% dimming and dim-to-off (shown in figure 2).

Note that PTBxxE models do not offer dim-to-off.

	Units	Minimum	Typical	Maximum	Notes
+Dim Signal, -Dim Signal		The PTB series operate only with 0-10 V dimmers that sink current. The method to dim the output current of the driver is done via the +Dim/-Dim Signal pins. The +Dim/-Dim signal pins can be used to adjust the output setting via a standard commercial wall dimmer, an external control voltage source (0 to 10 Vdc), or a variable resistor when using the recommended number of LEDs. The dimming input permits 1% to 100% dimming.			
Dimming Profile for models with no suffix (see figure 1)		100% of output current between 10 V and 8.2 V, Linear between 8.2 V and 1.5 V, 1% of output current below 1.5 V.			
Dimming Range	%	1		100	When testing, if light is measured, dimming range is based on light output. If no light is measured, dimming range is based on percentage of output current.
High Level Voltage - A	V		8.2	8.5	
Low Level Voltage - B	V	0.5	1.5		
Current Supplied by the +Dim Signal Pin	mA			1	
Output Current Tolerance While Being Dimmed	%			±8	The tolerance of the output current while being dimmed is ≤ ±8% until down to 1.5V.
Isolation	The 0-10 V circuit is isolated from the AC input and the main DC output and meets UL 8750 supplement SF requirements.				

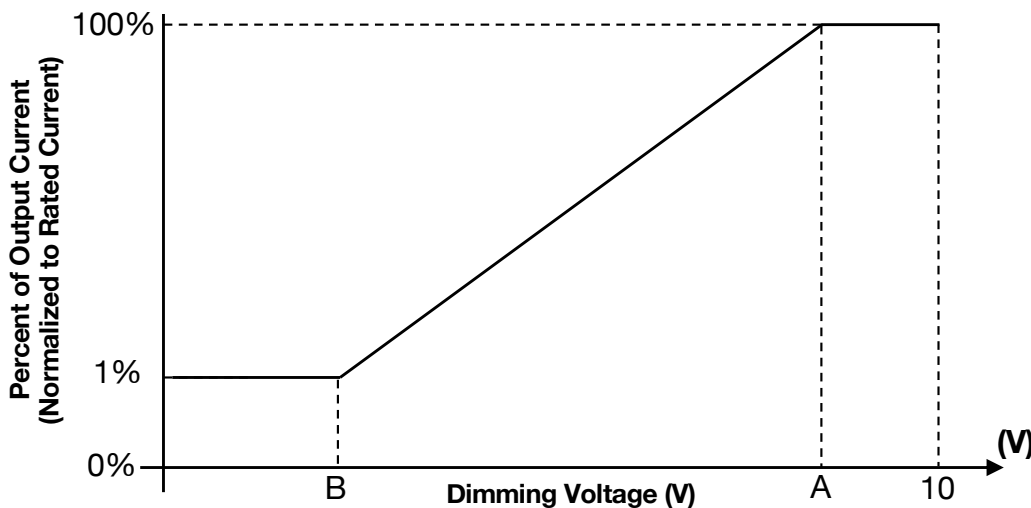


Figure 1

30 W Programmable CC Class 2 LED Driver with Enhanced Tri-Mode Dimming™ (TRIAC, ELV & 0-10V/1-10V)

4 - 0-10 V DIMMING CONTROL (@25°C ambient temperature) (CONTINUED)

Models with the “-ZN” suffix are pre-loaded with the non-linear profile with 1% dimming and dim-to-off (shown in figure 2).

Note that PTBxxE models do not offer dim-to-off.

	Units	Minimum	Typical	Maximum	Notes
Dimming Profile for “-ZN” models (see figure 2)		100% of output current between 10 V and 8.2 V, Linear between 8.2 V and 1.5 V, 1% of output current between 1.5 V and 0.7 V, Output current off below 0.7 V.			
Dimming Range	%	1		100	When testing, if light is measured, dimming range is based on light output. If no light is measured, dimming range is based on percentage of output current.
High Level Voltage - A	V		8.2	8.5	
Low Level Voltage - B	V		1.5		
Dim to Off - C	V	0.6	0.7	0.8	
Dim to Off Hysteresis - D	V			+0.2	
Current Supplied by the +Dim Signal Pin	mA			1	
Output Current Tolerance While Being Dimmed	%			±8	The tolerance of the output current while being dimmed is ≤ +/-8% until down to 1.5V.
Isolation	The 0-10 V circuit is isolated from the AC input and the main DC output and meets UL 8750 supplement SF requirements.				

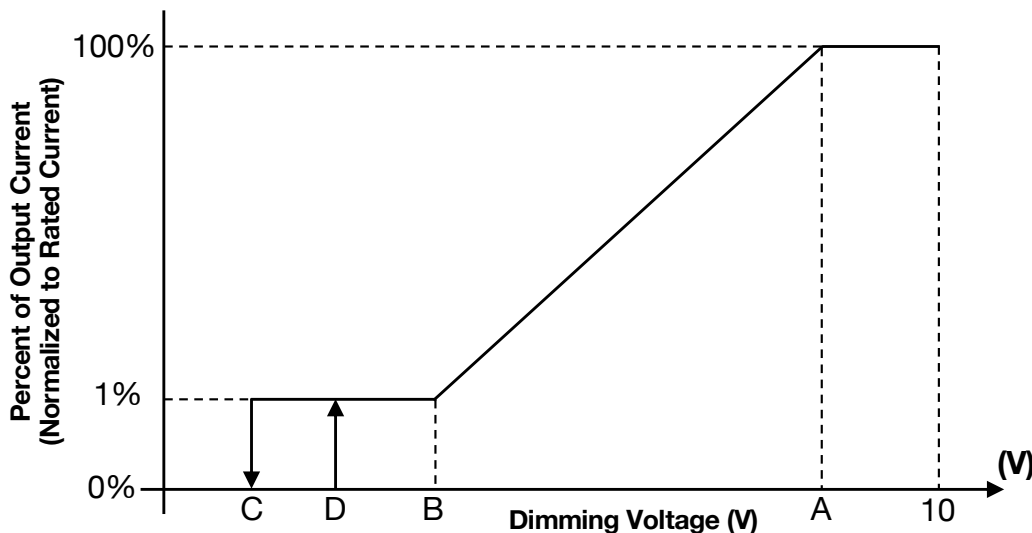


Figure 2

30 W Programmable CC Class 2 LED Driver with Enhanced Tri-Mode Dimming™ (TRIAC, ELV & 0-10V/1-10V)

5 - ENVIRONMENTAL CONDITIONS

	Units	Minimum	Typical	Maximum	Notes
Operating Ambient Temperature (Ta)	°C	-10		50	50°C is the non-derated temperature (Refer to section 8 'Output power de-rating at elevated temperatures'.)
Maximum Case Temperature (Tc)	°C			+90	Case temperature measured at the hot spot •tc (see label on page 17)
Storage Temperature	°C	-40		+85	
Humidity	%	5	-	95	Non-condensing
Cooling	Convection cooled				
Acoustic Noise	dBA			24	Measured at a distance of 1 foot, without dimmer.
Mechanical Shock Protection	per EN60068-2-27				
Vibration Protection	per EN60068-2-6 & EN60068-2-64				
MTBF	> 200,000 hours when operated at nominal input and output conditions, and at Tc ≤ 75°C				
Lifetime	50,000 hours at Tc ≤ 75°C maximum case hot spot temperature (see hot spot •tc on label on page 17)				
Warranty	5 years. Users must utilize proper thermal management techniques to ensure proper thermal conductivity between the driver and heat sink. The use of double-sided tape to mount the driver voids the warranty.				

6 - EMC COMPLIANCE AND SAFETY APPROVALS

EMC Compliance			
Conducted and Radiated EMI	•PTBxxW models: Compliant with FCC CFR Title 47 Part 15 Class B at 120 Vac & Class A at 277 Vac •PTBxxE models: Compliant with EN55015 (CISPR 15) at 220, 230, and 240 Vac		
Harmonic Current Emissions	IEC61000-3-2	For Class C equipment	
Voltage Fluctuations & Flicker	IEC61000-3-3		
Immunity Compliance	ESD (Electrostatic Discharge)	IEC61000-4-2	6 kV contact discharge, 8 kV air discharge, level 3
	RF Electromagnetic Field Susceptibility	IEC61000-4-3	3 V/m, 80 - 1000 MHz, 80% modulated at a distance of 3 meters
	Electrical Fast Transient	IEC61000-4-4	± 2 kV on AC power port for 1 minute, ±1 kV on signal/control lines
	Surge	IEC61000-4-5	± 2 kV line to line (differential mode) / ± 2 kV line to common mode ground (tested to secondary ground) on AC power port, ±0.5 kV for outdoor cables
		ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A, 2.5 kV ring wave	
	Conducted RF Disturbances	IEC61000-4-6	3V, 0.15-80 MHz, 80% modulated
	Voltage Dips	IEC61000-4-11	>95% dip, 0.5 period; 30% dip, 25 periods; 95% reduction, 250 periods

Safety Agency Approvals	
UL	PTBxxW models: UL8750 Class 2, supplement SF
cUL	PTBxxW models: CAN/CSA C22.2 No. 250.13-14 LED equipment for lighting applications
CE	PTBxxE models: IEC61347-2-13 electronic control gear for LED Modules & EN55015 (EMC compliance)
ENEC	PTBxxE models

Safety					
	Units	Minimum	Typical	Maximum	Notes
Hi Pot (High Potential) or Dielectric voltage-withstand • PTBxxW models	Vdc	2200			•Insulation between the input (AC line and Neutral) and the output •Tested at the RMS voltage equivalent of 1550 Vac
• PTBxxE models		4242			•Tested at the RMS voltage equivalent of 3000 Vac •Meets class II reinforced/double insulation

30 W Programmable CC Class 2 LED Driver with Enhanced Tri-Mode Dimming™ (TRIAC, ELV & 0-10V/1-10V)

7 - PROTECTION FEATURES

Input Over Current Protection

The PTB series incorporates a primary AC line fuse for input over current protection to prevent damage to the LED driver and meet product safety requirements as outlined in Section 6.

Short Circuit and Over Current Protection

The PTB series is protected against short-circuit such that a short from any output to return shall not result in a fire hazard or shock hazard. The driver shall hiccup as a result of a short circuit or over current fault. Removal of the fault will return the driver to within normal operation. The driver shall recover, with no damage, from a short across the output for an indefinite period of time.

Internal Over temperature Protection

The PTB series is equipped with internal temperature sensor on the primary power train. Failure to stay within the convection power rating will result in the power supply reducing the available current (fold back) below the programmed amount. The main output current will be restored to the programmed value when the temperature of the built-in temperature sensor cools adequately.

Output Open Load Protection

When the LED load is removed, the output voltage of the PTB series is typically limited to 1.3 times the maximum output voltage of each model.

8 - OUTPUT POWER DE-RATING AT ELEVATED TEMPERATURES

The PTB series can be operated with cooling air temperatures above 50°C ambient by linearly de-rating the total maximum output power (or current) by 2.5%/°C typical from 50°C to 70°C.

30 W Programmable CC Class 2 LED Driver with Enhanced Tri-Mode Dimming™ (TRIAC, ELV & 0-10V/1-10V)

9 - PHASE-CUT DIMMING

Dimming of the driver is possible with standard TRIAC-based incandescent dimmers that chop the AC voltage as shown in Figure 3, or with ELV dimmers. During the rapid rise time of the AC voltage when the dimmer turns on, the driver does not generate any voltage or current oscillations, and inrush current is controlled. During the on-time of the AC input, the driver regulates the output current based upon the conduction angle. The RMS value of the driver output current is proportional to the on-time of the AC input voltage. When operating with an incandescent dimmer, the RMS output current varies depending upon the conduction angle and RMS value of the applied AC input voltage.

Forward-phase (TRIAC) and reverse-phase (ELV) dimming work only at 120 Vac. The PTB series offers Tri-Mode Dimming™ compatibility with both phase-cut (reverse-phase and forward-phase) and 0-10V dimmers. Phase-cut dimming always has priority over 0-10 V dimming.

Note that PTBxxE models are not compatible with phase-cut dimming.

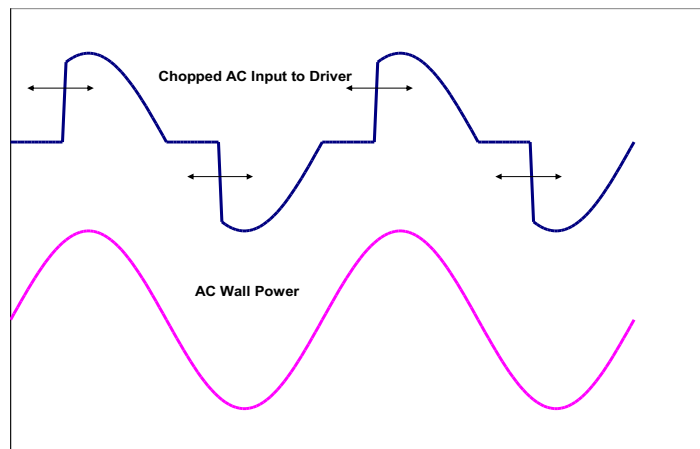


Figure 3

10 - COMPATIBLE PHASE-CUT DIMMERS

120Vac Dimmers					
Mfg.	Model	Mfg.	Model	Mfg.	Model
Lutron	LGCL-153PL	Lutron	DVRP-253P	Leviton	VPE06
Lutron	RRD-6CL	Lutron	NTELV-600P	Leviton	DW1KD-1BZ
Lutron	DVELV-303P	Lutron	MAELV-600	Cooper	SAL06P-W-K
Lutron	MACL-153M	Lutron	SCL-153P	Cooper	DAL06P
Lutron	RRD-10ND	Leviton	DSL06-1LZ	Cooper	TAL06P1-C1
Lutron	PD-6WCL	Leviton	IPE04		
Lutron	SELV-300P	Leviton	IPL06		
Lutron	DVCL-153P	Leviton	6674		

Dimming compatibility charts are available for each model on the PTB series page at: erp-power.com.

30 W Programmable CC Class 2 LED Driver with Enhanced Tri-Mode Dimming™ (TRIAC, ELV & 0-10V/1-10V)

11 - 0-10 V DIMMING

The PTB series operate only with 0-10 V dimmers that sink current. They are not designed to operate with 0-10 V control systems that source current, as used in theatrical/entertainment systems. Developed in the 1980's, the 0-10 V sinking current control method is adopted by the International Electrotechnical Commission (IEC) as part of its IEC Standard 60929 Annex E.

The method to dim the output current of the driver is done via the +Dim/-Dim Signal pins. The +Dim/-Dim Signal pins respond to a 0 to 10 V signal, delivering 1% to 100% of the output current based on rated current for each model. A pull-up resistor is included internal to the driver. When the +Dim wire (purple) is short circuited to the -Dim wire (pink) or to the -LED wire (blue or black), the output current turns off.

If the +Dim input is > 10 V or open circuited, the output current is programmed to 100% of the rated current. When not used, the -Dim wire (pink) and to the +Dim wire (purple) can be individually capped or cut off. In this configuration, no dimming is possible and the driver delivers 100% of its rated output current.

The maximum source current (flowing from the driver to the 0-10 V dimmer) supplied by the +Dim Signal pin is ≤ 1 mA. The tolerance of the output current while being dimmed shall be $\pm 8\%$ typical until down to 1.5 V.

In the PTB series, several 0-10 V dimming profiles can be selected, such as a logarithmic profile, a non-linear profile with 1% minimum dimming, and a non-linear profile with 10% minimum.

By default, the non-linear profile with 1% minimum dimming (show in figure 4) is pre-loaded in the PTB series. In this non-linear 0-10 V dimming profile, 10 V to 8.2 V=100% of the output current, linear between 8.2 V and 1.5 V, <1.5 V=1%. Models with the "-ZN" suffix are pre-loaded with a non-linear dim-to-off dimming profile (see page 5).

Note that PTBxxE models do not offer dim-to-off.

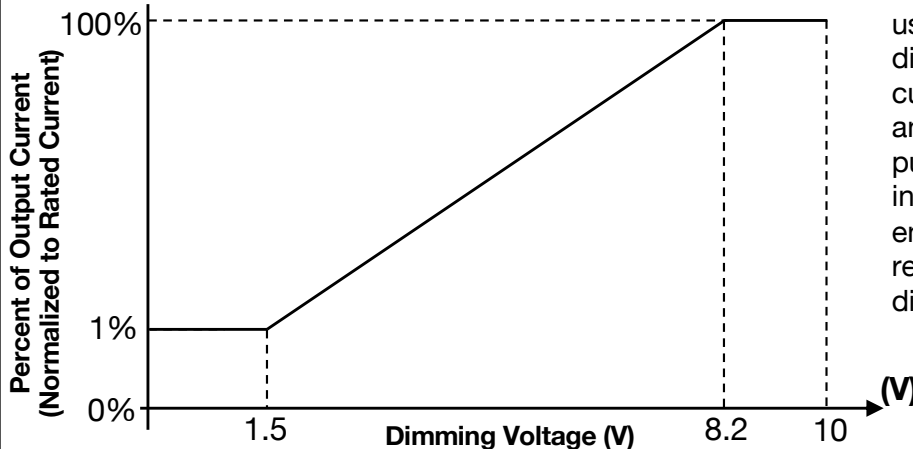


Figure 4

The non-linear curve is recommended when using standard in wall 0-10 V logarithmic dimmers to avoid having insufficient source current available to pull the dimmer up to 10 V and to account for the inability of the dimmer to pull below approximately 0.9 V. In these type of installations, the modified transfer function will ensure 100% light output and dimming to 1%, regardless of the number of drivers on the 0-10 V dimming line.

12 - COMPATIBLE 0-10 V DIMMERS

Mfg.	Model	Mfg.	Model	Mfg.	Model
Lutron	NFTV	Lutron	DVTV	Lutron	DVSTV
Leviton	IP710-LFZ	Lightolier	SR1200ZTUNV	Cooper	SF10P-W
Leviton	IP710-DL				

30 W Programmable CC Class 2 LED Driver with Enhanced Tri-Mode Dimming™ (TRIAC, ELV & 0-10V/1-10V)

13 - PROGRAMMING

The PTB series can be programmed by inserting the audio jack of the cable shown in figure 5 into the driver and by plugging the USB other end of the cable into a computer. **The driver should not be powered on during the programming process.**

When ordering the PTB series, please make sure to order a programming cable. The part number for the programming cable is “PROG-JACK-USB”.

Programming is done by using the ERP LED Driver Configuration Tool (also known as ERP GUI), downloadable through the ERP website (<https://www.erp-power.com/erp-light-engines/led-light-programming-software/>), which enables the user to adjust output current and dimming profile.

Please note that, for each model, the **default output current setting is listed on page 2 of this datasheet.**

Furthermore, when connecting the driver to a computer using the programming cable, you can access the driver's internal data log and read the following information: SKU, serial number, manufacturing lot code, hours of operation, firmware revision, and fault events: power failure, and thermal events (i.e. number of times the case temperature has exceed the maximum case temperature of 90° C).

While programming drivers in a lot, the ERP LED Driver Configuration Tool can interface with a label printer, which enables the user to add configuration labels to driver labels in order to highlight programmed output current. Listed below is the equipment needed to print labels.

Equipment	Part Number	Where to buy
Printer	TSC TC210	barcodefactory.com/tsc/printers/tc210/99-059a001-54lf
Ribbon	TSC Prem. Resin, 60mm x 110mm	barcodefactory.com/tsc/35-r060110-23cf
Labels	BAR-.81x.28-1-TT	barcodefactory.com/barcodefactory/labels/bar-.81x.28-1-tt

For more information, please refer to the ERP LED Driver Configuration Tool user's manual at: (<https://www.erp-power.com/erp-light-engines/led-light-programming-software/>).

Programming Cable

Part number: PROG-JACK-USB



Figure 5

30 W Programmable CC Class 2 LED Driver with Enhanced Tri-Mode Dimming™ (TRIAC, ELV & 0-10V/1-10V)

14 - PREDICTED LIFETIME VERSUS CASE AND AMBIENT TEMPERATURE

Lifetime is defined by the measurement of the temperatures of all the electrolytic capacitors whose failure would affect light output under the nominal LED load and worst case AC line voltage. The graphs in figures 6 and 7 are determined by the electrolytic capacitor with the shortest lifetime, among all electrolytic capacitors. It represents a worst case scenario in which the LED driver is powered 24 hours/day, 7 days/week. The lifetime of an electrolytic capacitor is measured when any of the following changes in performance are observed:

- 1) Capacitance changes more than 20% of initial value
- 3) Equivalent Series Resistance (ESR): 150% or less of initial specified value

- 2) Dissipation Factor ($\tan \delta$): 150% or less of initial specified value
- 4) Leakage current: less of initial specified value

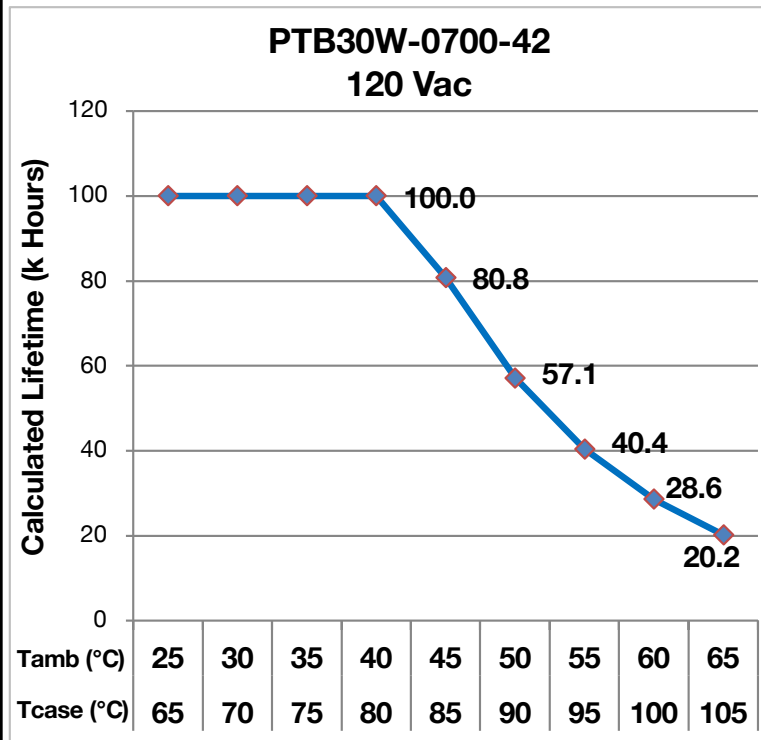


Figure 6

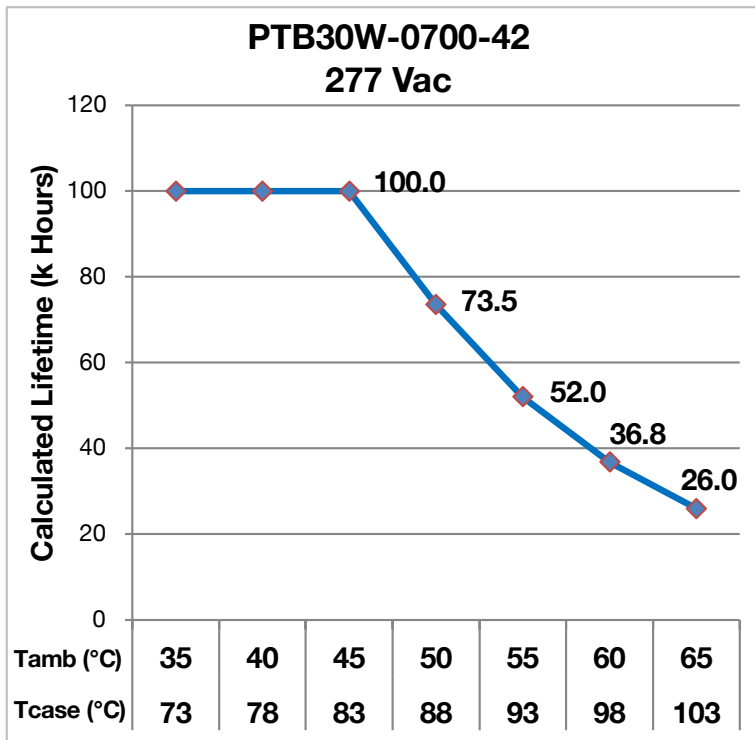


Figure 7

Notes:

- The PTB30W-0700-42 and PTB30W-0500-42 are not recommended for IC (Insulated Contact) rated fixtures. For IC rated applications at the 30 W power level, ERP recommends the use of the PSS series.
- The ambient temperature T_{ambient} and the differential between T_{ambient} and T_{case} mentioned in the above graphs are relevant only as long as both the driver and the light fixture are exposed to the same ambient room temperature. If the LED driver is housed in an enclosure or covered by insulation material, then the ambient room temperature is no longer valid. In this situation, please refer only to the case temperature T_{case} .
- It should be noted the graph "Lifetime vs. Ambient Temperature" may have an error induced in the final application if the mounting has restricted convection flow around the case. For applications where this is evident, the actual case temperature measured at the Tc point in the application should be used for reliability calculations.
- Users must utilize proper thermal management techniques to ensure proper thermal conductivity between the driver and heat sink. The use of double-sided tape to mount the driver voids the warranty.

30 W Programmable CC Class 2 LED Driver with Enhanced Tri-Mode Dimming™ (TRIAC, ELV & 0-10V/1-10V)

15 – EFFICIENCY VERSUS LOAD

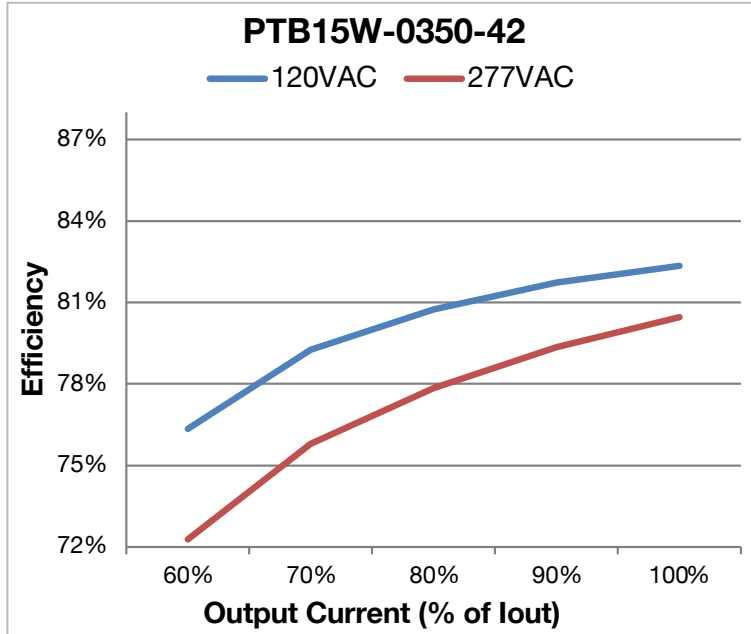


Figure 8

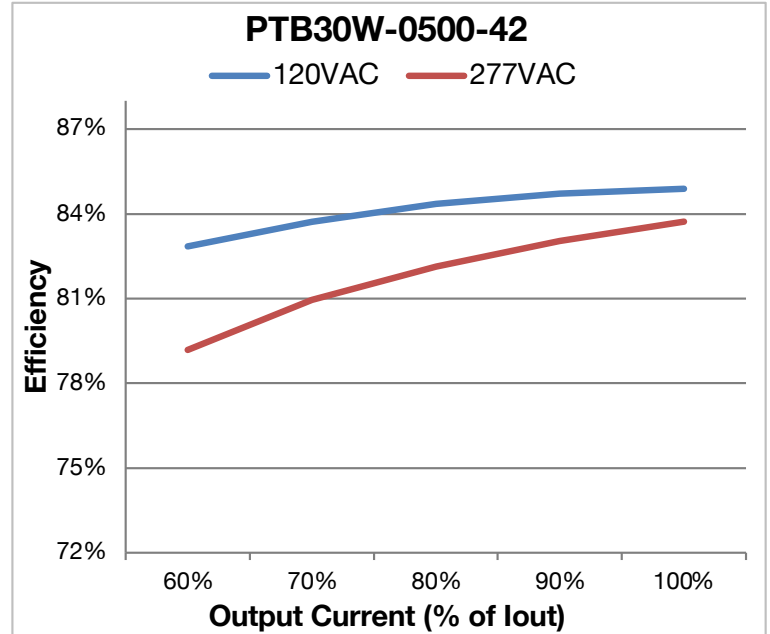


Figure 9

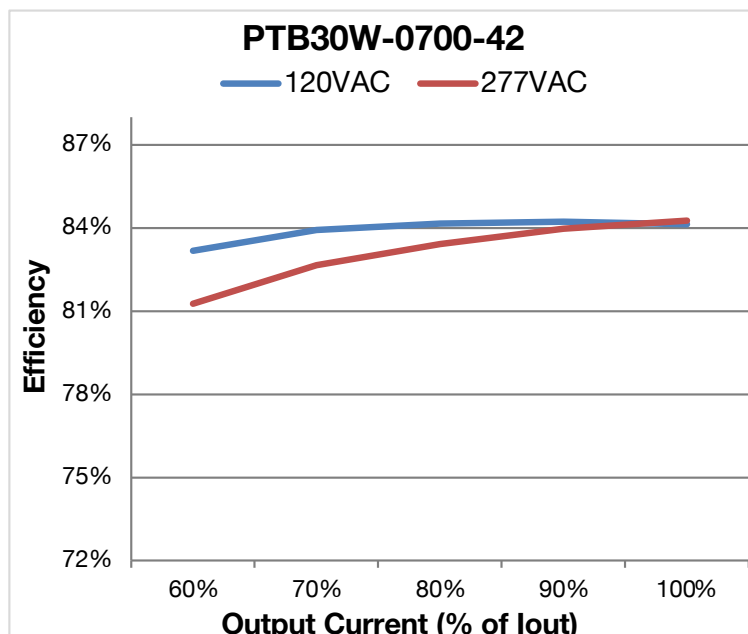


Figure 10

30 W Programmable CC Class 2 LED Driver with Enhanced Tri-Mode Dimming™ (TRIAC, ELV & 0-10V/1-10V)

16 – POWER FACTOR VERSUS LOAD

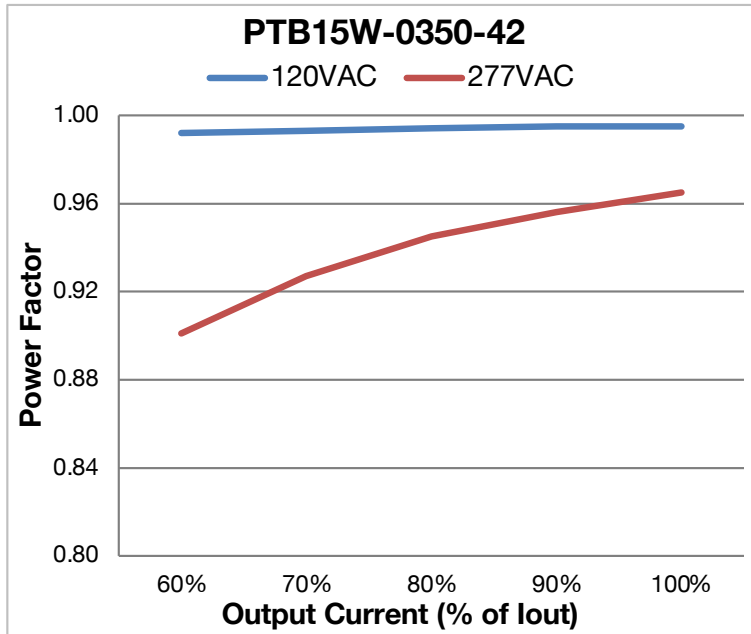


Figure 11

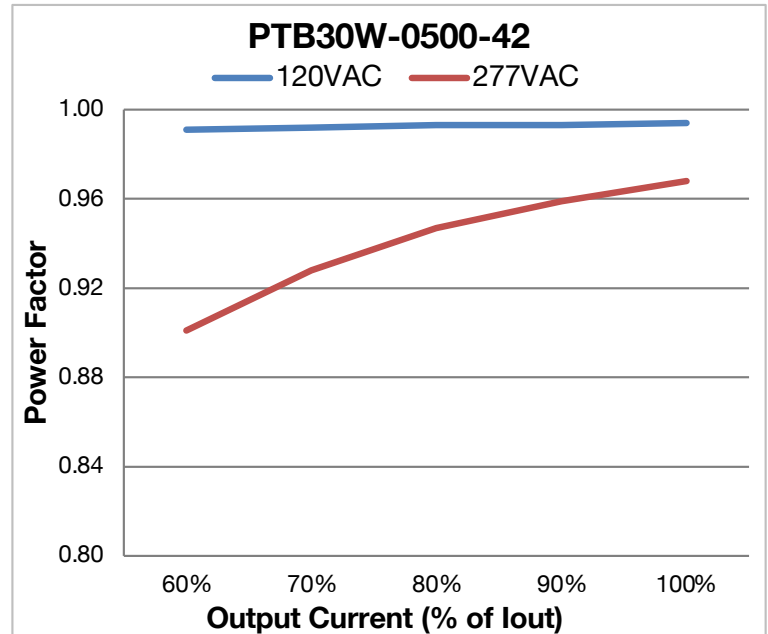


Figure 12

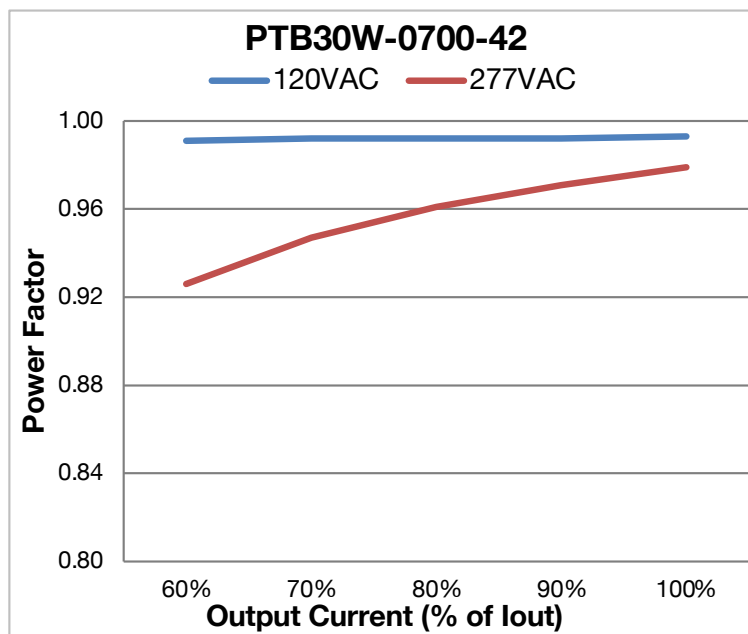


Figure 13

30 W Programmable CC Class 2 LED Driver with Enhanced Tri-Mode Dimming™ (TRIAC, ELV & 0-10V/1-10V)

17 – THD VERSUS LOAD

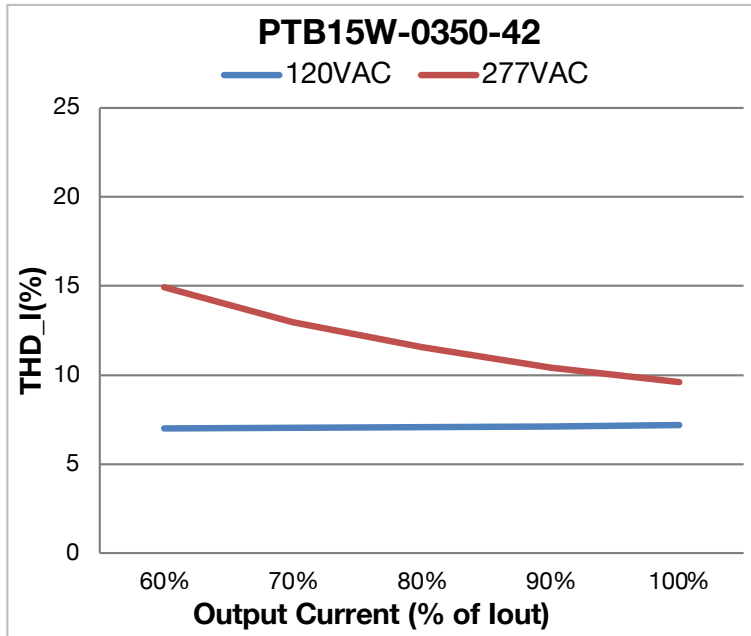


Figure 14

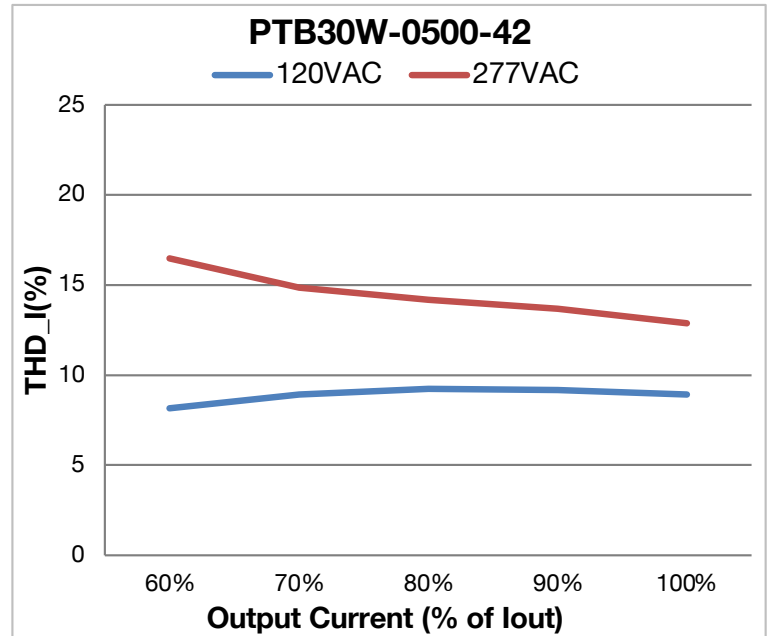


Figure 15

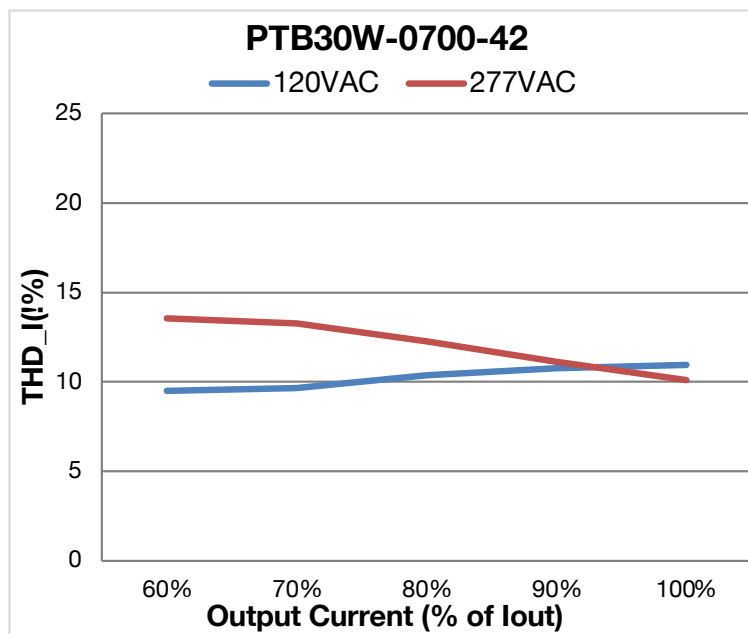


Figure 16

30 W Programmable CC Class 2 LED Driver with Enhanced Tri-Mode Dimming™ (TRIAC, ELV & 0-10V/1-10V)

18 - MECHANICAL DETAILS



- **Packaging:** Plastic case
- **I/O Connections:**
 - **Models with flying leads:** 18 AWG on all leads, 22 AWG on 0-10V dimming wires, 157 mm (6.18 in) long, 105°C rated, stranded, stripped by approximately 9.5 mm, and tinned. All the wires, on both input and output, have a 300 V insulation rating.
- **Ingress Protection:** IP20 rated
- **Mounting Instructions:** The PTB driver case must be secured on a flat surface through the two mounting clips, shown here below in the case outline drawings. The use of double-sided tape voids the warranty.

19 - OUTLINE DRAWINGS (MODELS WITH FLYING LEADS)

Dimensions: L 70 * W 40 * H 29.5 mm (L 2.76 * W 1.57 * H 1.16 in.)

Volume: 82.6 cm³ (5.02 in³)

Weight: 119 g (4.2 oz)

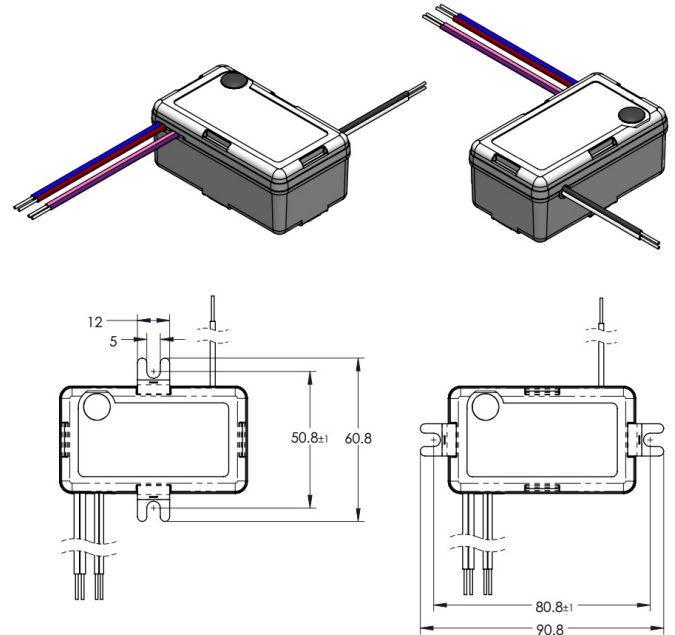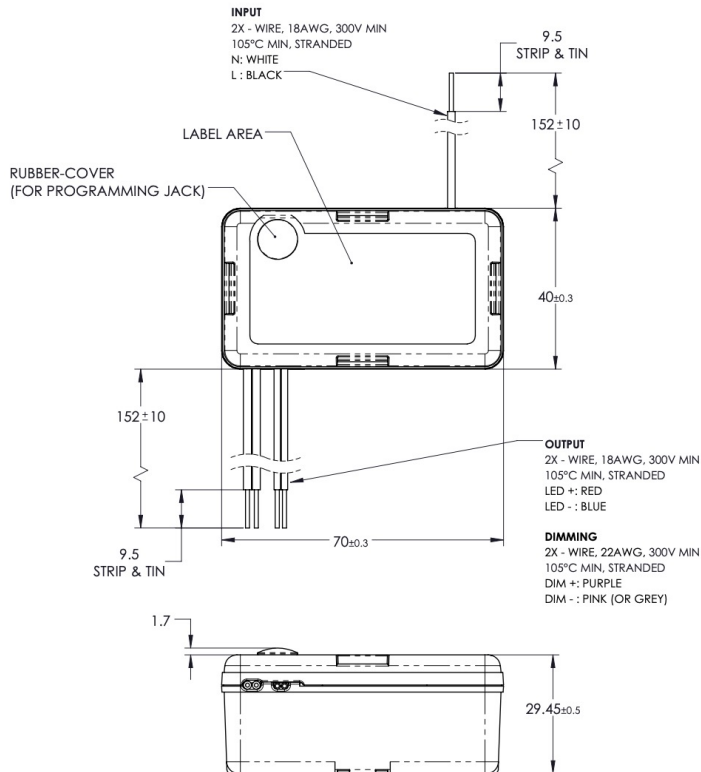

Note: MOUNTING OPTION-1

- By default, each PTB series driver is shipped with 2 metal mounting clips. Additional mounting clips can be ordered separately using the part number PTB-CLIPS-100 or PTB-CLIPS-1K

MOUNTING OPTION-2

All dimensions are in mm

Figure 17

30 W Programmable CC Class 2 LED Driver with Enhanced Tri-Mode Dimming™ (TRIAC, ELV & 0-10V/1-10V)

20 - LABELING

The PTB15W-0350-42-FN is used in figure 18 as an example to illustrate a typical label.

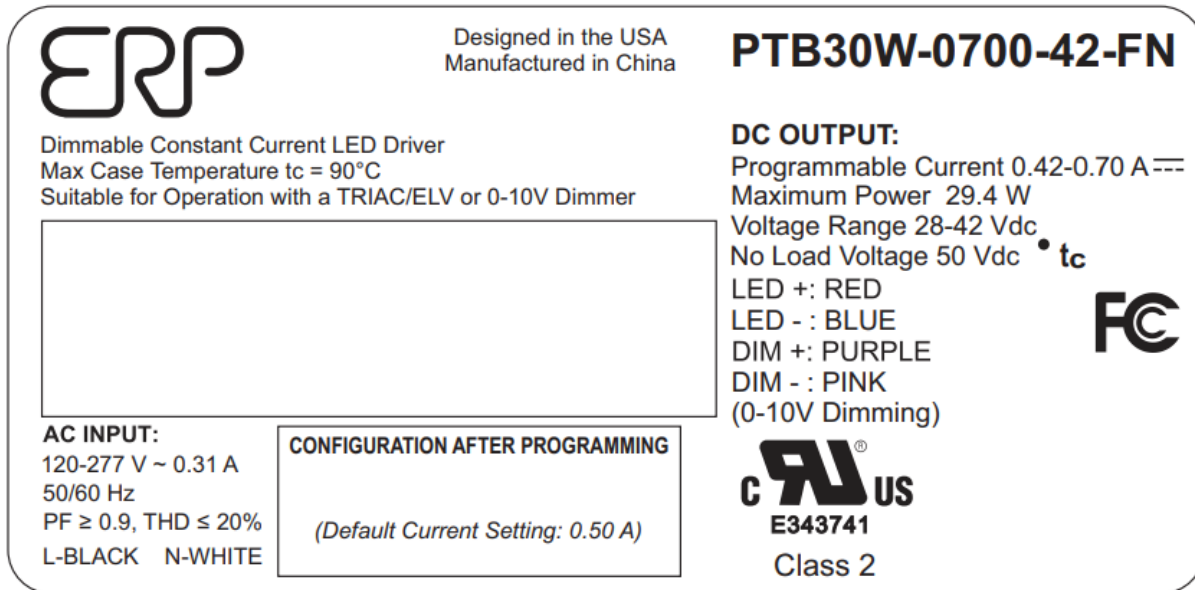


Figure 18

USA Headquarters

Tel: +1-805-517-1300
Fax: +1-805-517-1411
2625 Townsgate Road, Suite 106
Westlake Village, CA 91361, USA

CHINA Operations

Tel: +86-756-6266298
Fax: +86-756-6266299
No. 8 Pingdong Road 2
Zhuhai, Guangdong, China 519060

ERP Power, LLC (ERP) reserves the right to make changes without further notice to any products herein. ERP makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ERP assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in ERP data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ERP does not convey any license under its patent rights nor the rights of others. ERP products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the ERP product could create a situation where personal injury or death may occur. Should Buyer purchase or use ERP products for any such unintended or unauthorized application, Buyer shall indemnify and hold ERP and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ERP was negligent regarding the design or manufacture of the part. ERP is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

30 W Programmable CC Class 2 LED Driver with Enhanced Tri-Mode Dimming™ (TRIAC, ELV & 0-10V/1-10V)

Revision History

Date	Comments
16NOV2020	Initial Release
19APR2021	• Pg2: added information regarding Vout max
25MAY2021	• Pg1: Grammar changes
30SEP2021	• Pg2: Added "-Z1" models • Clarified input voltage
10JAN2022	• Pg2: Added "-FN" and "-ZN" models
15JUN2022	• Pg3: Clarified Start-up Time
29MAR2023	• Pg1: Added RoHS logo • Pg2: removed "-Z1" models and models with no suffix
14JUL2025	• Included 3 models in the PTBxxE: PTB10E-0250-42-FN, PTB20E-0420-42-FN, and PTB30E-0700-42-FN
23JUL2025	• Corrected part numbers for the PTBxxE
05SEP2025	• Added note 1, 2 and 3 in the ORDERING INFORMATION section • Included pictures of the mounting metal clips