



Mini-Circuits®

CERAMIC


High Pass Filter

HFCN-6010+

50Ω 6300 to 15000 MHz

THE BIG DEAL

- Small Size
- 5 Sections
- Temperature Stable
- Excellent Power Handling, 7 W
- Hermetically Sealed
- LTCC Construction
- Low Cost
- Protected by US Patent 7,760,485



Generic photo used for illustration purposes only

CASE STYLE: FV1206-1

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Point-to-Point Radio
- Sub-Harmonic Rejection
- Transmitters/Receivers

ELECTRICAL SPECIFICATIONS^{1,2} AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Stopband	Rejection Loss	5190	30		dB
		5200	20		
	Freq. Cut-Off	6010	3.0		dB
	VSWR	5190-5200	20		:1
Passband	Insertion Loss	6300-15000		5.0	dB
		6350-13000		3.0	dB
	VSWR	6050-8000	1.5		:1

1. In Application where DC voltage is present at either input or output ports, coupling capacitors are required.


2. Measured on Mini-Circuits Characterization Test Board TB-HFCN-6010+.

ABSOLUTE MAXIMUM RATINGS


Parameter	Ratings
Operating Temperature	-55°C to +100°C
Storage Temperature	-55°C to +100°C
RF Power Input ³	7 W max. at +25°C

3. Passband rating, derate linearly to 3 W at +100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

TYPICAL FREQUENCY RESPONSE

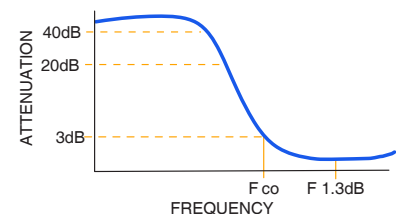

FUNCTIONAL SCHEMATIC

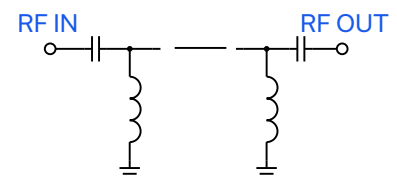

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. E
ECO-023234
HFCN-6010+
MCL NY
250702

PAGE 1 OF 3



Mini-Circuits®

CERAMIC

High Pass Filter


HFCN-6010+

50Ω 6300 to 15000 MHz

PIN CONNECTIONS

RF IN	1
RF OUT	3
GROUND	2,4,5,6

PRODUCT MARKING: G5

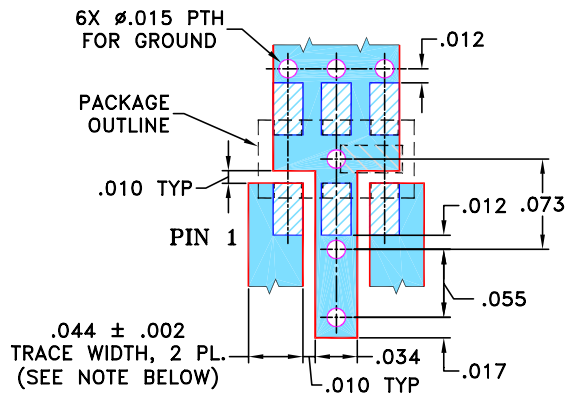DEMO BOARD MCL P/N: TB-HFCN-6010+
SUGGESTED PCB LAYOUT (PL-158)


- NOTE:** 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350 WITH DIELECTRIC THICKNESS: $.020 \pm .0015$; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.




DENOTES PCB COPPER LAYOUT

DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

OUTLINE DRAWING

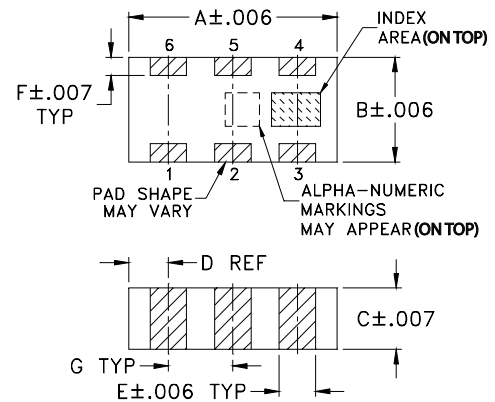

PCB Land Pattern

Suggested Layout,
Tolerance to be within $\pm .002$

OUTLINE DIMENSIONS (Inches mm)

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K		wt
.039	.024	.042	.123		grams
0.99	0.61	1.07	3.12		.020

TAPE & REEL INFORMATION: F75



CERAMIC

High Pass Filter



HFCN-6010+

Mini-Circuits

50Ω 6300 to 15000 MHz

TYPICAL PERFORMANCE DATA AT +25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
50	69.96	868.59
500	44.13	868.59
1000	38.47	579.06
2000	34.30	193.02
5190	31.50	35.46
5200	31.74	34.63
5500	23.93	23.49
5725	12.23	12.35
5870	6.45	5.89
6010	2.99	2.45
6050	2.43	2.00
6300	1.51	1.41
6350	1.47	1.47
8000	1.34	1.69
10000	1.84	2.44
13000	1.27	1.75
15000	3.23	2.36

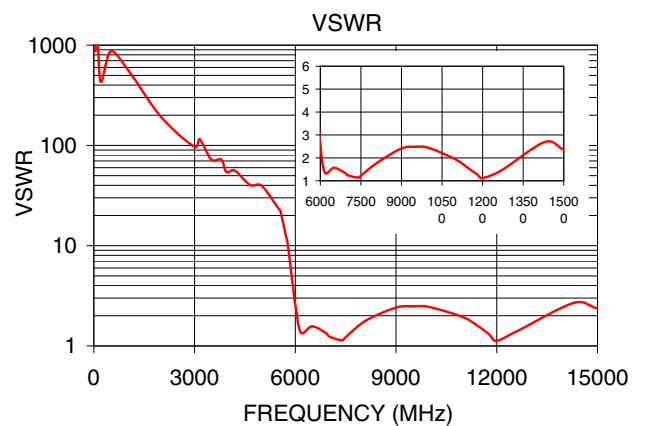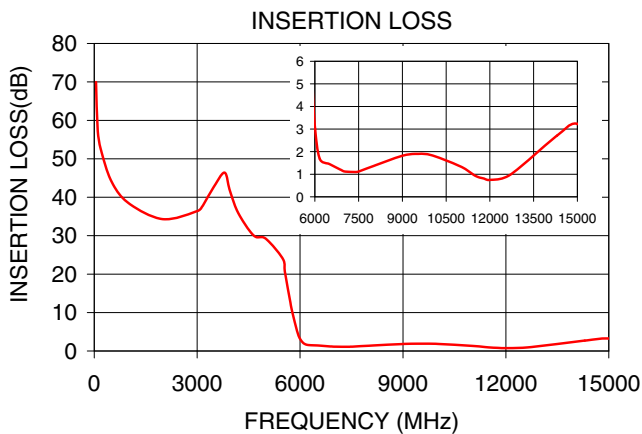

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

