

## **EXTREME LOW VF SCHOTTKY RECTIFIER**

Voltage 20-40 V Current 0.8 A

#### **Features**

- Ultra low forward voltage, low power loss
- Fast switching speed
- Surface mount package
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard


## **Applications**

- Low voltage rectification
- Reverse polarity protection
- Low power consumption applications

#### **Mechanical Data**

- Case: Molded plastic, SOD-323
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.00014 ounces, 0.0041 grams

# Maximum Ratings (T<sub>A</sub> = 25 °C unless otherwise noted)

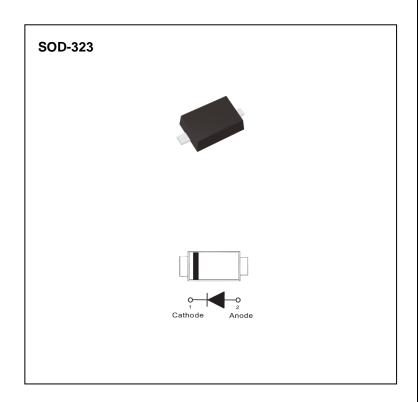

PARAMETER	SYMBOL	SBA0820CS	SBA0830CS	SBA0840CS	UNIT	
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	V	
Maximum rms voltage	V <sub>RMS</sub>	14	21	28	V	
Maximum dc blocking voltage	V <sub>R</sub>	20	30	40	V	
Maximum average forward rectified current	I <sub>F(AV)</sub>	0.8				
Peak forward surge current: 8.3ms single half sine- wave Superimposed on rated load	I <sub>FSM</sub>	2				
Total discount of the control of the	R <sub>0</sub> JC (2)	230				
Typical thermal resistance	R <sub>θJA</sub> <sup>(1)</sup>	650				
Operating junction temperature range	TJ	-55 to +150				
Storage temperature range	Tstg	-55 to +150				

## **Electrical Characteristics**


DADAMETED	SYMBOL TES	TEST CO.	EST CONDITION		SBA0820CS		SBA0830CS		SBA0840CS	
PARAMETER S		TEST CONDITION -		TYP.	MAX.	TYP.	MAX.	TYP.	MAX.	UNIT
Forward voltage	IF = 1   IF = 8   IF = 1   I	I <sub>F</sub> = 10mA		0.24	-	0.25	-	0.26	-	
		I <sub>F</sub> = 100mA	T <sub>J</sub> =25 °C	0.32	-	0.33	-	0.35	-	V
		I <sub>F</sub> = 800mA		-	0.55	-	0.6	-	0.7	
		I <sub>F</sub> = 10mA	T <sub>J</sub> =125 °C	0.13	-	0.13	-	0.15	-	V
		I <sub>F</sub> = 100mA		0.23	-	0.24	-	0.29	-	
Reverse current		V <sub>R</sub> = 10V	T <sub>J</sub> =25°C	4.6	-	4	-	1.3	-	μА
		V <sub>R</sub> = 20V		-	100	9	-	1.9	-	
		V <sub>R</sub> = 30V		-	-	-	100	3.1	-	
	V <sub>R</sub> = 20 V <sub>R</sub> = 30	V <sub>R</sub> = 40V		-	-	-	-	-	50	
		V <sub>R</sub> = 20V	T <sub>J</sub> =125 °C	1.7	-	1.4	-	0.5	-	mA
		V <sub>R</sub> = 30V		-	-	3.5	-	0.8	-	
		V <sub>R</sub> = 40V		-	-	-	-	1.3	-	


Note: 1. Mounted on a FR4 PCB, single-sided copper, mini pad.


- 2. Mounted on a FR4 PCB, single-sided copper, with 100cm<sup>2</sup> copper pad area.
- 3. Short duration pulse test used to minimize self-heating effect.





#### **TYPICAL CHARACTERISTIC CURVES**

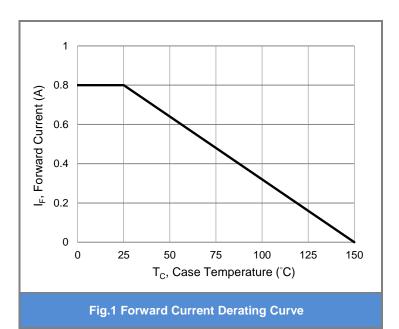


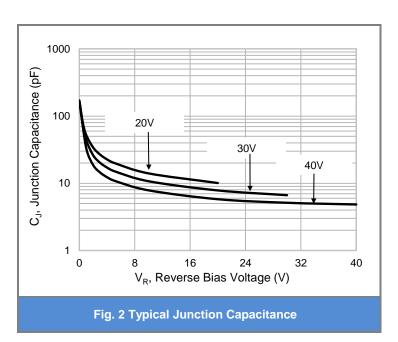

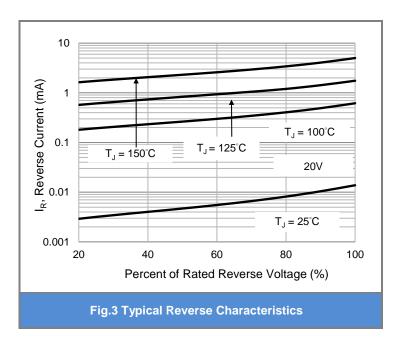


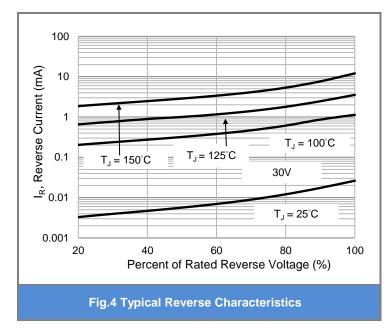


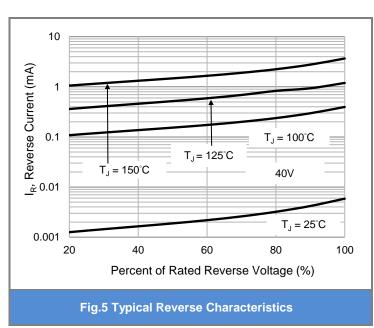


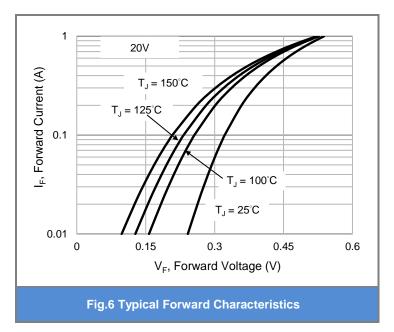



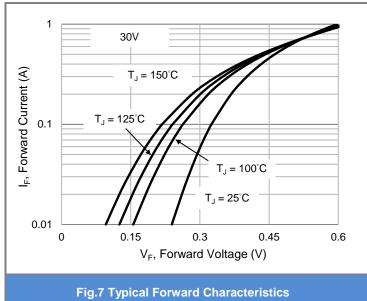

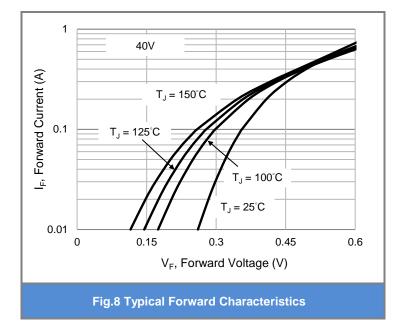

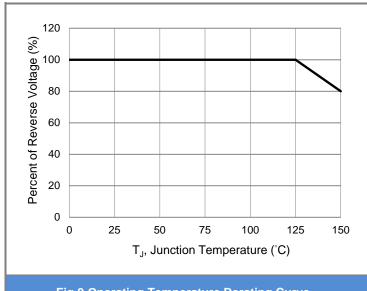





## **Product and Packing Information**

Part No.	Package Type	Packing Type	Marking
SBA0820CS	SOD-323	5K / 7" Reel	2AS
SBA0830CS	SOD-323	5K / 7" Reel	3AS
SBA0840CS	SOD-323	5K / 7" Reel	4AS

## **Packaging Information & Mounting Pad Layout**

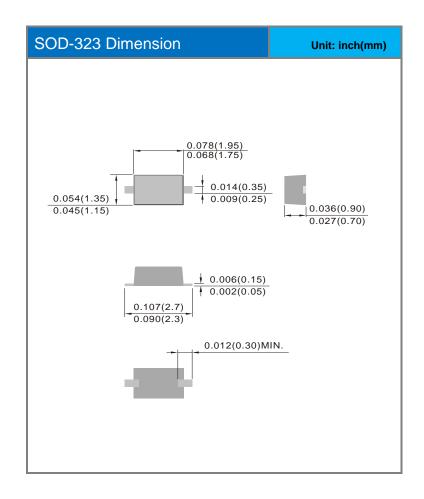

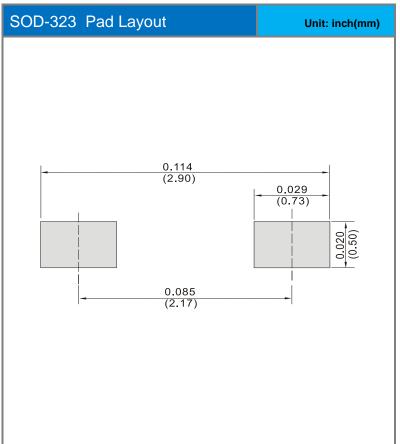



#### Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.