

# ***Bluetooth*<sup>®</sup> low energy Module**

## **Bluetooth<sup>®</sup> 5.0 low energy**

**EJ2832AA1**

**EJ2832AA2**

Data Sheet

By purchase of any products described in this document, the customer is deemed to understand and accept contents of this document.

The **Bluetooth**<sup>®</sup> word mark and logos are owned by the **Bluetooth** SIG, Inc. and any use of such marks by KAGA FEI Co., Ltd. is under license.

## Contents

|                                                                              |           |
|------------------------------------------------------------------------------|-----------|
| <b>1. Document constituent list</b>                                          | <b>3</b>  |
| <b>2. General Items</b>                                                      | <b>4</b>  |
| 2.1. Scope                                                                   | 4         |
| 2.2. Description                                                             | 4         |
| <b>3. Absolute maximum ratings</b>                                           | <b>11</b> |
| <b>4. Electrical characteristics</b>                                         | <b>12</b> |
| 4.1. Recommendation operating range                                          | 12        |
| 4.2. DC Specifications                                                       | 12        |
| 4.3. RF Specifications                                                       | 13        |
| <b>5. Circuit Schematic</b>                                                  | <b>14</b> |
| 5.1. Block Diagram                                                           | 14        |
| 5.2. Sample circuits                                                         | 15        |
| 5.3. Reference Circuits                                                      | 16        |
| <b>6. Outline/Appearance</b>                                                 | <b>17</b> |
| <b>7. Pin Layout</b>                                                         | <b>18</b> |
| <b>8. Handling Precaution</b>                                                | <b>19</b> |
| 8.1. Environment conditions for use and storage                              | 19        |
| 8.2. Conditions for handling of products                                     | 19        |
| <b>9. Packaging Specification</b>                                            | <b>21</b> |
| 9.1. Packaging Specification                                                 | 21        |
| 9.2. Tape specification                                                      | 22        |
| 9.3. Reel specification                                                      | 23        |
| 9.4. Taping performance                                                      | 24        |
| <b>10. Antenna application note</b>                                          | <b>25</b> |
| 10.1. Recommended module mounting example                                    | 25        |
| 10.2. Other module mounting examples                                         | 26        |
| 10.3. Placement of resin or plastic parts                                    | 26        |
| 10.4. Directional characteristics example (when mounted on evaluation board) | 27        |
| About this Application Note                                                  | 27        |
| <b>11. Design guide</b>                                                      | <b>28</b> |
| 11.1. Power Up Sequence                                                      | 28        |
| 11.2. Recommended Power Circuit                                              | 28        |
| 11.3. Battery operation                                                      | 28        |
| 11.4. Pattern Design Guide                                                   | 28        |
| 11.4.1. Power Supply System                                                  | 28        |
| 11.4.2. Bypass Capacitor Layout                                              | 28        |
| 11.4.3. GND Pattern                                                          | 28        |
| <b>12. Notes</b>                                                             | <b>29</b> |
| <b>Precautions</b>                                                           | <b>30</b> |

## 1.Document constituent list

| Control name               | Control No.   | Document Page             |
|----------------------------|---------------|---------------------------|
| General Items              | KM-AG-A223005 | <a href="#">1/7 - 7/7</a> |
| Absolute maximum ratings   | KM-AM-A223005 | <a href="#">1/1</a>       |
| Electrical characteristics | KM-AE-A223005 | <a href="#">1/2 - 2/2</a> |
| Circuit schematic          | KM-MC-A223005 | <a href="#">1/3 - 3/3</a> |
| Outline / Appearance       | KM-AD-A223005 | <a href="#">1/1</a>       |
| Pin Layout                 | KM-BA-A223005 | <a href="#">1/1</a>       |
| Handling Precaution        | MQ-H-001      | <a href="#">1/2 - 2/2</a> |
| Packaging Specification    | KM-BB-A223005 | <a href="#">1/4 - 4/4</a> |
| Antenna application note   | -             | <a href="#">1/3 - 3/3</a> |
| Design guide               | -             | <a href="#">1/1</a>       |
| Notes                      | -             | <a href="#">1/1</a>       |
| Precautions                | MQ-P-001      | <a href="#">1/1</a>       |

### Revision History

04-Aug. 2023 > Ver.1.0 Release

26-Mar. 2024 > Ver.1.1 Update

|                              |       |                               |
|------------------------------|-------|-------------------------------|
| Control No.<br>KM-AG-A223005 | (1/7) | Control name<br>General Items |
|------------------------------|-------|-------------------------------|

## 2.General Items

### 2.1.Scope

This specification ("Specification") applies to the hybrid IC "EJ2832AA1" and "EJ2832AA2", **Bluetooth®** 5.0 low energy modules ("Product") manufactured by KAGA FEI Co., Ltd. ("KAGA FEI")

### 2.2.Description

- a) User Code: EJ2832AA1...nRF52832-CIAA-R  
EJ2832AA2...nRF52832-CIAA-G-R  
MODEL : EJ2832  
\*User Code may be changed for mass production or other cases.  
Note: Please use the User Code (EJ2832AA1, EJ2832AA2) to order this product

The EJ2832AA1 and EJ2832AA2 have only different Nordic chip revisions and have different memory access methods for debugging, program writing and so on.  
Please refer to the following documents for more details.

- Firmware Writing Manual

- b) Chip : Nordic nRF52832 (512KB Flash, 64KB RAM)
- c) Function : Radio frequency transceiver Module. Bluetooth®5.0 conformity.
- d) Application : IoT devices, Health & Fitness Equipment, Sensor, Toys
- e) Structure : Hybrid IC loaded with silicon monolithic semiconductor  
Regarding the containment of hazardous substance in this Product,  
it conforms to RoHS Directive.
- f) Outline : 5.1 x 11.3 x 1.3 mm  
28-pin Land Grid Array
- g) Marking : Part Number, Lot Number and manufacturer on Shielding Case
- h) Country of origin : Japan or Thailand
- i) Packaging : Packaging method: Tape & reel + aluminum moisture barrier bag  
Packaging unit: 2000  
\* The samples may have different packing specification.

|                              |       |                               |
|------------------------------|-------|-------------------------------|
| Control No.<br>KM-AG-A223005 | (2/7) | Control name<br>General Items |
|------------------------------|-------|-------------------------------|

j) Notes:

a. Limitation of Warranty

- 1) KAGA FEI provides warranties only if the Product is operated under the condition set forth in this Specification. Please note that KAGA FEI shall not be liable for any defect and/or malfunction arising from use of the Product under the terms and conditions other than the operating conditions hereof. In addition, when this Product is used under environmental conditions such as over voltage which is not guaranteed, it may be destroyed in short mode. To ensure the security of customer's product, please add an extra fuse or/and a protection circuit for over voltage.
- 2) This Product is designed for use in products which comply with Bluetooth® Specifications. KAGA FEI disclaims and is not responsible for any liability concerning infringement by this Product under any intellectual property right owned by third party in case the customer uses this Product in any product which does not comply with Bluetooth® Specifications (the "non-complying products"). Furthermore, KAGA FEI warrants only that this Product complies with this Specification and does not grant any other warranty including warranty for application of the non-complying products.
- 3) In some cases, KAGA FEI may use replacements as component parts of Products. Such replacement shall apply only to component part of Products, which KAGA FEI deems it possible to replace or substitute according to (i) Scope of Warranty provided in this specification (e.g. Electric Characteristics, Outline, dimension, Conditions of Use, Reliability Tests, Official Standard (Type Approvals etc.)) and (ii) Quality of Products. KAGA FEI also ensures traceability of such replacement on production lot basis.

b. Instruction for Use (CAUTION)

- 1) This Product is not designed to be radiation-resistant. Please do not expose Product to radiation.
- 2) Communication between this Product and other might not be established nor maintained depending upon radio environment or operating condition of this Product and other products with wireless technology.
- 3) This Product operates in the unlicensed ISM band at 2.4GHz. In case this Product is used around the other wireless devices which operate in same frequency band of this Product, there is a possibility that interference occurs between this Product and such other devices. If such interference occurs, please stop the operation of other devices or relocate this Product before using this Product or do not use this Product around the other wireless devices.
- 4) This Product mentioned in this Specification is manufactured for use in Health & Fitness Equipment, Sensor, Toys. Before using this Product in any special equipment (such as medical equipment, space equipment, aircraft, disaster prevention equipment), where higher safety and reliability are duly required, the applicability and suitability of this Product must be fully evaluated by the customer at its sole risk to ensure correct and safety operation of those special equipments. Also, evaluation of the safety function of this Product even for use in general electronics equipment shall be thoroughly made and when necessary, a protective circuit shall be added in design stage, all at the customer's sole risk.

|                              |       |                               |
|------------------------------|-------|-------------------------------|
| Control No.<br>KM-AG-A223005 | (3/7) | Control name<br>General Items |
|------------------------------|-------|-------------------------------|

5) Japan Regulatory Information

This module is approved with the specific antenna on this module. Please ensure that your product can also bear a label with the following information. If the product is so small that it is not practicable to place the label, you can also place it in the instruction manual and package. The mark diameter shall be easily legible without using a device such as light microscopes.



005-103120

It is recommended to include the following sentence in the user manual of your product:  
This product installs a radio system which has been approved as a radio station in a low power data communication system based on the Radio Law.  
EJ2832: 005-103120

6) Canada Regulatory Information

- a) This device complies with Innovation, Science and Economic Development Canada's applicable license-exempt RSSs. Operation is subject to the following two conditions:
- (1) this device may not cause interference, and
  - (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- 1) l'appareil ne doit pas produire de brouillage;
- 2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

- b) This product is certified as type of the portable device with Innovation, Science and Economic Development Canada Rules. To maintain compliance with RF Exposure requirement, please use within specification of this product.

Ce produit est certifié comme type de l'appareil portable avec Innovation, Sciences et Développement économique Canada Règles. Pour maintenir l'acquiescement avec exigence Exposition de RF, veuillez utiliser dans spécification de ce produit.

- c) Please notify certified ID by either one of the following methods on your product.  
Spécifiez ID certifiée dans votre produit par une de méthode suivante.  
-Contains Transmitter module IC: 28568-EJ2832  
-Contains IC: 28568-EJ2832
- d) Please indicate your product name at any location on the exterior of the host product or product packaging or product literature, which shall be available with the host product or online.

Control No.  
KM-AG-A223005

(4/7)

Control name  
General Items

- e) Please include the following statements in rectangle on the user manual of the host device of this module;

This device complies with Innovation, Science and Economic Development Canada license-exempt RSS standards. Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- 1) l'appareil ne doit pas produire de brouillage;
- 2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

7) FCC Regulatory Information

- a) This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
  - (1) This device may not cause harmful interference, and
  - (2) this device must accept any interference received, including interference that may cause undesired operation.
- b) FCC ID is not indicated on this device since there is no space on it. FCC ID of this device is as below.

FCC ID: 2A6NFEJ2832
- c) Please notify certified ID by either one of the following methods on your product.
  - Contains Transmitter Module FCC ID: 2A6NFEJ2832
  - Contains FCC ID: 2A6NFEJ2832
- d) CAUTION: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- e) This product is product is certified as type of the portable device with FCC Rules. To maintain compliance with RF Exposure requirement, please use within specification of this product.
- f) The antenna used for this transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
- g) This module can change the output power depending on the circumstances by the application software which is developed by module installer. Any end user cannot change the output power.
- h) This device complies with part 15 of the FCC Rules.
  - Part 15 Subpart C

|                              |       |                               |
|------------------------------|-------|-------------------------------|
| Control No.<br>KM-AG-A223005 | (5/7) | Control name<br>General Items |
|------------------------------|-------|-------------------------------|

- i) The modular transmitter is only FCC authorized for the specific rule parts (Part 15 Subpart C) listed on the grant, and the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. The final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.
- j) Co-location of this module with other transmitters that operate simultaneously are required to be evaluated using the FCC multi transmitter procedures. When installing this module to your final devices, please make sure to carry out all the necessary evaluations according to the applicable guidelines like follows:  
 -for RF exposure: KDB 447498, KDB 996369 and any other relevant guidelines  
 -for EMC: KDB 996369 D04 and any other relevant guidelines
- k) When you install this module to your final devices, please ensure that your final composite product complies with the applicable FCC rules in reference to a guidance in KDB 996369.
- l) **Antenna List**  
 This module is approved along with the following antenna.  
 You cannot use any antennas other than the listed one because it deviates from the accredited conditions.

|                      |                                                   |
|----------------------|---------------------------------------------------|
| Manufacturer         | KAGA FEI                                          |
| Part No.             | N/A (Printed on PCB)<br>Dimensions 3.45mm x 4.7mm |
| Antenna Type         | Monopole                                          |
| Maximum Antenna Gain | -1.5dBi                                           |

- m) Please include the following statements in rectangle on the user manual of the host device of this module;

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:  
 (1) This device may not cause harmful interference, and  
 (2) this device must accept any interference received, including interference that may cause undesired operation.

**FCC CAUTION:** Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The antenna used for this transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

This product is certified as type of the portable device with FCC Rules. To maintain compliance with RF Exposure requirement, please use within specification of this product.

This product is certified as type of the portable device with FCC Rules. To maintain compliance with RF Exposure requirement, please use within specification of this product.

|                              |       |                               |
|------------------------------|-------|-------------------------------|
| Control No.<br>KM-AG-A223005 | (6/7) | Control name<br>General Items |
|------------------------------|-------|-------------------------------|

8) CE Regulatory Information

- a) When your end product installs this module, it is required to proceed additional certification processes before placing on the market in EU member states to make your products fully comply with relative EU standards.
- b) KAGA FEI can provide you the test reports of conducted measurement portion for the radio module. You can utilize the test reports for the certification processes of your end product as it requires radio testing.

c. Term of Support

- 1) In the case that customer requests KAGA FEI to customize the hardware of this Product in order to meet such customer's specific needs, KAGA FEI will make commercially reasonable effort to modify such hardware or software at customer's expense; provide however, the customer is kindly requested to agree it doesn't mean that KAGA FEI has obligations to do so even in the case it is technically difficult for KAGA FEI.
- 2) Any failure arising out of this Product will be examined by KAGA FEI regardless of before or after mass production. Customer agrees that once such failure is turned out not to be responsible for KAGA FEI after aforesaid examination, some of the technical support shall be conducted by KAGA FEI at customer's expense; provided however, exact cost of this technical support can be agreed through the negotiation by the parties.
- 3) Do not alter hardware and/or software of this Product. Please note that KAGA FEI shall not be liable for any problem if it is caused by customer's alteration of Hardware without KAGA FEI's prior approvals.
- 4) KAGA FEI does not guarantee functions and performances which depend on the customer's firmware. KAGA FEI does not assume liabilities for defects and failures (i) in functions, performances and quality of the Customer's product incorporating the Products and (ii) which may occur as the Product is incorporated in the Customer's product.

d. Caution for Export Control

This Product may be subject to governmental approvals, consents, licenses, authorizations, declarations, filings, and registrations for export or re-export of the Product, required by Japanese Foreign Exchange and Foreign Trade Law (including related laws and regulations) and/or any other country's applicable laws or regulations related to export control.

In case you will export or re-export this Product, you are strongly recommended to check and confirm, before exporting or re-exporting, necessary procedures for export or re-export of this Product which is required by applicable laws and regulations, and if necessary, you have to obtain necessary and appropriate approvals or licenses from governmental authority at your own risk and expense.

e. Term of Warranty

KAGA FEI warrants only that this Product is in conformity with this Specification for one year after purchase and shall in no event give any other warranty.


f. Items of the Specification

- 1) Any question arising from the Specification shall be solved in good faith through mutual discussion by the parties hereof.
- 2) The language of this "General items" is Japanese and this "General items" shall be interpreted by Japanese. Any copies of translation is a reference purpose only and is not binding on both parties hereto.

|                              |       |                               |
|------------------------------|-------|-------------------------------|
| Control No.<br>KM-AG-A223005 | (7/7) | Control name<br>General Items |
|------------------------------|-------|-------------------------------|

g. Special note

- 1) The latest errata and document released by Nordic Semiconductor ASA must be referred the document is given priority over this document. Please note that KAGA FEI shall not be liable for any problem and related issue for developed or manufactured application software or product without reference or consideration of the information released by Nordic Semiconductor ASA.
- 2) KAGA FEI writes firmware for and fixed SoftDevice (s132\_nrf52\_7.2.0\_softdevice.hex) to this product. Customer writes firmware that is match the customer applications including SoftDevice at the customer's own responsibility.
- 3) The Electrical Characteristics defined in this Specification are of the module with above Firmware (s132\_nrf52\_7.2.0\_softdevice.hex). If other firmware developed by Customer is installed, the characteristics may differ from the defined value in the Electrical Characteristics. Bluetooth qualification and radio type approval may become invalid.
- 4) EJ2832 series module is qualified as PHY only with Component category by Bluetooth SIG. The QDID of this module is 97482. The final product needs to get qualification as End product combining with PHY (module), SoftDevice and Profile before selling the product. The combination of Link and Host layer is different depending on SoftDevice. Please refer to following combination and consult with your qualification body and BQC.

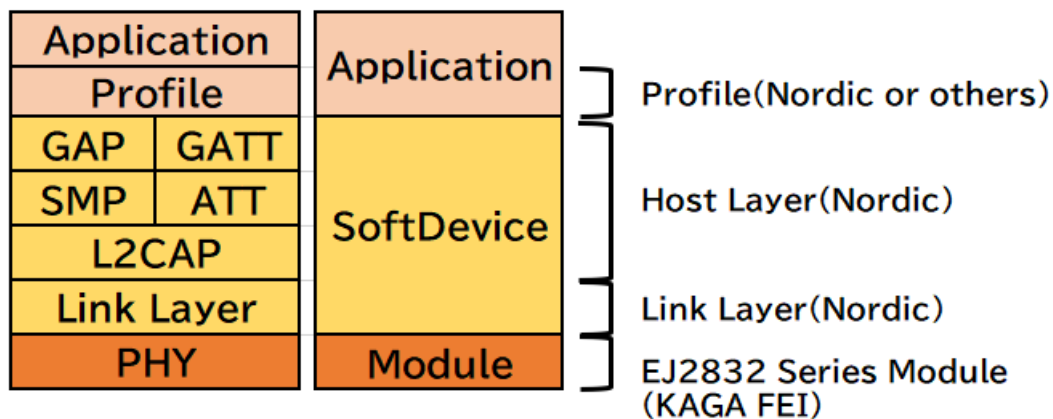

|                              |       |                                          |
|------------------------------|-------|------------------------------------------|
| Control No.<br>KM-AM-A223005 | (1/1) | Control name<br>Absolute maximum ratings |
|------------------------------|-------|------------------------------------------|

### 3.Absolute maximum ratings

| Symbol                                                               | Parameter                  | Min.     | Max.         | Units              |
|----------------------------------------------------------------------|----------------------------|----------|--------------|--------------------|
| VCC_NRF                                                              |                            | -0.3     | +3.9         | V                  |
| GND                                                                  |                            |          | 0            | V                  |
| VIO, VCC_NRF≤3.6V                                                    |                            | -0.3     | VCC_NRF+ 0.3 | V                  |
| VIO, VCC_NRF>3.6V                                                    |                            | -0.3     | +3.9         | V                  |
| Storage temperature                                                  |                            | -40      | +85          | Deg-C              |
| MSL                                                                  | Moisture Sensitivity Level | 3        |              |                    |
| ESD HBM                                                              | Human Body Model           |          | 1            | kV                 |
| ESD MM                                                               | Machine Model              |          | 100          | V                  |
| Endurance                                                            | Flash Memory Endurance     | 10000    |              | write/erase cycles |
| Retention                                                            | Flash Memory Retention     | 10 years |              | At 85 deg-C        |
| Number of times a 512 byte block can be written between erase cycles | 32bit writes               |          | 181          | times              |

|                              |       |                                            |
|------------------------------|-------|--------------------------------------------|
| Control No.<br>KM-AE-A223005 | (1/2) | Control name<br>Electrical characteristics |
|------------------------------|-------|--------------------------------------------|

## 4. Electrical characteristics

### 4.1. Recommendation operating range

| Symbol     | Parameter                       | Min. | Typ. | Max. | Units |
|------------|---------------------------------|------|------|------|-------|
| VCC_NRF    | Supply voltage, normal mode     | 1.7  | 3.0  | 3.6  | V     |
| tR_VCC_NRF | Supply rise time (0V to 1.7V)*1 |      |      | 60   | ms    |
| TA         | Operation temperature           | -40  | 25   | 85   | Deg-C |

\*1 The on-chip power-on reset circuitry may not function properly for rise times outside the specified interval. Also after power off, it must start up from below 0.3V. The on-chip power-on reset circuitry may not function properly.

### 4.2. DC Specifications

The Specification applies for Topr.= 25 degrees C, VCC\_NRF = 3.0V

| Symbol          | Parameter (condition)                                 | Min.        | Typ. | Max.        | Units |
|-----------------|-------------------------------------------------------|-------------|------|-------------|-------|
| VIH             | Input high voltage                                    | 0.7 VCC_NRF |      | VCC_NRF     | V     |
| VIL             | Input low voltage                                     | GND         |      | 0.3 VCC_NRF | V     |
| VOH             | Output high voltage (high drive 5 mA)                 | VCC_NRF-0.4 |      | VCC_NRF     | V     |
| VOL             | Output low voltage (high drive 5 mA)                  | GND         |      | GND+0.4     | V     |
| RPU             | Pull-up resistance                                    | 11          | 13   | 16          | kohm  |
| RPD             | Pull-down resistance                                  | 11          | 13   | 16          | kohm  |
| ITX,+4dBm, DCDC | TX only run current (DCDC, 3V)<br>PRF=+4 dBm          |             | 7.5  |             | mA    |
| ITX,+4dBm       | TX only run current PRF=+4 dBm                        |             | 16.6 |             | mA    |
| IRX,1M, DCDC    | RX only run current (DCDC, 3V)<br>1Mbps BLE           |             | 5.4  |             | mA    |
| IRX,1M          | RX only run current 1Mbps BLE                         |             | 11.7 |             | mA    |
| IRX,2M, DCDC    | RX only run current (DCDC, 3V)<br>2Mbps BLE           |             | 5.8  |             | mA    |
| IRX,2M          | RX only run current 2Mbps BLE                         |             | 12.9 |             | mA    |
| IOFF            | Current in SYSTEM-OFF,<br>no RAM retention            |             | 0.3  |             | uA    |
| ION             | SYSTEM-ON base current                                |             | 1.2  |             | uA    |
| IRAM            | Additional RAM retention current per<br>4KB RAM block |             | 20   |             | nA    |

|                              |       |                                            |
|------------------------------|-------|--------------------------------------------|
| Control No.<br>KM-AE-A223005 | (2/2) | Control name<br>Electrical characteristics |
|------------------------------|-------|--------------------------------------------|

#### 4.3.RF Specifications

| Symbol          | Description                                                             | Min. | Typ.   | Max. | Units |
|-----------------|-------------------------------------------------------------------------|------|--------|------|-------|
| Fop             | Operating frequencies                                                   | 2402 |        | 2480 | MHz   |
| PLLchsp         | PLL channel spacing                                                     |      | 1      |      | MHz   |
| DfBLE2M         | Frequency deviation @ BLE 1Mbps                                         |      | +/-250 |      | kHz   |
| DfBLE2M         | Frequency deviation @ BLE 2Mbps                                         |      | +/-500 |      | kHz   |
| PRF             | Maximum output power                                                    |      | 4      | 6    | dBm   |
| PRFC            | RF power control range                                                  |      | 24     |      | dB    |
| PRFCR           | RF power accuracy                                                       |      |        | +/-4 | dB    |
| PRF1            | 1st Adjacent Channel Transmit Power 1 MHz                               |      | -25    |      | dBc   |
| PRF2            | 2nd Adjacent Channel Transmit Power 2 MHz                               |      | -50    |      | dBc   |
| PRXMAX          | Maximum received signal strength at < 0.1% PER                          |      | 0      |      | dBm   |
| PSENS,IT,1M,BLE | Receiver sensitivity 1Mbps BLE Ideal transmitter <=37bytes (0.1% BER)   |      | -94    |      | dBm   |
| PSENS,IT,2M,BLE | Receiver sensitivity 2Mbps BLE Ideal transmitter Packet length<=37bytes |      | -91    |      | dBm   |

Many documents of nRF52832, such as product specification and the errata, can be found at the link below (There is a possibility that it will change in the future). Please be sure to check these latest documents when using our module.

nRF52832\_Product Specification

[https://infocenter.nordicsemi.com/topic/struct\\_nrf52/struct/nrf52832\\_ps.html](https://infocenter.nordicsemi.com/topic/struct_nrf52/struct/nrf52832_ps.html)

nRF52832\_Errata

[https://infocenter.nordicsemi.com/topic/struct\\_nrf52/struct/nrf52832\\_errata.html](https://infocenter.nordicsemi.com/topic/struct_nrf52/struct/nrf52832_errata.html)

S132\_SoftDevice Specification

[https://infocenter.nordicsemi.com/topic/sds\\_s132/SDS/s1xx/s130.html](https://infocenter.nordicsemi.com/topic/sds_s132/SDS/s1xx/s130.html)


For more information

[https://infocenter.nordicsemi.com/topic/struct\\_welcome/struct/welcome.html](https://infocenter.nordicsemi.com/topic/struct_welcome/struct/welcome.html)

|                              |       |                                   |
|------------------------------|-------|-----------------------------------|
| Control No.<br>KM-MC-A223005 | (1/3) | Control name<br>Circuit Schematic |
|------------------------------|-------|-----------------------------------|

## 5.Circuit Schematic

### 5.1.Block Diagram

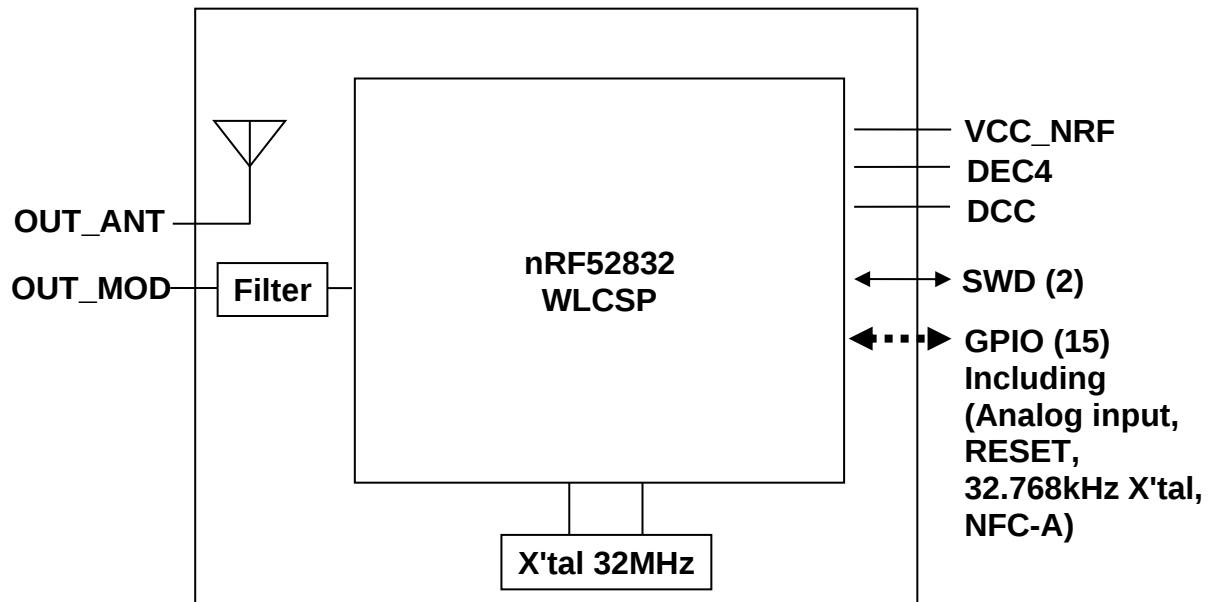


Control No.  
KM-MC-A223005


(2/3)

Control name  
Circuit Schematic


## 5.2.Sample circuits

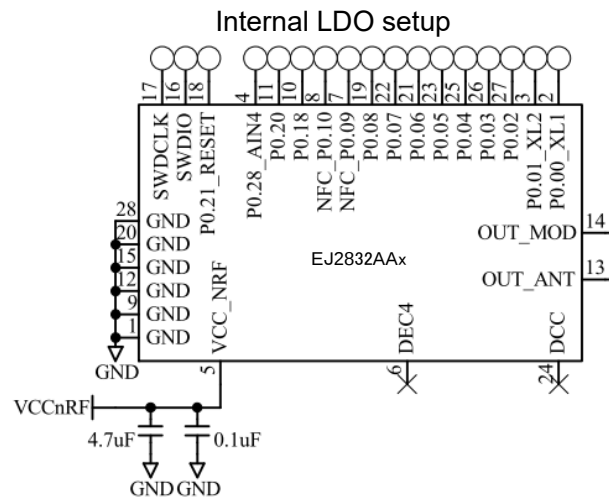

Internal LDO setup with external 32.768kHz X'tal

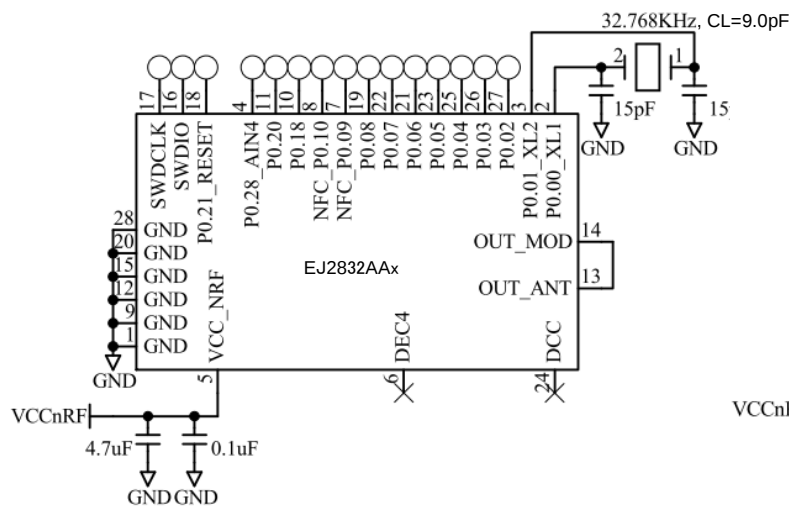

DC/DC converter setup

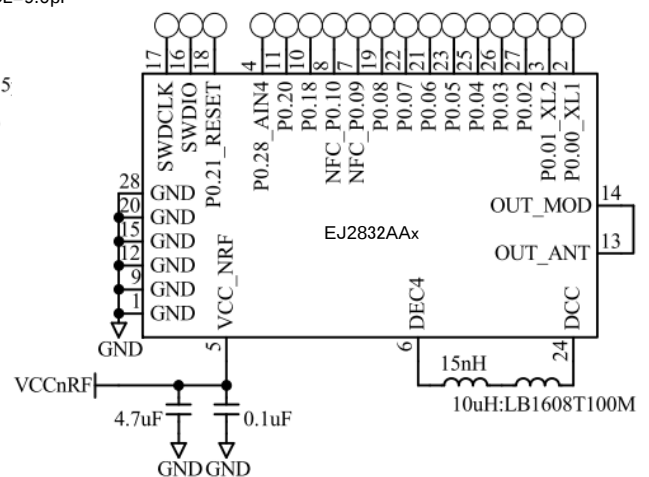


| Value      | Description                                   | Footprint [mm] |
|------------|-----------------------------------------------|----------------|
| 0.1uF      | Capacitor, X5R, ±10 %                         | 1005           |
| 4.7uF      | Capacitor, X5R, ±10 %                         | 1608           |
| 15pF       | Capacitor, C0H, ±5 %                          | 1005           |
| 32.768 kHz | FC-12M (EPSON), SC-20S (SII), etc., CI = 9 pF | 2012           |
| 15nH       | High frequency chip inductor ±5 %             | 1005           |
| 10uH       | LB1608T100M                                   | 1608           |

Control No.  
KM-MC-A223005

(3/3)

Control name  
Circuit Schematic


### 5.3.Reference Circuits

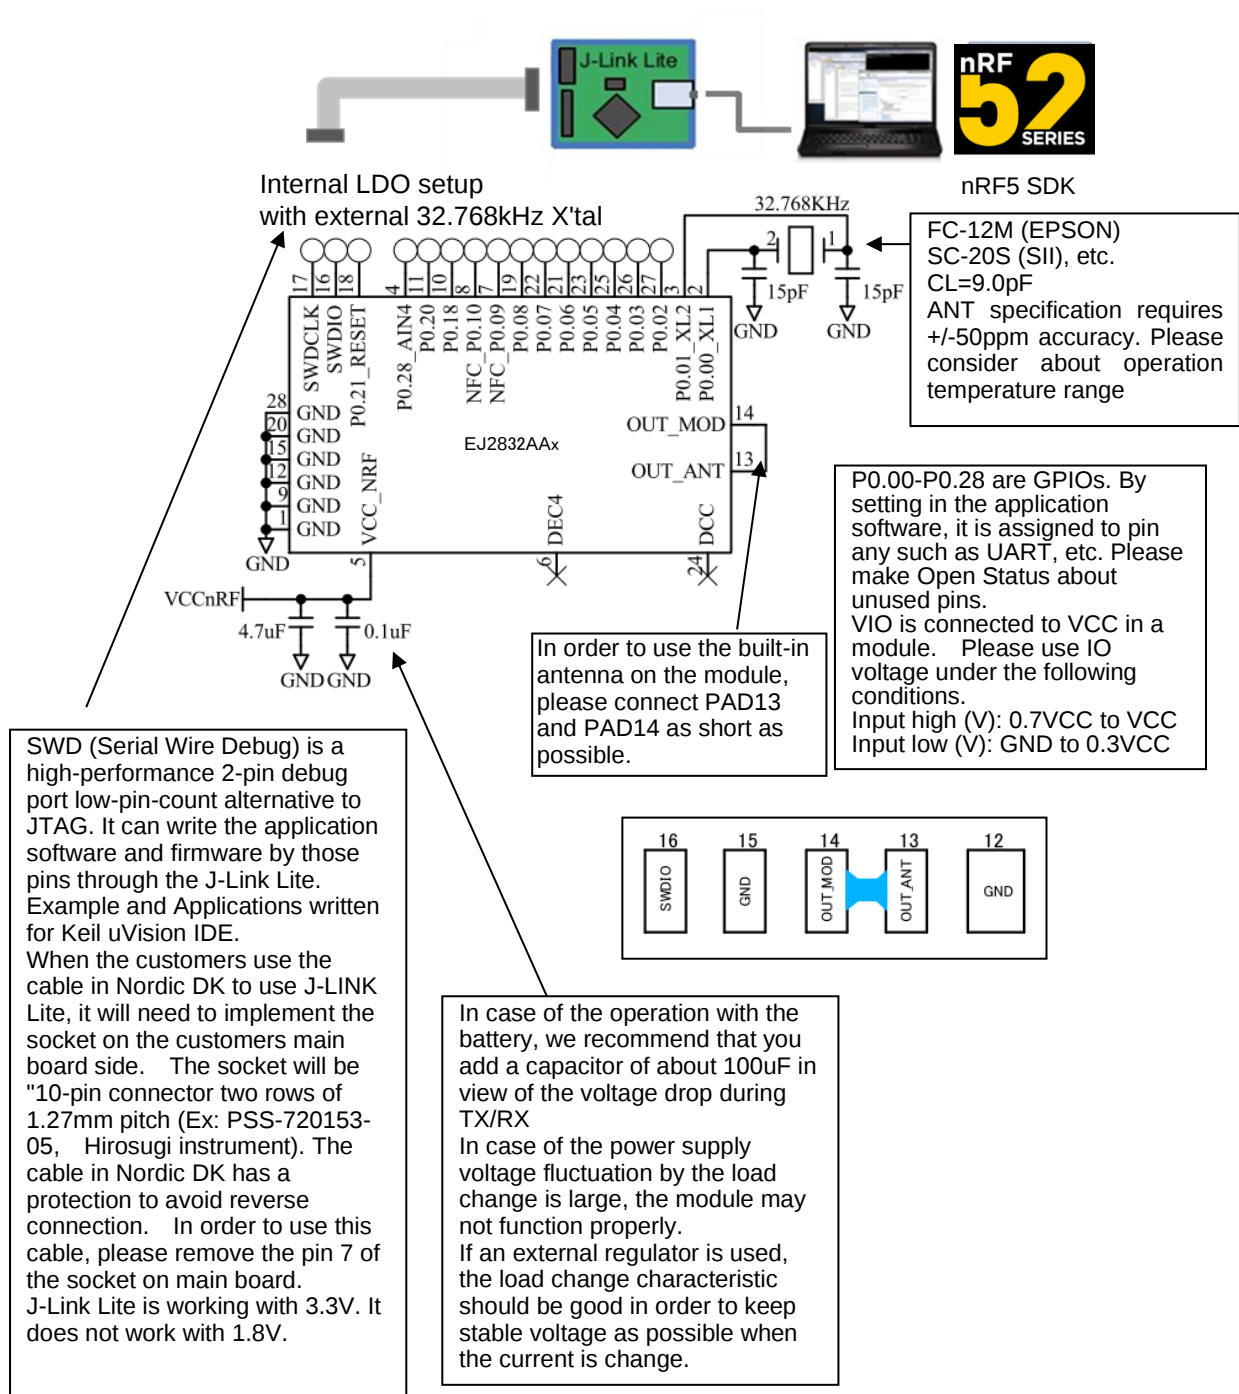



|                              |                                    |
|------------------------------|------------------------------------|
| Control No.<br>KM-AD-A223005 | Control name<br>Outline/Appearance |
|------------------------------|------------------------------------|

## 6.Outline/Appearance

## Outline / Land pattern example

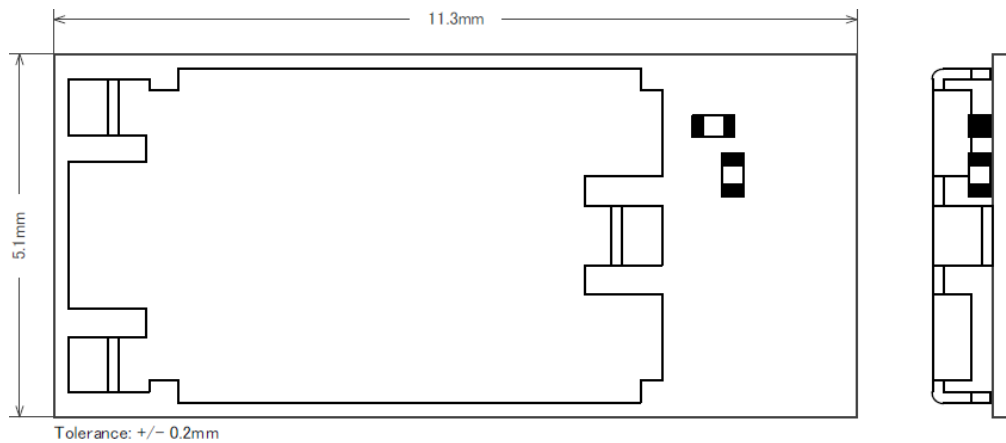

Tolerance: +/- 0.2mm  
Unit: (mm)

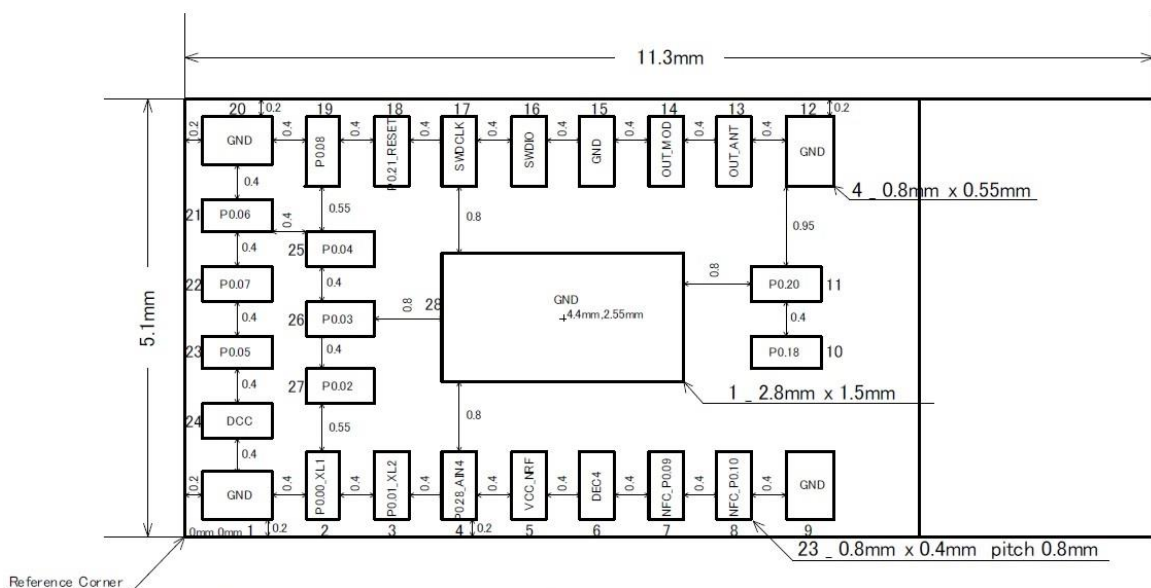


Top view

**The dimension of the land pattern is the same as a foot pattern.**

**Recommended metal mask for solder printing**

| Pad size   |                   | Metal mask opening |
|------------|-------------------|--------------------|
| Signal pad | 23 – 0.4 x 0.8 mm | 0.35 x 0.7 mm      |
| Corner pad | 4 – 0.55 x 0.8 mm | 0.45 x 0.75 mm     |
| Center pad | 1 – 2.8 x 1.5 mm  | 1.1 x 1.2 mm x 2   |

**The metal mask thickness:  $t=0.1\text{mm}$**

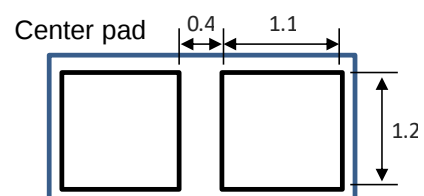

|                              |       |                            |
|------------------------------|-------|----------------------------|
| Control No.<br>KM-BA-A223005 | (1/1) | Control name<br>Pin Layout |
|------------------------------|-------|----------------------------|

## 7.Pin Layout

### Pin Descriptions

| Pin | Pin name              | Pin function                | Description                                                                              |
|-----|-----------------------|-----------------------------|------------------------------------------------------------------------------------------|
| 1   | GND                   | Ground                      | Ground pin. (0 V)                                                                        |
| 2   | P0.00_XL1             | Digital I/O<br>Analog input | General purpose I/O pin.<br>Connection for 32.768kHz crystal (LFXO).                     |
| 3   | P0.01_XL2             | Digital I/O<br>Analog input | General purpose I/O pin.<br>Connection for 32.768kHz crystal (LFXO).                     |
| 4   | P0.28_AIN4            | Digital I/O<br>Analog input | General purpose I/O pin.<br>SAADC/COMP/LPCOMP input.                                     |
| 5   | VCC_NRF               | Power                       | Power supply pin.                                                                        |
| 6   | DEC4                  | Power                       | 1V3 regulator supply decoupling.<br>Input from DC/DC converter. Output from 1.3 V LDO.   |
| 7   | NFC1_P0.09            | NFC input<br>Digital I/O    | NFC antenna connection.<br>General purpose I/O pin.                                      |
| 8   | NFC2_P0.10            | NFC input<br>Digital I/O    | NFC antenna connection.<br>General purpose I/O pin.                                      |
| 9   | GND                   | Ground                      | Ground pin. (0 V)                                                                        |
| 10  | P0.18<br>TRACEDATA[0] | Digital I/O                 | General purpose I/O pin.<br>Trace port output.                                           |
| 11  | P0.20<br>TRACECLK     | Digital I/O                 | General purpose I/O pin.<br>Trace port clock output.                                     |
| 12  | GND                   | Ground                      | Ground pin. (0 V)                                                                        |
| 13  | OUT_ANT               | Antenna In/Out              | Internal antenna. It should be connected to Pin 14<br>OUT_MOD for normal operation.      |
| 14  | OUT_MOD               | RF In/Out                   | RF I/O pin. It should be connected to Pin 13 OUT_ANT for<br>normal operation.            |
| 15  | GND                   | Ground                      | Ground pin. (0 V)                                                                        |
| 16  | SWDIO                 | Digital I/O                 | Serial Wire Debug I/O for debug and programming                                          |
| 17  | SWDCLK                | Digital input               | Serial Wire Debug clock input for debug and programming                                  |
| 18  | P0.21_RESET           | Digital I/O                 | General purpose I/O pin.<br>Configurable as system RESET pin.<br>(Factory default: GPIO) |
| 19  | P0.08                 | Digital I/O                 | General purpose I/O pin.                                                                 |
| 20  | GND                   | Ground                      | Ground pin. (0 V)                                                                        |
| 21  | P0.06                 | Digital I/O                 | General purpose I/O pin.                                                                 |
| 22  | P0.07                 | Digital I/O                 | General purpose I/O pin.                                                                 |
| 23  | P0.05_AIN3            | Digital I/O<br>Analog input | General purpose I/O pin.<br>SAADC/COMP/LPCOMP input.                                     |
| 24  | DCC                   | Power                       | DC/DC converter output pin.                                                              |
| 25  | P0.04_AIN2            | Digital I/O<br>Analog input | General purpose I/O pin.<br>SAADC/COMP/LPCOMP input.                                     |
| 26  | P0.03_AIN1            | Digital I/O<br>Analog input | General purpose I/O pin.<br>SAADC/COMP/LPCOMP input.                                     |
| 27  | P0.02_AIN0            | Digital I/O<br>Analog input | General purpose I/O pin.<br>SAADC/COMP/LPCOMP input.                                     |
| 28  | GND                   | Ground                      | Ground pin. (0 V)                                                                        |

|                         |       |                                     |
|-------------------------|-------|-------------------------------------|
| Control No.<br>MQ-H-001 | (1/2) | Control name<br>Handling Precaution |
|-------------------------|-------|-------------------------------------|

## 8. Handling Precaution

This specification describes desire and conditions especially for mounting.

### Desire/Conditions

#### 8.1. Environment conditions for use and storage

1. Store the components in an environment of < **40deg-C/90%RH** if they are in a moisture barrier bag packed by KAGA FEI.
2. Keep the factory ambient conditions at < **30deg-C/60%RH**.
3. Store the components in an environment of < **25±5deg-C/10%RH** after the bag is opened.  
(The condition is also applied to a stay in the manufacture process).

#### 8.2. Conditions for handling of products

Make sure all of the moisture barrier bags have no holes, cracks or damages at receiving. If an abnormality is found on the bag, its moisture level must be checked in accordance with 2 in 8.2.


Refer to the label on the bag.

1. All of the surface mounting process (reflow process) must be completed **in 12 months** from the bag seal date.
2. Make sure humidity in the bag is less than **10%RH** immediately after open, using a humidity indicator card sealed with the components.
3. **All** of the surface mounting process (reflow process including rework process) must be completed in **168 hours** after the bag is opened (inclusive of any other processes).
4. If any conditions in 8.1 or condition 2 and 3 in 8.2 are not met, bake the components in accordance with the conditions at **125deg-C 24hours**.
5. As a rule, baking the components in accordance with conditions 4 in 8.2 shall be once.
6. Since semi-conductors are inside of the components, they must be free from static electricity while handled. (<100V) Use ESD protective floor mats, wrist straps, ESD protective footwear, air ionizers etc. , if necessary.
7. Please make sure that there are lessen mechanical vibration and shock for this module, and do not drop it.
8. Please recognize pads of back side at surface mount.
9. Washing the module is not recommended. If washing cannot be avoided, please test module functionality and performance after thoroughly drying the module. We cannot be held responsible for any failure due washing the module.

|                         |       |                                     |
|-------------------------|-------|-------------------------------------|
| Control No.<br>MQ-H-001 | (2/2) | Control name<br>Handling Precaution |
|-------------------------|-------|-------------------------------------|

10. Please perform temperature conditions of module at reflow within the limits of the following.  
Please give the number of times of reflow as a maximum of 2 times.

#### Recommended Reflow Profile

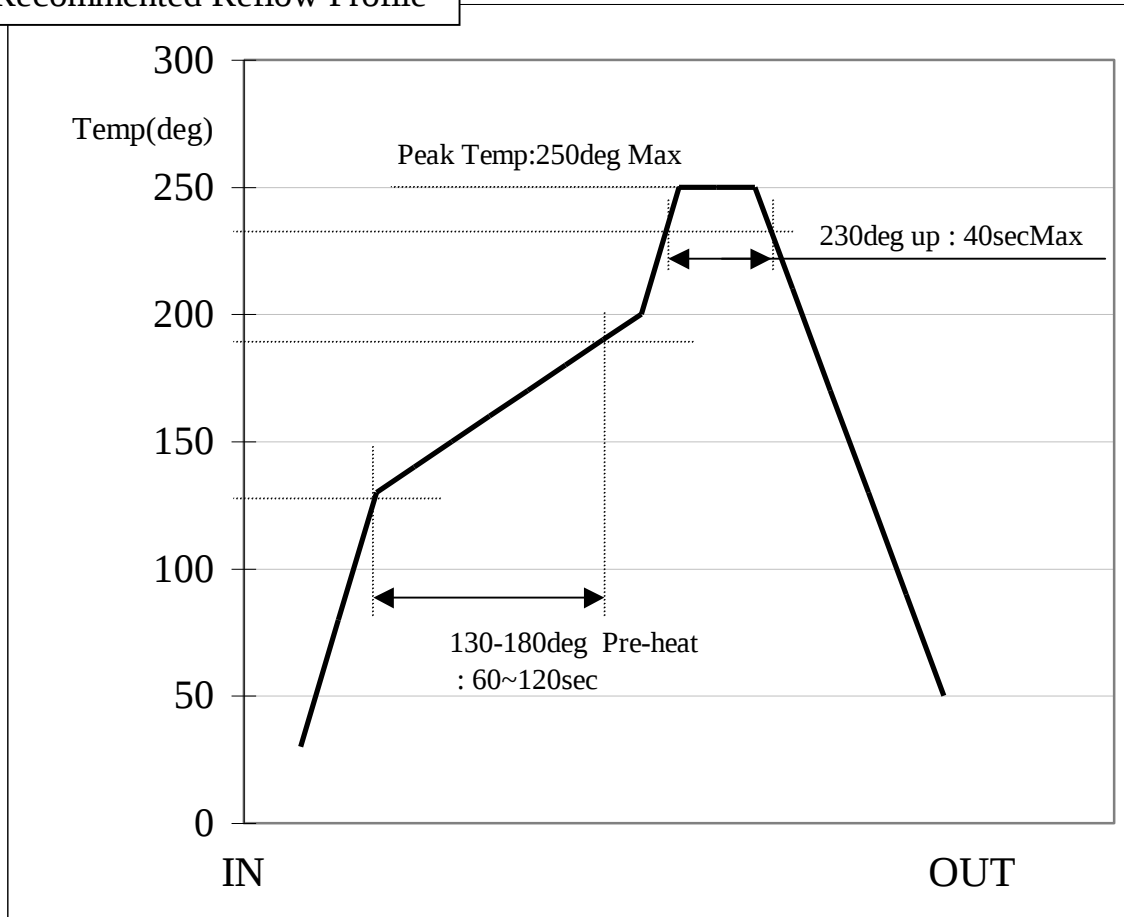

Control No.  
KM-BB-A223005

(1/4)

Control name  
Packaging Specification

## 9. Packaging Specification

### 9.1. Packaging Specification

#### (1) Packaging Material


| Name                            | Outline                  | Materials            |
|---------------------------------|--------------------------|----------------------|
| Emboss                          | 24 mm wide - 12 mm Pitch | Couductive PS        |
| Cover Tape                      | -                        | -                    |
| Reel                            | φ330 mm                  | Couductive PS        |
| Desiccant                       | 30g×1                    | -                    |
| Humidity indicator card         | -                        | -                    |
| Aluminum moisture barrier bag   | 420×460 (mm)             | (AS)PET/AL/NY/PE(AS) |
| Label                           | -                        | -                    |
| Corrugated cardboard box(Inner) | 339×351×74 (mm)          | -                    |
| Corrugated cardboard box(Outer) | 369×369×277(mm)          | -                    |

#### (2) Packaging Unit

Max 2,000 pieces/Reel

Max 6,000 pieces/Box(Outer)


#### (3) Packing Figure

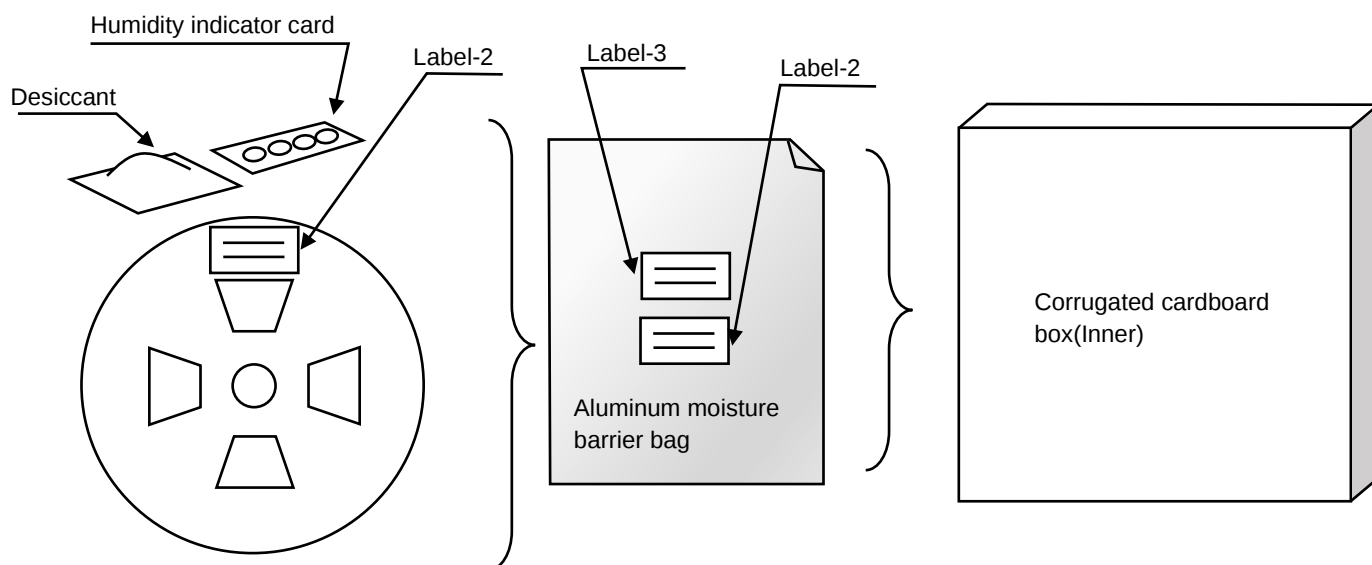

Control No.  
KM-BB-A223005

(2/4)

Control name  
Packaging Specification

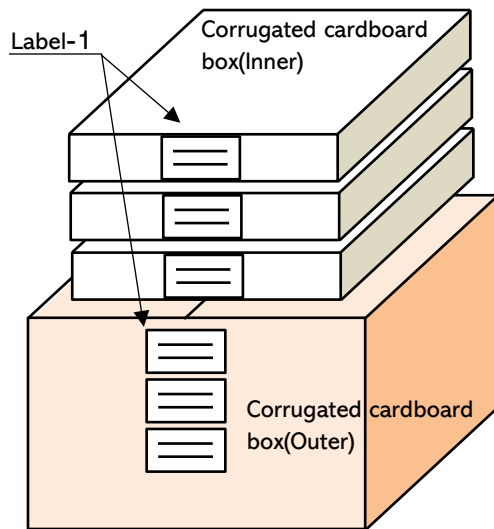

#### (4) Label

##### Label-1

- Purchase order
- Part No.
- Quantity
- Lot No.
- Technical conformity mark
- Certification No.
- FCC/ISED certification No.
- Country of origin


##### Label-2

- Serial No.
- Part No.
- Quantity
- Technical conformity mark
- Certification No.
- FCC/ISED certification No.
- Country of origin

##### Label-3

- Caution label
- MSL Level3

## 9.2. Tape specification

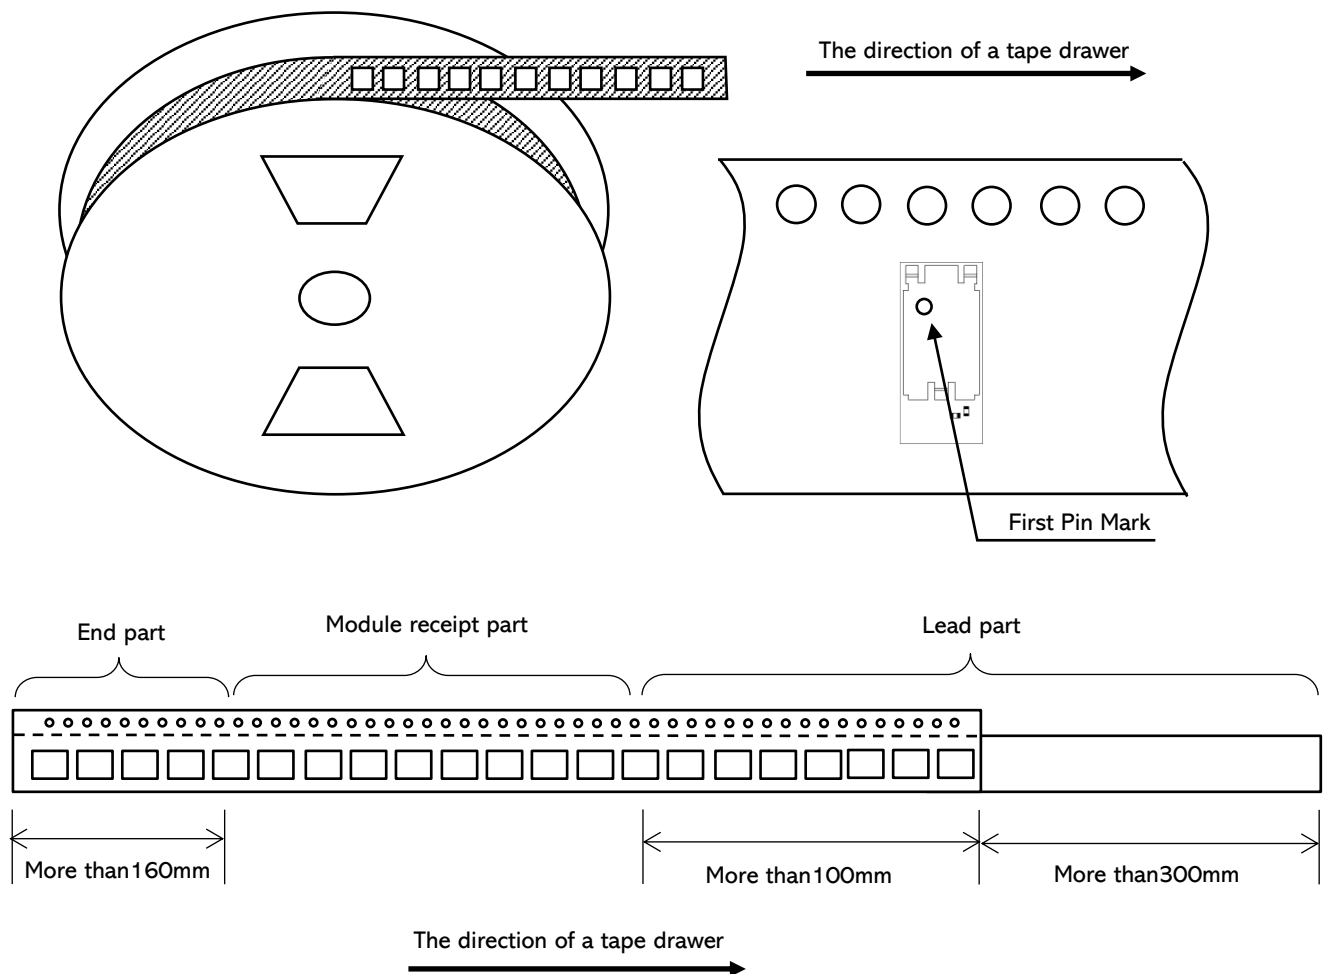


Control No.  
KM-BB-A223005


(3/4)

Control name  
Packaging Specification

### Emboss carrier tape drawing

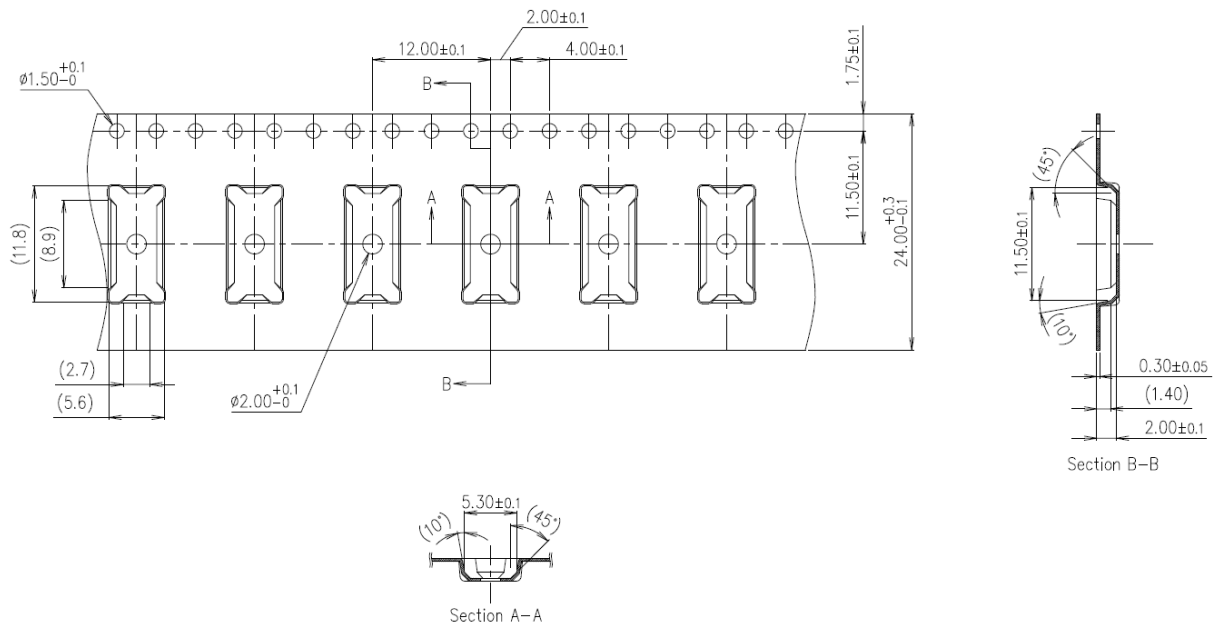

### 9.3.Reel specification

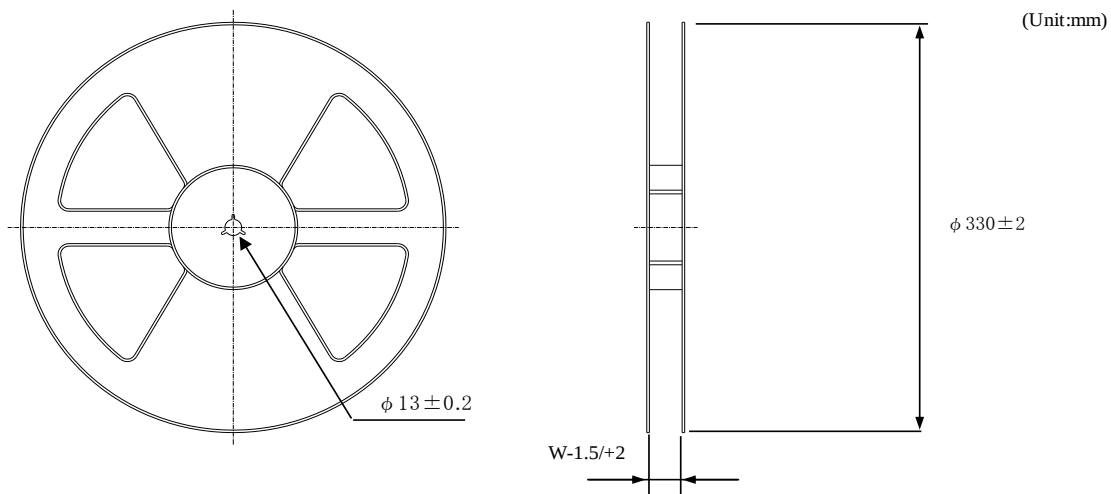

| Tape wide | 8mm   | 12mm   | 16mm   | 24mm   | 32mm   | 44mm   |
|-----------|-------|--------|--------|--------|--------|--------|
| W         | 9.4mm | 13.4mm | 17.4mm | 25.4mm | 33.4mm | 45.4mm |

|                              |       |                                         |
|------------------------------|-------|-----------------------------------------|
| Control No.<br>KM-BB-A223005 | (4/4) | Control name<br>Packaging Specification |
|------------------------------|-------|-----------------------------------------|

#### 9.4.Taping performance

Both of an embossing tape top cover tape bear this, when the power of 10N is applied in the direction of a drawer.

The exfoliation adhesion of a top cover tape is the intensity of 0.1~1.3N.  
(The angle to pull is 165~180 degrees. The speed to pull is 300 mm/min)

#### Note

Lack of the parts in 1 reel is with two or less pieces.

MSL Level 3 Under control

Control No.


(1/3)

Control name

Antenna application note

## 10. Antenna application note

### 10.1. Recommended module mounting example

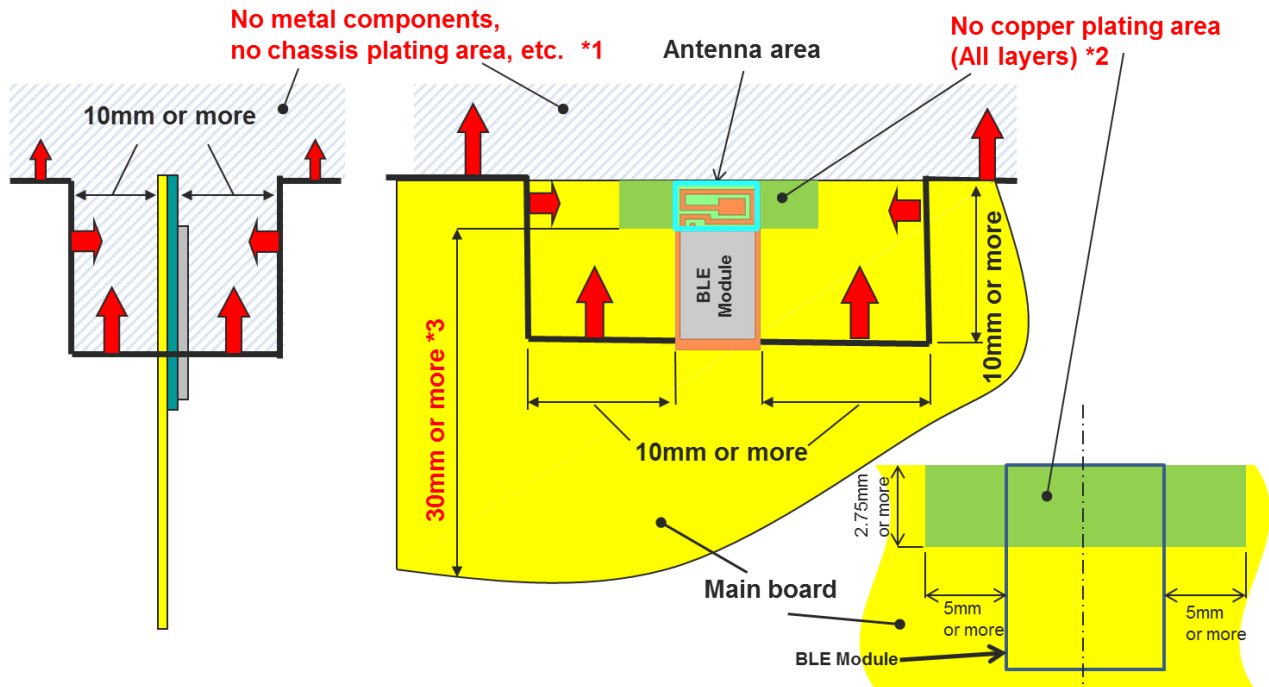

- \*1 Please do not place any metal components in blue shaded space. \*1) We do not recommend placing any metal objects upper space of the module in the above figure. If it needs to place metal objects, please consider keeping the metal off from the antenna as far as you can. Such as signal line and metal chassis as possible except for main board while mounting the components in \*1 space on the main board is allowed except for no copper plating area. (\*2).
- \*2 This area is routing prohibited area on the main board. Please do not place copper on any layer. Please remain use of FR-4 dielectric material. The antenna is tuned with the FR-4.
- \*3 Characteristics may deteriorate when GND pattern length is less than 30mm. It should be 30 mm or more as possible.

Even when above mentioned condition is satisfied, communication performance may be significantly deteriorated depending on the structure of the product.


Control No.

(2/3)


Control name

Antenna application note

## 10.2. Other module mounting examples

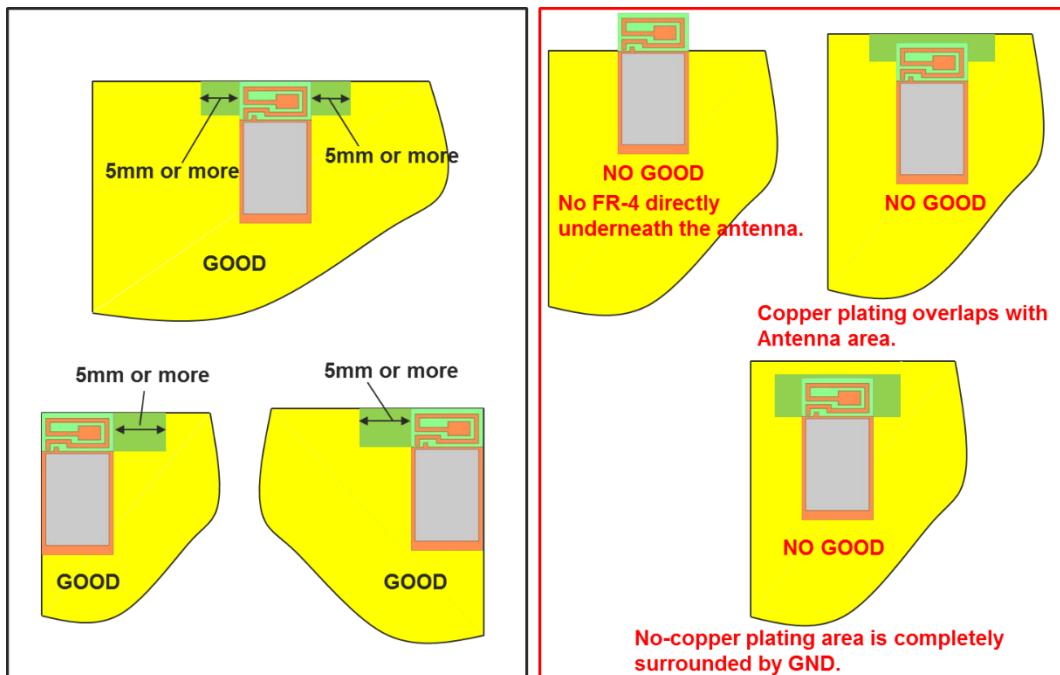

## 10.3. Placement of resin or plastic parts

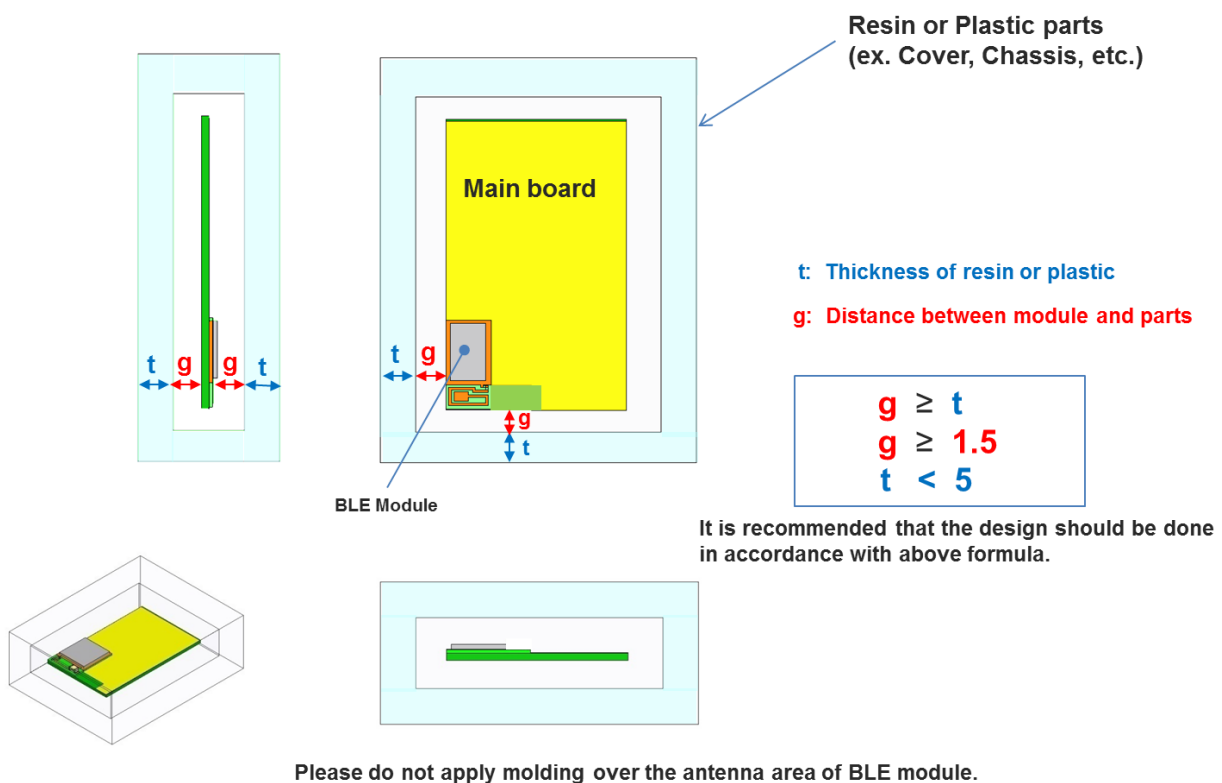


Control No.

(3/3)

Control name

Antenna application note

## 10.4. Directional characteristics example (when mounted on evaluation board)

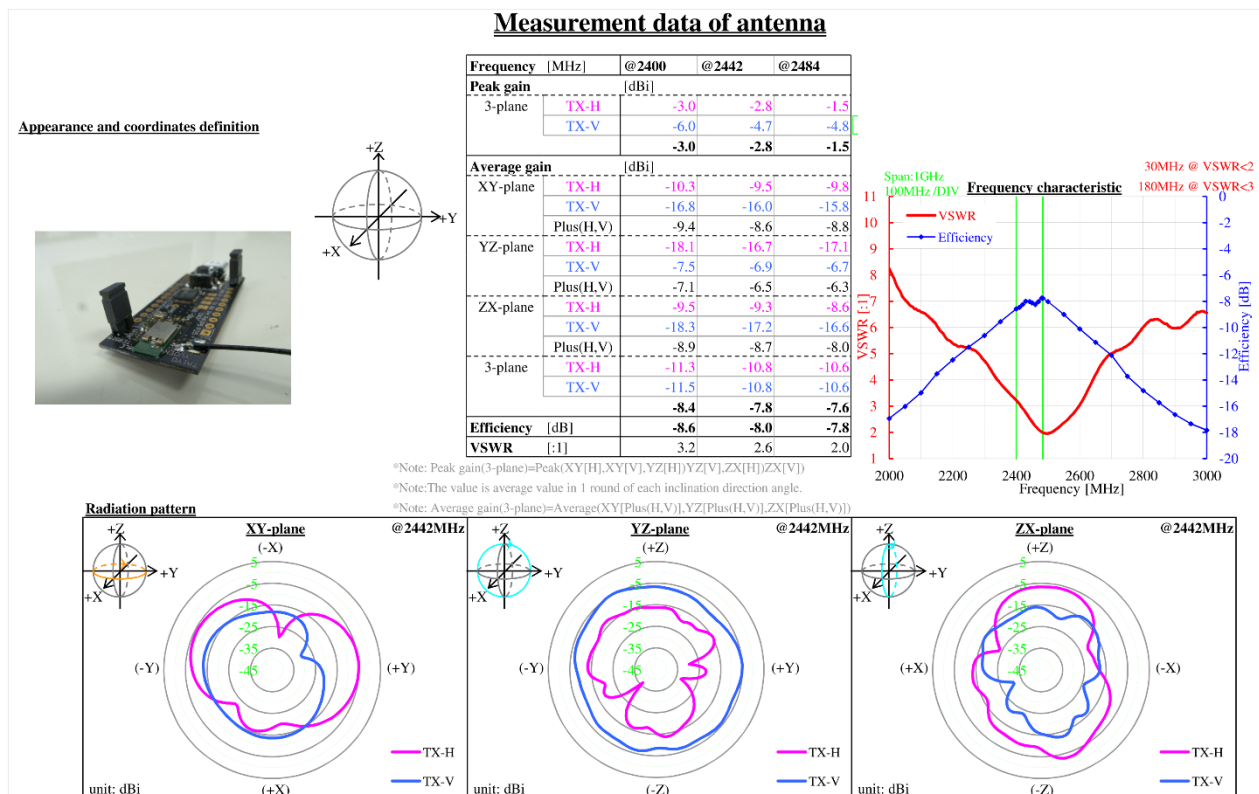

### About this Application Note

- This Application Note has been prepared as a reference material to help obtaining the antenna performance mounted on BLE module better while it is not guaranteed or assured to obtain better communication performance and distance.
- This product “BLE module” has been certified and matching circuit constant for antenna within module cannot be changed when ambient environment condition changes. The product must be re-certified when matching circuit constant is changed.

|                      |                              |
|----------------------|------------------------------|
| Control No.<br>(1/1) | Control name<br>Design guide |
|----------------------|------------------------------|

## 11.Design guide

### 11.1.Power Up Sequence

VCC\_NRF power supply rise time (0V to 1.7V) must not exceed 60ms.

### 11.2.Recommended Power Circuit

VCC\_NRF is the main power supply (1.7 – 3.6V) for this module. The supply voltage range of VCC\_NRF is 1.7V to 3.6V in both of LDO and DCDC mode. In case of the power supply voltage fluctuation by the load change is large, the module may not function properly. If an external regulator is used, the load change characteristic should be good in order to keep stable voltage as possible when the current is change.


### 11.3.Battery operation

When using a small battery (e.g. CR2032), a large capacitor (e.g.100uF low leakage capacitor) should be placed near the battery. This will reduce the voltage drop especially when the module is operated at low temperatures

### 11.4.Pattern Design Guide

#### 11.4.1.Power Supply System

Power supply bypass capacitors should be placed close to the VCC\_NRF pin of the module. The VCC\_NRF trace should be greater than 0.5mm and a bigger a via diameter is recommended.

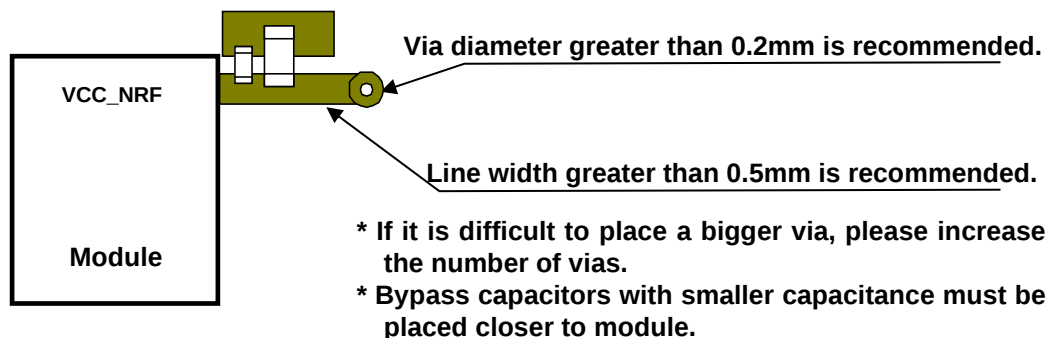


#### 11.4.2.Bypass Capacitor Layout

A parallel combination of a small capacitance (about 10pF) and a large capacitance (1uF to 10uF) is recommended for bypass capacitors. The GND of the bypass capacitor must be placed close to an adjacent module GND to ensure the shortest closed loop.

#### 11.4.3.GND Pattern

Power supply bypass capacitor GND should be placed in proximity of module GND. Wide GND area must be provided to ensure isolation for each layer.

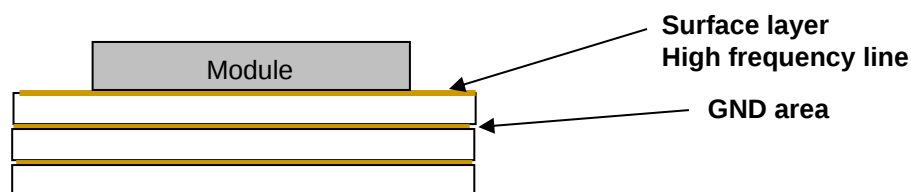

GND pattern of each layer should be connected to GND area with large number of via.

|             |              |
|-------------|--------------|
| Control No. | Control name |
| (1/1)       | Notes        |

## 12. Notes

### 32kHz Clock

This module does not installed 32.768kHz crystal. In case of operating without external crystal, please modify sdk\_config.h in order to enable internal 32.768kHz RC oscillator (32k RCOSC).  
The content may change depending on the SDK you use.

```
--sdk_config.h-- (In case of SDK17.1)
// <o> CLOCK_CONFIG_LF_SRC - LF Clock Source
// <0=> RC
// <1=> XTAL
// <2=> Synth
// <131073=> External Low Swing
// <196609=> External Full Swing
#ifndef CLOCK_CONFIG_LF_SRC
#define CLOCK_CONFIG_LF_SRC 0
#endif
// </h>
//=====
// <h> Clock - SoftDevice clock configuration
//=====
// <o> NRF_SDH_CLOCK_LF_SRC - SoftDevice clock source.
// <0=> NRF_CLOCK_LF_SRC_RC
// <1=> NRF_CLOCK_LF_SRC_XTAL
// <2=> NRF_CLOCK_LF_SRC_SYNTH
#ifndef NRF_SDH_CLOCK_LF_SRC
#define NRF_SDH_CLOCK_LF_SRC 0
#endif
// <o> NRF_SDH_CLOCK_LF_RC_CTIV - SoftDevice calibration timer interval.
#ifndef NRF_SDH_CLOCK_LF_RC_CTIV
#define NRF_SDH_CLOCK_LF_RC_CTIV 16
#endif
// <o> NRF_SDH_CLOCK_LF_RC_TEMP_CTIV - SoftDevice calibration timer interval under constant temperature.
// <i> How often (in number of calibration intervals) the RC oscillator shall be calibrated
// <i> if the temperature has not changed.
#ifndef NRF_SDH_CLOCK_LF_RC_TEMP_CTIV
#define NRF_SDH_CLOCK_LF_RC_TEMP_CTIV 2
#endif
// <o> NRF_SDH_CLOCK_LF_ACCURACY - External clock accuracy used in the LL to compute timing.
// <0=> NRF_CLOCK_LF_ACCURACY_250_PPM
// <1=> NRF_CLOCK_LF_ACCURACY_500_PPM
// <2=> NRF_CLOCK_LF_ACCURACY_150_PPM
// <3=> NRF_CLOCK_LF_ACCURACY_100_PPM
// <4=> NRF_CLOCK_LF_ACCURACY_75_PPM
// <5=> NRF_CLOCK_LF_ACCURACY_50_PPM
// <6=> NRF_CLOCK_LF_ACCURACY_30_PPM
// <7=> NRF_CLOCK_LF_ACCURACY_20_PPM
// <8=> NRF_CLOCK_LF_ACCURACY_10_PPM
// <9=> NRF_CLOCK_LF_ACCURACY_5_PPM
// <10=> NRF_CLOCK_LF_ACCURACY_2_PPM
// <11=> NRF_CLOCK_LF_ACCURACY_1_PPM
#ifndef NRF_SDH_CLOCK_LF_ACCURACY
#define NRF_SDH_CLOCK_LF_ACCURACY 1
#endif
//=====
```

Note that when you choose to use the RC oscillator, it will add around 2uA average current consumption compared to a 20ppm external crystal.  
ANT specification requires +/-50ppm accuracy for 32.768kHz clock. There is a possibility that the internal RC oscillator does not meet to the specification.

## Precautions

- Please conduct validation and verification of our products in actual condition of mounting and operating environment before using our products.
- The products listed in this Specification are intended for use in general electronic equipment (e.g., AV equipment, OA equipment, home electric appliances, office equipment, information and communication equipment including, without limitation, mobile phone, and PC). Please be sure to contact KAGA FEI for further information before using the products for any equipment which may directly cause loss of human life or bodily injury (e.g., transportation equipment including, without limitation, automotive powertrain control system, train control system, and ship control system, traffic signal equipment, disaster prevention equipment, medical equipment classified as Class I, II or III by IMDRF, highly public information network equipment including, without limitation, telephone exchange, and base station).  
Please do not incorporate our products into any equipment requiring high levels of safety and/or reliability (e.g., aerospace equipment, aviation equipment, medical equipment classified as Class IV by IMDRF, nuclear control equipment, undersea equipment, military equipment).  
When our products are used even for high safety and/or reliability-required devices or circuits of general electronic equipment, it is strongly recommended to perform a thorough safety evaluation prior to use of our products and to install a protection circuit as necessary.  
Please note that unless you obtain prior written consent of KAGA FEI, KAGA FEI shall not be in any way responsible for any damages incurred by you or third parties arising from use of the products listed in this Specification for any equipment requiring inquiry to KAGA FEI or prohibited for use by KAGA FEI as described above.
- Information contained in this Specification is intended to convey examples of typical performances and/or applications of our products and is not intended to make any warranty with respect to the intellectual property rights or any other related rights of KAGA FEI or any third parties nor grant any license under such rights.
- Please note that the scope of warranty for our products is limited to the delivered our products themselves and KAGA FEI shall not be in any way responsible for any damages resulting from a fault or defect in our products.
- The contents of this Specification are applicable to our products which are purchased from our sales offices or authorized distributors (hereinafter "KAGA FEI's official sales channel"). Please note that the contents of this specification are not applicable to our products purchased from any seller other than KAGA FEI's official sales channel.
- The contents of this Specification are applied in preference to any agreement between you and KAGA FEI or KAGA FEI's official sales channel (e.g., supply and purchase agreement, quality assurance agreement).
- You will have deemed accepted the contents of this Specification upon usage of our products.
- Caution for Export  
Some of our products listed in this specification may require specific procedures for export according to "U.S. Export Administration Regulations" and other applicable regulations.  
Regulations" and other applicable regulations.